



US 20150156554A1

(19) **United States**

(12) **Patent Application Publication**
Sirpal et al.

(10) **Pub. No.: US 2015/0156554 A1**
(43) **Pub. Date: Jun. 4, 2015**

(54) **ON-SCREEN SETTINGS INTERACTION FOR INTERACTIVE TELEVISION**

H04N 21/45 (2006.01)
H04N 21/462 (2006.01)

(Continued)

(71) Applicant: **FLEXTRONICS AP, LLC**, San Jose, CA (US)

(52) **U.S. Cl.**

CPC *H04N 21/485* (2013.01); *H04N 21/4858* (2013.01); *G06F 3/017* (2013.01); *G06F 3/0481* (2013.01); *G06F 3/04883* (2013.01); *H04L 51/32* (2013.01); *H04N 17/04* (2013.01); *H04N 21/25808* (2013.01); *H04N 21/26291* (2013.01); *H04N 21/42204* (2013.01); *H04N 21/4307* (2013.01); *H04N 21/4316* (2013.01); *H04N 21/432* (2013.01); *H04N 21/433* (2013.01); *H04N 21/435* (2013.01); *H04N 21/437* (2013.01); *H04N 21/4396* (2013.01); *H04N 21/442* (2013.01); *H04N 21/44204* (2013.01); *H04N 21/44213* (2013.01); *H04N 21/44222* (2013.01); *H04N 21/4532* (2013.01); *H04N 21/4622* (2013.01); *H04N 21/47* (2013.01); *H04N 21/472* (2013.01); *H04N 21/47202* (2013.01); *H04N 21/4755* (2013.01); *H04N 21/478* (2013.01); *H04N 21/4788* (2013.01); *H04N 21/482* (2013.01); *H04N 21/4821* (2013.01); *H04N 21/4823* (2013.01); *H04N 21/4828* (2013.01); *H04N 21/488* (2013.01); *H04N 21/4882* (2013.01); *H04N 21/6125* (2013.01); *H04N 21/6175* (2013.01); *H04N 21/8126* (2013.01); *H04N 21/8133* (2013.01); *H04N 21/8166* (2013.01); *H04N 21/8173* (2013.01); *H04N 21/8358* (2013.01); *H04N 21/84* (2013.01); *H04N 5/4401* (2013.01); *H04N 5/4403* (2013.01); *H04N 5/445* (2013.01); *H04N 5/50* (2013.01); *G06F 2203/04804* (2013.01); *H04N 5/44* (2013.01); *H04N 5/45* (2013.01)

(72) Inventors: **Sanjiv Sirpal**, Oakville (CA); **Fuqu Wu**, Burlington (CA); **Saulo Correia Dourado**, Oakville (CA); **Mohammed Selim**, Oakville (CA)

(21) Appl. No.: **14/407,601**

(22) PCT Filed: **Apr. 16, 2013**

(86) PCT No.: **PCT/US13/36678**

§ 371 (c)(1),

(2) Date: **Dec. 12, 2014**

Related U.S. Application Data

(60) Provisional application No. 61/684,672, filed on Aug. 17, 2012, provisional application No. 61/697,710,

(Continued)

Publication Classification


(51) **Int. Cl.**

H04N 21/485 (2006.01)
G06F 3/0481 (2006.01)
G06F 3/0488 (2006.01)
H04L 12/58 (2006.01)
H04N 17/04 (2006.01)
H04N 21/258 (2006.01)
H04N 21/262 (2006.01)
H04N 21/422 (2006.01)
H04N 21/43 (2006.01)
H04N 21/431 (2006.01)
H04N 21/432 (2006.01)
H04N 21/433 (2006.01)
H04N 21/435 (2006.01)
H04N 21/437 (2006.01)
H04N 21/439 (2006.01)
H04N 21/442 (2006.01)

(57)

ABSTRACT

A means for setting a television's settings with a particular value is provided. As the user selects a graphical target associated with a particular setting value, the value is applied and the user is provided with immediate feedback. If the user accepts the setting, they can navigate away from the graphical target or navigate to another target to change the setting to a different value. The setting may be associated with a particular silo of the television.

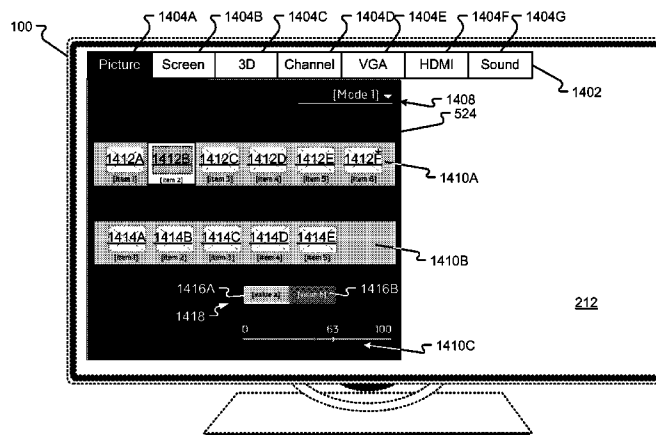

Related U.S. Application Data

filed on Sep. 6, 2012, provisional application No. 61/700,182, filed on Sep. 12, 2012, provisional application No. 61/702,650, filed on Sep. 18, 2012, provisional application No. 61/736,692, filed on Dec. 13, 2012, provisional application No. 61/798,821, filed on Mar. 15, 2013, provisional application No. 61/805,027, filed on Mar. 25, 2013, provisional application No. 61/805,038, filed on Mar. 25, 2013, provisional application No. 61/804,971, filed on Mar. 25, 2013, provisional application No. 61/804,942, filed on Mar. 25, 2013, provisional application No. 61/805,030, filed on Mar. 25, 2013, provisional application No. 61/804,998, filed on Mar. 25, 2013, provisional application No. 61/805,003, filed on Mar. 25, 2013, provisional application No. 61/805,042, filed on Mar. 25, 2013, provisional application No. 61/805,053, filed on Mar. 25, 2013, provisional application No. 61/804,990, filed on Mar. 25, 2013.

Publication Classification

(51)	Int. Cl.	
	H04N 21/47	(2006.01)
	H04N 21/472	(2006.01)
	H04N 21/475	(2006.01)
	H04N 21/478	(2006.01)
	H04N 21/4788	(2006.01)
	H04N 21/482	(2006.01)
	H04N 21/488	(2006.01)
	H04N 21/61	(2006.01)
	H04N 21/81	(2006.01)
	H04N 21/8358	(2006.01)
	H04N 21/84	(2006.01)
	H04N 5/44	(2006.01)
	H04N 5/445	(2006.01)
	H04N 5/50	(2006.01)
	G06F 3/01	(2006.01)

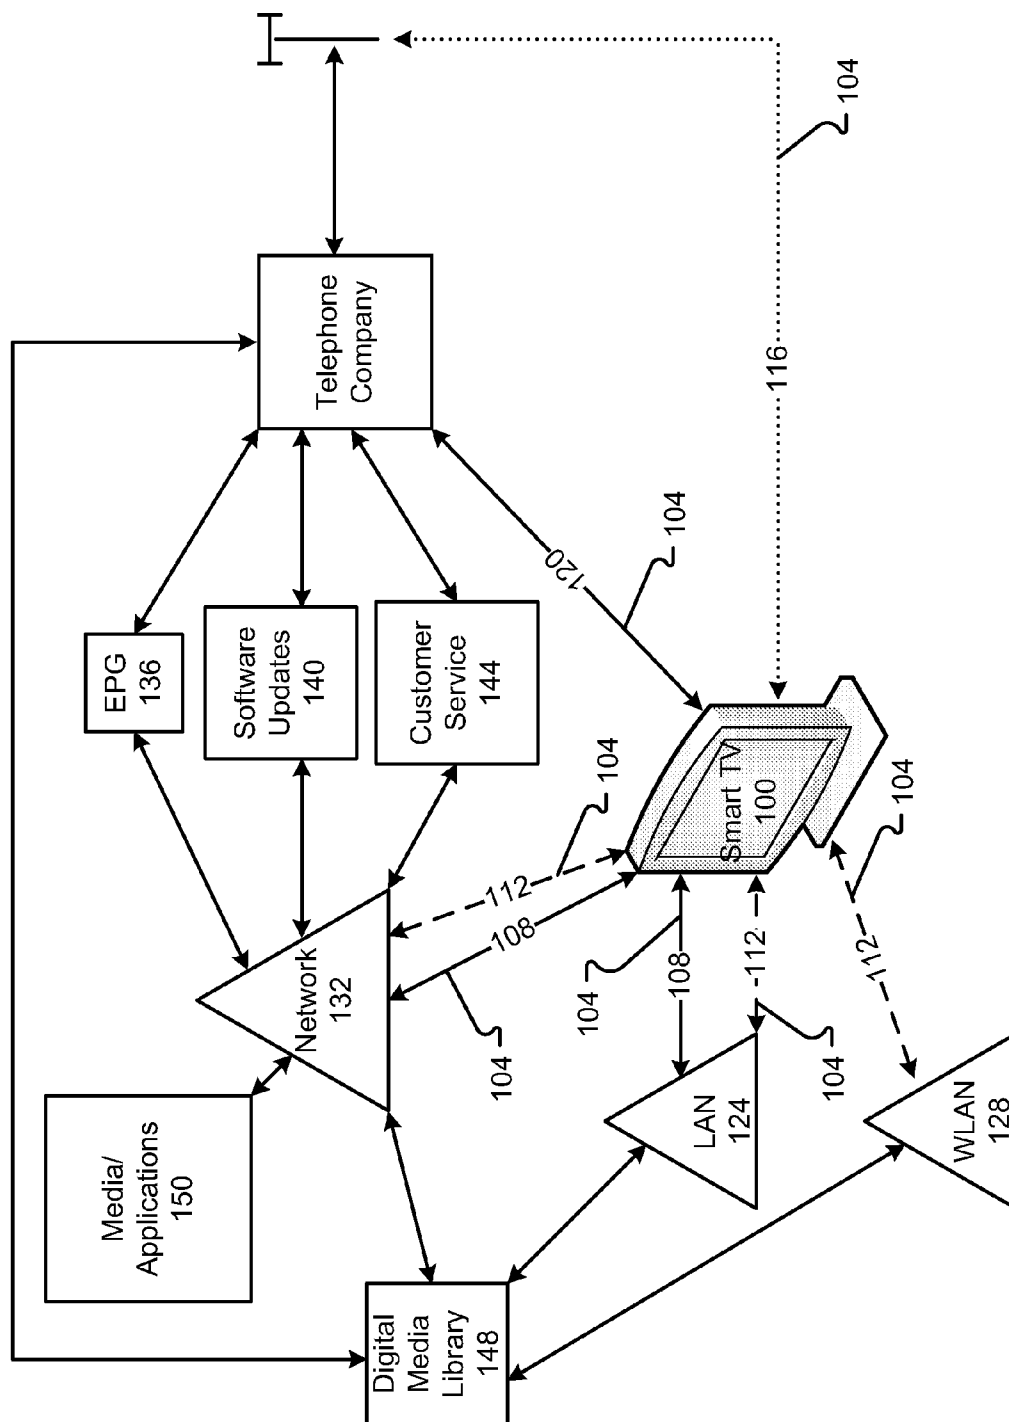


Fig. 1A

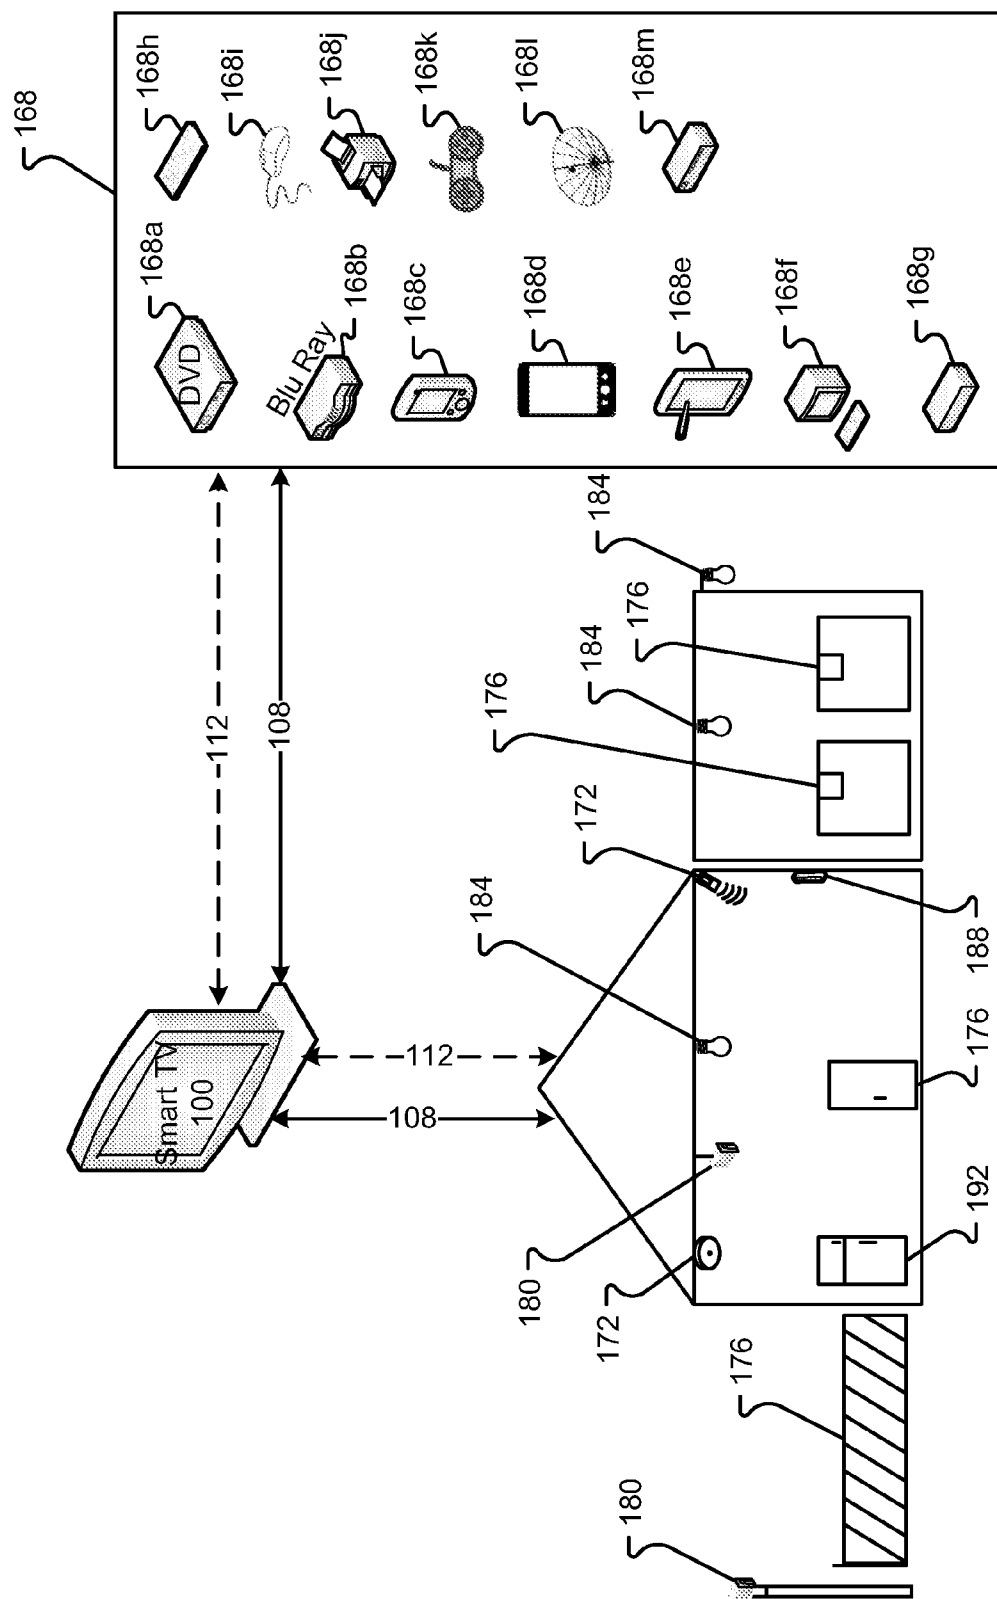


Fig. 1B

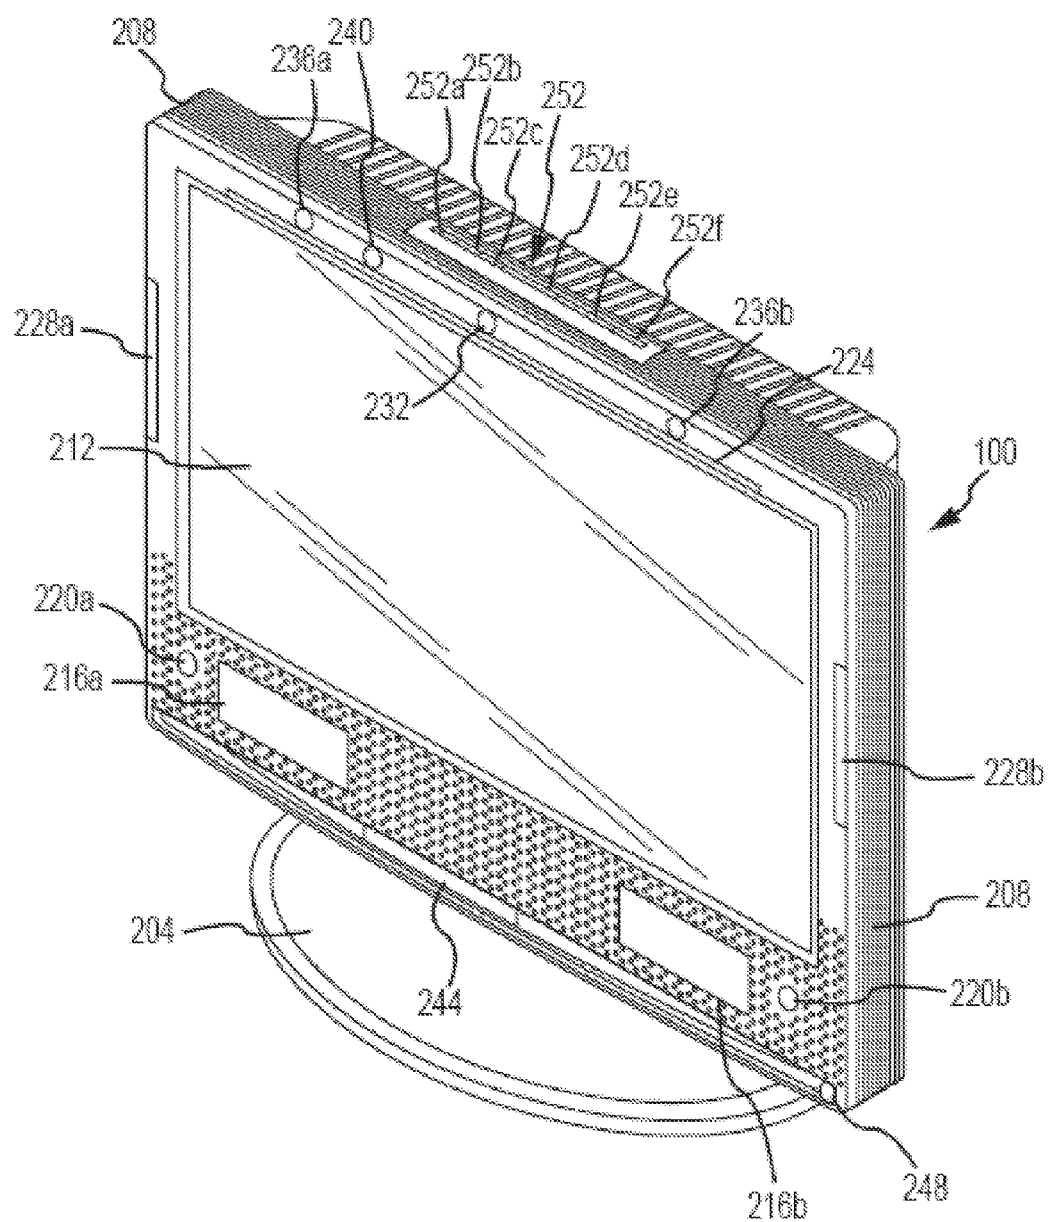


Fig. 2A

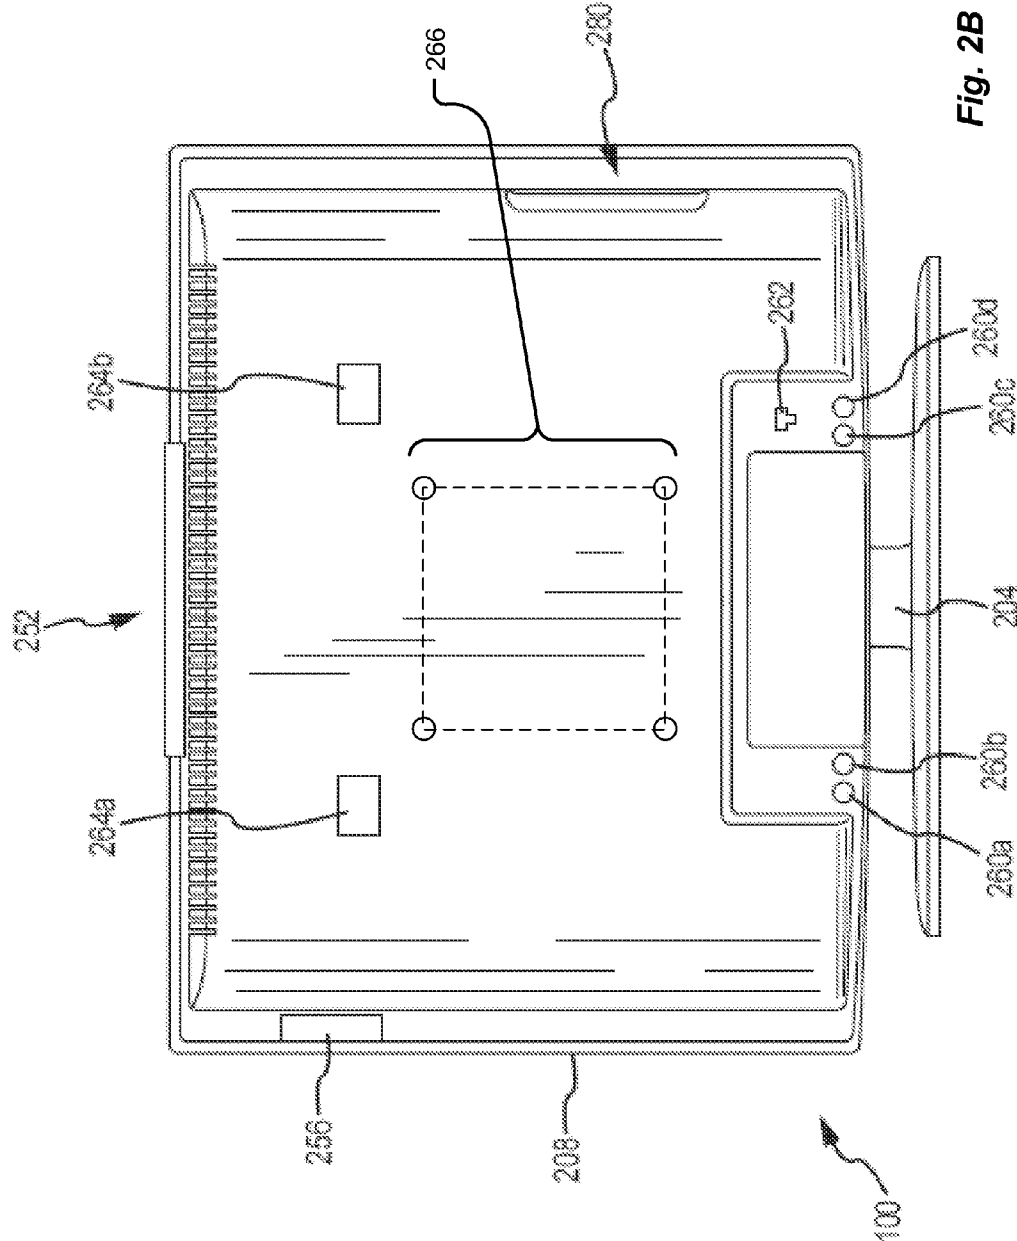


Fig. 2B

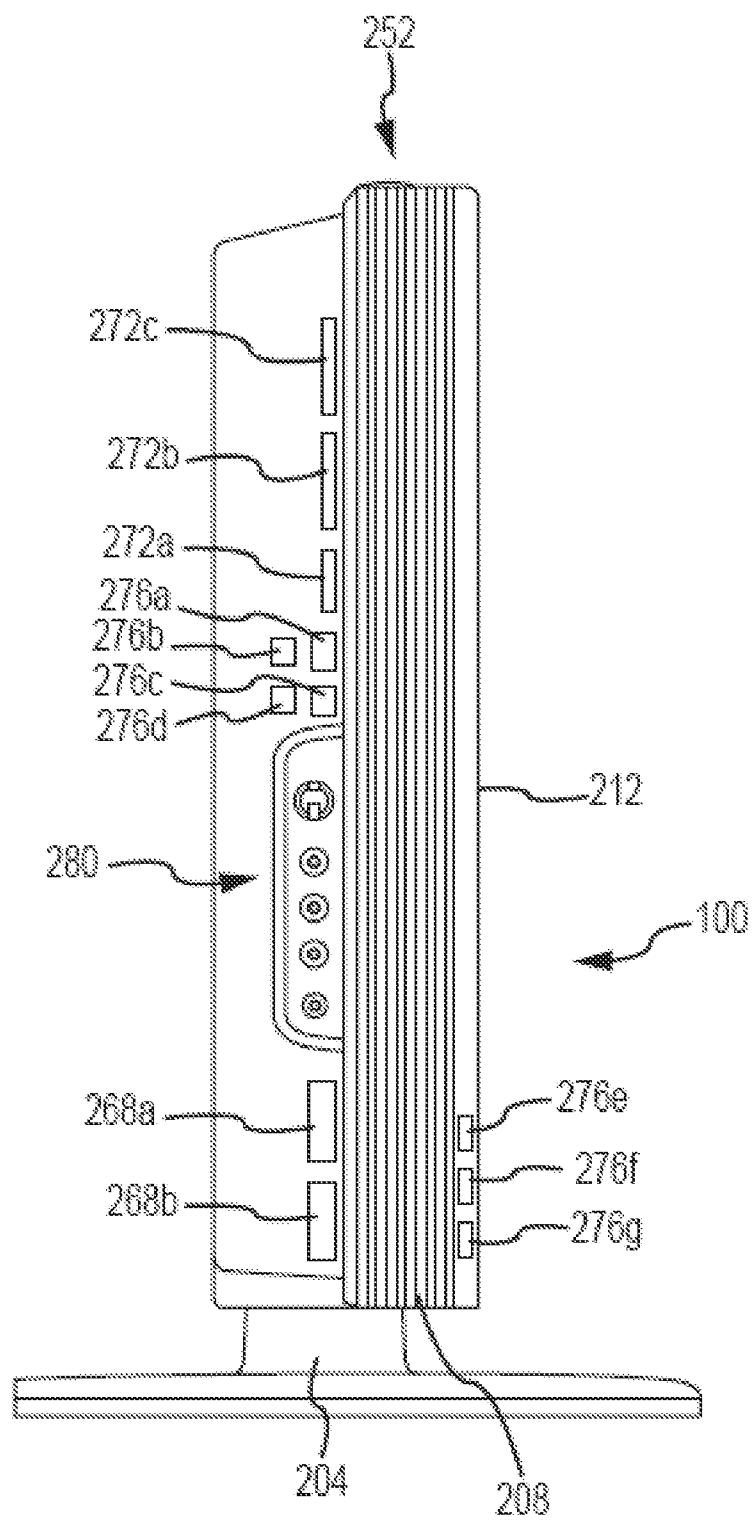


Fig. 2C

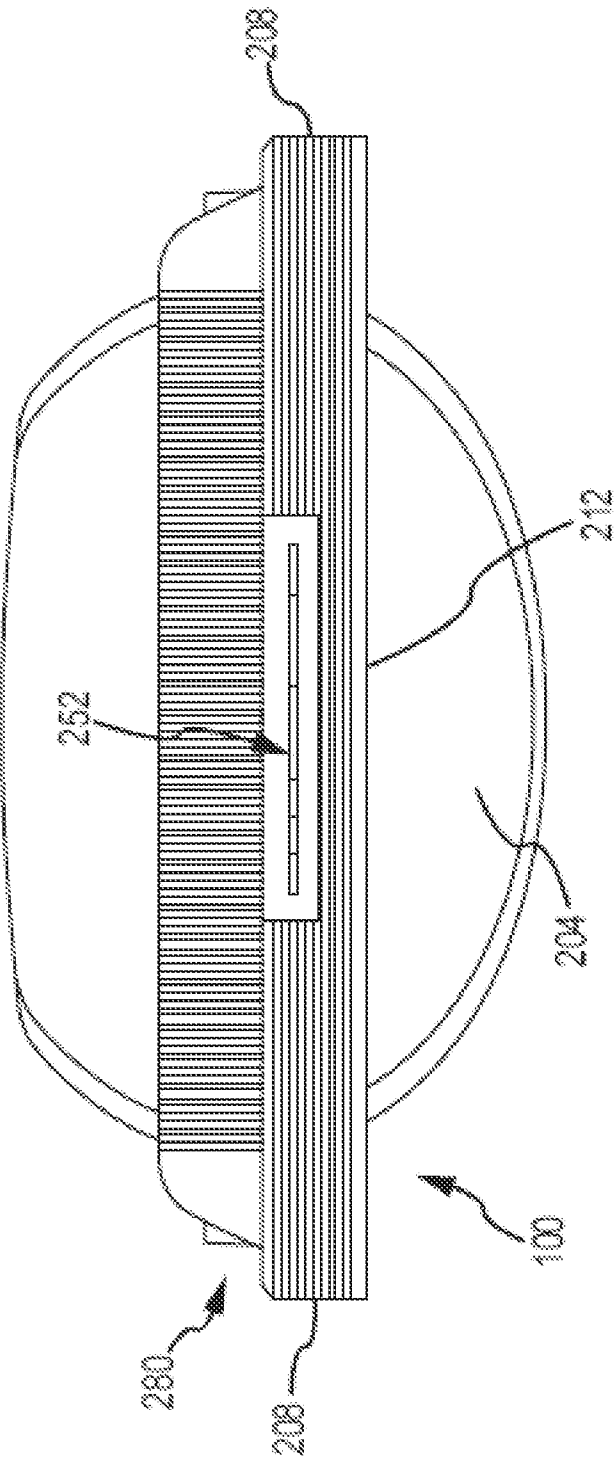


Fig. 2D

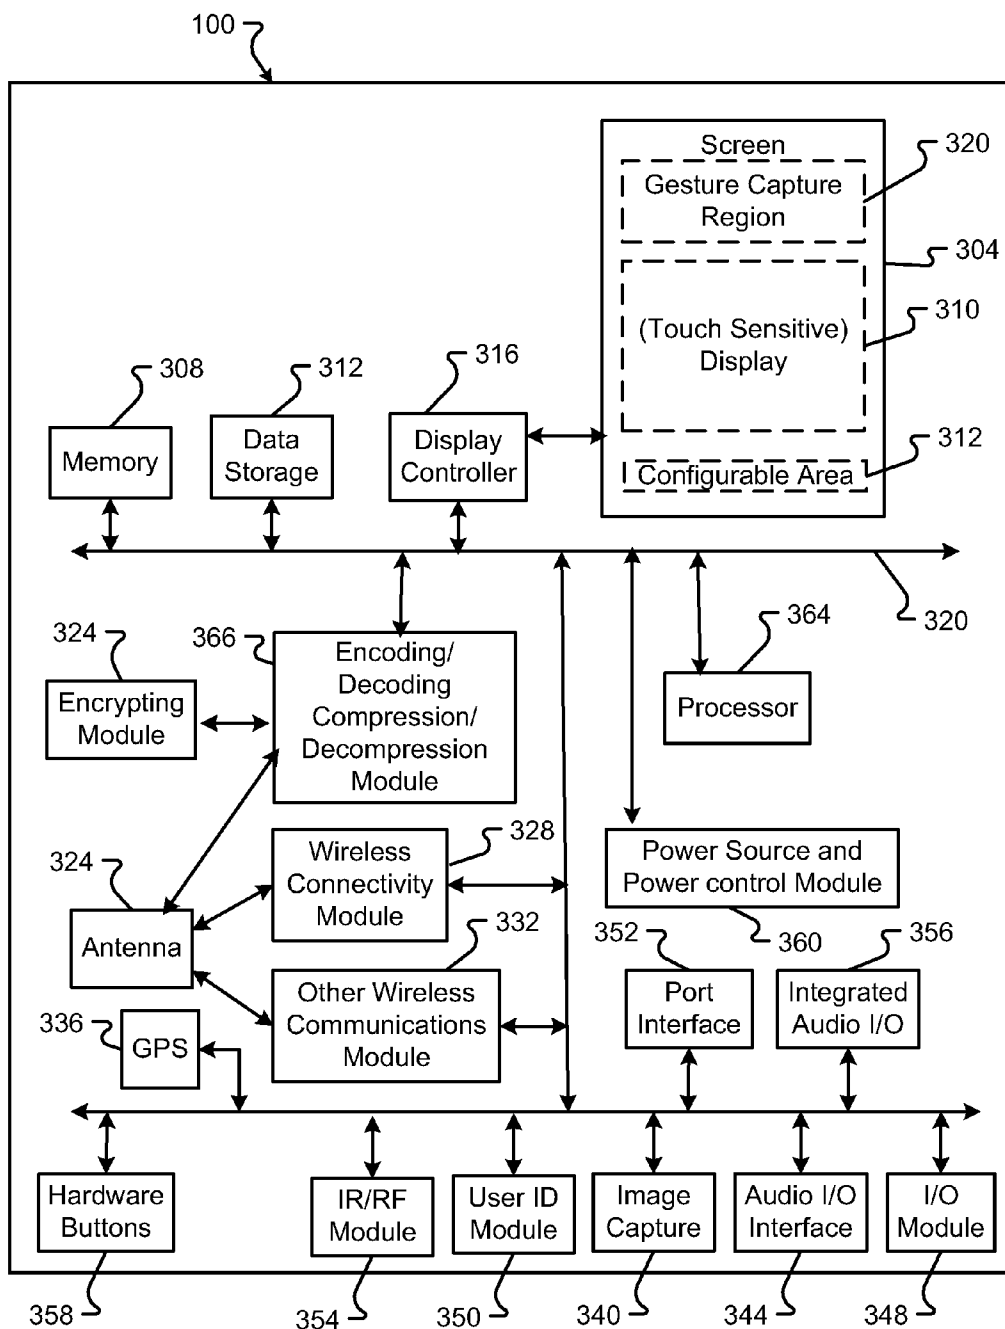


FIG. 3

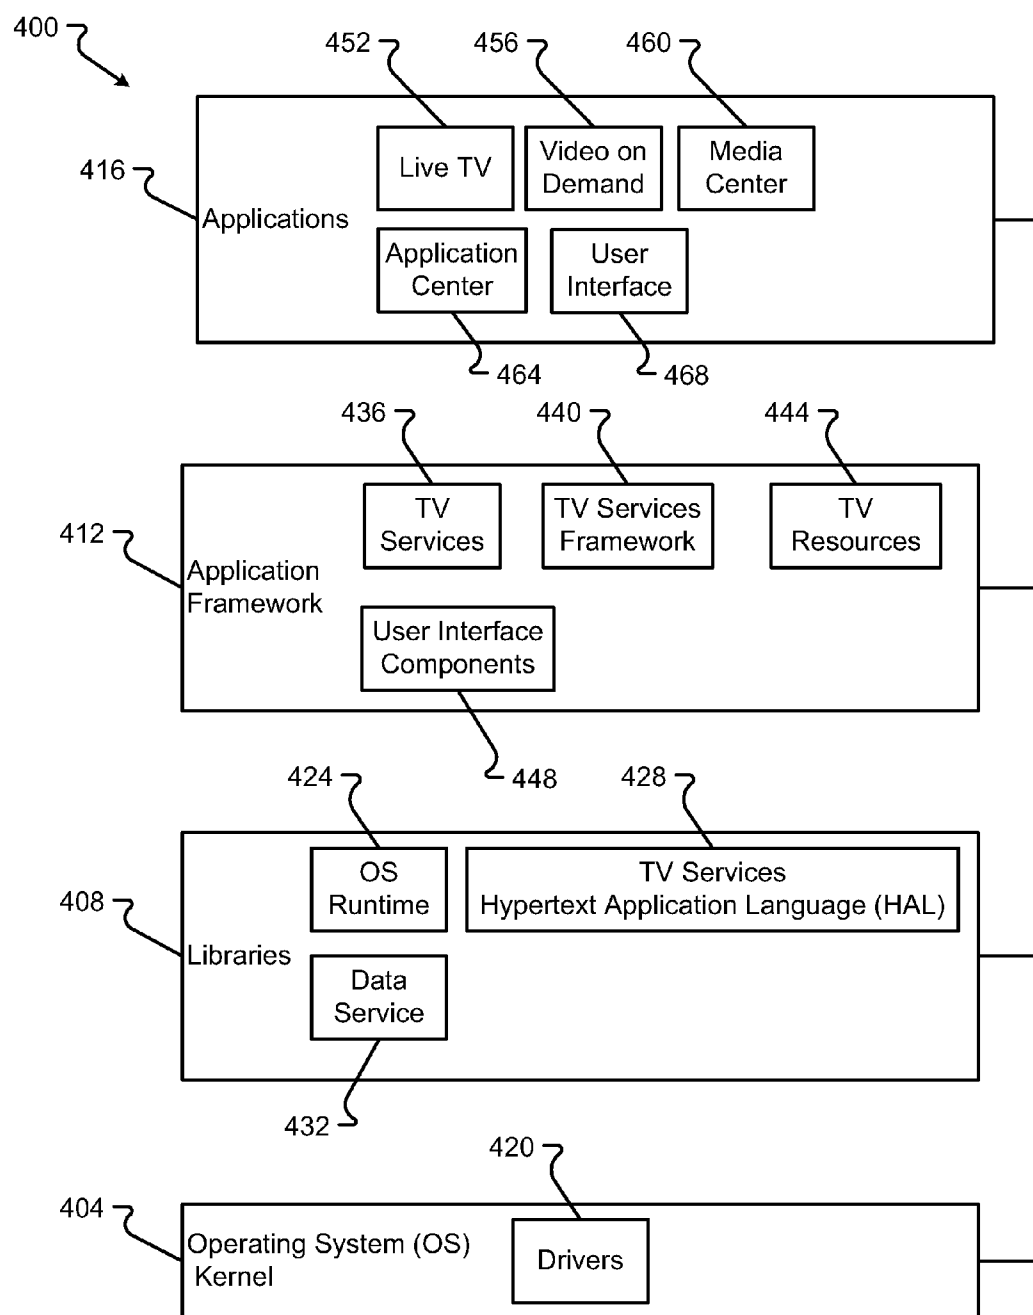


FIG. 4

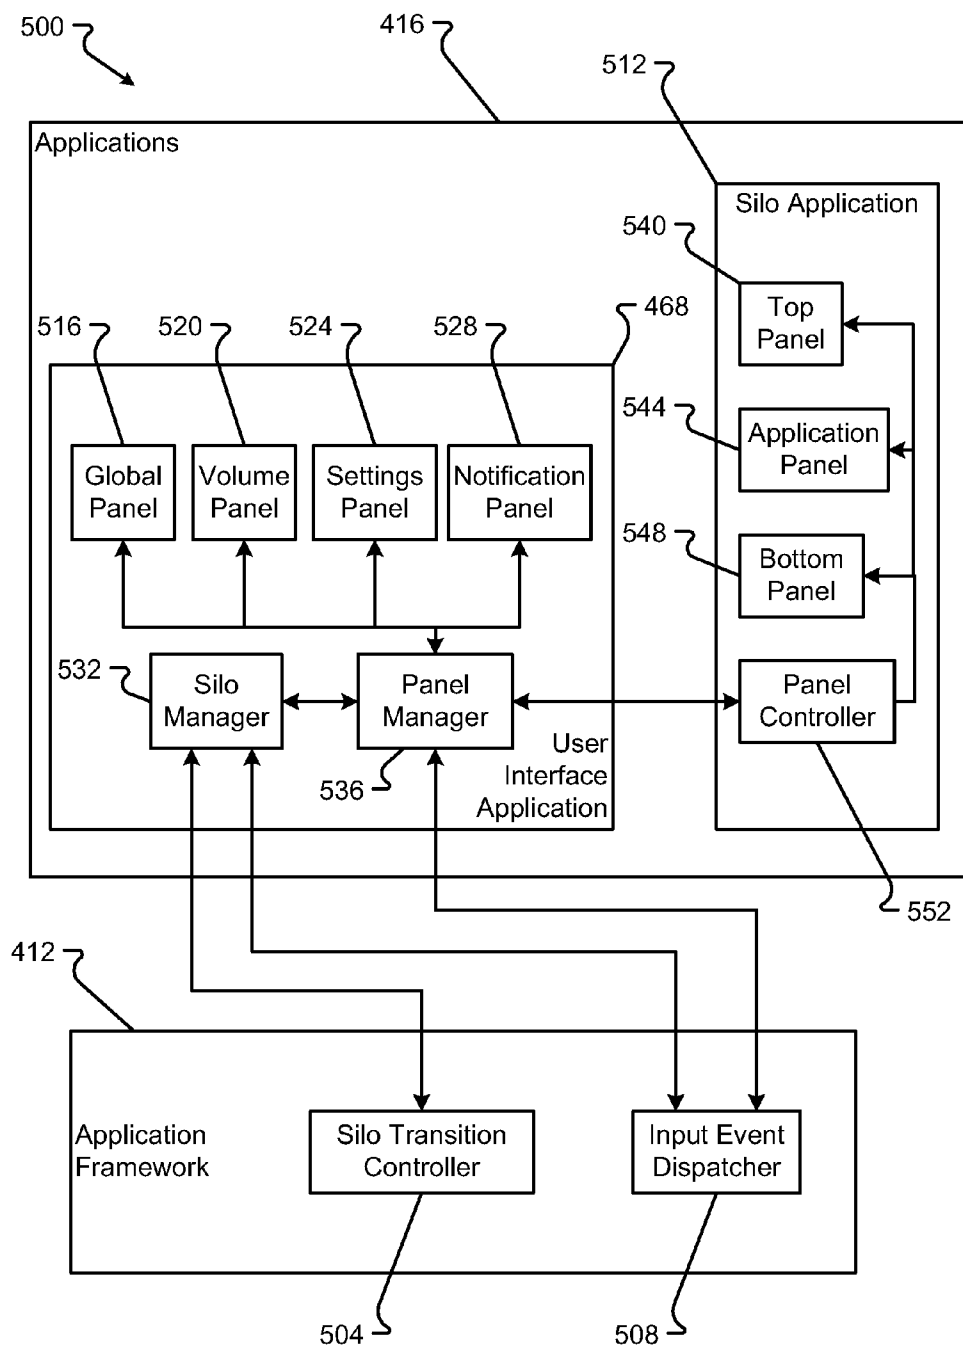


FIG. 5

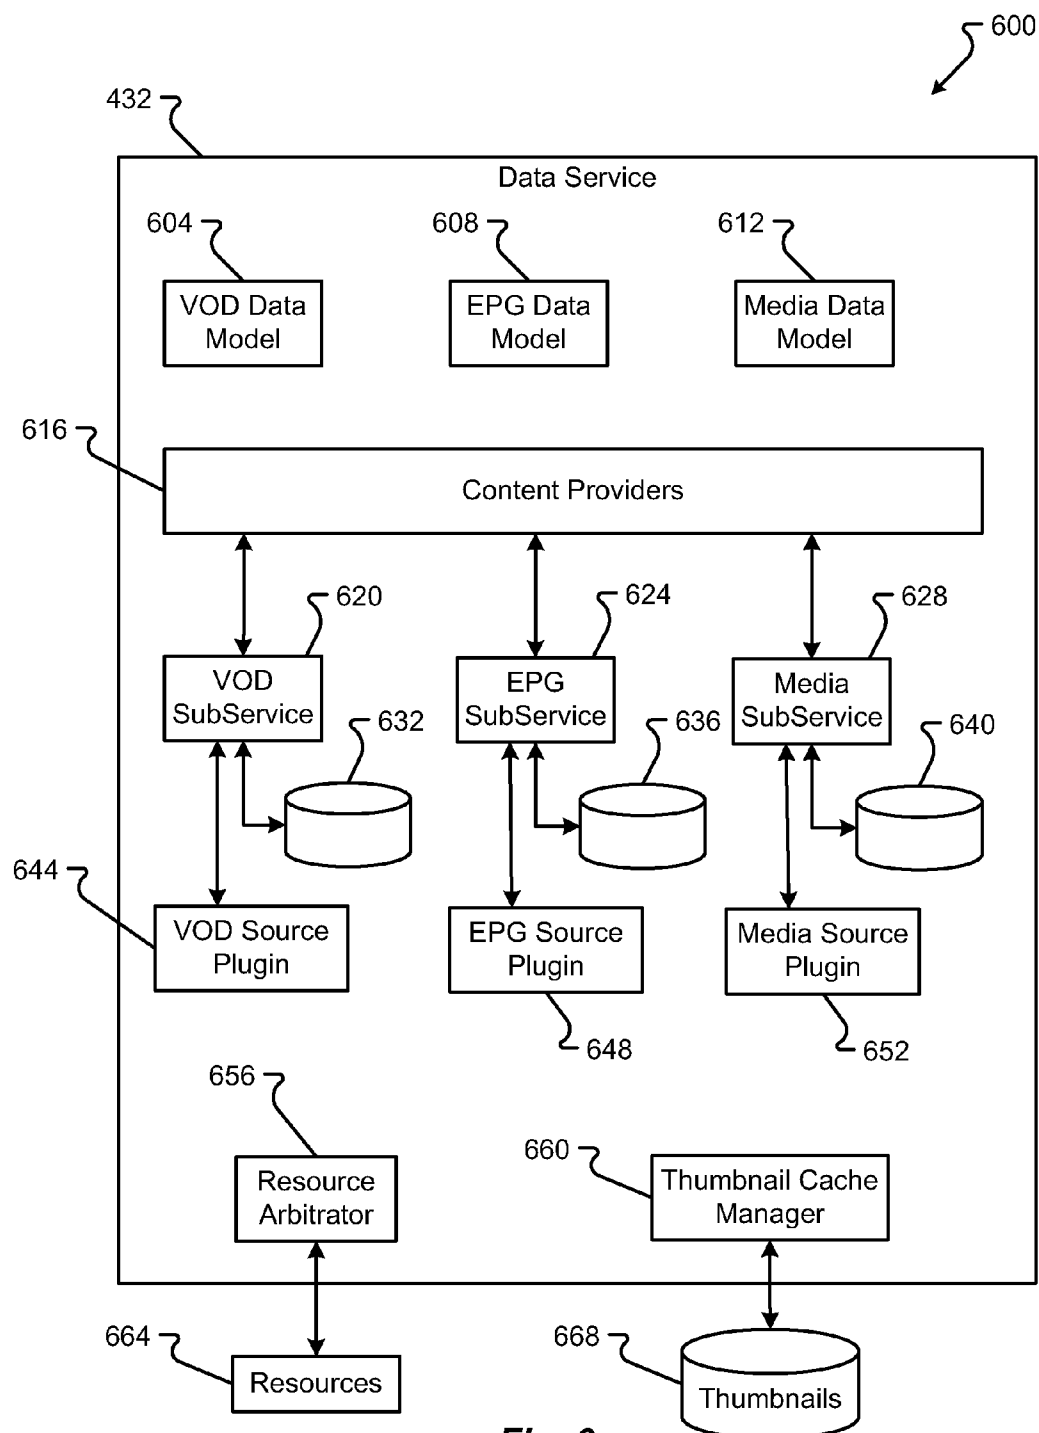


Fig. 6

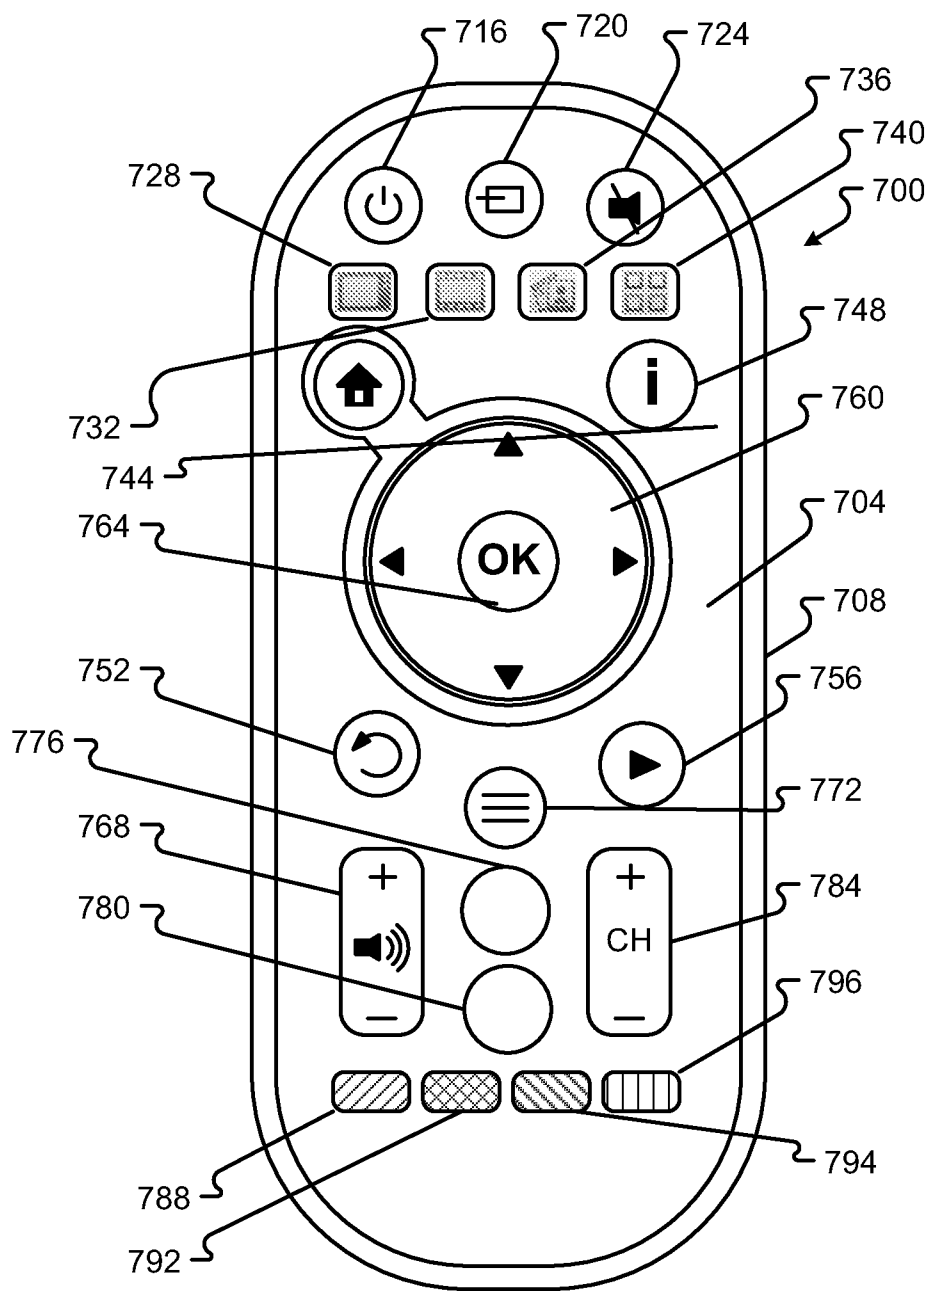


Fig. 7

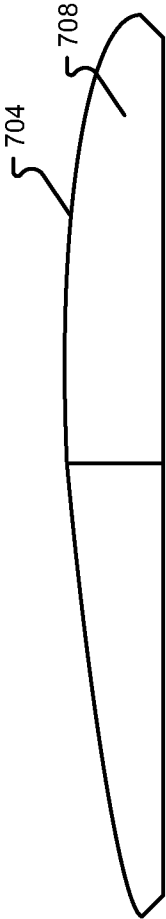


Fig. 8

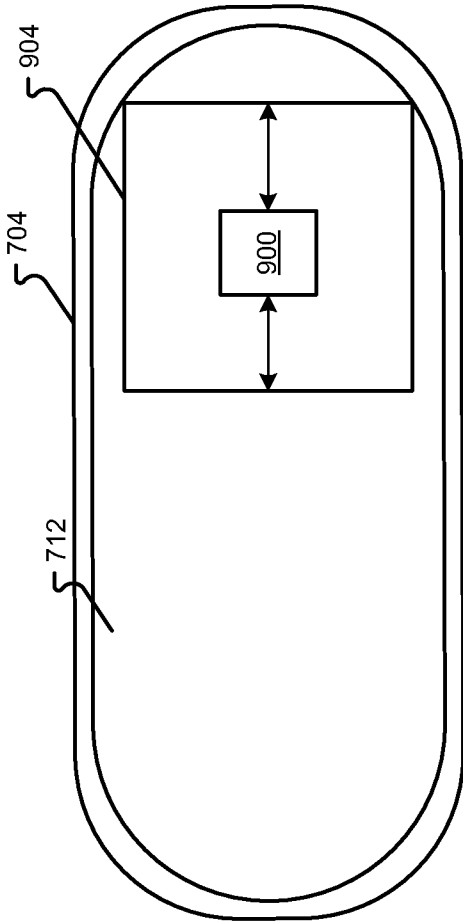


Fig. 9A

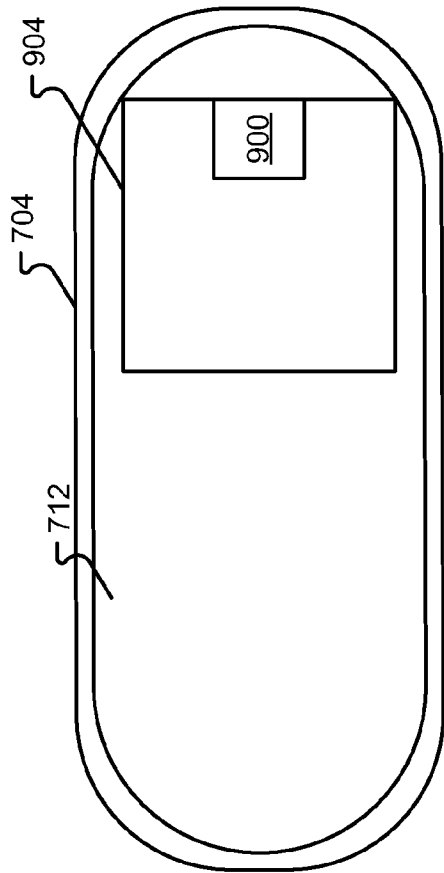


Fig. 9B

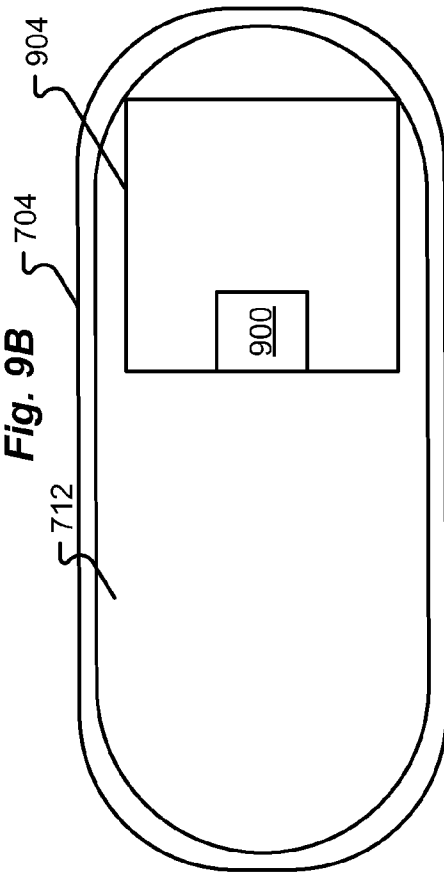


Fig. 9C

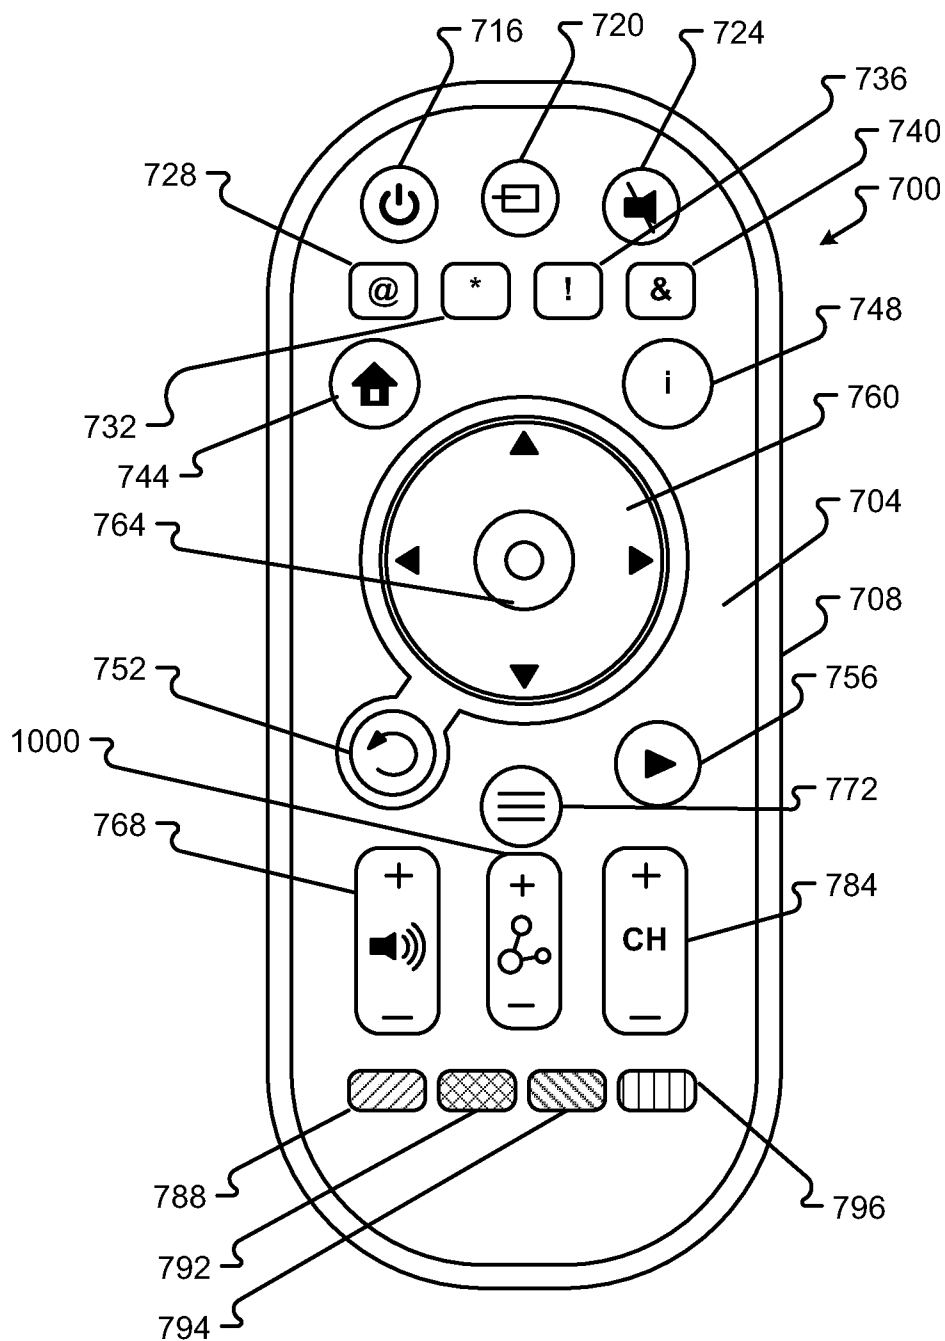


Fig. 10

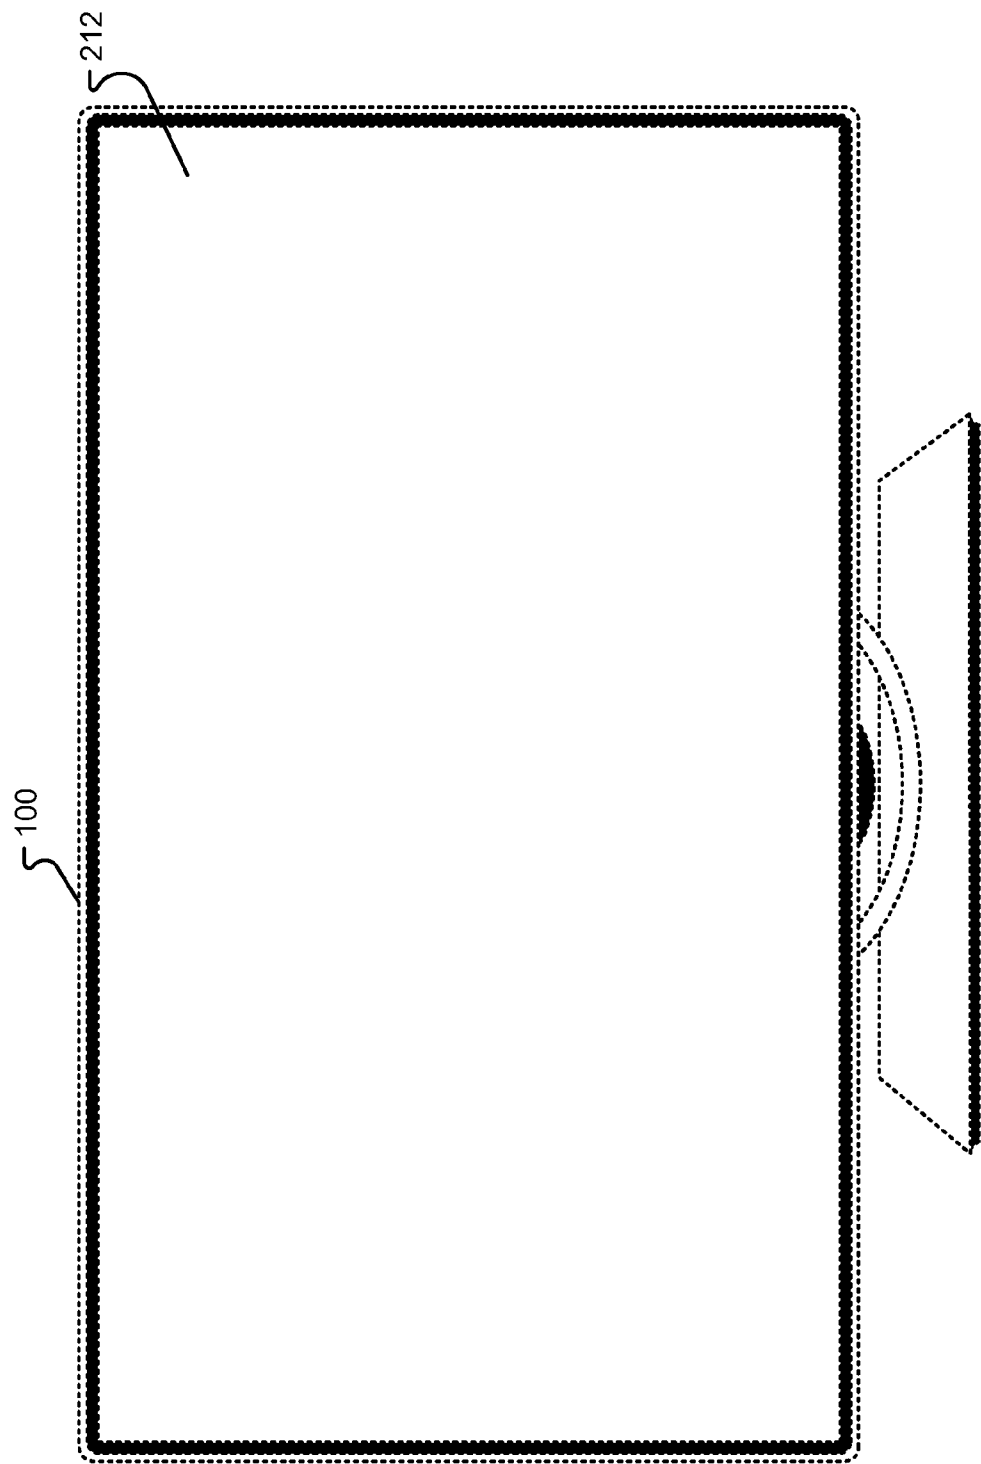


Fig. 11A

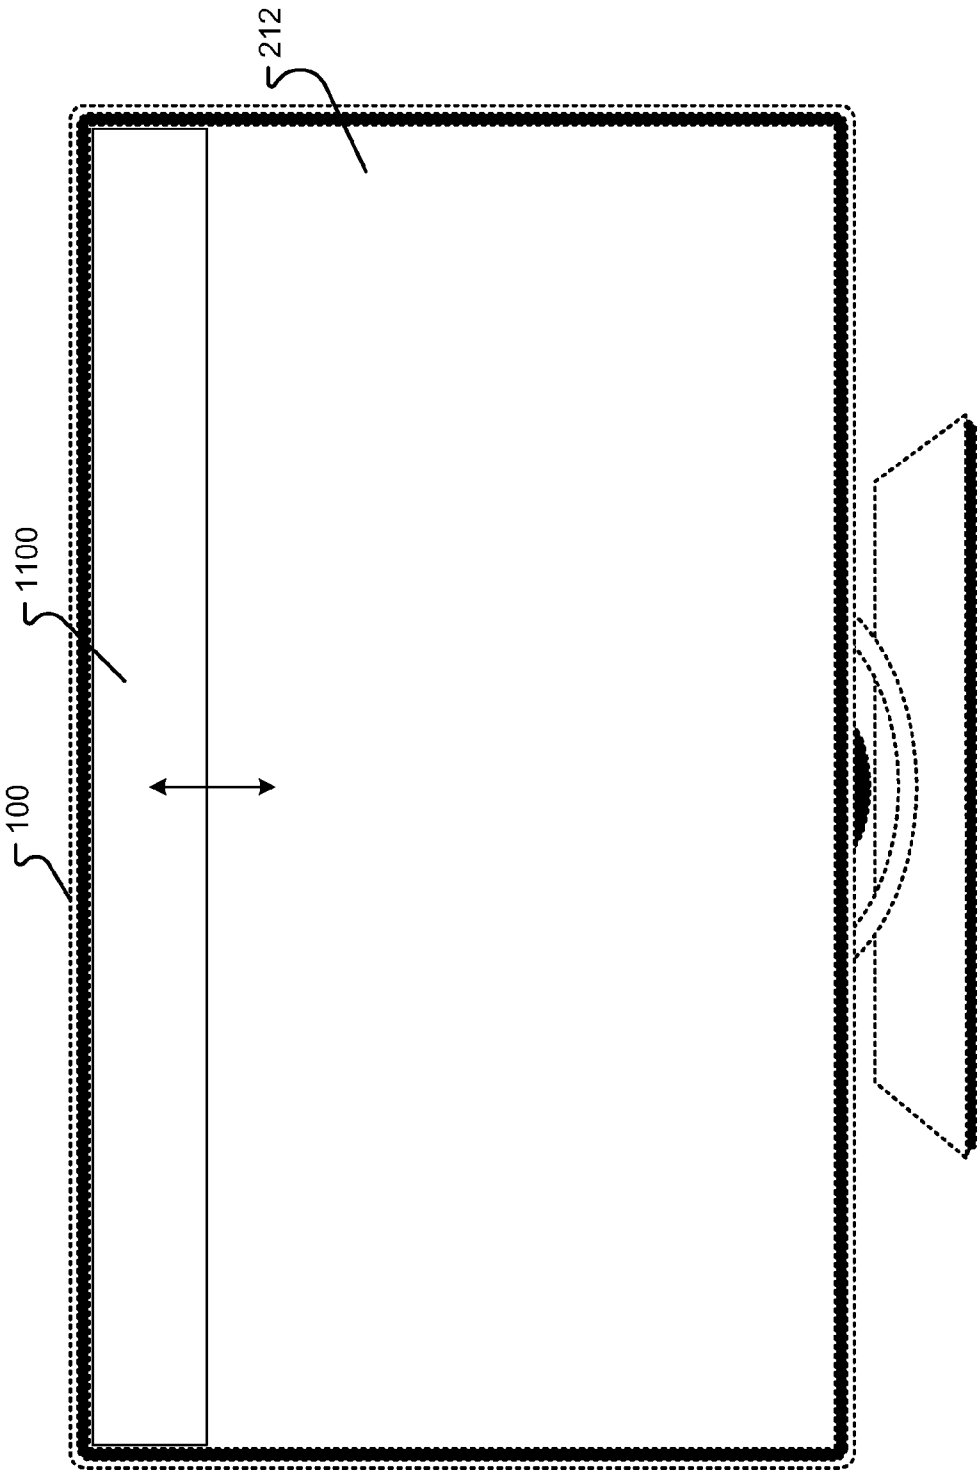


Fig. 11B

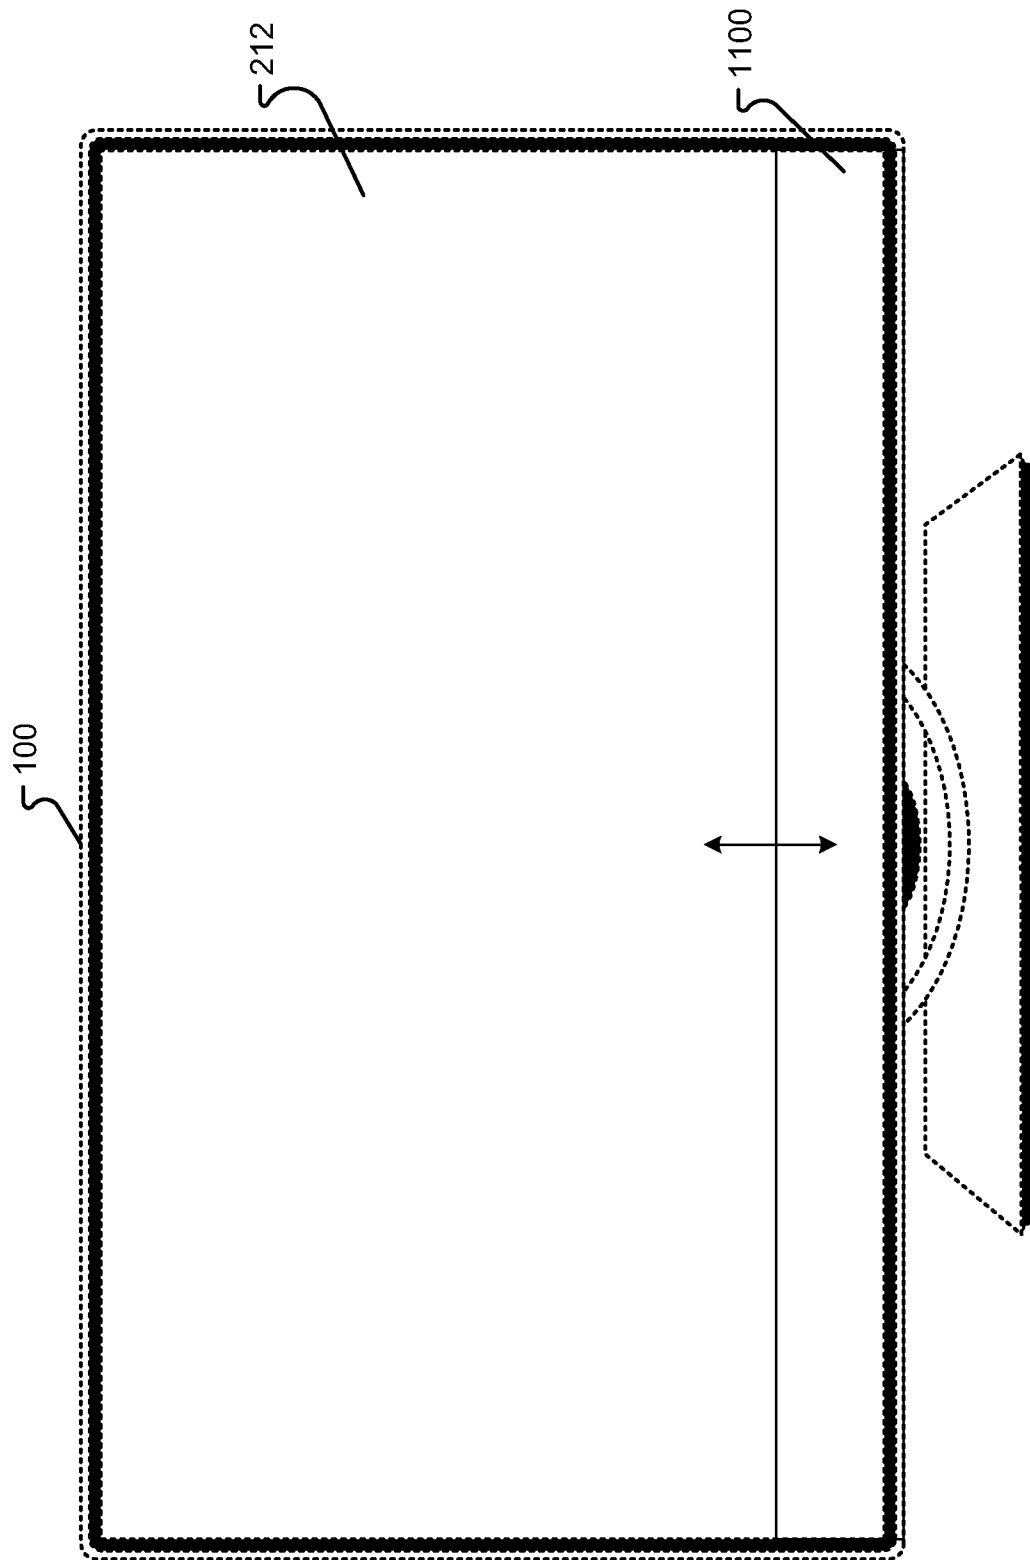


Fig. 11C

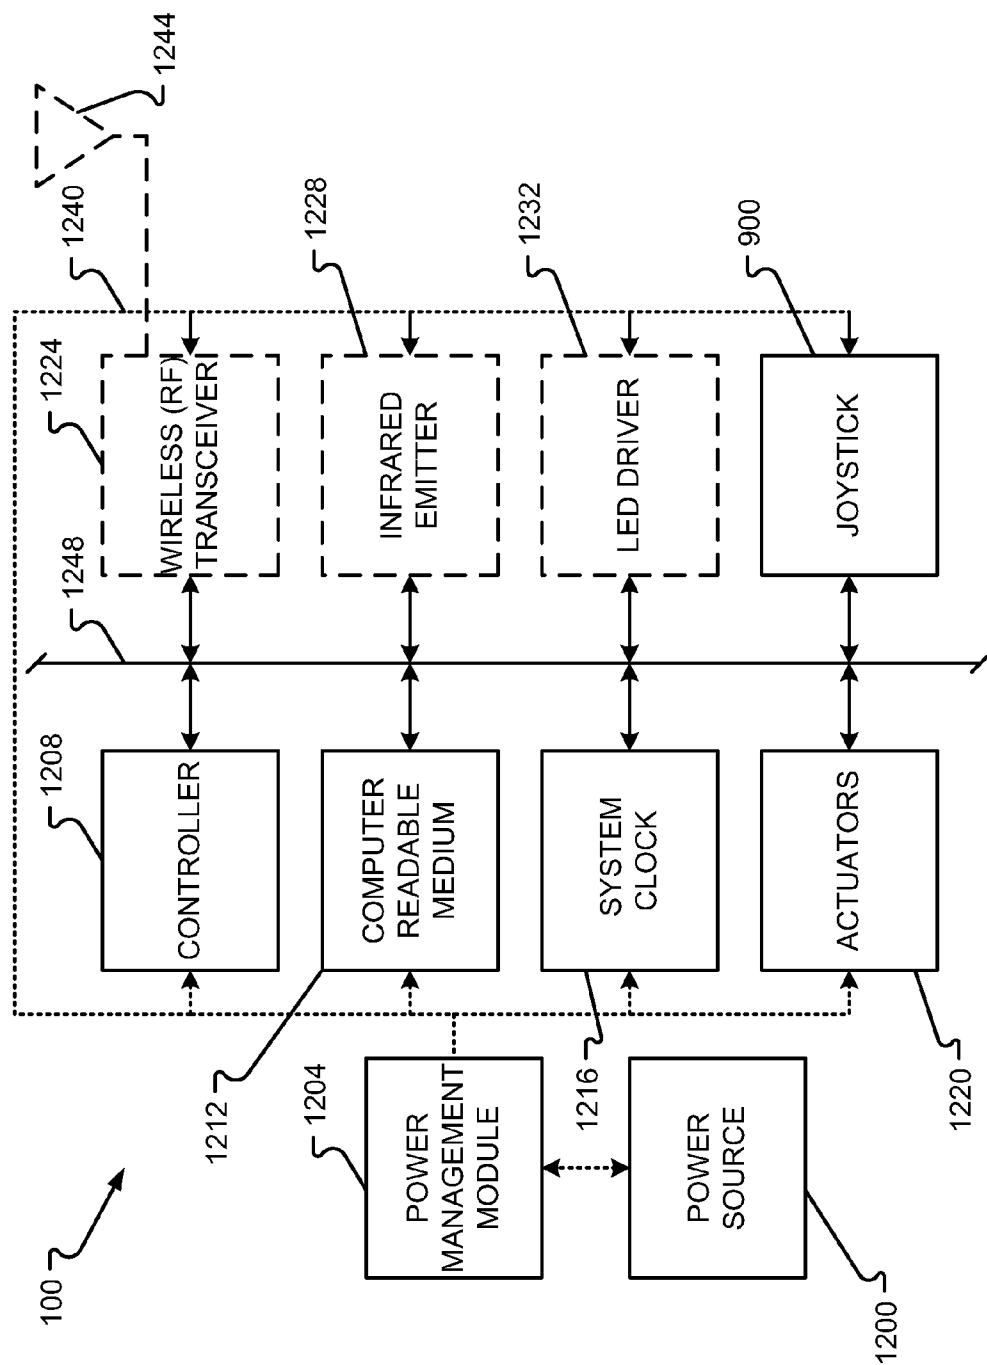


Fig. 12

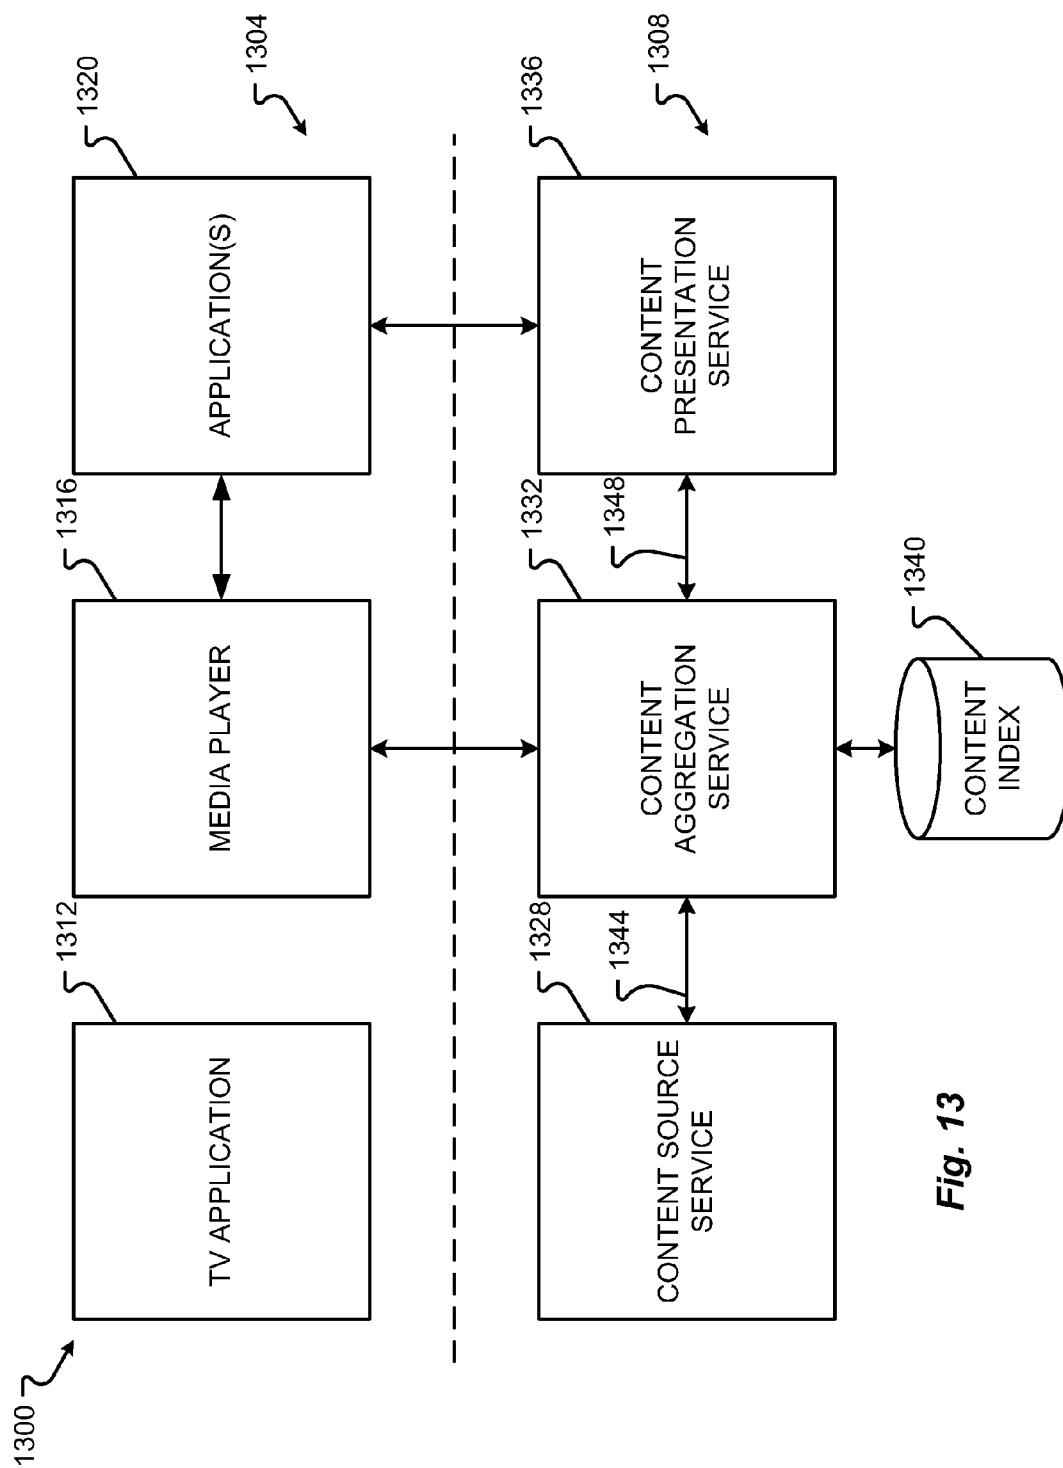


Fig. 13

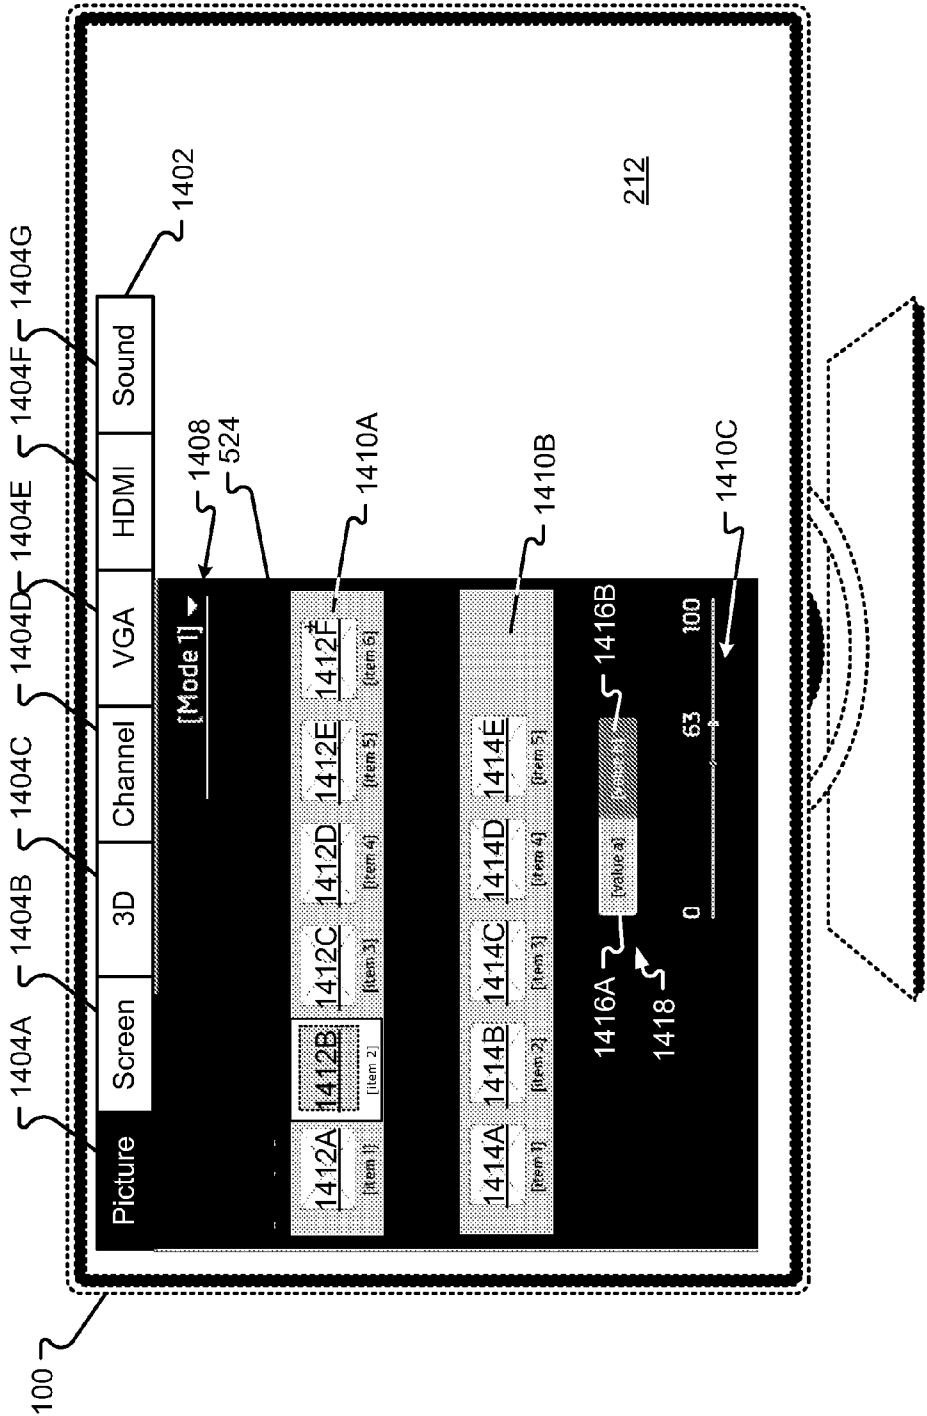


Fig. 14

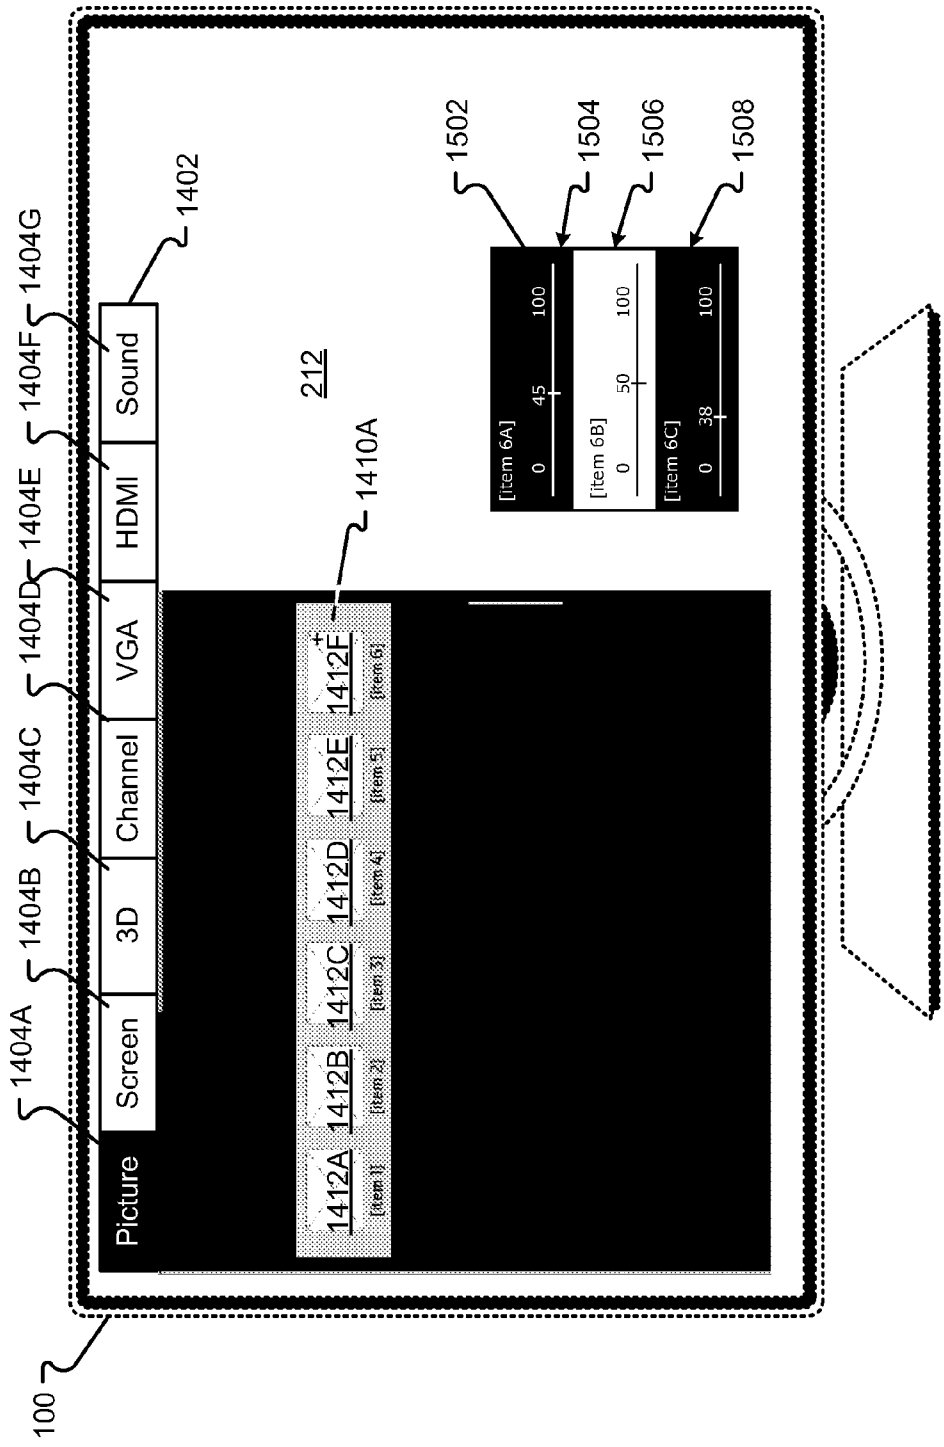


Fig. 15

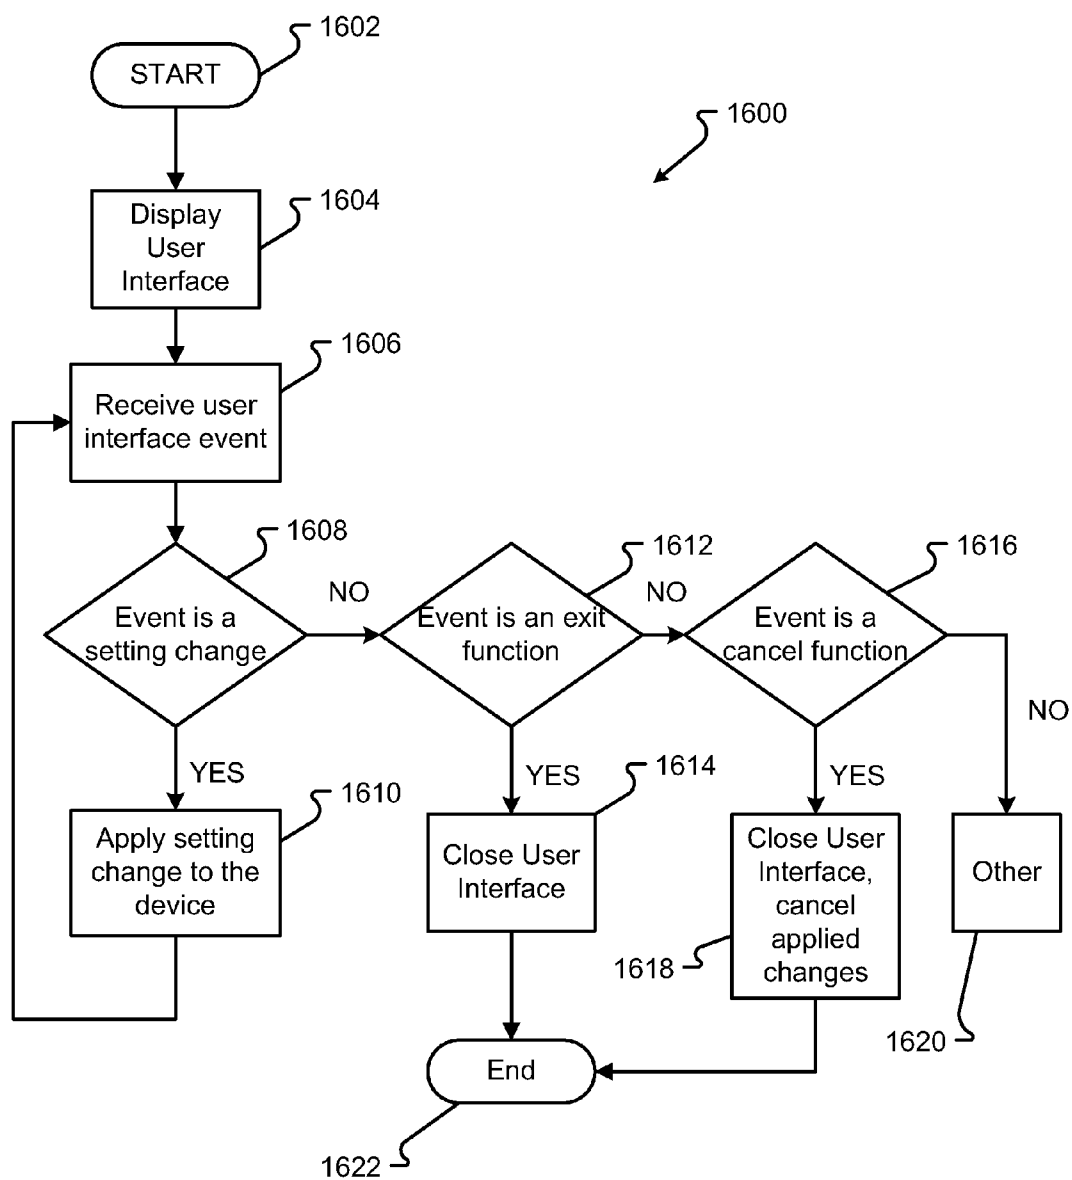


Fig. 16

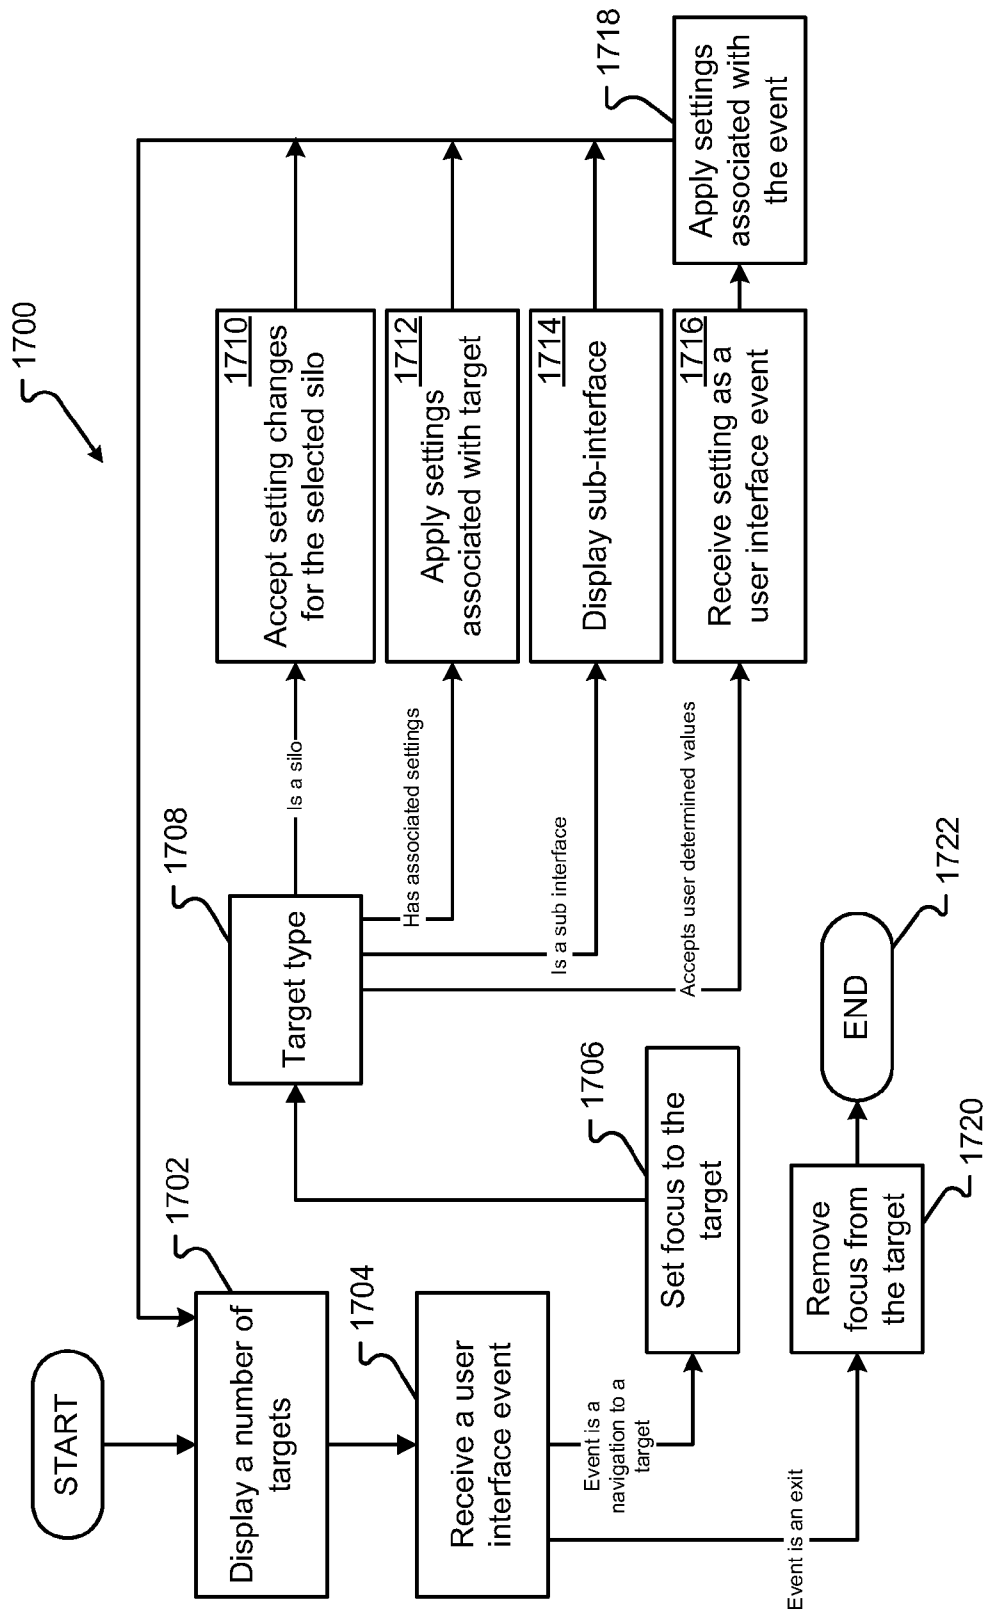


Fig. 17

ON-SCREEN SETTINGS INTERACTION FOR INTERACTIVE TELEVISION

CROSS REFERENCE TO RELATED APPLICATION

[0001] The present application claims the benefits of and priority, under 35 U.S.C. §119(e), to U.S. Provisional Application Ser. Nos. 61/659,626 filed Jun. 14, 2012, “Method and System for Customizing Televised Content”; 61/684,672 filed Aug. 17, 2012, “Smart TV”; 61/702,650 filed Sep. 18, 2012, “Smart TV”; 61/697,710 filed Sep. 6, 2012, “Social TV”; 61/700,182 filed Sep. 12, 2012, “Social TV Roadmap”; 61/736,692 filed Dec. 13, 2012, “SmartTV”; 61/798,821 filed Mar. 15, 2013, “SmartTV”; 61/804,942 filed Mar. 25, 2013, “SmartTV”; 61/804,998 filed Mar. 25, 2013, “SmartTV”; 61/804,971 filed Mar. 25, 2013, “SmartTV”; 61/804,990 filed Mar. 25, 2013, “SmartTV”; 61/805,003 filed Mar. 25, 2013, “SmartTV”; 61/805,053 filed Mar. 25, 2013, “SmartTV”; 61/805,030 filed Mar. 25, 2013, “SmartTV”; 61/805,027 filed Mar. 25, 2013, “SmartTV”; 61/805,042 filed Mar. 25, 2013, “SmartTV”; 61/805,038 filed Mar. 25, 2013, “SmartTV.” Each of the aforementioned documents is incorporated herein by reference in their entirety for all that they teach and for all purposes.

BACKGROUND

[0002] Consolidation of device features or technological convergence is in an increasing trend. Technological convergence describes the tendency for different technological systems to evolve toward performing similar tasks. As people use more devices, the need to carry those devices, charge those devices, update software on those devices, etc. becomes more cumbersome. To compensate for these problems, technology companies have been integrating features from different devices into one or two multi-functional devices. For example, cellular phones are now capable of accessing the Internet, taking photographs, providing calendar functions, etc.

[0003] The consolidation trend is now affecting the design and functionality of devices generally used in the home. For example, audio receivers can access the Internet, digital video recorders can store or provide access to digital photographs, etc. The television in home audio/video systems remains a cornerstone device because the display function cannot be integrated into other devices. As such, consolidating home devices leads to integrating features and functionality into the television. The emergence of the Smart Television (Smart TV) is evidence of the trend to consolidate functionality into the television.

[0004] A Smart TV is generally conceived as a device that integrates access to the Internet and Web 2.0 features into television sets. The Smart TV represents the trend of technological convergence between computers and television sets. The Smart TV generally focuses on online interactive media, Internet TV, on-demand streaming media, and generally does not focus on traditional broadcast media. Unfortunately, most Smart TVs have yet to provide seamless and intuitive user interfaces for navigating and/or executing the various features of the Smart TV. As such, there are still issues with the consolidation of features and the presentation of these features in Smart TVs.

SUMMARY

[0005] There is a need for a Intelligent TV with intuitive user interfaces and with seamless user interaction capability. These and other needs are addressed by the various aspects, embodiments, and/or configurations of the present disclosure. Also, while the disclosure is presented in terms of exemplary embodiments, it should be appreciated that individual aspects of the disclosure can be separately claimed.

[0006] In one embodiment, a method is disclosed, comprising, displaying, on an electronic device, a user interface of the electronic device, the user interface comprising a number of settings associated with a number of operating parameters of the electronic device and further associated with a functional silo of the electronic device; receiving, at an input interface of the electronic device, a user interface event associated with the user interface; upon the user interface event indicating a setting change to at least one setting, applying the setting change to the electronic device substantially without delay; and upon receiving the user interface event indicating an exit function, preserving the setting change to the electronic device.

[0007] In another embodiment, an electronic device is disclosed, comprising, a display, operable to present a visual portion of an audio-visual presentation; a silos, representing at least one of an application and an source input; a settings dialog, operable to present a number of settings associated with the silo; the settings dialog further comprising a number of targets, at least one target associated with a value of a setting of an operating parameter of the electronic device; an input operable to receive a user input; and upon receiving a user input setting focus to first target, applying the associated value to the setting for the silo associated with the first target.

[0008] In another embodiment, a non-transitory machine readable medium is disclosed with instructions to cause the machine to perform, displaying, on an electronic device, a user interface of the electronic device, the user interface comprising a number of settings associated with a number of operating parameters of the electronic device and further associated with a functional silo of the electronic device; receiving, at an input interface of the electronic device, a user interface event associated with the user interface; upon the user interface event indicating a setting change to at least one setting, applying the setting change to the electronic device substantially without delay; and upon receiving the user interface event indicating an exit function, preserving the setting change to the electronic device.

[0009] The present disclosure can provide a number of advantages depending on the particular aspect, embodiment, and/or configuration. One advantage provided by the present disclosure is a more user-friendly means to set the settings of the electronic device. Another advantage provided is the configuration of the electronic device by silo.

[0010] These and other advantages will be apparent from the disclosure.

[0011] The phrases “at least one”, “one or more”, and “and/or” are open-ended expressions that are both conjunctive and disjunctive in operation. For example, each of the expressions “at least one of A, B and C”, “at least one of A, B, or C”, “one or more of A, B, and C”, “one or more of A, B, or C” and “A, B, and/or C” means A alone, B alone, C alone, A and B together, A and C together, B and C together, or A, B and C together.

[0012] The term “a” or “an” entity refers to one or more of that entity. As such, the terms “a” (or “an”), “one or more” and

“at least one” can be used interchangeably herein. It is also to be noted that the terms “comprising”, “including”, and “having” can be used interchangeably.

[0013] The term “automatic” and variations thereof, as used herein, refers to any process or operation done without material human input when the process or operation is performed. However, a process or operation can be automatic, even though performance of the process or operation uses material or immaterial human input, if the input is received before performance of the process or operation. Human input is deemed to be material if such input influences how the process or operation will be performed. Human input that consents to the performance of the process or operation is not deemed to be “material.”

[0014] A “blog” (a blend of the term web log) is a type of website or part of a website supposed to be updated with new content from time to time. Blogs are usually maintained by an individual with regular entries of commentary, descriptions of events, or other material such as graphics or video. Entries are commonly displayed in reverse-chronological order.

[0015] A “blogging service” is a blog-publishing service that allows private or multi-user blogs with time-stamped entries.

[0016] The term “cable TV” refers to a system of distributing television programs to subscribers via radio frequency (RF) signals transmitted through coaxial cables or light pulses through fiber-optic cables. This contrasts with traditional broadcast television (terrestrial television) in which the television signal is transmitted over the air by radio waves and received by a television antenna attached to the television.

[0017] The term “channel” or “television channel,” as used herein, can be a physical or virtual channel over which a television station or television network is distributed. A physical channel in analog television can be an amount of bandwidth, typically 6, 7, or 8 MHz, that occupies a predetermined channel frequency. A virtual channel is a representation, in cable or satellite television, of a data stream for a particular television media provider (e.g., CDS, TNT, HBO, etc.).

[0018] The term “computer-readable medium,” as used herein, refers to any tangible storage and/or transmission medium that participate in providing instructions to a processor for execution. Such a medium may take many forms, including but not limited to, non-volatile media, volatile media, and transmission media. Non-volatile media includes, for example, NVRAM, or magnetic or optical disks. Volatile media includes dynamic memory, such as main memory. Common forms of computer-readable media include, for example, a floppy disk, a flexible disk, hard disk, magnetic tape, or any other magnetic medium, magneto-optical medium, a CD-ROM, any other optical medium, punch cards, paper tape, any other physical medium with patterns of holes, a RAM, a PROM, and EPROM, a FLASH-EPROM, a solid state medium like a memory card, any other memory chip or cartridge, a carrier wave as described hereinafter, or any other medium from which a computer can read. A digital file attachment to e-mail or other self-contained information archive or set of archives is considered a distribution medium equivalent to a tangible storage medium. When the computer-readable media is configured as a database, it is to be understood that the database may be any type of database, such as relational, hierarchical, object-oriented, and/or the like. Accordingly, the disclosure is considered to include a tangible storage medium or distribution medium and prior art-recognized

equivalents and successor media, in which the software implementations of the present disclosure are stored.

[0019] The term “enhanced television” refers to a collection of specifications developed under the OpenCable project of CableLabs (Cable Television Laboratories, Inc.) that define an ETV Application consisting of resources (files) adhering to the Enhanced TV Binary Interchange Format (EBIF) content format as well as PNG images, JPEG images, and PFR downloadable fonts. An ETV application is normally delivered through an MPEG transport stream and accompanies an MPEG program containing video and audio elementary streams. An “ETV Application” is a collection of resources (files) that include one or more EBIF resources that represent viewable information in the form of pages. Two forms of a given ETV Application may be distinguished: (1) an interchange form and (2) an execution form. The interchange form of an ETV Application consists of the resources (files) that represent the compiled application prior to its actual execution by an ETV User Agent. The execution form of an ETV Application consists of the stored, and possibly mutated forms of these resources while being decoded, presented, and executed by an ETV User Agent. An “ETV User Agent” is a software component that operates on a set-top box, a television, or any other computing environment capable of receiving, decoding, presenting, and processing an ETV Application. This component usually provides, along with its host hardware environment, one or more mechanisms for an end-user to navigate and interact with the multimedia content represented by ETV Applications.

[0020] The term “high-definition television” (HDTV) provides a resolution that is substantially higher than that of standard-definition television. HDTV may be transmitted in various formats, namely 1080p—1920×1080p: 2,073,600 pixels (approximately 2.1 megapixels) per frame, 1080i (which is typically either 1920×1080i: 1,036,800 pixels (approximately 1 megapixel) per field or 2,073,600 pixels (approximately 2.1 megapixels) per frame or 1440×1080i: 1,777,600 pixels (approximately 0.8 megapixels) per field or 1,555,200 pixels (approximately 1.6 megapixels) per frame), or 720p—1280×720p: 921,600 pixels (approximately 0.9 megapixels) per frame. As will be appreciated, “frame size” in pixels is defined as number of horizontal pixels×number of vertical pixels, for example 1280×720 or 1920×1080. Often the number of horizontal pixels is implied from context and is omitted, as in the case of 720p and 1080p, “scanning system” is identified with the letter “p” for progressive scanning or “i” for interlaced scanning, and “frame rate” is identified as number of video frames per second. For interlaced systems an alternative form of specifying number of fields per second is often used. For purposes of this disclosure, high-definition television” is deemed to include other high-definition analog or digital video formats, including ultra high definition television.

[0021] The term “internet television” (otherwise known as Internet TV, Online Television, or Online TV) is the digital distribution of television content via the Internet. It should not be confused with Web television—short programs or videos created by a wide variety of companies and individuals, or Internet protocol television (IPTV)—an emerging internet technology standard for use by television broadcasters. Internet Television is a general term that covers the delivery of television shows and other video content over the internet by video streaming technology, typically by major traditional television broadcasters. It does not describe a technology

used to deliver content (see Internet protocol television). Internet television has become very popular through services such as RTE Player in Ireland; BBC iPlayer, 4oD, ITV Player (also STV Player and UTV Player) and Demand Five in the United Kingdom; Hulu in the United States; Nederland 24 in the Netherlands; ABC iview and Australia Live TV in Australia; Tivibu in Turkey; iWanTV! in the Philippines.

[0022] The term “internet protocol television” (IPTV) refers to a system through which television services are delivered using the Internet protocol suite over a packet-switched network such as the Internet, instead of being delivered through traditional terrestrial, satellite signal, and cable television formats. IPTV services may be classified into three main groups, namely live television, with or without interactivity related to the current TV show; time-shifted television: catch-up TV (replays a TV show that was broadcast hours or days ago), start-over TV (replays the current TV show from its beginning); and video on demand (VOD): browse a catalog of videos, not related to TV programming. IPTV is distinguished from Internet television by its on-going standardization process (e.g., European Telecommunications Standards Institute) and preferential deployment scenarios in subscriber-based telecommunications networks with high-speed access channels into end-user premises via set-top boxes or other customer-premises equipment.

[0023] The term “silo,” as used herein, can be a logical representation of inputs or applications. An input can be a device or devices (e.g., DVD, VCR, etc.) electrically connected to the television through a port (e.g., HDMI, video/audio inputs, etc.) or through a network (e.g., LAN WAN, etc.). An application can be a software service that provides a particular type of function (e.g., Live TV, Video on Demand, User Applications, Photograph display, etc.).

[0024] The term “panel,” as used herein, can mean a user interface displayed in at least a portion of the display. The panel may be interactive (e.g., accepts user input) or informational (e.g., does not accept user input). A panel may be translucent whereby the panel obscures but does not mask the underlying content being displayed in the display. Panels may be provided in response to a user input from a button or remote control interface.

[0025] The term “screen,” as used herein, refers to a physical structure that includes one or more hardware components that provide the device with the ability to render a user interface and/or receive user input. A screen can encompass any combination of gesture capture region, a touch sensitive display, and/or a configurable area. The device can have one or more physical screens embedded in the hardware. However a screen may also include an external peripheral device that may be attached and detached from the device. In embodiments, multiple external devices may be attached to the device. For example, another screen may be included with a remote control unit that interfaces with the Intelligent TV.

[0026] The term “media” of “multimedia,” as used herein, refers to content that may assume one of a combination of different content forms. Multimedia can include one or more of, but is not limited to, text, audio, still images, animation, video, or interactivity content forms.

[0027] A “smart TV”, sometimes referred to as connected TV or hybrid TV, (not to be confused with IPTV, Internet TV, or with Web TV), describes a trend of integration of the Internet and Web 2.0 features into television sets and set-top boxes, as well as the technological convergence between computers and these television sets/set-top boxes. The

devices have a higher focus on online interactive media, Internet TV, over-the-top content, as well as on-demand streaming media, and less focus on traditional broadcast media than traditional television sets and set-top boxes

[0028] The term “television” is a telecommunication medium, device (or set) or set of associated devices, programming, and/or transmission for transmitting and receiving moving images that can be monochrome (black-and-white) or colored, with or without accompanying sound. Different countries use one of the three main video standards for TVs, namely PAL, NTSC or SECAM. Television is most commonly used for displaying broadcast television signals. The broadcast television system is typically disseminated via radio transmissions on designated channels in the 54-890 MHz frequency band. A common television set comprises multiple internal electronic circuits, including those for receiving and decoding broadcast signals. A visual display device which lacks a tuner is properly called a video monitor, rather than a television. A television may be different from other monitors or displays based on the distance maintained between the user and the television when the user watches the media and based on the inclusion of a tuner or other electronic circuit to receive the broadcast television signal.

[0029] The term “Live TV,” as used herein, refers to a television production broadcast in real-time, as events happen, in the present.

[0030] The term “standard-definition television” (SDTV) is a television system that uses a resolution that is not considered to be either high-definition television (HDTV 720p and 1080p) or enhanced-definition television (EDTV 480p). The two common SDTV signal types are 576i, with 576 interlaced lines of resolution, derived from the European-developed PAL and SECAM systems; and 480i based on the American National Television System Committee NTSC system. In the US, digital SDTV is broadcast in the same 4:3 aspect ratio as NTSC signals. However, in other parts of the world that used the PAL or SECAM analog standards, standard-definition television is now usually shown with a 16:9 aspect ratio. Standards that support digital SDTV broadcast include DVB, ATSC and ISDB. Television signals are transmitted in digital form, and their pixels have a rectangular shape, as opposed to square pixels that are used in modern computer monitors and modern implementations of HDTV. The table below summarizes pixel aspect ratios for various kinds of SDTV video signal. Note that the actual image (be it 4:3 or 16:9) is always contained in the center 704 horizontal pixels of the digital frame, regardless of how many horizontal pixels (704 or 720) are used. In case of digital video signal having 720 horizontal pixels, only the center 704 pixels contain actual 4:3 or 16:9 image, and the 8 pixel wide stripes from either side are called nominal analogue blanking and should be discarded before displaying the image. Nominal analogue blanking should not be confused with overscan, as overscan areas are part of the actual 4:3 or 16:9 image.

[0031] The term “video on demand (VOD),” as used herein, refers to systems and processes which allow users to select and watch/listen to video or audio content on demand. VOD systems may stream content, to view the content in real time, or download the content to a storage medium for viewing at a later time.

[0032] The term “satellite positioning system receiver” refers to a wireless receiver or transceiver to receive and/or send location signals from and/or to a satellite positioning system, such as the Global Positioning System (“GPS”) (US),

GLONASS (Russia), Galileo positioning system (EU), Compass navigation system (China), and Regional Navigational Satellite System (India). The term “display,” as used herein, refers to at least a portion of a screen used to display the output of the television to a user. A single physical screen can include multiple displays that are managed as separate logical displays. Thus, different content can be displayed on the separate displays although part of the same physical screen.

[0033] The term “displayed image,” as used herein, refers to an image produced on the display. A typical displayed image is a television broadcast or menu. The displayed image may occupy all or a portion of the display.

[0034] The term “display orientation,” as used herein, refers to the way in which a rectangular display is oriented by a user for viewing. The two most common types of display orientation are portrait and landscape. In landscape mode, the display is oriented such that the width of the display is greater than the height of the display (such as a 4:3 ratio, which is 4 units wide and 3 units tall, or a 16:9 ratio, which is 16 units wide and 9 units tall). Stated differently, the longer dimension of the display is oriented substantially horizontal in landscape mode while the shorter dimension of the display is oriented substantially vertical. In the portrait mode, by contrast, the display is oriented such that the width of the display is less than the height of the display. Stated differently, the shorter dimension of the display is oriented substantially horizontal in the portrait mode while the longer dimension of the display is oriented substantially vertical.

[0035] The term “module,” as used herein, refers to any known or later developed hardware, software, firmware, artificial intelligence, fuzzy logic, or combination of hardware and software that is capable of performing the functionality associated with that element.

[0036] The terms “determine,” “calculate” and “compute,” and variations thereof, as used herein, are used interchangeably and include any type of methodology, process, mathematical operation or technique.

[0037] The term “touch screen” or “touchscreen” refer to screen that can receive user contact or other tactile input, such as a stylus. The touch screen may sense user contact in a number of different ways, such as by a change in an electrical parameter (e.g., resistance or capacitance), acoustic wave variations, infrared radiation proximity detection, light variation detection, and the like. In a resistive touch screen, for example, normally separated conductive and resistive metallic layers in the screen pass an electrical current. When a user touches the screen, the two layers make contact in the contacted location, whereby a change in electrical field is noted and the coordinates of the contacted location calculated. In a capacitive touch screen, a capacitive layer stores electrical charge, which is discharged to the user upon contact with the touch screen, causing a decrease in the charge of the capacitive layer. The decrease is measured, and the contacted location coordinates determined. In a surface acoustic wave touch screen, an acoustic wave is transmitted through the screen, and the acoustic wave is disturbed by user contact. A receiving transducer detects the user contact instance and determines the contacted location coordinates.

[0038] The term “web television” is original television content produced for broadcast via the World Wide Web. Some major distributors of web television are YouTube, Myspace, Newgrounds, Blip.tv, and Crackle.

[0039] The term “display” refers to a portion of one or more screens used to display the output of a computer to a user. A

display may be a single-screen display or a multi-screen display, referred to as a composite display. A composite display can encompass the touch sensitive display of one or more screens. A single physical screen can include multiple displays that are managed as separate logical displays. Thus, different content can be displayed on the separate displays although part of the same physical screen.

[0040] The terms “instant message” and “instant messaging” refer to a form of real-time text communication between two or more people, typically based on typed text.

[0041] The term “internet search engine” refers to a web search engine designed to search for information on the World Wide Web and FTP servers. The search results are generally presented in a list of results often referred to as SERFS, or “search engine results pages”. The information may consist of web pages, images, information and other types of files. Some search engines also mine data available in databases or open directories. Web search engines work by storing information about many web pages, which they retrieve from the html itself. These pages are retrieved by a Web crawler (sometimes also known as a spider)—an automated Web browser which follows every link on the site. The contents of each page are then analyzed to determine how it should be indexed (for example, words are extracted from the titles, headings, or special fields called meta tags). Data about web pages are stored in an index database for use in later queries. Some search engines, such as Google™, store all or part of the source page (referred to as a cache) as well as information about the web pages, whereas others, such as AltaVista™, store every word of every page they find.

[0042] The term “module” as used herein refers to any known or later developed hardware, software, firmware, artificial intelligence, fuzzy logic, or combination of hardware and software that is capable of performing the functionality associated with that element. Also, while the disclosure is presented in terms of exemplary embodiments, it should be appreciated that individual aspects of the disclosure can be separately claimed.

[0043] The terms “online community”, “e-community”, or “virtual community” mean a group of people that primarily interact via a computer network, rather than face to face, for social, professional, educational or other purposes. The interaction can use a variety of media formats, including wikis, blogs, chat rooms, Internet forums, instant messaging, email, and other forms of electronic media. Many media formats are used in social software separately or in combination, including text-based chatrooms and forums that use voice, video text or avatars.

[0044] The term “remote control” refers to a component of an electronics device, most commonly a television set, DVD player and/or home theater system for operating the device wirelessly, typically from a short line-of-sight distance. Remote control normally uses infrared and/or radio frequency (RF) signaling and can include WiFi, wireless USB, Bluetooth™ connectivity, motion sensor enabled capabilities and/or voice control. A touchscreen remote control is a handheld remote control device which uses a touchscreen user interface to replace most of the hard, built-in physical buttons used in normal remote control devices.

[0045] The term “satellite TV” refers to television programming delivered by the means of communications satellite and received by an outdoor antenna, usually a parabolic reflector generally referred to as a satellite dish, and as far as

household usage is concerned, a satellite receiver either in the form of an external set-top box or a satellite tuner module built into a TV set.

[0046] The term “social network service” is a service provider that builds online communities of people, who share interests and/or activities, or who are interested in exploring the interests and activities of others. Most social network services are web-based and provide a variety of ways for users to interact, such as e-mail and instant messaging services.

[0047] The term “social network” refers to a web-based social network.

[0048] The term “gesture” refers to a user action that expresses an intended idea, action, meaning, result, and/or outcome. The user action can include manipulating a device (e.g., opening or closing a device, changing a device orientation, moving a trackball or wheel, etc.), movement of a body part in relation to the device, movement of an implement or tool in relation to the device, audio inputs, etc. A gesture may be made on a device (such as on the screen) or with the device to interact with the device.

[0049] The term “gesture capture” refers to a sense or otherwise a detection of an instance and/or type of user gesture. The gesture capture can occur in one or more areas of the screen. A gesture region can be on the display, where it may be referred to as a touch sensitive display or off the display where it may be referred to as a gesture capture area.

[0050] The term “electronic address” refers to any contactable address, including a telephone number, instant message handle, e-mail address, Universal Resource Locator (“URL”), Universal Resource Identifier (“URI”), Address of Record (“AOR”), electronic alias in a database, like addresses, and combinations thereof.

[0051] It shall be understood that the term “means,” as used herein, shall be given its broadest possible interpretation in accordance with 35 U.S.C., Section 112, Paragraph 6. Accordingly, a claim incorporating the term “means” shall cover all structures, materials, or acts set forth herein, and all of the equivalents thereof. Further, the structures, materials or acts and the equivalents thereof shall include all those described in the summary of the invention, brief description of the drawings, detailed description, abstract, and claims themselves.

[0052] The term “setting” or “settings,” as used herein, refers to the operating parameter of the Smart TV. Certain settings may be readily modified by a user, while other settings are factory-set and resist user modification. Settings include, but are not limited to, operating parameters associated with visual output (e.g., brightness, hue, saturation, and gamma correction), format (e.g., NTSC, PAL, letterbox and zoom), electrical operation (e.g., power saving features, voltage and cycles per second), administrative operation (e.g., parental controls and timers), audio output (e.g., Dolby settings, surround sound configuration and bass and treble levels), and any of the many other operating parameters associated with the operation of an audio-video device, such as Smart TV.

[0053] The term “sub-interface,” as used herein, refers to a number of logical groupings of targets presented with a common visual association (e.g., a display area, a window, a dialog, and an emphasized portion of a display area visually grouping a number of targets). Furthermore, it should be noted that the term “sub-interface” is not used to denote a child interface within a hierarchical organization of interfaces or sub-interfaces, although such a relationship may exist.

[0054] The term “target,” as used herein, refers to a displayed icon, text, geometric shape, symbol or other representation by which a user may associate a function of the television with selecting, or interacting, therewith. A target may be associated with a preset function, a preset function that is designated as configurable by the user, or associated with one or more secondary input values whereby a specific value may be applied by the user to a setting.

[0055] The preceding is a simplified summary of the disclosure to provide an understanding of some aspects of the disclosure. This summary is neither an extensive nor exhaustive overview of the disclosure and its various aspects, embodiments, and/or configurations. It is intended neither to identify key or critical elements of the disclosure nor to delineate the scope of the disclosure but to present selected concepts of the disclosure in a simplified form as an introduction to the more detailed description presented below. As will be appreciated, other aspects, embodiments, and/or configurations of the disclosure are possible utilizing, alone or in combination, one or more of the features set forth above or described in detail below.

BRIEF DESCRIPTION OF THE DRAWINGS

[0056] FIG. 1A includes a first view of an embodiment of an environment or a intelligent television;

[0057] FIG. 1B includes a second view of an embodiment of an environment or a intelligent television;

[0058] FIG. 2A includes a first view of an embodiment of a intelligent television;

[0059] FIG. 2B includes a second view of an embodiment of a intelligent television;

[0060] FIG. 2C includes a third view of an embodiment of a intelligent television;

[0061] FIG. 2D includes a fourth view of an embodiment of a intelligent television;

[0062] FIG. 3 is a block diagram of an embodiment of the hardware of the intelligent television;

[0063] FIG. 4 is a block diagram of an embodiment of the intelligent television software and/or firmware;

[0064] FIG. 5 is a second block diagram of an embodiment of the intelligent television software and/or firmware;

[0065] FIG. 6 is a third block diagram of an embodiment of the intelligent television software and/or firmware;

[0066] FIG. 7 is a plan view of an embodiment of a handheld remote control;

[0067] FIG. 8 is a side view of an embodiment of a remote control;

[0068] FIG. 9A is a bottom view of an embodiment of a remote control with a joystick in a neutral position;

[0069] FIG. 9B is a bottom view of an embodiment of a remote control with the joystick in a lower position;

[0070] FIG. 9C is a bottom view of an embodiment of a remote control with the joystick in an upper position;

[0071] FIG. 10 is a plan view of another embodiment of a handheld remote control;

[0072] FIG. 11A is a front view of an embodiment of an Intelligent TV screen;

[0073] FIG. 11B is a front view of an embodiment of an Intelligent TV screen;

[0074] FIG. 11C is a front view of an embodiment of an Intelligent TV screen;

[0075] FIG. 12 is a block diagram of an embodiment of a handheld remote control of either FIG. 7 or 10;

[0076] FIG. 13 is a block diagram of an embodiment of a content data service;

[0077] FIG. 14 is a first view of an embodiment of a user interface of a smart television settings panel;

[0078] FIG. 15 is a second view of an embodiment of a user interface of a smart television settings panel;

[0079] FIG. 16 is a first flowchart of an embodiment of a smart television settings panel operation; and

[0080] FIG. 17 is a second flowchart of an embodiment of a smart television settings panel operation.

[0081] In the appended figures, similar components and/or features may have the same reference label. Further, various components of the same type may be distinguished by following the reference label by a letter that distinguishes among the similar components. If only the first reference label is used in the specification, the description is applicable to any one of the similar components having the same first reference label irrespective of the second reference label.

DETAILED DESCRIPTION

[0082] Presented herein are embodiments of a device. The device can be a telecommunications device, such as a television, an electronic visual display device, or other smart device. The device can include one or more screens, or sections of a screen, that are configured to receive and present information from a number of sources. Further, the device can receive user input in unique ways. The overall design and functionality of the device provides for an enhanced user experience making the device more useful and more efficient.

[0083] Intelligent Television (TV) Environment:

[0084] Referring to FIGS. 1A and 1B, an Intelligent TV, or device, 100 is shown. It is anticipated that the Intelligent TV 100 may be used for entertainment, business applications, social interaction, content creation and/or consumption, and to organize and control one or more other devices that are in communication with the Intelligent TV 100. As can be appreciated, the Intelligent TV can be used to enhance the user interactive experience whether at home or at work.

[0085] In some embodiments, the Intelligent TV 100 may be configured to receive and understand a variety of user and/or device inputs. For example, a user may interface with the Intelligent TV 100 via one or more physical or electrical controls, such as buttons, switches, touch sensitive screens/regions (e.g., capacitive touch, resistive touch, etc.), and/or other controls associated with the Intelligent TV 100. In some cases, the Intelligent TV 100 may include the one or more interactive controls. Additionally or alternatively, the one or more controls may be associated with a remote control. The remote control may communicate with the Intelligent TV 100 via wired and/or wireless signals. As can be appreciated, the remote control may operate via radio frequency (RF), infrared (IR), and/or a specific wireless communications protocol (e.g., Bluetooth™, Wi-Fi, etc.). In some cases, the controls, whether physical or electrical, may be configured (e.g., programmed) to suit a user's preferences.

[0086] Additionally or alternatively, smart phones, tablets, computers, laptops, netbooks, and other smart devices may be used to control the Intelligent TV 100. For example, control of the Intelligent TV 100 may be achieved via an application running on a smart device. The application may be configured to present a user with various Intelligent TV 100 controls in an intuitive user interface (UI) on a screen associated with the device 100. The screen may be a touch sensitive, or touch screen, display. Selections input by a user via the UI may be

configured to control the Intelligent TV 100 by the application accessing one or more communication features associated with the smart device.

[0087] It is anticipated that the Intelligent TV 100 can receive input via various input devices including, but in no way limited to, video, audio, radio, light, tactile, and combinations thereof. Among other things, these input devices may be configured to allow the Intelligent TV 100 to see, recognize, and react to user gestures. For instance, a user may talk to the Intelligent TV 100 in a conversational manner. The Intelligent TV 100 may hear and understand voice commands in a manner similar to a smart device's intelligent personal assistant and voice-controlled navigator application (e.g., Apple's Siri, Android's Skyvi, Robin, Iris, and other applications).

[0088] The Intelligent TV 100 may also be a communications device which can establish network connections 104 through many alternate means, including wired 108 or wireless 112 means, over cellular networks 116, and by using a telephone line 120 to connect to telephone networks operated by telephone companies. These connections 104 enable the Intelligent TV 100 to access one or more communication networks. The communication networks may comprise any type of known communication medium or collection of communication media and may use any type of protocols to transport messages or signals between endpoints. The communication networks may include wired and/or wireless communication technologies. The Internet is an example of the communication network 132 that constitutes an Internet Protocol (IP) network consisting of many computers, computing networks, and other communication devices located all over the world, which are connected through many telephone systems and other means.

[0089] Other examples of the communication network 132 include, without limitation, a standard Plain Old Telephone System (POTS), an Integrated Services Digital Network (ISDN), the Public Switched Telephone Network (PSTN), a Local Area Network (LAN), a Wide Area Network (WAN), a cellular network, and any other type of packet-switched or circuit-switched network known in the art. In addition, it can be appreciated that the communication network 132 need not be limited to any one network type, and instead may be comprised of a number of different networks and/or network types.

[0090] In some embodiments, the Intelligent TV 100 may be equipped with multiple communication means. The multiple communication means may allow the Intelligent TV 100 to communicate across Local Area Networks (LANs) 124, wireless local area networks (WLANs) 128, and other networks 132. The networks may be connected in a redundant manner to ensure network access. In other words, if one connection is interrupted, the intelligent TV 100 can use an alternate communications path to reestablish and/or maintain the network connection 104. Among other things, the intelligent TV 100 may use these network connections 104 to send and receive information, interact with an electronic program guide (EPG) 136, receive software updates 140, contact customer service 144 (e.g., to receive help or service, etc.), and/or access remotely stored digital media libraries 148. In addition, these connections can allow the Intelligent TV 100 to make phone calls, send and/or receive email messages, send and/or receive text messages (such as email and instant messages), surf the Internet using an internet search engine, post blogs by a blogging service, and connect/interact with social

media sites and/or online community (e.g., Facebook, Twitter, LinkedIn, Pinterest, GooglePlus, MySpace, and the like) maintained by a social network service. In combination with other components of the Intelligent TV 100 described in more detail below, these network connections 104 also enable the Intelligent TV 100 to conduct video teleconferences, electronic meetings, and other communications. The Intelligent TV 100 may capture and store images and sound, using associated cameras, microphones, and other sensors. Additionally or alternatively, the Intelligent TV 100 may create and save screen shots of media, images, and data displayed on a screen associated with the Intelligent TV 100.

[0091] Further, as shown in FIG. 1B, the Intelligent TV 100 can interact with other electronic devices 168 by either by the wired 108 and/or wireless 112 connections. As described herein, components of the Intelligent TV 100 allow the device 100 to be connected to devices 168 including, but not limited to, DVD players 168a, BluRay players 168b, portable digital media devices 168c, smart phones 168d, tablet devices 168e, personal computers 168f, external cable boxes 168g, keyboards 168h, pointing devices 168i, printers 168j, game controllers and/or game pads 168k, satellite dishes 168l, external display devices 168m, and other universal serial bus (USB), local area network (LAN), Bluetooth™, high-definition multimedia interface (HDMI) compliant devices, and/or wireless devices. When connected to an external cable box 168g or satellite dish 168l, the Intelligent TV 100 can access additional media content. Also, as further described below, the Intelligent TV 100 is capable of receiving digital and/or analog signals broadcast by TV stations. The Intelligent TV 100 can be configured as one or more of a standard-definition television, enhanced television, and high-definition television. It may operate as one or more of cable, Internet, Internet Protocol, satellite, web, and/or smart television. The Intelligent TV 100 may also be used to control the operation of, and may interface with, other smart components such as security systems 172, door/gate controllers 176, remote video cameras 180, lighting systems 184, thermostats 188, refrigerators 192, and other appliances.

[0092] Intelligent TV:

[0093] FIGS. 2A-2D illustrate components of the Intelligent TV 100. In general, as shown by FIG. 2A, the Intelligent TV 100 can be supported by a removable base or stand 204 that is attached to a frame 208. The frame 208 surrounds edges of a display screen 212, leaving a front surface of the display screen 212 uncovered. The display screen 212 may comprise a Liquid Crystal Display (LCD) screen, a plasma screen, Light Emitting Diode (LED) screen, or other screen types. In embodiments, the entire front surface of the screen 212 may be touch sensitive and capable of receiving input by the user touching the front surface of the screen 212.

[0094] The Intelligent TV 100 may include integrated speakers 216 and at least one microphone 220. A first area of the frame 208 may comprise a horizontal gesture capture region 224 and second areas comprise vertical gesture capture regions 228. The gesture capture regions 224, 228 may comprise areas or regions that are capable of receiving input by recognizing gestures made by the user, and in some examples, without the need for the user to actually touch the screen 212 surface of the Intelligent TV 100. However, the gesture capture regions 224, 228 may not include pixels that can perform a display function or capability.

[0095] One or more image capture devices 232, such as a camera, can be included for capturing still and/or video

images. The image capture device 232 can include or be associated with additional elements, such as a flash or other light source 236 and a range finding device 240 to assist focusing of the image capture device. In addition, the microphone 220, gesture capture regions 224, 228, image capture devices 232, and the range finding device 240 may be used by the Intelligent TV 100 to recognize individual users. Additionally or alternatively, the Intelligent TV 100 may learn and remember preferences associated with the individual users. In some embodiments, the learning and remembering (i.e., identifying and recalling stored information) may be associated with the recognition of a user.

[0096] An IR transmitter and receiver 244 may also be provided to connect the Intelligent TV 100 with a remote control device (not shown) or other IR devices. Additionally or alternatively, the remote control device may transmit wireless signals via RF, light, and/or a means other than IR. Also shown in FIG. 2A is an audio jack 248, which may be hidden behind a panel that is hinged or removable. The audio jack 248 accommodates a tip, ring, sleeve (TRS) connector, for example, to allow the user to utilize headphones, a headset, or other external audio equipment.

[0097] The Intelligent TV 100 can also include a number of buttons 252. For example, FIG. 2A illustrates the buttons 252 on the top of the Intelligent TV 100, although the buttons could be placed at other locations. As shown, the Intelligent TV 100 includes six buttons 252a-f, which can be configured for specific inputs. For example, the first button 252a may be configured as an on/off button used to control overall system power to the Intelligent TV 100. The buttons 252 may be configured to, in combination or alone, control a number of aspects of the Intelligent TV 100. Some non-limiting examples include, but are not limited to, overall system volume, brightness, the image capture device, the microphone, and initiation/termination of a video conference. Instead of separate buttons, two of the buttons may be combined into a rocker button. This rocker button arrangement may be useful in situations where the buttons are configured to control features such as volume or brightness. In some embodiments, one or more of the buttons 252 are capable of supporting different user commands. By way of example, a normal press has a duration commonly of less than about 1 second and resembles a quick input. A medium press has a duration commonly of 1 second or more but less than about 12 seconds. A long press has a duration commonly of about 12 seconds or more. The function of the buttons is normally specific to the application that is active on the Intelligent TV 100. In the video conference application for instance and depending on the particular button, a normal, medium, or long press can mean end the video conference, increase or decrease the volume, increase a rate speed associated with a response to an input, and toggle microphone mute. Depending on the particular button, a normal, medium, or long press can also control the image capture device 232 to increase zoom, decrease zoom, take a photograph, or record video.

[0098] In support of communications functions or capabilities, the Intelligent TV 100 can include one or more shared or dedicated antennae 256 and wired broadband connections 260 as shown in FIG. 2B. The antennae 256 also enable the Intelligent TV 100 to receive digital and/or analog broadcast TV channels. The wired broadband connections 260 are, for example, a Digital Subscriber Line (DSL), an optical line, an Ethernet port, an IEEE 1394 interface, or other interfaces. The

Intelligent TV 100 also has a telephone line jack 262 to further provide communications capability.

[0099] In addition to the removable base 204, the Intelligent TV 100 may include hardware and mounting points 264 on a rear surface to facilitate mounting the Intelligent TV 100 to a surface, such as a wall. In one example, the Intelligent TV 100 may incorporate at least one Video Equipment Standards Association (VESA) mounting interface for attaching the device 100 to the surface.

[0100] As shown in FIG. 2C, the Intelligent TV 100 may include docking interfaces or ports 268. The docking ports 268 may include proprietary or universal ports to support the interconnection of the Intelligent TV 100 to other devices or components, which may or may not include additional or different capabilities from those integral to the Intelligent TV 100. In addition to supporting an exchange of communication signals between the Intelligent TV 100 and a connected device or component, the docking ports 268 can support the supply of power to the connected device or component. The docking ports 268 can also comprise an intelligent element that comprises a docking module for controlling communications or other interactions between the Intelligent TV 100 and the connected device or component.

[0101] The Intelligent TV 100 also includes a number of card slots 272 and network or peripheral interface ports 276. The card slots 272 may accommodate different types of cards including subscriber identity modules (SIM), secure digital (SD) cards, MiniSD cards, flash memory cards, and other cards. Ports 276 in embodiments may include input/output (I/O) ports, such as universal serial bus (USB) ports, parallel ports, game ports, and high-definition multimedia interface (HDMI) connectors.

[0102] An audio/video (A/V) I/O module 280 can be included to provide audio to an interconnected speaker or other device, and to receive audio input from a connected microphone or other device. As an example, the audio input/output interface 280 may comprise an associated amplifier and analog to digital converter.

[0103] Hardware Features:

[0104] FIG. 3 illustrates components of a Intelligent TV 100 in accordance with embodiments of the present disclosure. In general, the Intelligent TV 100 includes a primary screen 304. Screen 304 can be a touch sensitive screen and can include different operative areas.

[0105] For example, a first operative area, within the screen 304, may comprise a display 310. In some embodiments, the display 310 may be touch sensitive. In general, the display 310 may comprise a full color, display.

[0106] A second area within the screen 304 may comprise a gesture capture region 320. The gesture capture region 320 may comprise an area or region that is outside of the display 310 area, and that is capable of receiving input, for example in the form of gestures provided by a user. However, the gesture capture region 320 does not include pixels that can perform a display function or capability.

[0107] A third region of the screen 304 may comprise a configurable area 312. The configurable area 312 is capable of receiving input and has display or limited display capabilities. In embodiments, the configurable area 312 may present different input options to the user. For example, the configurable area 312 may display buttons or other relatable items. Moreover, the identity of displayed buttons, or whether any buttons are displayed at all within the configurable area 312 of

a screen 304, may be determined from the context in which the Intelligent TV 100 is used and/or operated.

[0108] In an exemplary touch sensitive screen 304 embodiment, the touch sensitive screen 304 comprises a liquid crystal display extending across at least those regions of the touch sensitive screen 304 that are capable of providing visual output to a user, and a capacitive input matrix over those regions of the touch sensitive screen 304 that are capable of receiving input from the user.

[0109] One or more display controllers 316 may be provided for controlling the operation of the screen 304. The display controller 316 may control the operation of the touch sensitive screen 304, including input (touch sensing) and output (display) functions. The display controller 316 may also control the operation of the screen 304 and may interface with other inputs, such as infrared and/or radio input signals (e.g., door/gate controllers, alarm system components, etc.). In accordance with still other embodiments, the functions of a display controller 316 may be incorporated into other components, such as a processor 364.

[0110] The processor 364 may comprise a general purpose programmable processor or controller for executing application programming or instructions. In accordance with at least some embodiments, the processor 364 may include multiple processor cores, and/or implement multiple virtual processors. In accordance with still other embodiments, the processor 364 may include multiple physical processors. As a particular example, the processor 364 may comprise a specially configured application specific integrated circuit (ASIC) or other integrated circuit, a digital signal processor, a controller, a hardwired electronic or logic circuit, a programmable logic device or gate array, a special purpose computer, or the like. The processor 364 generally functions to run programming code or instructions implementing various functions of the Intelligent TV 100.

[0111] In support of connectivity functions or capabilities, the Intelligent TV 100 can include a module for encoding/decoding and/or compression/decompression 366 for receiving and managing digital television information. Encoding/decoding compression/decompression module 366 enables decompression and/or decoding of analog and/or digital information dispatched by a public television chain or in a private television network and received across antenna 324, I/O module 348, wireless connectivity module 328, and/or other wireless communications module 332. The television information may be sent to screen 304 and/or attached speakers receiving analog or digital reception signals. Any encoding/decoding and compression/decompression is performable on the basis of various formats (e.g., audio, video, and data). Encrypting module 324 is in communication with encoding/decoding compression/decompression module 366 and enables the confidentiality of all the data received or transmitted by the user or supplier.

[0112] In support of communications functions or capabilities, the Intelligent TV 100 can include a wireless connectivity module 328. As examples, the wireless connectivity module 328 can comprise a GSM, CDMA, FDMA and/or analog cellular telephony transceiver capable of supporting voice, multimedia and/or data transfers over a cellular network. Alternatively or in addition, the Intelligent TV 100 can include an additional or other wireless communications module 332. As examples, the other wireless communications module 332 can comprise a Wi-Fi, Bluetooth™, WiMax, infrared, or other wireless communications link. The wireless

connectivity module **328** and the other wireless communications module **332** can each be associated with a shared or a dedicated antenna **324** and a shared or dedicated I/O module **348**.

[0113] An input/output module **348** and associated ports may be included to support communications over wired networks or links, for example with other communication devices, server devices, and/or peripheral devices. Examples of an input/output module **348** include an Ethernet port, a Universal Serial Bus (USB) port, Thunderbolt™ or Light Peak interface, Institute of Electrical and Electronics Engineers (IEEE) 1394 port, or other interface.

[0114] An audio input/output interface/device(s) **344** can be included to provide analog audio to an interconnected speaker or other device, and to receive analog audio input from a connected microphone or other device. As an example, the audio input/output interface/device(s) **344** may comprise an associated amplifier and analog-to-digital converter. Alternatively or in addition, the Intelligent TV **100** can include an integrated audio input/output device **356** and/or an audio jack for interconnecting an external speaker or microphone. For example, an integrated speaker and an integrated microphone can be provided, to support near talk or speaker phone operations.

[0115] A port interface **352** may be included. The port interface **352** may include proprietary or universal ports to support the interconnection of the device **100** to other devices or components, such as a dock, which may or may not include additional or different capabilities from those integral to the device **100**. In addition to supporting an exchange of communication signals between the device **100** and another device or component, the docking port **136** and/or port interface **352** can support the supply of power to or from the device **100**. The port interface **352** also comprises an intelligent element that comprises a docking module for controlling communications or other interactions between the Intelligent TV **100** and a connected device or component. The docking module may interface with software applications that allow for the remote control of other devices or components (e.g., media centers, media players, and computer systems).

[0116] An Intelligent TV **100** may also include memory **308** for use in connection with the execution of application programming or instructions by the processor **364**, and for the temporary or long term storage of program instructions and/or data. As examples, the memory **308** may comprise RAM, DRAM, SDRAM, or other solid state memory. Alternatively or in addition, data storage **312** may be provided. Like the memory **308**, the data storage **312** may comprise a solid state memory device or devices. Alternatively or in addition, the data storage **312** may comprise a hard disk drive or other random access memory.

[0117] Hardware buttons **358** can be included for example for use in connection with certain control operations. One or more image capture interfaces/devices **340**, such as a camera, can be included for capturing still and/or video images. Alternatively or in addition, an image capture interface/device **340** can include a scanner, code reader, or motion sensor. An image capture interface/device **340** can include or be associated with additional elements, such as a flash or other light source. The image capture interfaces/devices **340** may interface with a user ID module **350** that assists in identifying users of the Intelligent TV **100**.

[0118] The Intelligent TV **100** can also include a global positioning system (GPS) receiver **336**. In accordance with

embodiments of the present invention, the GPS receiver **336** may further comprise a GPS module that is capable of providing absolute location information to other components of the Intelligent TV **100**. As will be appreciated, other satellite-positioning system receivers can be used in lieu of or in addition to GPS.

[0119] Power can be supplied to the components of the Intelligent TV **100** from a power source and/or power control module **360**. The power control module **360** can, for example, include a battery, an AC to DC converter, power control logic, and/or ports for interconnecting the Intelligent TV **100** to an external source of power.

[0120] Firmware and Software:

[0121] An embodiment of the software system components and modules **400** is shown in FIG. 4. The software system **400** may comprise one or more layers including, but not limited to, an operating system kernel **404**, one or more libraries **408**, an application framework **412**, and one or more applications **416**. The one or more layers **404-416** can communicate with each other to perform functions for the Intelligent TV **100**.

[0122] An operating system (OS) kernel **404** contains the primary functions that allow the software to interact with hardware associated with the Intelligent TV **100**. Kernel **404** can include a collection of software that manages the computer hardware resources and provides services for other computer programs or software code. The operating system kernel **404** is the main component of the operating system and acts as an intermediary between the applications and data processing done with the hardware components. Part of the operating system kernel **404** can include one or more device drivers **420**. A device driver **420** can be any code within the operating system that helps operate or control a device or hardware attached to or associated with the Intelligent TV. The driver **420** can include code for operating video, audio, and/or other multimedia components of the Intelligent TV **100**. Examples of drivers include display, camera, flash, binder (IPC), keypad, WiFi, and audio drivers.

[0123] Library **408** can contain code or other components that may be accessed and implemented during the operation of the software system **400**. The library **408** may contain one or more of, but is not limited to, an operating system runtime library **424**, a TV services hypertext application language (HAL) library **428**, and/or a data service library **432**. The OS runtime library **424** may contain the code required by the operating system kernel **404** or other operating system functions to be executed during the runtime of the software system **400**. The library can include the code that is initiated during the running of the software system **400**.

[0124] The TV services hypertext application language **428** can include code required by TV services either executed in the application framework **412** or an application **416**. The TV services HAL library **428** is specific to the Intelligent TV **100** operations that control different functions of the Intelligent TV. The TV service HAL library **428** can also be formed from other types of application languages or embodiments of different types of code or formats for code beyond the hypertext application language.

[0125] The data services library **432** can include the one or more components or codes to implement components for the data services function. The data services function can be implemented in the application framework **412** and/or applications layer **416**. An embodiment of a function of the data services and the type of components that may be included is shown in FIG. 6.

[0126] The application framework 412 can include a general abstraction for providing functionality that can be selected by one or more application 416 to provide specific application functions or software for those applications. Thus, the framework 412 can include one or more different services, or other applications, that can be accessed by the applications 416 to provide general functions across two or more applications. Such functions include, for example, management of one or more of windows or panels, surfaces, activities, content, and resources. The application framework 412 can include one or more, but is not limited to, TV services 434, TV services framework 440, TV resources 444, and user interface component 448.

[0127] The TV services framework 440 can provide an additional abstraction for different TV services. TV services framework 440 allows for the general access and function of services that are associated with the TV functionality. The TV services 436 are general services provided within the TV services framework 440 that can be accessed by applications in the applications layer 416. The TV resources 444 provide code for accessing TV resources including any types of storage, video, audio, or other functionality provided with the Intelligent TV 100. The TV resources 444, TV services 436, and TV services framework 440 provide for the different implementations of TV functionality that may occur with the Intelligent TV 100.

[0128] One or more user interface components 448 can provide general components for display of the Intelligent TV 100. The user interface components 448 might be general components that may be accessed by different applications provided in the application framework 412. The user interface components 448 may be accessed to provide for panels and silos as described in conjunction with FIG. 5.

[0129] The applications layer 416 can both contain and execute applications associated with the Intelligent TV 100. Applications layer 416 may include one or more of, but is not limited to, a live TV application 452, a video on demand application 456, a media center application 460, an application center application 464, and a user interface application 468. The live TV application 452 can provide live TV over different signal sources. For example, the live TV application, 452, can provide TV from input from cable television, over air broadcasts, from satellite services, or other types of live TV services. Live TV application 452 may then present the multimedia presentation or video and audio presentation of the live television signal over the display of the Intelligent TV 100.

[0130] The video on demand application 456 can provide for video from different storage sources. Unlike Live TV application 452, video on demand 456 provides for display of videos that are accessed from some memory source. The sources of the video on demand can be associated with users or with the Intelligent TV or some other type of service. For example, the video on demand 456 may be provided from an iTunes library stored in a cloud, from a local disc storage that contains stored video programs, or from some other source.

[0131] The media center application 460 can provide application for different types of media presentation. For example, the media center 460 can provide for displaying pictures or audio that is different from, but still accessible by the user and different from live TV or video on demand. The media center 460 allows for the access of different sources to obtain the media in the display of such media on the Intelligent TV 100.

[0132] The application center 464 allows for the provision, storage and use of applications. An application can be a game, a productivity application, or some other application generally associated with computer systems or other devices, but may be operated within the Intelligent TV. An application center 464 may obtain these applications from different sources, store them locally and then execute those types of applications for the user on the Intelligent TV 100.

[0133] User interface application 468 provides for the specific user interfaces associated with the Intelligent TV 100. These user interfaces can include the silos and panels that are described in FIG. 5. An embodiment of the user interface software 500 is shown in FIG. 5. Here the application framework 412 contains one or more code components which help control the user interface events while one or more applications in the applications layer 416 affects the user interface use for the Intelligent TV 100. The application framework 412 can include a silo transition controller 504 and/or an input event dispatcher 508. There may be more or fewer code components in the application framework 412 than those shown in FIG. 5. The silo transition controller 504 contains the code and language that manages the transitions between one or more silos. A silo can be a vertical user interface feature on the Intelligent TV that contains information for user. The transition controller 504 can manage the changes between two silos when an event occurs in the user interface. The input event dispatcher 508 can receive user interface events that may be received from the operating system and provided to the input even dispatcher 508. These events can include selections of buttons on a remote control or on the TV or other types of user interface inputs. The input even dispatcher may then send these events to a silo manager 532 or panel manager 536 depending on the type of the event. The silo transition controller 504 can interface with the silo manager 532 to affect changes in the silos.

[0134] The application framework 416 can include a user interface application 468 and/or a silo application 512. The application framework 416 can include more or fewer user interface applications as necessary to control the user interface of the Intelligent TV 100 than those shown in FIG. 5. The user interface application can include a silo manager 532, a panel manager 536, and one or more types of panels 516 through 528. The silo manager 532 manages the display and/or features of silos. The silo manager 532 can receive or send information from the silo transition controller 504 or the input event dispatcher 508 to change the silos displayed and/or to determine types of input received in the silos.

[0135] A panel manager 536 is operable to display panels in the user interface to manage transitions between those panels or to affect user interface inputs received in the panel. The panel manager 536 may thus be in communication with different user interface panels such as a global panel 516, a volume panel 520, a settings panel 524, and/or a notification panel 528. The panel manager 536 can display these types of panels depending on the inputs received from the input event dispatcher 508. The global panel 516 may include information that is associated with the home screen or top level hierarchal information for the user. A volume panel 520 may display information about an audio volume control or other settings for volume. A settings panel 524 can include information displayed about the settings of the audio or video, or other settable characteristics of the Intelligent TV 100. A notification panel 528 can provide information about notifications to a user. These notifications can be associated with

information, such as, video on demand displays, favorites, currently provided programs, or other information. Notifications can be associated with the media or with some type of setting, or operation or the Intelligent TV 100. The panel manager 536 may be in communication with the panel controller 552 of the silo application 512.

[0136] The panel controller 552 may operate to control portions of the panels of the types described previously. Thus, the panel controller 552 may be in communication with a top panel application 540, an application panel 544, and/or bottom panel 548. These types of panels may be differently displayed in the user interface of the Intelligent TV 100. The panel control thus may be based on the configuration of the system or the type of display being used currently, put the types of panels 516-528 into a certain display orientation governed by the top panel application 540, application panel 544, or bottom panel application 548.

[0137] An embodiment of the data service 632 and the operation of the data management is shown in FIG. 6. The data management 600 can include one or more code components that are associated with different types of data. For example, there may be code components within the data service 632 that execute and are associated with video on demand, the electronic program guide, or media data. There may be more or fewer types of data service 632 components than those shown in FIG. 6. Each of the different types of data may include a data model 604-612. The data models govern what information is to be stored and how that information will be stored by the data service. Thus, the data model can govern regardless of where the data comes from, how the data will be received or managed within the Intelligent TV system. Thus, the data model 604, 608, and/or 612, can provide a translation ability or affect the ability to translate data from one form to another to be used by the Intelligent TV 100.

[0138] The different types of data services (video on demand, electronic programming guide, media) each have a data subservice 620, 624, and/or 628 that is in communication with one or more internal and/or external content providers 616. The data subservices 620, 624, and 628 that communicate with the content providers 616 to obtain data that may then be stored in databases 632, 636, and 640. The subservices 620, 624, and 628 may communicate with and initiate or enable one or more source plug-ins 644, 648, and 652 to communicate with the content provider. For each content provider 616, there may be a different source plug-in 644, 648, and 652. Thus, if there is more than one source of content for the data, each of the data subservice 620, 624, and 628 may determine and then enable or initiate a different source plug-in 644, 648, and/or 652. The content providers 616 may also provide information to a resource arbitrator 656 and/or thumbnail cash manager 660. The resource arbitrator 656 may operate to communicate with resources 664 that are external to the data service 632. Thus, the resource arbitrator 656 may communicate with cloud based storage, network based storage, or other types of external storage in the resources 664. This information may then be provided through the content provider module 616 to the data subservices 620, 624, 628. Likewise, a thumbnail cash manager may obtain thumbnail information from one of the data subservices 620, 624, 628 and store that information in the thumbnail database 666. Further the thumbnail cash manager 660 may extract or retrieve that information from the thumbnails database 666 to provide to one of the data subservices 620, 624, 628.

[0139] An exemplary content aggregation architecture 1300 is shown in FIG. 13. The architecture can include a user interface and content aggregation layers 1304 and 1308. The user interface layer 1304 may include a TV application 1312, media player 1316, and application(s) 1320. The TV application 1312 enables the viewer to view channels received via an appropriate transmission medium, such as cable, satellite, and/or the Internet. The media player 1316 views other types of media received via an appropriate transmission medium, such as the Internet. The application(s) 1320 include other TV-related (pre-installed) applications, such as content viewing, content searching, device viewing, and setup algorithms, and coordinates with the media player 1316 to provide information to the viewer.

[0140] The content source layer 1308 includes, as data services, a content source service 1328, a content aggregation service 1332 and a content presentation service 1336. The content source service 1328 can manage content source investigators, including local and/or network file system(s), digital network device manager (which discovers handheld and non-handheld devices (e.g., digital media servers, players, renderers, controllers, printers, uploaders, downloaders, network connectivity functions, and interoperability units) by known techniques, such as a multicast universal plug and play or UPnP discovery techniques, and, for each discovered device, retrieves, parses, and encodes device descriptors, notifies the content source service of the newly discovered device, and provides information, such as an index, on previously discovered devices), Internet Protocol Television or IPTV, digital television or DTV (including high definition and enhanced TV), third party services (such as those referenced above), and applications (such as Android applications).

[0141] Content source investigators can track content sources and are typically configured as binaries. The content source service 1328 starts content source investigators and maintains open and persistent channels for communications. The communications include query or command and response pairs. The content aggregation service 1332 can manage content metadata fetchers, such as for video, audio, and/or picture metadata. The content presentation service 1336 may provide interfaces to the content index, such as an Android application interface and digital device interfaces.

[0142] The content source service 1328 can send and receive communications 1344 to and from the content aggregation service 1332. The communications can include notifications regarding new and removed digital devices and/or content and search queries and results. The content aggregation service 1332 can send and receives communications 1348 to and from the content presentation service 1336 including device and/or content lookup notifications, content-of-interest advisories and notifications, and search queries and results.

[0143] When a search is performed, particularly when the user is searching or browsing content, a user request may be received from the user interface layer 1300, by the content presentation service 1336, which responsively opens a socket and sends the request to the content aggregation service 1332. The content aggregation service 1332 first returns results from the local database 1340. The local database 1340 includes an index or data model and indexed metadata. The content source service 1328 further issues search and browse requests for all content source investigators and other data management systems. The results are forwarded to the con-

tent aggregation service **1332**, which updates the database **1340** to reflect the further search results and provides the original content aggregation database search results and the data updates, reflecting the additional content source service search results, over the previously opened socket to the content presentation service **1336**. The content presentation service **1336** then provides the results to one or more components in the user interface layer **1300** for presentation to the viewer. Then the search session is over, the user interface layer **1300** disconnects the socket. As shown, media can be provided directly by the content aggregation service **1332** to the media player **1316** for presentation to the user.

[0144] Remote Control:

[0145] A handheld remote control can be provided to enable user interaction with the Intelligent TV **100**. An exemplary handheld remote control is shown in FIGS. 7-9. The remote control **700** can include one or more of, but is not limited to, top, side and bottom housings **704**, **708**, and **712**, an (on/off) power button **716**, an input source button **720** (to select input source such as Live TV, video on demand, media center, application center, high definition multimedia interface or HDMI, component or COMP, audio/Video or A/V, digital or analog television or DTV/ATV, and video graphics array (VGA)), a (volume) mute button **724**, a Live TV button **728** (to activate or select Live TV), a video on demand (VOD) button **732** (to activate or select video on demand), a media center button **736** (to activate or select a media center application which access various types of media such as music, TV programming, videos, and the like), an application center button **740** (to activate or select an application center application), a global panel button **744**, an application panel button **748**, a back button **752** (to select a prior user operation or Intelligent TV state and/or navigate up a hierarchy of any displayed image or object(s) (in which case the back button **752** does not navigate within application panels or across application silos), a play button **756** (to play or pause media), a D-pad **760** (which includes north, east, west, and south directional arrows to navigate among displayed images and/or move between levels of an application's or object's hierarchy such as application view navigation, panel navigation, and collection navigation), an OK (or select) button **764** (to select a highlighted displayed image (such as displayed speed control, rewind, forward, play, and pause objects and/or objects on menu bar or in a menu box) and/or navigate down a hierarchy of any displayed image or object(s)), a rocker-type volume-up and volume-down button **768** (to adjust the volume), a menu/guide button **772** (to select for display a menu or guide of programming), a 0-9 (number) button **776** (to display a number pad on the TV screen), a settings button **780** (which launches an application to access current and change TV settings (such as channel settings and settings used to adjust picture and sound effects (e.g., image mode (e.g., standard, playground, game, cinema, concert, and studio), brightness, contrast, saturation, color temperature, energy savings, 3D noise reduction, hue, sharpness, zoom mode (e.g., full screen, standard, smart zoom, and dot-to-dot), picture position, 3D mode, for picture, and sound retrieval system or SRS TruSurround, sound mode (e.g., standard, live 1, live 2, theatre, music, speech, user equalizer mode, Left/Right speaker balance, auto volume control, Sony/Philips Interconnect Format or S/PDIF (off, auto, pulse code modulation or PCM) for sound) and system settings (such as system (e.g., selected language for graphical user interface, user geographical and/or geopolitical location information, input

method, area settings, and sleep time), network (e.g., WiFi, WiFi hotspot, WiFi direct, Point-to-Point Protocol over Ethernet or PPPoE (asymmetric digital subscriber line or ADSL), Ethernet) settings (e.g., enabled and disabled and selected and non-selected) and information (e.g., network information (e.g., electronic address such as Internet Protocol or IP address, subnet mask, gateway, domain name server information, domain name, Media Access Control or MAC address, service set identification or SSID, security information, and password information) and inline status), manage applications (e.g., currently installed applications, currently executing applications, and internal and external computer readable medium usage), and view user information regarding the Intelligent TV **100**)), a rocker-type channel-up and channel-down button **784** (to increment or decrement the selected channel), and first, second, third and fourth hotkeys **788**, **792**, **794**, and **796**, and/or a moveable joystick **900** on a bottom of the remote control **700**. As can be seen, the actuator layout can provide a highly efficient, satisfactory, and easily usable experience to the end user.

[0146] Unlike the functional associations and functions of many of the actuators, those of some of the actuators are not readily apparent. A number of examples will now be discussed by way of illustration.

[0147] The media center button **736**, when selected, can provide information regarding music, videos, photographs, collections or groupings of music, videos, and/or photographs, and internal and external computational devices (such as personal computers, laptops, tablet computers, wireless phones, removable computer readable media, and the like), which can be grouped in a selected manner (such as favorites, most recently viewed, most watched or viewed, and most recently added). The information can include previews (which can include selected portions of the media content, duration, file size, date created, date last watched, times watched or viewed, and audio and/or video format information).

[0148] The application center button **740**, when selected, may provide information regarding pre-installed and downloaded applications. Unlike downloaded applications, pre-installed applications cannot be removed by the user or manually updated. Exemplary pre-installed applications include web browser, settings control, and content search algorithms. By way of illustration, the application center button **740** can provide a scrollable graphical grid of icons (each icon being associated with an application) currently available in the application center.

[0149] The global panel button **744**, when selected, can provide the user, via one or more panels or windows, with access to one or more of, but not limited to, silos, notifications, a web browser, system settings, and/or information associated therewith. For example, the global panel button **744** can enable the user to determine what external devices are currently connected to and/or disconnected from the Intelligent TV **100**, determine what inputs (e.g., HDMI ports) are currently available for connecting to external devices, determine a connection and/or operational status of a selected external device and/or network (e.g., WiFi connected, Ethernet connected, and offline), assign a custom (or user selected) name to each input source, determine what content is currently being offered on Live TV, on demand, the media center, and/or the application center, access vendor messages and notifications to the user (e.g., system and/or application updates are available), activate the Internet browser, and/or

access shortcuts on a displayed shortcut bar to more frequently used and desired applications. Common shortcuts are Internet browser (e.g., Internet search engine), system settings, and notifications. The common types of panels are for information (which is typically information related to a currently displayed image and/or content (e.g., title, date/time, audio/visual indicator, rating, and genre), browse requests, and/or search requests (such as search term field)). Each of the panel types may include a panel navigation bar, detailed information or relevant content to the panel function, operation and/or purpose, and a hotkey bar (defining currently enabled functional associations of hotkeys).

[0150] The application panel button **748**, when selected, can display an application window or panel. One application panel may be an information panel regarding a selected (pre-installed or previously downloaded) application icon. The information panel can one or more of identify the selected application, provide a description of the functionality (including application developer and/or vendor, version, release, and/or last update date and a category or type of application based on the application's functionality) and user ratings and/or degree of other user downloading of the application (e.g., a star rating assigned based on one or more of the foregoing inputs), provide the option to launch, remove, update, and add to favorites the identified application, and provide a listing of selectable links of other (not yet downloaded) recommended applications that provide similar functionality to the identified application. The latter listing can, in turn, provide a description of the functionality (including application developer and/or vendor, version, release, and/or last update date and a category or type of application based on the application's functionality) and user ratings and/or degree of other user downloading of the application (e.g., a star rating assigned based on one or more of the foregoing inputs).

[0151] The functions of the first, second, third, and fourth hotkeys **788**, **792**, **794**, and **796** can change depending on system state, context, and/or, within a selected screen, based on a content or currently selected portion of (or relative cursor position on) the screen. In other words, a first function of one of the first, second, third, and fourth hotkeys **788**, **792**, **794**, and **796** is activated by the respective hotkey in a first system state while a different second function is activated by the respective hotkey in a different second system state. In another example, a third function of one of the first, second, third, and fourth hotkeys **788**, **792**, **794**, and **796** is activated by the respective hotkey when a user focus (or currently selected cursor position or screen portion) is at a first screen position while a different fourth function is activated by the respective hotkey when a user focus (or currently selected cursor position or screen portion) is at a different second screen position. The first screen position can, for instance, be within an icon while the second screen position is outside of the icon. Hotkey functionality that could be enabled when in the first screen position may be "configure" and "remove" and disabled is "add", and, when in the second position hotkey functionality enabled can be "add" and disabled is "configure" and "remove". Generally, the states of hotkeys can include normal (for enabled actions or functions), disabled (when an action or function is temporarily disabled), pressed (when selected by a user to command an action or function to be performed), and unavailable (when no association between the hotkey and an action or function is currently available).

[0152] The first hotkey **788**, which can be assigned a first color (e.g., red), when selected in a first system state, can enable the user to assign, change, or edit a name of an input source. It is typically enabled only when the input source of HDMI, Comp/YPbPr (e.g., component video cables), video output, and VGA is in focus. When selected in a second system state, the first hotkey **788** can return the user to a top of a scrollable collection of objects, such as application icons.

[0153] The second hotkey **792** may show all or less. In other words, the hotkey **792** allows the user to show all inputs, including the unconnected/undetected ones and to hide the unconnected/undetected inputs, e.g., to expand and collapse the silo/input list. Each input source can have one of two states, namely connected/detected and unconnected/undetected. Some input sources, including Live TV, video on demand, media center, and application center are always connected/detected.

[0154] The moveable joystick **900** on the bottom of the remote control **700**, when manipulated, can cause a displayed image on the Intelligent TV **100** screen to be displaced a proportional amount. In other words, the displayed image is displaced substantially simultaneously with displacement of the joystick **900** within the joystick aperture **904** in the bottom housing **712** of the remote control. As shown in FIGS. 9B-C, the joystick **900** moves or slides between forward and reverse positions. Releasing the joystick **900** causes the joystick **900** to return to the center position of FIG. 9A, and the window to move or slide upwardly (when the joystick is released from the joystick position of FIG. 9B) or downwardly (when the joystick is released from the joystick position of FIG. 9C) until it disappears from view as shown in FIG. 11A. The effect on the screen of the Intelligent TV **100** is shown in FIGS. 11A-C. In FIG. 11A, video content, such as TV programming, a video, movie, and the like, is being displayed by front surface of the screen **212**. In FIG. 11B, the joystick **900** is moved or slid to the upper position of FIG. 9B, and a drop down window or panel **1100** moves or slides down (at the substantially the same rate of joystick **900** movement) at the top of the screen **212**. In FIG. 11C, the joystick **900** is moved or slid to the lower position of FIG. 9C, and a drop up window or panel **1100** moves or slides up (at the substantially the same rate of joystick **900** movement) at the bottom of the screen **212**. The window **1100** partially covers the video content appearing on the remainder of the screen **212** and/or causes a portion of the screen **212** displaying video content to move and/or compress up or down the height of the window **1100**.

[0155] The window **100** can include one or more of information (which is typically information related to a currently displayed image and/or content (e.g., panel navigation bar, detailed information (e.g., title, date/time, audio/visual indicator, rating, and genre), and hotkey bar (defining current functional associations of hotkeys)), browse requests, and/or search requests. Commonly, the window **1100** includes suitable information about the content (such as name, duration, and/or remaining viewing duration of content), settings information, TV or system control information, application (activation) icons (such as for pre-installed and/or downloaded applications such as application center, media center and WEB browser), and/or information about input source(s). When the joystick **900** is in either the forward or reverse position, the user can select an actuator on the front of the remote control, such as the OK button **764**, and be taken, by displayed images on the screen **212**, to another location in the user interface, such as a desktop. This can be done in an

unintrusive manner and without affecting the flow of content that is pushed up or down. The joystick **900** could be moved, additionally or differently, from side-to-side to cause the window to appear at the left or right edge of the screen **212**.

[0156] An alternative actuator configuration is shown in FIG. **10**. The actuators are substantially the same as those of FIGS. **7-9** except that the social network button **1000**, when selected, can automatically select content and publish, via a social network service or other social media, the content to a social network or online community. User or viewer comments and/or other messages can be included in the outbound message. For example, all or one or frames or portions of media content (such as a video, music, a photograph, a picture, or text) can be provided automatically to a predetermined or selected group of people via Linked-In™, Myspace™, Twitter™, YouTube™, DailyMotion™, Facebook™, or Second Life™. The user, upon activating the button **1000** could, in response, select a social forum or media upon which the selected content (which is the content displayed to the user when the social network button **1000** is activated) is to be posted and/or a predetermined group within that social media to which the content is to be posted. Alternatively, these selections could be preconfigured or preselected by the user.

[0157] The social network button can also be used to “turn up” or “turn down” a social volume visualization. The Intelligent TV **100** can create dynamically a visualization of aggregated connections (and inbound and/or outbound messages) from a variety of social networks. The aggregation (and inbound and outbound messages) can be depicted graphically on the screen as a volume of connections to influence the viewer user. With a social volume visualization, selected contents of each linked social network profile of a social contact (and inbound and/or outbound messages from or to the linked social network contact and/or current activity of the social contact (such as watching the same programming or content the viewer is currently watching) can be presented in a separate tile (or visually displayed object). The size of the tile can be related to any number of criteria, including a relationship of the linked social contact (e.g., a relative degree of importance or type of relationship can determine the relative size of the tile, a degree of influence of the linked social contact to the current viewer, a geographic proximity of the linked social contact to the current viewer, a degree to which the currently provided media content is of interest to both the viewer and linked social contact (e.g., both parties enjoy war movies, murder mysteries, musicals, comedies, and the like), an assigned ranking of the linked viewer by the viewer, a type of social network type linking the viewer with the linked social contact, a current activity of the social network contact (e.g., currently watching the same content that the viewer is currently watching), a current online or offline status of the linked social contact, and a social network grouping type or category to which both the viewer and linked social contact belong (e.g., work contact, best friend, family member, etc.).

[0158] The viewer can designate a portion of the screen to depict the social network aggregation. By turning the social volume up (+) or down (−), the viewer can increase the size and/or numbers of linked contact tiles provided to the viewer. In other words, by increasing the social volume the viewer can view, access, and/or push more social content from those of his or her social networks associated with him or her in a memory of the Intelligent TV. By decreasing the social volume, the viewer can view, access, and/or push less social content from his or her associated social networks. By select-

ing the mute button **724**, the viewer can stop or pause any interactivity with his or her associated social networks (e.g., inbound or outbound messages). Social volume and/or mute can be separated into two (or more) volume settings for outbound and inbound social network activity. By way of illustration, a first volume setting, control, and/or button can control the volume for outbound social network activity (e.g., outbound social messages) while a second (different) volume setting, control, and/or button can control the volume for inbound social network activity (e.g., inbound social messages). By way of further illustration, a first mute setting, control, and/or button can stop or pause outbound social network activity (e.g., outbound social messages) while a second (different) mute setting, control, and/or button can stop or pause inbound social network activity (e.g., inbound social messages).

[0159] A functional block diagram of the remote control is shown in FIG. **12**. The remote control **700** includes a controller **1208** to control and supervise remote control operations, optional wireless (RF) transceiver **1224** and antenna **1244** to send and receive wireless signals to and from the Intelligent TV **100** and other external components, optional infrared emitter **1228** to emit infrared signals to the Intelligent TV **100**, optional light emitting diode or LED driver **1232** to control LED operation to provide video-enabled feedback to the user, actuators **1220** (including the various buttons and other actuators discussed above in connection with FIGS. **7** and **10**), and joystick **900**, all interconnected via a bus **1248**. An on board power source **1200** and power management module **1204** provide power to each of these components via power circuitry **1240**. The infrared emitter **1228** and receiver (not shown) on the Intelligent TV system **100** can be used to determine a displayed object illuminated by the infrared signal and therefore adjust the displayed image, for example to indicate a focus of the user (e.g., illuminate a displayed object or show cursor position relative to displayed objects on the screen) and to determine and activate a desired command of the user. This can be done by tracking a position of the remote control in relation to infrared tracking reference points (e.g., a sensor bar or infrared LED's) positioned on or adjacent to the screen of the Intelligent TV **100**. Motion tracking can further be augmented using position information received from a multi-axis gyroscope and/or accelerometer on board the remote control (not shown).

[0160] Settings Panel:

[0161] Additional embodiments of settings panel **524** will now be described. Settings panel **524** provides an interface whereby a user may view and/or modify one or more settings associated with one or more operating parameters of Smart TV **100**. A setting may be associated with a single operating parameter, such as brightness, or a number of operating parameters. For example, a single “concert” setting may be associated with specific values for the settings, such as color saturation, refresh rate, and audio output. The value for a setting may be translated into a user-friendly format (e.g., 0 to 100) or in a more native format, such the literal red-green-blue (RGB) values used to calculate luminance.

[0162] In one embodiment, settings panel **524** receives a user's input events via any one or more of the input interfaces of Smart TV **100** and visually presents the interface on screen display **212**. In one embodiment, a user interfaces with remote control device **700** as the input device to Smart TV **100** and settings panel **524**. As described above, other means of presenting and receiving information to and from Smart

TV 524 may be implemented to provide alternative or supplemental means by which a user may interact with settings panel 524.

[0163] FIG. 14 illustrates one embodiment of settings panel 524 as displayed on display screen 212 of Smart TV 100. Settings panel 524 comprises a number of targets. A target is selected by the user navigating to the target and the target receives focus. The user navigates to the target by interacting with an interface, such as via remote control device 700. As a user moves from one target to another, an indication of the user's position within settings panel 524 is provided by an indicator, such as a color scheme, highlight, symbol or other indication operable to inform a user of their position and indicate focus.

[0164] In one embodiment, the initial presentation of settings panel 524 displays main settings bar 1402. Main settings bar 1402 includes strip items 1404A-1404G, which may be associated with a silo or other major category of Smart TV 100 operation. In the embodiment illustrated, strip item 1404A has been selected and the selection is evidenced by an inverse color scheme providing a differentiation between strip item 1404A and strip items 1404B-1404G. Silo settings may be unique to each silo, or at least one setting may be shared between at least two silos. Optionally, a copy feature may be implemented such that settings not shared may be copied from one silo to another. In one embodiment, strip item 1404E represents a VGA input silo and the settings, including any settings changed during the user's interaction with settings panel 524, applied exclusively to the VGA silo.

[0165] Settings display 524 includes various components to provide user information and receive user interaction, including dropdown bar 1408, settings strips 1410A and 1410B, and strip items 1412A-1412F and 1414A-1414E, toggle bar 1418, and slider bar 1410C. Other user interface elements (not shown) may also be incorporated, including, but not limited to, spinners, push buttons, dials, input fields, radio buttons, multi-select buttons and other elements. Dropdown bar 1408, strip items 1412A-1412F and 1414A-1414E, toggle bar 1418, and slider bar 1410C represent targets for user interaction.

[0166] While focus is set to items indicating a specific graphic element which can receive user input, optionally sub-interfaces, such as settings strips 1410A and 1410B and toggle bar 1418, may indicate focus, such as when a component therein has focus. A sub-interface may or may not display all associated targets simultaneously (e.g., a scrolling sub-interface wherein less than all associated targets are displayed at any one time). Furthermore, a sub-interface may not display any associated targets when focus is not within the sub-interface (e.g., a pop-up dialog, dropdown dialog, grayed-out, or otherwise indicative of the sub-interface not being in a mode whereby user inputs will be accepted for the sub-interface).

[0167] In one embodiment as a user navigates to strip item 1412B, strip item 1412B receives focus and is highlighted in a manner to be visually distinguished from other targets. One or more strip items 1412A-1412F and 1414A-1414E may be associated with preset functions. Preset functions include factory presets, which are intended to be substantially static, or user presets, which may represent a user-defined group of settings and their values. Upon strip item 1412B receiving focus, the settings associated with strip item 1412B are immediately,

as perceived by a human observer, applied to the portion of display screen 212 not obscured by settings panel 524.

[0168] The user may exit from a particular target, sub-interface or settings panel 524. Depending on the type of exit functionality encountered, the settings applied to Smart TV 100 may be preserved or discarded. In one embodiment, the exit functionality is a cancel command issued by the user upon remote device 700. Other options to issue a cancel command also exist, such as navigating to, and optionally selecting, a target designated "cancel," "discard changes" or the like (not shown).

[0169] In one embodiment, all targets within a sub-interface are associated with a common set of settings for Smart TV 100 and are operable to have different values for one or more of the common settings. As a benefit, a user navigating between targets in the same sub-interface causes the settings currently applied to Smart TV 100 to be overwritten by the then-current target. As each target sets the values, which may include identical values, for the settings, there is no need to perform an undo operation to remove the settings applied upon the previous target receiving focus. In another embodiment, targets within the same sub-interface have a different set of associated settings, and exiting from a target, as part of a cancel command, trigger an undo operation such that the settings unique to the target losing focus, are backed out.

[0170] In another embodiment, an exit function is determined by the manner in which focus is removed. Navigation within the same sub-interface, such as from strip item 1412B to either strip item 1412A or 1412C, may cause all the settings associated with strip item 1412B to be overwritten by the selected strip item 1412A and 1412C and immediately applied to display screen 212. Navigation from strip item 1412B directly to strip item 1412D, 1412E or 1412F may be possible without selecting any intermediate strip items, such as by hotkey functionality, and the settings associated with 1412D, 1412E or 1412F applied immediately.

[0171] Navigation from a target in one sub-interface, such as strip item 1412B in settings strip 1410A, to a target in a second sub-interface, such as strip item 1414B in settings strip 1410B, causes the settings associated with exited strip item 1412B to be preserved.

[0172] In one embodiment, targets are associated with substantially static values for a set of settings. In another embodiment, targets are associated with at least one additional sub-interface. Strip item 1412F is designated with an indicator (here, a plus (+) sign) associated with such an additional sub-interface. The additional sub-interface may be variously embodied and include, but are not limited to, a modal and non-modal dialogs, drop down, unprotecting a previously protected set of targets, or other input interfaces. Another embodiment of a sub-interface is illustrated with respect to FIG. 15.

[0173] Embodiments of targets illustrated include, dropdown bar 1408. Upon receiving focus, dropdown bar 1408 expands to show a number of display elements. Dropdown bar 1408 may be a sub-interface and incorporate targets and/or include informational elements. In another embodiment, toggle bar 1418 provides mutually exclusive options, first option 1416A and second option 1416B (e.g., on/off). Navigating from a first option 1416A sets the value, such as on, and navigating to the second option 1416B sets an opposite value. Exiting either first or second option 1416A, 1416B by navigating to a target in a different sub-interface, for example to

slider bar **1410C**, preserves the setting associated with the last of first option **1416A** or second option **1416B** to have focus. Slider bar **1410C**, upon receiving focus, receives user input, such as a left-right command on remote control device **700**, a typed value in an input field (not shown), or by other input means whereby a user can alter the value of the setting associated with slider bar **1410C**. Exiting slider bar **1410C** as a cancel function may require a secondary input, such as by pressing a cancel button on remote device **700**.

[0174] In one embodiment, an exit function may signal display interface **524** to close and/or close main settings bar **1402**. One exit function is associated with focus being at a target of main settings bar **1402**, for example, strip item **1404A**.

[0175] The exemplary systems and methods of this disclosure have been described in relation to Smart TV **100** settings and settings panel **524**. However, to avoid unnecessarily obscuring the present disclosure, the preceding description omits a number of known structures and devices. This omission is not to be construed as a limitation of the scopes of the claims. Specific details are set forth to provide an understanding of the present disclosure. It should however be appreciated that the present disclosure may be practiced in a variety of ways beyond the specific detail set forth herein.

[0176] Smart TV **100** and settings panel **524** is variously embodied. In one embodiment, dynamic picture adjustment is provided. In one embodiment, sub-interfaces, such as one or more of sub-interfaces **1410**, are provided for categories of picture adjustment, including image mode, color temperature, energy savings, 3D noise reduction, and advanced settings. Individual strip items **1412** and **1414** are provided such as for image mode: “standard (default),” “Playground,” “Game,” “Cinema,” “Concert,” “Studio,” and “user mode.” Settings groups with a “User mode” option may be embodied as strip item **1412F**, whereby an additional sub-dialog is displayed to accept additional settings. “Color Temperature” may have strip items **1412** and **1414** for “Hot,” “Warm,” “Cool,” and “Cold.” “Energy savings” may have strip items **1412** and **1414** for “Auto (default),” “bright light,” “soft light,” “dynamic,” and “user mode.” “3D Noise reduction” may have strip items **1412** and **1414** for “off,” “low,” “medium (default),” and “high.” Advanced settings may include strip items or other targets to set values for sharpness, hue or other settings.

[0177] In one embodiment, settings are silo specific. For example, “3D Noise Reduction” may be grayed-out, not displayed or otherwise unavailable for silos where such settings do not apply, for example, VGA silo **1404E**.

[0178] In another embodiment, a sub-interface, such as sub-interface **1410A**, is provided for screen zoom settings. Individual strip items **1412** or **1414** may be provided for “full screen (default),” “standard,” “Zoom 1,” “Zoom 2,” and “Smart Zoom.” Additional sub-interfaces may be provided with one or more targets to receive screen position inputs.

[0179] In another embodiment, a sub-interface, such as sub interface **1410A**, is provided for audio settings. Preset functions may be provided as strip items **1412** or **1414** for elements such as in the “sound mode” sub-interface. Individual strip items **1412** or **1414** may include “Standard (default),” “Live 1,” “Live 2,” “Theatre,” “Music,” “Speech,” and “user mode.” Other targets, such as toggle bar **1418** may be provided for on-off values, such as for “SRS TruSurround” and “Auto Volume.” Still other targets may be provided, such as slider bar **1410C** for “Left/Right speaker balance.” And in yet

another embodiment, dropdown **1408** is provided for “S/PDIF,” which, when selected, displays a sub-interface with settings such as “Off,” “Auto (Default),” and “PCM.” In other embodiments, other graphical elements are provided to display and receive values for various settings.

[0180] In a further embodiment, “user mode” is associated with strip item **1412F**, where additional information is indicated (e.g., a “+” symbol). Upon strip item **1412F** receiving focus, a new sub-dialog, such as dialog **1502** may be provided for “user mode” settings. In one embodiment, dialog **1502** is modal and presents a number of slider bar **1410C** to receive values on a scale, each scale representing a particular frequency band of an equalizer.

[0181] In a further embodiment, focus is transferred to a target, such as slider bar **1504**, upon strip item **1412F** receiving an initial focus.

[0182] FIG. 15 illustrates one embodiment of settings panel **524** as displayed on display screen **212** of Smart TV **100**. In the embodiment illustrated, settings panel **524** includes dialog box **1502**. Dialog box **1502** may be modal, non-modal, a window, dropdown, or other display panel as is known in the art of graphical user interfaces. In the illustrated embodiment slider bars **1504**, **1506** and **1508** are presented in association with strip element **1410A** having focus. Slider bar **1506** is illustrated in reverse colors to indicate slider bar **1506** currently has focus. Upon the user’s navigation “up” to slider bar **1504**, slider bar **1504** would then indicate focus. Similarly, navigating “down” to slider bar **1508** would cause slider bar **1508** to indicate focus. In one embodiment, navigating left or right may be an input to set a value of slider bar **1506**.

[0183] In one embodiment, strip element **1410A** received focus and the user performed an act, such as pressing a button on remote device **700** to cause dialog box **1502** to be displayed. In other embodiments, dialog box displays upon strip element **1410A** being selected without any additional steps.

[0184] A user’s interaction with targets within dialog box **1504** may be similar to those of settings panel **524**. Additionally, navigating “up” when focus is at a top target (e.g., slider bar **1504**) or “down” when focus is at a bottom target (e.g., slider bar **1508**) may be an exit function whereby focus is transferred to strip item **1410A** or another element of settings panel **524**. An exit function that is a cancel operation, whereby settings applied during a user’s interaction with dialog box **1502** are discarded, may be performed by pressing a designated “cancel” button on remote device **700** or by other action known to be a cancel operation.

[0185] Changes applied by a user to the targets displayed in dialog box **1502** may be associated with the parent target, in the embodiment illustrated, strip item **1412F**. Therefore changes to a specific silo maybe made as if the change was made by selecting strip item **1412F** with the additional settings associated with dialog box **1502**.

[0186] FIG. 15 illustrates first flowchart **1600** of an embodiment of a smart television settings panel operation, such as Smart TV **100** and settings panel **524**. Flowchart **1600** starts **1602** and displays a user interface **1604** upon receiving an event to display and/or set one or more settings of Smart TV **100**. A first event of step **1606** may be a command to open settings panel **524** and/or main settings bar **1402**. Step **1608** determines if the received event in step **1606** is a settings change event. If yes, processing continues to step **1610** whereby the setting may be immediately, as observed by a human observer, applied to Smart TV **100**. Processing then continues back to step **1606** whereby another event is

received. If the event is determined, by step **1608**, to be a settings change event, processing then continues as described above.

[0187] It should be noted that nested “if-then” statements are just one way that a received event may be evaluated and processed according to a characterizing of the event. All alternative algorithms are contemplated herein. In the embodiment illustrated, a received event **1606** is determined not to be a settings change event by step **1608**. Step **1612** determines if the event is an exit function. If yes, step **1614** closes the user interface and the settings are preserved. If step **1612** determines the function is not an exit function, processing may continue to step **1616** whereby the event is determined to be a cancel function. In another embodiment, if the event is an exit function associated with a cancel operation, Step **1618** is then operable to negate changes made to at least one setting received by step **1606** and applied to Smart TV **100** during step **1610**. In one embodiment, step **1618** is an operation to restore a user-determined setting to a factory default setting.

[0188] Should processing continue to step **1620**, other processing may be performed. Examples of other processing include an error handling or resuming processing at step **1606** with another event. Processing following exit processing step **1614** or cancel processing step **1618** may continue to step **1622**, whereby the processing ends until such time as it is reinitiated at step **1602**.

[0189] FIG. 17 illustrates second flowchart **1700** of an embodiment of a smart television settings panel operation, such as Smart TV **100** and settings panel **524**. Processing of flowchart **1700** starts with step **1702** displaying a number of targets. As described with respect to FIGS. 14 and 15, a target is an interface object that is navigated to by a user. Step **1704** receives an event from the user interface. If the event is a navigation to a target, step **1706** sets focus to the target. If the event is an exit function, step **1720** removes function from a target that most recently had focus. In a further embodiment, step **1720** closes a settings panel, such as settings panel **524**.

[0190] Upon step **1706** setting focus, step **1708** evaluates the type of target. If the target is a silo, step **1710** causes all settings changes to be applied to this particular silo. Settings are applied to a different silo upon processing continuing to step **1702**, **1704**, **1706**, **1708** and **1710** where a silo, different from the previous silo, is selected.

[0191] If step **1708** determines the target has associated settings (e.g., presets, configurable presents), step **1712** applies the setting to Smart TV **100** immediately, as perceived by a human observer. If processing or other requirements prohibit applying the settings changes immediately to Smart TV **100**, then the settings may be applied promptly, or at least as promptly as processing allows.

[0192] If step **1708** determines that the target is a sub-interface, step **1714** displays the sub-interface. In embodiments where the sub-interface is, or has become, displayed, step **1714** may set focus to a target within the sub-interface.

[0193] If step **1708** determines the target accepts user determined values, step **1716** receives the user determined value and step **1718** applies the value to Smart TV **100**.

[0194] The exemplary systems and methods of this disclosure have been described in relation to a Smart TV. However, to avoid unnecessarily obscuring the present disclosure, the preceding description omits a number of known structures and devices. This omission is not to be construed as a limitation of the scopes of the claims. Specific details are set forth

to provide an understanding of the present disclosure. It should however be appreciated that the present disclosure may be practiced in a variety of ways beyond the specific detail set forth herein.

[0195] Furthermore, while the exemplary aspects, embodiments, and/or configurations illustrated herein show the various components of the system collocated, certain components of the system can be located remotely, at distant portions of a distributed network, such as a LAN and/or the Internet, or within a dedicated system. Thus, it should be appreciated that the components of the system can be combined in to one or more devices, such as a Personal Computer, or collocated on a particular node of a distributed network, such as an analog and/or digital telecommunications network, a packet-switch network, or a circuit-switched network. It will be appreciated from the preceding description, and for reasons of computational efficiency, that the components of the system can be arranged at any location within a distributed network of components without affecting the operation of the system. For example, the various components can be located in a switch such as a PBX and media server, gateway, in one or more communications devices, at one or more users' premises, or some combination thereof. Similarly, one or more functional portions of the system could be distributed between a telecommunications device(s) and an associated computing device.

[0196] Furthermore, it should be appreciated that the various links connecting the elements can be wired or wireless links, or any combination thereof, or any other known or later developed element(s) that is capable of supplying and/or communicating data to and from the connected elements. These wired or wireless links can also be secure links and may be capable of communicating encrypted information. Transmission media used as links, for example, can be any suitable carrier for electrical signals, including coaxial cables, copper wire and fiber optics, and may take the form of acoustic or light waves, such as those generated during radio-wave and infra-red data communications.

[0197] Also, while the flowcharts have been discussed and illustrated in relation to a particular sequence of events, it should be appreciated that changes, additions, and omissions to this sequence can occur without materially affecting the operation of the disclosed embodiments, configuration, and aspects.

[0198] A number of variations and modifications of the disclosure can be used. It would be possible to provide for some features of the disclosure without providing others.

[0199] For example in one alternative embodiment, a computing device is embodied in place of Smart TV **100**.

[0200] In another alternative embodiment, a computing device is used to display settings panel **524** and receive the interactions of a user. The computing device then communicates with Smart TV.

[0201] In yet another embodiment, the systems and methods of this disclosure can be implemented in conjunction with a special purpose computer, a programmed microprocessor or microcontroller and peripheral integrated circuit element(s), an ASIC or other integrated circuit, a digital signal processor, a hard-wired electronic or logic circuit such as discrete element circuit, a programmable logic device or gate array such as PLD, PLA, FPGA, PAL, special purpose computer, any comparable means, or the like. In general, any device(s) or means capable of implementing the methodology illustrated herein can be used to implement the various aspects of this

disclosure. Exemplary hardware that can be used for the disclosed embodiments, configurations and aspects includes computers, handheld devices, telephones (e.g., cellular, Internet enabled, digital, analog, hybrids, and others), and other hardware known in the art. Some of these devices include processors (e.g., a single or multiple microprocessors), memory, nonvolatile storage, input devices, and output devices. Furthermore, alternative software implementations including, but not limited to, distributed processing or component/object distributed processing, parallel processing, or virtual machine processing can also be constructed to implement the methods described herein.

[0202] In yet another embodiment, the disclosed methods may be readily implemented in conjunction with software using object or object-oriented software development environments that provide portable source code that can be used on a variety of computer or workstation platforms. Alternatively, the disclosed system may be implemented partially or fully in hardware using standard logic circuits or VLSI design. Whether software or hardware is used to implement the systems in accordance with this disclosure is dependent on the speed and/or efficiency requirements of the system, the particular function, and the particular software or hardware systems or microprocessor or microcomputer systems being utilized.

[0203] In yet another embodiment, the disclosed methods may be partially implemented in software that can be stored on a storage medium, executed on programmed general-purpose computer with the cooperation of a controller and memory, a special purpose computer, a microprocessor, or the like. In these instances, the systems and methods of this disclosure can be implemented as program embedded on personal computer such as an applet, JAVA® or CGI script, as a resource residing on a server or computer workstation, as a routine embedded in a dedicated measurement system, system component, or the like. The system can also be implemented by physically incorporating the system and/or method into a software and/or hardware system.

[0204] Although the present disclosure describes components and functions implemented in the aspects, embodiments, and/or configurations with reference to particular standards and protocols, the aspects, embodiments, and/or configurations are not limited to such standards and protocols. Other similar standards and protocols not mentioned herein are in existence and are considered to be included in the present disclosure. Moreover, the standards and protocols mentioned herein and other similar standards and protocols not mentioned herein are periodically superseded by faster or more effective equivalents having essentially the same functions. Such replacement standards and protocols having the same functions are considered equivalents included in the present disclosure.

[0205] The present disclosure, in various aspects, embodiments, and/or configurations, includes components, methods, processes, systems and/or apparatus substantially as depicted and described herein, including various aspects, embodiments, configurations, subcombinations, and/or subsets thereof. Those of skill in the art will understand how to make and use the disclosed aspects, embodiments, and/or configurations after understanding the present disclosure. The present disclosure, in various aspects, embodiments, and/or configurations, includes providing devices and processes in the absence of items not depicted and/or described herein or in various aspects, embodiments, and/or

configurations hereof, including in the absence of such items as may have been used in previous devices or processes, e.g., for improving performance, achieving ease and/or reducing cost of implementation.

[0206] The foregoing discussion has been presented for purposes of illustration and description. The foregoing is not intended to limit the disclosure to the form or forms disclosed herein. In the foregoing Detailed Description for example, various features of the disclosure are grouped together in one or more aspects, embodiments, and/or configurations for the purpose of streamlining the disclosure. The features of the aspects, embodiments, and/or configurations of the disclosure may be combined in alternate aspects, embodiments, and/or configurations other than those discussed above. This method of disclosure is not to be interpreted as reflecting an intention that the claims require more features than are expressly recited in each claim. Rather, as the following claims reflect, inventive aspects lie in less than all features of a single foregoing disclosed aspect, embodiment, and/or configuration. Thus, the following claims are hereby incorporated into this Detailed Description, with each claim standing on its own as a separate preferred embodiment of the disclosure.

[0207] Moreover, though the description has included description of one or more aspects, embodiments, and/or configurations and certain variations and modifications, other variations, combinations, and modifications are within the scope of the disclosure, e.g., as may be within the skill and knowledge of those in the art, after understanding the present disclosure. It is intended to obtain rights which include alternative aspects, embodiments, and/or configurations to the extent permitted, including alternate, interchangeable and/or equivalent structures, functions, ranges or steps to those claimed, whether or not such alternate, interchangeable and/or equivalent structures, functions, ranges or steps are disclosed herein, and without intending to publicly dedicate any patentable subject matter.

What is claimed is:

1. A method, comprising:

displaying, on an electronic device, a user interface of the electronic device, the user interface comprising a number of settings associated with a number of operating parameters of the electronic device and further associated with a functional silo of the electronic device;

receiving, at an input interface of the electronic device, a user interface event associated with the user interface;

upon the user interface event indicating a setting change to at least one setting, applying the setting change to the electronic device substantially without delay; and

upon receiving the user interface event indicating an exit function, preserving the setting change to the electronic device.

2. The method of claim 1, wherein:

the user interface, further comprises, a number of targets, substantially each of the number of targets being associated with at least one setting; and

the user interface event indicating a setting change, further comprises, the user interface event setting focus to a current target; and

the user interface event indicating the exit function, further comprises, the user interface event removing focus from the current target.

3. The method of claim 2, wherein displaying the user interface further comprises selectively presenting a number of sub-interfaces, each sub-interface presenting a portion of the number of targets.

4. The method of claim 3, wherein the user interface event indicating the exit function, further comprises, a user interface event removing focus from a current sub-interface.

5. The method of claim 4, wherein the user interface event indicating an exit function, further comprises a cancel function, whereby a settings change is backed out.

6. The method of claim 2, wherein at least one of the number of targets is associated with settings which are preset settings.

7. The method of claim 2, wherein the user interface event indicating a setting change, further comprises, a supplemental user interface event indicating a value of the setting associated with the setting change.

8. The method of claim 1, wherein at least one silo is an input source to the electronic device.

9. The method of claim 1, wherein at least one silo is an application executable by the electronic device.

10. An electronic device, comprising:

a display, operable to present a visual portion of an audio-visual presentation;

a silos, representing at least one of an application and an source input;

a settings dialog, operable to present a number of settings associated with the silo;

the settings dialog further comprising a number of targets, at least one target associated with a value of a setting of an operating parameter of the electronic device;

an input operable to receive a user input; and

upon receiving a user input setting focus to first target, applying the associated value to the setting for the silo associated with the first target.

11. The electronic device of claim 10, wherein, upon receiving the user input deselecting the first target as part of a cancel function, removing the applied associated value from the setting for the silo.

12. The electronic device of claim 10, at least one of the number of targets further comprise a user-determined value associated with at least one setting of the electronic device.

13. The electronic device of claim 10, further comprising at least one sub-interface visually containing the first target and additional targets, whereby setting focus from a first target

within the sub-interface to a second target not within the sub-interface causes the applied value associated with the setting to be preserved.

14. The electronic device of claim 13, further comprising setting focus from the first target to a third target, the third target being one of the additional targets within the sub-interface, causes the settings associated with the first target to be overwritten by the settings associated with the third target.

15. A non-transitory machine readable medium with instructions to cause the machine to perform:

displaying, on an electronic device, a user interface of the electronic device, the user interface comprising a number of settings associated with a number of operating parameters of the electronic device and further associated with a functional silo of the electronic device;

receiving, at an input interface of the electronic device, a user interface event associated with the user interface;

upon the user interface event indicating a setting change to at least one setting, applying the setting change to the electronic device substantially without delay; and

upon receiving the user interface event indicating an exit function, preserving the setting change to the electronic device.

16. The instructions of claim 15, wherein:

the user interface, further comprises, a number of targets, substantially each of the number of targets being associated with at least one setting; and

the user interface event indicating a setting change, further comprises, the user interface event setting focus to a current target; and

the user interface event indicating the exit function, further comprises, the user interface event removing focus from the current target.

17. The instructions of claim 16, wherein displaying the user interface further comprises selectively presenting a number of sub-interfaces, each sub-interface presenting a portion of the number of targets.

18. The instructions of claim 17, wherein the user interface event indicating the exit function, further comprises, a user interface event removing focus from a current sub-interface.

19. The instructions of claim 18, wherein the user interface event indicating an exit function, further comprises a cancel function, whereby a settings change is backed out.

20. The instructions of claim 16, wherein at least one of the number of targets is associated with settings which are preset settings.

* * * * *