




US 20090059971A1

(19) **United States**(12) **Patent Application Publication****Atia et al.**(10) **Pub. No.: US 2009/0059971 A1**(43) **Pub. Date: Mar. 5, 2009**(54) **LINEARIZED SWEEPED LASER SOURCE FOR
OPTICAL COHERENCE ANALYSIS SYSTEM****Publication Classification**(75) Inventors: **Walid A. Atia**, Lexington, MA
(US); **Mark E. Kuznetsov**,
Lexington, MA (US); **Dale C.
Flanders**, Lexington, MA (US)(51) **Int. Cl.**
H01S 3/10 (2006.01)(52) **U.S. Cl.** **372/20**

Correspondence Address:

**HOUSTON ELISEEVA
4 MILITIA DRIVE, SUITE 4
LEXINGTON, MA 02421 (US)**(73) Assignee: **AXSUN TECHNOLOGIES, INC.**,
Billerica, MA (US)(21) Appl. No.: **12/027,710**(22) Filed: **Feb. 7, 2008****Related U.S. Application Data**(60) Provisional application No. 60/968,185, filed on Aug.
27, 2007.(57) **ABSTRACT**

A frequency swept laser source that generates an optical signal that is tuned over a spectral scan band at single discrete wavelengths associated with longitudinal modes of the swept laser source. Laser hopping over discrete single cavity modes allows long laser coherence length even under dynamic very high speed tuning conditions. A ramp drive to the laser is used to linearize laser frequency tuning. A beam splitter is used to divide the optical signal between a reference arm leading to a reference reflector and a sample arm leading to a sample. A detector system detects the optical signal from the reference arm and the sample arm for generating depth profiles and images of the sample.

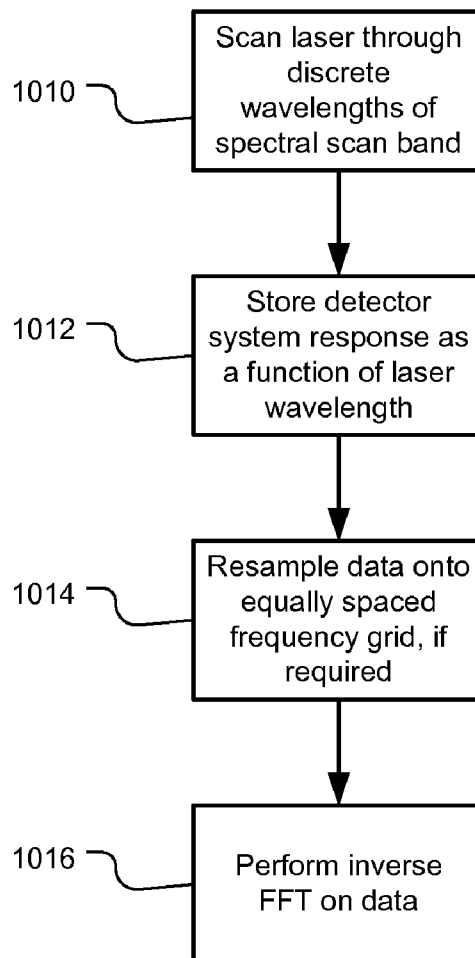

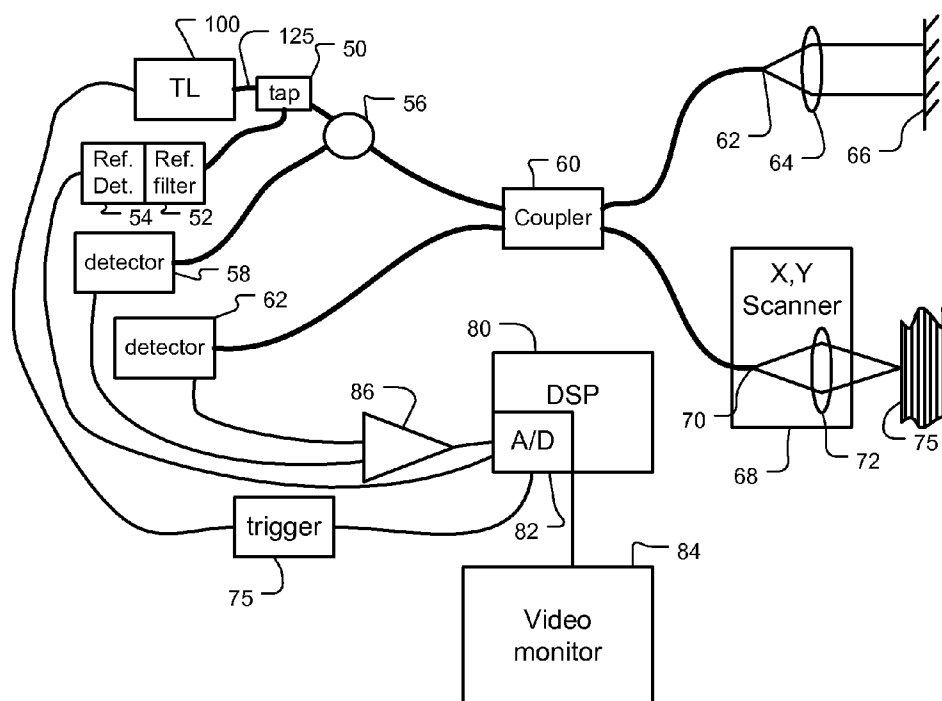


Fig. 1

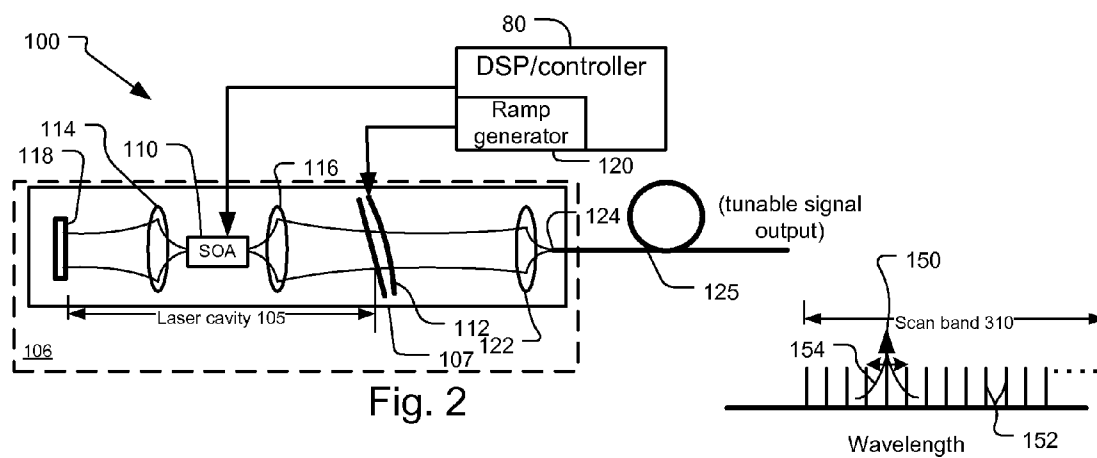


Fig. 3

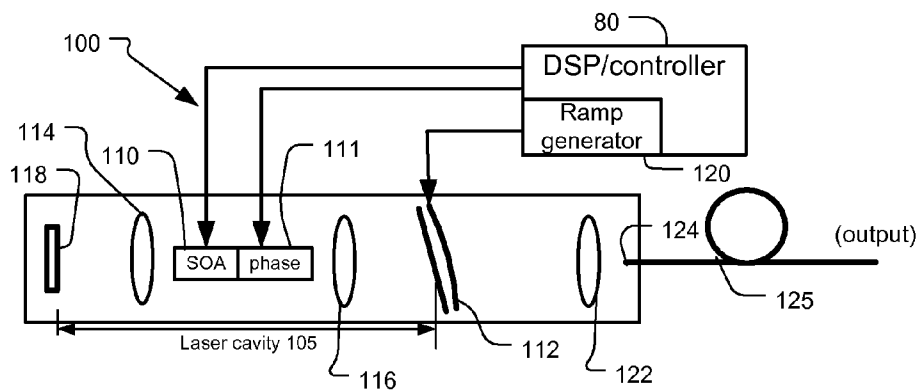


Fig. 4

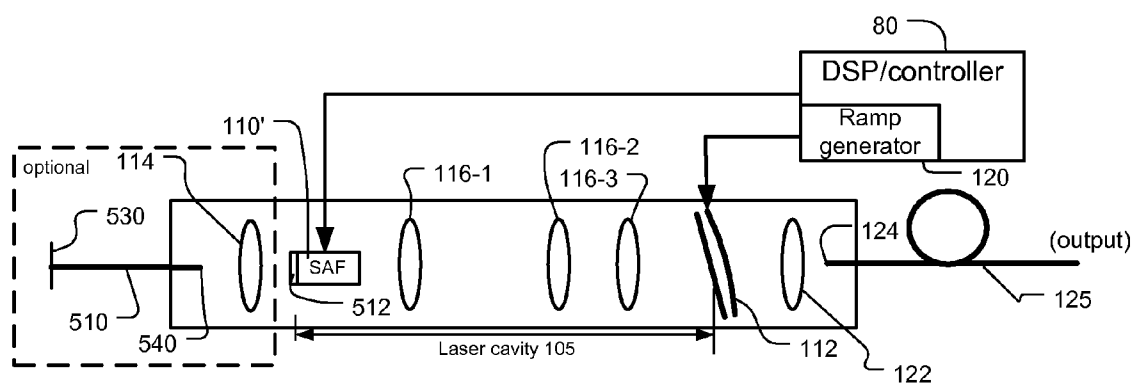


Fig. 5

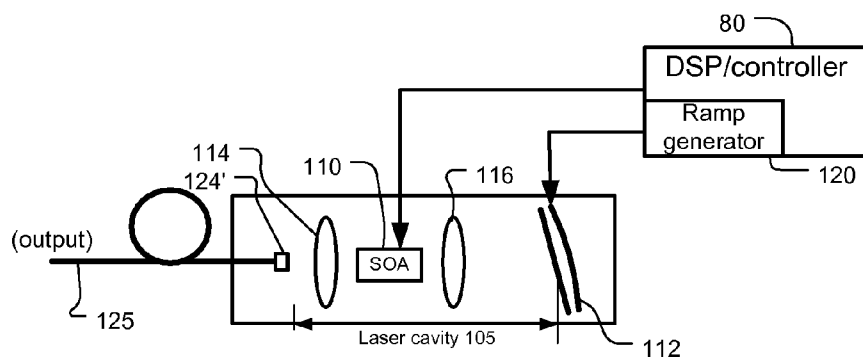


Fig. 6

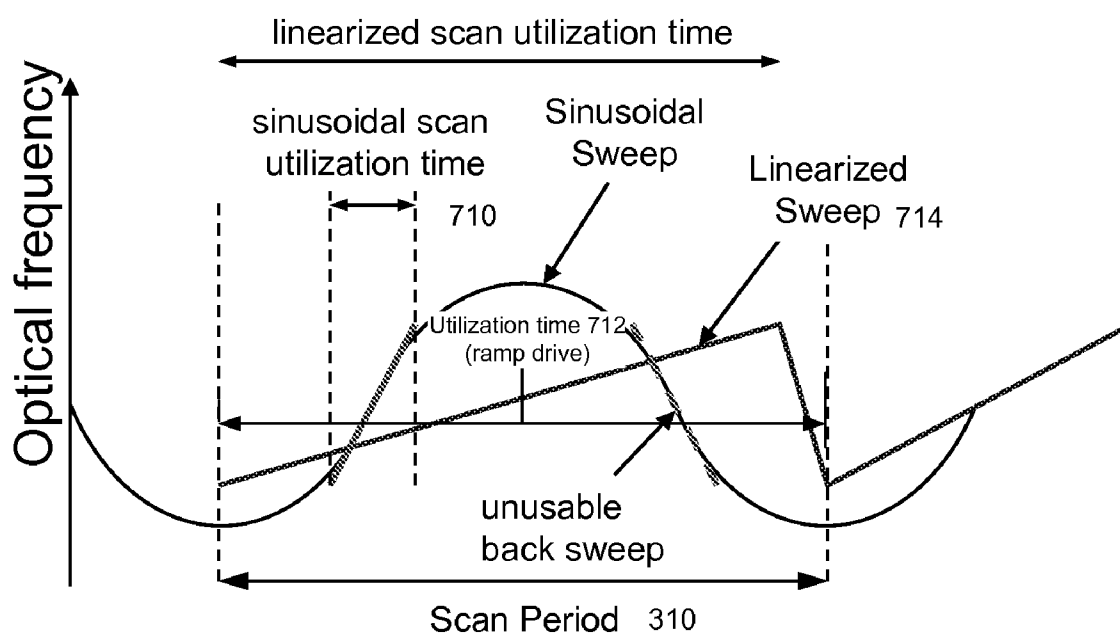


Fig. 7

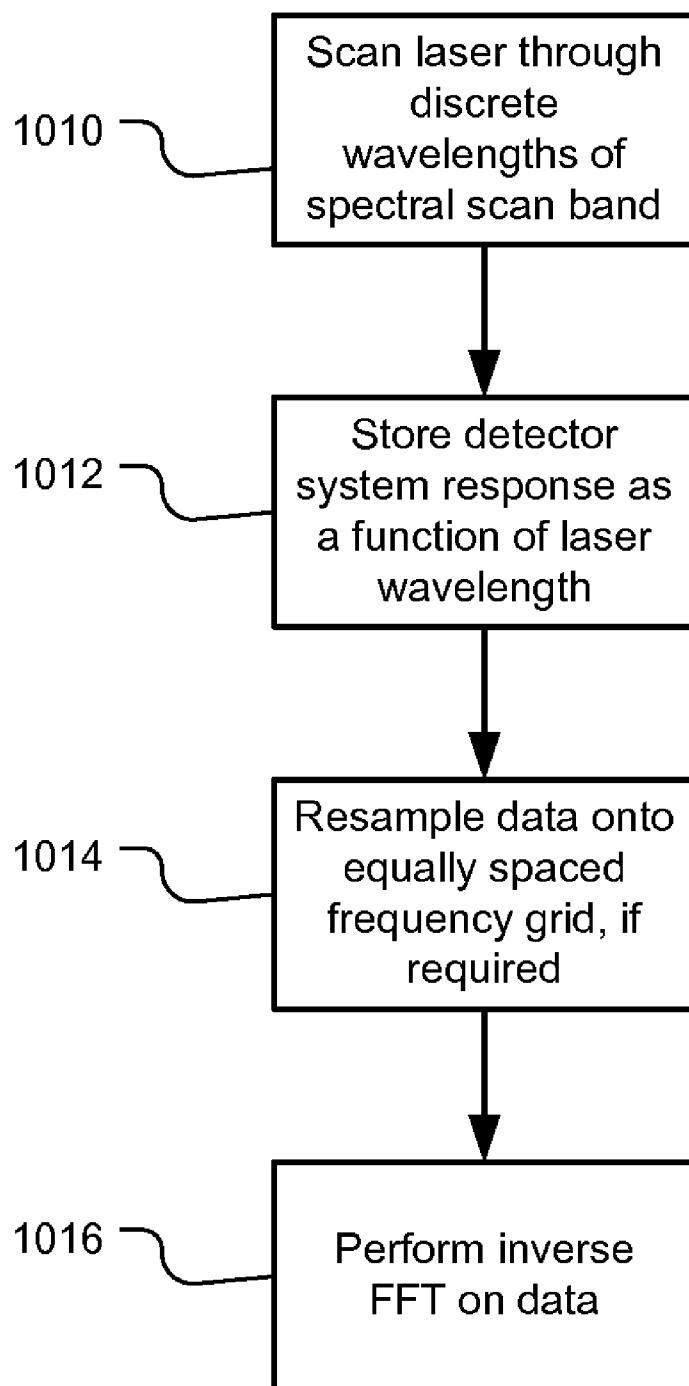


Fig. 8

LINEARIZED SWEEPED LASER SOURCE FOR OPTICAL COHERENCE ANALYSIS SYSTEM

RELATED APPLICATIONS

[0001] This application claims the benefit under 35 USC 119(e) of U.S. Provisional Application No. 60/968,185, filed on Aug. 27, 2007.

[0002] This application is related to U.S. application No. _____ filed on an even date herewith, entitled Mode Hopping Swept Frequency Laser for FD OCT and Method of Operation, now U.S. Patent Publication No.: _____, which is incorporated herein by reference in its entirety.

BACKGROUND OF THE INVENTION

[0003] Optical coherence analysis relies on the use of the interference phenomena between a reference wave and an experimental wave or between two parts of an experimental wave to measure distances and thicknesses, and calculate indices of refraction of a sample. Optical Coherence Tomography (OCT) is one example technology that is used to perform usually high-resolution cross sectional imaging that can provide images of biological tissue structure, for example, on the microscopic scales in real time. Optical waves are sent through an object and a computer produces images of cross sections of the object by using information on how the waves are changed.

[0004] The original OCT imaging technique, the time-domain OCT (TD-OCT) uses a movable reference mirror in a Michelson interferometer arrangement. Another type of optical coherence analysis is termed Fourier domain OCT (FD-OCT). Other terms are time encoded Frequency Domain OCT and swept source OCT. These techniques use either a wavelength swept source and a single detector, sometimes referred to as time-encoded FD-OCT or TEFD-OCT, or a broadband source and spectrally resolving detector system, sometimes referred to spectrum-encoded FD-OCT or SEFD-OCT. FD-OCT has advantages over time domain OCT (TD-OCT) in speed and signal-to-noise ratio (SNR).

[0005] TEFD-OCT has advantages over SEFD-OCT in some respects. The spectral components are not encoded by spatial separation, but they are encoded in time. The spectrum is either filtered or generated in successive frequency steps and reconstructed before Fourier-transformation. Using the frequency scanning light source (i.e. wavelength tuned laser) the optical configuration becomes less complex but the critical performance characteristics now reside in the wavelength tuned laser.

SUMMARY OF THE INVENTION

[0006] Frequency swept laser source for TEFD-OCT imaging requires tuning at very high repetition rates, in the tens of kilohertz, for fast real-time image frame acquisition with a sufficiently large image pixel count. At the same time, long coherence length of the source is required for large imaging depth range. Simultaneous high speed tuning while maintaining long coherence length is difficult to achieve in conventional tunable lasers, such as conventional external cavity semiconductor tunable lasers.

[0007] Long laser coherence length requires narrow spectral linewidth operation and therefore demands a narrow bandwidth tunable filter for the laser. Fast tuning of a narrow filter implies laser light makes very few roundtrips inside the laser cavity as the filter shifts its center frequency by its width.

Few roundtrips imply detrimental decrease of coherence length of the laser. We define dwell time as the number of roundtrips light makes inside the laser cavity while intracavity tunable filter tunes by its full width at half maximum. As the laser tuning speed is increased and the dwell time decreases to less than about 2, the laser coherence length degrades very rapidly and eventually the laser power turns off completely. One solution to this problem is the frequency domain modelocked laser (FDML), where light in a kilometer long fiber cavity is repetitively filtered by the tunable filter on multiple round trips in the cavity, such that long coherence length is maintained even at high tuning speeds. Such a laser, however, is bulky, has complications related to using very long fiber, and has a number of other limitations.

[0008] Dwell time of a tunable laser at high tuning speed can be increased by using a short laser cavity length with a correspondingly small cavity roundtrip time. Such a short required cavity length, e.g. 10 to 30 millimeters (mm), is typically difficult to achieve with conventional external cavity semiconductor lasers. Using micro-electro-mechanical system (MEMS) tunable filters and optical micro-bench packaging allows such compact tunable lasers, however.

[0009] Furthermore, as the cavity length gets smaller, cavity mode spacing gets larger, so that fewer modes remain lasing under the narrow tunable filter spectral envelope, eventually leaving just a single lasing mode. Conventional thinking has assumed that a continuously tuned laser mode or a group of modes is required for OCT imaging. However, since OCT data is read at discrete time intervals anyway, a laser tuned over a discrete set of individual wavelengths should be also suitable for OCT imaging. Such a discretely tuned single mode laser can have a short laser cavity and thus capable of operating at very high speeds with dwell times sufficiently high for maintaining the long required dynamic coherence length.

[0010] The present invention concerns a wavelength tuned laser for an optical coherence analysis system. The laser hops between single discrete modes of the laser cavity. The laser can be tuned at very high scanning speeds while maintaining long coherence length. Further, laser frequency tuning with time can be linearized with a high utilization duty cycle.

[0011] In general, according to one aspect, the invention features a swept laser source for an optical coherence analysis system. This source comprises a laser cavity, a semiconductor gain medium in the laser cavity, and a tuning element in the laser cavity that is tuned over a spectral scan band. According to the invention, a ramp generator is provided for driving the tuning element with a ramp function substantially to linearize frequency tuning with time of an optical signal over the spectral scan band.

[0012] The use of the ramp generator provides for linearized scan utilization duty cycle of greater than 50%, usually better than 80%.

[0013] In general, according to one aspect, the invention features an optical coherence analysis method, comprising tuning an optical signal over a scan band by a tuning element in a laser cavity with a ramp function to linearize frequency tuning of the optical signal over the spectral scan band, dividing the optical signal between a reference arm leading to a reference reflector and a sample arm leading to a sample, and detecting the optical signal from the reference arm and the sample arm.

[0014] The above and other features of the invention including various novel details of construction and combina-

tions of parts, and other advantages, will now be more particularly described with reference to the accompanying drawings and pointed out in the claims. It will be understood that the particular method and device embodying the invention are shown by way of illustration and not as a limitation of the invention. The principles and features of this invention may be employed in various and numerous embodiments without departing from the scope of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0015] In the accompanying drawings, reference characters refer to the same parts throughout the different views. The drawings are not necessarily to scale; emphasis has instead been placed upon illustrating the principles of the invention. Of the drawings:

[0016] FIG. 1 is a schematic block diagram of an optical coherence analysis system to which the invention is applicable;

[0017] FIG. 2 is a schematic diagram of a single longitudinal mode hopping tunable laser for the optical coherence analysis system, according to a first embodiment of the present invention;

[0018] FIG. 3 is a spectral plot illustrating the relationship between the tunable signal emission from the mode hopping laser, the laser's cavity modes, scan band, and intracavity filter passband;

[0019] FIG. 4 is a schematic diagram of a single longitudinal mode hopping tunable laser for the optical coherence analysis system with phase compensation, according to a second embodiment of the present invention;

[0020] FIG. 5 is a schematic diagram of a single longitudinal mode hopping tunable laser for the optical coherence analysis system using a single angle facet (SAF) semiconductor optical amplifier (SOA) chip, according to a third embodiment of the present invention;

[0021] FIG. 6 is a schematic diagram of a single longitudinal mode hopping tunable laser for the optical coherence analysis system taking the tunable optical signal directly from the SOA, according to a fourth embodiment of the present invention;

[0022] FIG. 7 is a plot of optical frequency as a function of scan period showing the inventive saw-toothed tuning ramp compared with a convention sinusoid tuning drive; and

[0023] FIG. 8 is a flow diagram illustrating process for optical coherence analysis.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0024] FIG. 1 shows an optical coherence analysis system to which the present invention is applicable.

[0025] In more detail, the illustrated system is a time encoded Fourier domain optical coherence tomography system (TEFD-OCT). As such it comprises a tunable narrow-band light source. Specifically, a tunable semiconductor diode laser system 100 is used. The light from the tunable laser 100 is output on a fiber 125 to a tap 50. A tap 50 takes a portion of the tunable signal from the tunable laser 100 and directs it to a wavelength or frequency reference system. Specifically, the tap 50 is coupled to a reference filter 52 that applies a known spectral function against the tunable signal. A reference detector 54 detects the tunable signal as it is filtered by the reference filter 52. In one example, the refer-

ence filter 52 comprises a fixed etalon providing a series of transmission peaks spaced at known wavelengths.

[0026] The light that is not diverted by the tap 50 is provided to a circulator 56. This directs the light from the tunable laser 100 to a coupler 60. The tunable signal is divided by the coupler 60 into a reference arm and a sample arm of the system. Specifically, the optical fiber of the reference arm terminates at the fiber endface 62. The light exiting from the reference arm fiber endface 62 is collimated by a lens 64 and then reflected on a mirror 66 to return back to the coupler 60.

[0027] The external mirror 66 has an adjustable fiber to mirror distance. This distance determines the depth range being imaged, i.e. the position in the sample of the zero path length difference between the reference and the sample arms. The distance is adjusted for different sampling catheters and/or imaged samples.

[0028] The fiber on the sample arm terminates at the sample arm fiber endface 70. The light exiting from the fiber endface 70 is focused by a lens 72 onto the sample 75. The fiber endface 70 and the lens 72 are controlled by an x-y-z scanner 68. Specifically, the x-y-z scanner 68 scans the focused beam from the fiber endface 70 relative to the sample 75 while collecting the spectral response from the sample 75. The light reflected back into the fiber endface 70 is returned to the coupler 60 which then combines the signals from the reference and sample arms. Light then returns to a first detector 58 via circulator 56 and to a second detector 62.

[0029] In examples, the x-y-z scanning is implemented by moving the lens 72 and endface 70 using a three dimensional positioner. In other examples, the x-y-z scanning is implemented by moving the sample 75 relative to the lens 72 and endface 70. In still other examples, the scanning is implemented by rotating and laterally moving the lens 72/endface 70.

[0030] The first detector 58 and the second detector 62 function in a balanced detector scheme. Specifically, their electrical responses are combined in a differential amplifier 86 and then sampled in a current embodiment.

[0031] In one implementation, an analog to digital converter system 82 of a digital signal processor (DSP) 80 is used to sample the output from the differential amplifier 86.

[0032] The analog to digital detection system 82, and usually a second converter, is used to sample the output from the reference detector 54. As a result, the DSP 80 is able to determine the instantaneous wavelength or frequency of the tunable laser 100 as it scans over the scan band.

[0033] In one embodiment, the output of the tunable laser is also provided to a direct trigger circuit 75 to provide the sampling trigger to the analog to digital converter system 82. Specifically, the trigger 75 detects the instantaneous amplitude of the tunable laser 100. When the amplitude jumps high as the tunable laser scans and discretely hops between the modes of the laser, the trigger circuit 75 generates a trigger signal that the analog to digital converter system 82 of the digital signal processor 80 uses to trigger and thus sample the output of the differential amplifier 86. In this case such direct laser trigger signal 75 is used instead of the reference detector 54 trigger signal.

[0034] Once a complete data set has been collected from the surface of the sample 75 by the operation of the scanner 68 and the spectral response at each one of these points is generated from the tuning of the tunable laser 100, the digital signal processor 80 performs a Fourier transform on the data in order to reconstruct the image and perform a 2D or 3D

tomographic reconstruction of the sample **75**. This information is generated by the digital signal processor **80** is then displayed on a video monitor **84**.

[0035] FIG. 2 shows the tunable semiconductor laser **100** according to a first embodiment of the invention.

[0036] In more detail, the tunable laser **100** comprises a semiconductor gain chip **110** that is paired with a microelectromechanical (MEMS) angled reflective Fabry-Perot tunable filter **112** to create external cavity tunable laser (ECL).

[0037] The semiconductor optical amplifier (SOA) chip **110** is located within a laser cavity **105**. In the current embodiment, both facets of the SOA chip are angled and anti-reflection (AR) coated, providing parallel beams from the two facets.

[0038] Specifically, each end facet of the SOA **110** has associated lenses **114**, **116** that are used to couple the light exiting from either facet of the SOA **110**. The first lens **114** couples the light between the back facet of the SOA **110** and a mirror **118**. Light exiting out the front facet of the SOA **110** is coupled by a second lens **116** to the reflective Fabry-Perot tunable filter **112**.

[0039] The angled reflective Fabry-Perot filter is a multi-spatial-mode tunable filter that provides angular dependent reflective spectral response back into the laser cavity **105**. This phenomenon is discussed in more detail in incorporated US20060215713A1.

[0040] In one specific example, the filter **112** is a curved-flat Fabry-Perot tunable filter that supports multiple spatial modes.

[0041] The light transmitted by the tunable filter **112** is coupled through to a third lens **122**. This focuses the light down into the endface **124** of an output optical fiber **125**, such as single mode fiber, which can also be polarization controlling, such as polarization maintaining (PM), fiber.

[0042] The single mode fiber **125** ultimately transports the tunable signal to the coupler **60** and then to each of the reference and sample arms of the optical coherence analysis system **100**, see FIG. 1.

[0043] In one embodiment, the drive current to the semiconductor optical amplifier **110** is controlled by the digital signal processor **80**. Specifically, in one implementation the drive current is controlled to stabilize the power output of the laser **100**. Further, in the preferred embodiment, the signal processor **80** either is implemented to function as a ramp generator or a separate ramp generator circuit **120** is provided, which is triggered by the DSP **80**. The ramp generator **120** provides a saw-toothed tuning voltage curve to the tunable filter **112** to thereby provide substantially linear frequency tuning with time over the scan band, which also maximizes the tuning performance of the tunable laser **100**.

[0044] In the preferred embodiment the tunable laser **100** is implemented on an optical bench **107**, which is installed in a hermetic package **106**. Specifically, this is a micro-optical bench to provide a relatively short laser cavity **105**.

[0045] FIG. 3 is an exemplary spectral plot illustrating of the relationship between the scan band **310**, longitudinal cavity modes **152**, the passband **154** for the tunable filter **112**, and the laser emission/tunable signal **150**.

[0046] The scan band **310** for the tunable laser **100** extends over a wavelength range. The passband **154** of the tunable filter **112** is then scanned over the band **310**. Its passband is such that it only selects no more than one of the cavity modes **152** of the laser cavity **105**. Thus, at points when the passband is directly between cavity modes, spectrally, it is possible that

no cavity modes are lasing. However, when the passband **154** aligns with a given cavity mode then the output tunable signal **150** is produced. In this way, the laser system **100** functions as a mode-hopping laser system that only produces an optical signal at the discrete wavelengths of the cavity modes **152**.

[0047] FIG. 4 shows a second embodiment of the mode hopping tunable laser **100**. This includes a second semiconductor chip section **111** that functions as an intra cavity phase or dispersion compensator, which is integral with the semiconductor gain medium in a preferred embodiment. Specifically, there is a certain amount of dispersion during scanning, which implies variation of cavity mode frequency spacing. The cavity **105** is not all air; there is refractive index dispersion in the laser chip, lenses, optical coatings. Also, laser threshold changes over the tuning range. Thus, there will typically be higher carrier density inside the gain chip **110**, when it is tuned to the edges of the spectrum. This increased carrier density decreases the chip's refractive index and thereby causes a dispersion-like effect.

[0048] The phase compensator **111** controls its refractive index and thus the optical length of the cavity as compensation.

[0049] In other embodiments, the compensator includes an electro-optic medium.

[0050] In other embodiments, signal processing by the DSP **80** is used to compensate for dispersion in the case of the mode-hopping laser. This involves measuring the laser's tuning dispersion. This dispersion relates to the variation in the optical frequency spacing between modes across the scan band. The collected data is then resampled onto an equally spaced frequency grid before doing the FFT to make the image.

[0051] FIG. 5 shows a third embodiment of the mode hopping tunable laser **100**. This uses a reflective SOA or single angled facet (SAF) chip **110'**. Specifically, the back normal facet **512** of the semiconductor amplifier **110'** is reflective to define one end of the laser cavity **105**. On the front angled non-reflective facet, a series of three lenses **116-1**, **116-2**, **116-3** is used to collimate the output of the semiconductor amplifier and relay it to the tunable filter **112**, thereby yielding the laser cavity with the desired length. Also in one implementation, light output through fiber **510** is taken, alternatively or in addition to output fiber **125**, through the back facet **512** of the reflective optical amplifier SAF **110'**. This is used to provide an alternative output of the tunable laser or a second laser output to serve as a possible input to the trigger circuit **75**, see FIG. 1.

[0052] In a variant design for longer laser cavities, the reflective SOA **110'** is replaced with an SOA having antireflection (AR) coated front and rear facets. Further, the facet **540** of the optical fiber **510** is AR coated. This extends the laser cavity **105** into the fiber **510**. Thus, with a reflective coated end **530** of the optical fiber, the length of the cavity is made longer to include a portion of the cavity in the fiber **510**.

[0053] FIG. 6 shows a fourth embodiment in which the tunable filter **112** forms the one end of the laser cavity **105**. The other end of the laser cavity is formed by a mirror **124'** formed or deposited on the endface of output optical fiber **125**. In preferred embodiment, the mirror is a dielectric multi-layer stack mirror. Further, the fiber **125** preferably has a mode expanded core or an integral mode expander/collimator, such as a fused graded index lens, at the endface/mirror **124'** so that the mode size of the fiber output matches the beam size produced by lens **114** from the output of SOA **110**.

[0054] This embodiment provides higher levels of output power since the output light does not need to pass through the tunable filter **112** and suffer corresponding insertion loss. Also, the beam profile is less distorted, yielding good power coupling. On the other hand, broadband amplified spontaneous emissions from the semiconductor amplifier **110** are not filtered out, as they are when output is taken through the filter **112**.

Mode Hopping Laser Specifications

[0055] The laser cavity **105** is preferably only about 10-30 millimeters (mm) long, in air. This provides roundtrip times that are on the order 0.07-0.20 nanoseconds (nsec). This short cavity provides for good dynamic laser coherence length upon fast sweep tuning: relatively long coherence length is largely preserved upon fast tuning because of the relatively short cavity.

[0056] The passband of the tunable filter **112** is selected to be relatively spectrally narrow in relation to the spectral longitudinal cavity mode spacing of the cavity **105**. Specifically, the filter is narrow to ensure only a few, and preferably never more than one, longitudinal mode of the cavity can lase during the scanning of the filter **112**. In one example, the passband of the filter **112** is less than 10 giga-Hertz (GHz) wide and is preferably about 5.0 GHz wide, tuning over 100 nanometer scan band near 1300 nm wavelength at 45 kilo-Hertz (kHz) repetition rate. Thus, the filter **112** tunes by one bandwidth in 2.0 nanosecond (nsec). This yields dwell times of 10-57 for 10-30 mm cavities, where dwell time is the number of roundtrips light makes inside laser cavity while the filter tunes by its full width at half maximum. Large dwell times imply static laser coherence length is well preserved under dynamic tuning conditions; for dwell times less than about 2, dynamic laser coherence length decreases rapidly.

[0057] First Single-Mode Laser:

[0058] Filter **112**, bandwidth 6-8 GHz.

[0059] Length of laser cavity **105**: ~17.5 mm, Mode Spacing~8.6 GHz.

[0060] Lorentzian filter transmission at side-mode: 0.11-0.20. Good single mode operation with low, >30 dB, sidemodes.

[0061] Second Single-Mode Laser:

[0062] Filter **112** bandwidth: 9-12 GHz.

[0063] Length of laser cavity **105**: 21 mm, Mode Spacing~7.0 GHz.

[0064] Lorentzian filter transmission at side-mode: 0.29-0.42.

[0065] side-mode suppression ration (SMSR) only ~10-15 dB.

[0066] FIG. 7 shows the conventional sinusoidal filter tuning drive. As a result, only a small portion of the total scan period has a near linear tuning curve (see sinusoid scan utilization time period **710**). This sinusoidal drive signal is necessitated by the relative high mass spectral tuning elements used in convention ECL devices, which requires driving such tunable filters sinusoidally in time near their resonant frequency. MEMS tunable filters, preferably used in the inventive lasers, have high resonance frequencies and their frequency tuning with time can be linearized for repetition frequencies of 50-100 kHz and higher.

[0067] According to the present invention, the ramp generator **120** produces a saw-toothed drive signal **714** to provide a linearized sweep that extends over 50% and preferably

greater than 80% of the scan period **310**, providing much higher duty cycles of 50-80% and greater.

[0068] FIG. 8 illustrates the process performed by the optical coherence analysis system. Specifically, in step **1010** the laser is scanned through the discrete wavelengths of the spectral scan band. In step **1012**, the detector system response is stored as a function of wavelength by the digital signal processor **80** in one example. The data are then reassembled on to an equally spaced frequency grid in step **114**. This is required if the discrete laser scan frequencies do not have the same spectral separation.

[0069] Finally, in step **1016** an inverse Fourier transform is applied to the data in order to reconstruct the image of the sample.

[0070] While this invention has been particularly shown and described with references to preferred embodiments thereof, it will be understood by those skilled in the art that various changes in form and details may be made therein without departing from the scope of the invention encompassed by the appended claims.

What is claimed is:

1. A swept laser source for an optical coherence analysis system comprising:

a laser cavity;

a semiconductor gain medium in the laser cavity; and

a tuning element in the laser cavity that is tuned over a spectral scan band;

a ramp generator for driving the tuning element with a ramp function substantially to linearize frequency tuning with time of an optical signal over the spectral scan band.

2. An optical coherence analysis system as claimed in claim 1, wherein a duty cycle of the linearized output is greater than 50%.

3. An optical coherence analysis system as claimed in claim 1, wherein a duty cycle of the linearized output is greater than 80%.

4. An optical coherence analysis system as claimed in claim 1, wherein the ramp generator drives the tuning element at greater than 10 kHz.

5. An optical coherence analysis system as claimed in claim 1, wherein the ramp generator drives the tuning element at greater than 30 kHz.

6. An optical coherence analysis system as claimed in claim 1, wherein the laser cavity is characterized by longitudinal modes and the swept source only generates an optical signal at single discrete wavelengths associated with the longitudinal modes.

7. An optical coherence analysis system as claimed in claim 1, wherein the tuning element comprises a tunable pass band that restricts the swept laser source to lasing at the single discrete wavelengths of the longitudinal modes.

8. An optical coherence analysis system as claimed in claim 1, wherein the tuning element comprises a Fabry-Perot tunable filter.

9. An optical coherence analysis system as claimed in claim 1, wherein the tuning element comprises a MEMS Fabry-Perot tunable filter.

10. An optical coherence analysis system as claimed in claim 1, wherein the laser cavity is defined by at least two reflectors.

11. An optical coherence analysis system as claimed in claim 10, wherein one of the reflectors is integral with the semiconductor gain medium.

12. An optical coherence analysis system as claimed in claim **10**, wherein one of the reflectors is integral with tuning element.

13. An optical coherence analysis system as claimed in claim **1**, wherein a bandwidth of the tuning element and spacing between longitudinal modes enables only individual ones of the longitudinal modes to lase as the optical signal is tuned over the spectral band.

14. An optical coherence analysis system as claimed in claim **1**, wherein the optical signal is taken from the laser cavity through the tuning element.

15. An optical coherence analysis system as claimed in claim **1**, wherein the optical signal is taken from the laser cavity through the semiconductor gain medium.

16. An optical coherence analysis method, comprising:
tuning an optical signal over a scan band by a tuning element in a laser cavity with a ramp function to linearize frequency tuning of the optical signal over the spectral scan band;

dividing the optical signal between a reference arm leading to a reference reflector and a sample arm leading to a sample; and

detecting the optical signal from the reference arm and the sample arm.

17. An optical coherence analysis method as claimed in claim **16**, wherein a duty cycle of the linearized output is greater than 50%.

18. An optical coherence analysis method as claimed in claim **16**, wherein a duty cycle of a linearized output is greater than 80%.

19. An optical coherence analysis method as claimed in claim **16**, further comprising driving the tuning element at greater than 10 kHz.

20. An optical coherence analysis method as claimed in claim **16**, further comprising driving the tuning element at greater than 30 kHz.

21. An optical coherence analysis method as claimed in claim **16**, wherein the laser cavity is characterized by longitudinal modes, and further comprising only generating the optical signal at single discrete wavelengths associated with the longitudinal modes.

22. An optical coherence analysis method as claimed in claim **16**, further comprising selecting a bandwidth of the tuning elements and spacing between longitudinal modes to enable only individual ones of the longitudinal modes to lase as the optical signal is tuned over the spectral scan band.

* * * * *