



- (51) **International Patent Classification:**
A61M 16/06 (2006.01) A44B 11/28 (2006.01)
- (21) **International Application Number:**
PCT/NZ2015/050186
- (22) **International Filing Date:**
6 November 2015 (06.11.2015)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
62/077,071 7 November 2014 (07.11.2014) US
62/212,431 31 August 2015 (31.08.2015) US
- (71) **Applicant: FISHER & PAYKEL HEALTHCARE LIMITED** [NZ/NZ]; 15 Maurice Paykel Place, East Tamaki, Auckland, 2013 (NZ).
- (72) **Inventors; and**
- (71) **Applicants : HUANG, Wen Don** [NZ/NZ]; c/o Fisher & Paykel Healthcare Limited, 15 Maurice Paykel Place, East Tamaki, Auckland, 2013 (NZ). **GARDIOLA, Arvin San Jose** [NZ/NZ]; c/o Fisher & Paykel Healthcare Limited, 15 Maurice Paykel Place, East Tamaki, Auckland, 2013 (NZ). **STEPHENSON, Matthew Roger** [NZ/NZ]; c/o Fisher &

Paykel Healthcare Limited, 15 Maurice Paykel Place, East Tamaki, Auckland, 2013 (NZ). **LIM, Toong** [NZ/NZ]; c/o Fisher & Paykel Healthcare Limited, 15 Maurice Paykel Place, East Tamaki, Auckland, 2013 (NZ). **WALLS, Bruce Michael** [NZ/NZ]; c/o Fisher & Paykel Healthcare Limited, 15 Maurice Paykel Place, East Tamaki, Auckland, 2013 (NZ). **YOUNG, Jeremy Owen** [NZ/NZ]; c/o Fisher & Paykel Healthcare Limited, 15 Maurice Paykel Place, East Tamaki, Auckland, 2013 (NZ).

(74) **Agent: BALDWINS INTELLECTUAL PROPERTY;** PO Box 852, Wellington, 6011 (NZ).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

[Continued on next page]

(54) Title: BREATHING APPARATUS

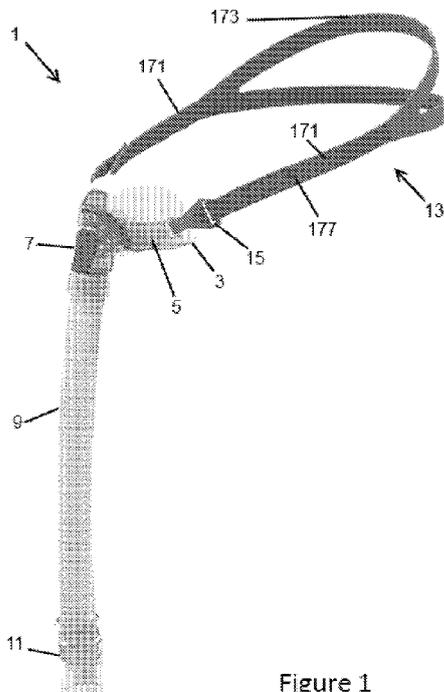


Figure 1

(57) **Abstract:** A mask frame, comprises a central conduit connection aperture and lateral arms having a 3-D curvature. The lateral arms extend: outwardly from a center of the frame, rearwardly, towards the patients ears, and upwardly, along a vector passing from below the nose to a point between the temple the top of the ear. The lateral arms "twist" along their length, such that a bottom margin of an end of each lateral arm is positioned further away from a notional vertical plane passing through the centre of the conduit connection aperture than a top margin. Also provided is an anti-rotation feature which limits or prevents rotation between straps of a headgear, and the mask frame. Further provided is a buckle for a closed loop headgear the buckle being formed with a plurality of openings and posts configured to form an angled headgear strap path through the buckle through which part of a headgear strap loop can pass. The buckle also comprises a friction loop opening through which a further of the headgear strap loop can pass, the angle of the angled path being such that the further part of the headgear strap loop frictionally engages the friction loop opening.

WO 2016/072868 A1



(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE,

SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

BREATHING APPARATUS

INCORPORATION BY REFERENCE TO ANY PRIORITY APPLICATIONS

[0001] This application claims priority from US62/077071 filed 11 July 2014 and from US62/212431 filed 31 August 2015, the entire contents of both of which applications are hereby incorporated by reference.

BACKGROUND

Technical Field

[0002] The presently disclosed subject matter invention generally relates to interfaces for providing a supply of pressurised gas to a recipient.

Description of the Related Art

[0003] Breathing gases can be delivered to users with a variety of different mask styles and can be delivered for a variety of different purposes. For example, users can be ventilated using non-invasive ventilation (NIV). In addition, continuous positive airway pressure (CPAP) or variable airway pressure can be delivered using masks to treat a medical disorder, such as obstructive sleep apnea (OSA), chronic obstructive pulmonary disease (COPD), or congestive heart failure (CHF).

[0004] These non-invasive ventilation and pressure support therapies generally involve the placement of a user interface device, which is typically a nasal or nasal/oral mask, on the face of a user. The flow of breathing gas can be delivered from the pressure/flow generating device to the airway of the user through the mask.

[0005] Typically, patient interface devices include a mask frame that supports a sealing member. The sealing member contacts the facial surfaces of the user, including regions surrounding the nose, including the nose and the nares. Because such masks are typically worn for an extended period of time, a variety of concerns must be taken into consideration. For example, in providing CPAP to treat OSA, the user normally wears the mask all night long while he or she sleeps. One concern in such a situation is that the mask should be as comfortable as possible. It is also important that the mask provide a sufficient seal against a user's face without significant discomfort.

BRIEF SUMMARY

[0006] According to a first aspect of the invention there is provided a mask frame for a patient mask for delivering breathing gases to a patient, the mask frame comprising:

a central region comprising a conduit connection aperture configured to be connected to a breathing gas delivery conduit, a notional central vertical plane extending through the centre of the conduit connection aperture; and

first and second lateral arms each extending outwardly from the central region away from the central vertical plane;

each lateral arm having a length and terminating in a distal end remote from the central region, each lateral arm comprising a top and bottom margin; wherein

each lateral arm twists along its length such that the bottom margin at the end of each lateral arm is positioned further away from the notional central vertical plane than the top margin at the end of each lateral arm.

[0007] The lateral arms may extend:

laterally outwardly from the central region of the frame;

rearwardly, towards the patients ears; and

upwardly, so that the lateral arms are angled upwards such that they extend along a direction extending from the ends of the lateral arms to an area between the user's temples and ears. The lateral arms may extend upwardly along a vector passing from below the nose to a point between the temple at the top of the ear.

[0008] Each lateral arm may comprise a planar, generally oblong, strip or band, the end of each strip defining top and bottom corners at the top and bottom margins respectively, wherein the side arms twist along their length such that the bottom corner of the ends of the lateral arms are positioned further away from the central region of the frame than the top corners.

[0009] Each lateral arm may be tapered along its length, that is, the distance between the top and bottom margins reduces along at least part of the length of each lateral arm.

[0010] The ends of the lateral arms may be positioned below a notional horizontal mid plane that passes through the centre of the elbow connection aperture.

[0011] The end of each arm may comprise a headgear connector configured to connect the frame to headgear. The headgear connector may comprise a loop and a post configured to provide a connection point for a hook of a headgear clip attached to headgear.

[0012] In some embodiments, the headgear connector may comprise a rotation limiting formation configured to limit relative rotation between headgear connected to the headgear connector, and the mask frame. The rotation limiting formation may comprise an end stop against which the headgear abuts after a predetermined amount of relative rotation between the mask frame and headgear. The rotation limiting formation may be provided on the post. The rotation limiting formation may comprise two spaced apart end stops, relative movement between the headgear and the mask frame being limited by the distance between the two spaced apart end stops.

[0013] According to another aspect of the invention there is provided a mask assembly comprising the mask frame of the first aspect, and further comprising: headgear configured to be connected to the lateral arms of the mask frame; and a sealing cushion configured to be mounted on the mask frame.

[0014] According to a further aspect of the invention there is provided a mask assembly comprising a mask frame and a headgear configured to be connected to the mask frame, at least one of the mask frame and headgear comprising a connector comprising a post, the other of the mask frame and headgear comprising a connector comprising a hook configured to receive the post to connect the headgear to the mask frame such that the hook can rotate about the post towards and away from the mask frame, the mask assembly further comprising at least one rotation limiting formation configured to limit the extent of relative rotation between the hook and post.

[0015] The rotation limiting formation may comprise an end stop on one of the mask frame and headgear against which the other of the mask frame and headgear abuts after a predetermined amount of relative rotation between the mask frame and headgear. Two end stops may be provided, one on the mask frame, the other on the headgear, the end stops being configured to abut after a predetermined amount of relative rotation between the mask frame and headgear. One end stop may be provided on the hook, and the other end stop may be provided on the post.

[0016] At least one of the hook and post may comprise two spaced apart end stops, relative movement between the hook and post being limited by the distance between the two spaced apart end stops. One of the end stops may comprise a protrusion projecting from one of the hook and post, the other of the hook and post comprising a groove or recess having opposed ends, the opposed ends forming the two spaced part apart end stops, the protrusion being received in the groove or recess when the headgear is connected to the mask frame and being configured such that the protrusion moves within the groove or recess, between the opposed ends. The groove or recess may be provided on the post, the protrusion being provided on the hook.

[0017] According to another aspect of the invention there is provided a headgear connector assembly for connecting a headgear to a mask, the headgear connector assembly comprising a first connector comprising a post, and a second connector comprising a hook configured to receive the post to connect the first connector to the second connector such that the hook can rotate about the post, the headgear connector assembly further comprising at least one rotation limiting formation configured to limit the extent of relative rotation between the hook and post.

[0018] According to a further aspect of the invention there is provided a mask assembly comprising a mask frame and a headgear configured to be connected to the mask frame, the mask frame comprising:

a central region comprising a conduit connection aperture configured to be connected to a breathing gas delivery conduit, a notional central vertical plane extending through the centre of the conduit connection aperture; and

first and second lateral arms each extending outwardly from the central region;
each lateral arm having a length and terminating in a distal end remote from the central region, each arm comprising a top and bottom margin; wherein

each lateral arm twists along its length such that the bottom margin at the end of each lateral arm is positioned further away from the notional central vertical plane than the top margin at the end of each lateral arm;

the headgear comprising straps having headgear connectors configured to be rotatably connected to the ends of the lateral arms;

the mask assembly further comprising at least one rotation limiting formation configured to limit the extent of relative rotation between the mask frame and the headgear.

[0019] According to another aspect of the invention there is provided a buckle for a closed loop headgear, the buckle comprising:

an inside face and an outside face extending between a bottom face and a top face;

an inside post, a central post, and an outside post, each post extending between the top and bottom faces;

a friction loop opening positioned between the inside post and the central post and configured to receive part of a headgear strap loop;

a front opening formed at least on the inside face;

an outside opening formed at least on the outside face;

a headgear strap path extending between the front opening and the outside opening between the outside post and the central post, the path being configured to receive a return part of the headgear strap loop,

wherein the front opening and the outside opening are offset such that the headgear strap path is angled.

[0020] The buckle may further comprise a strap attachment surface located on an inside surface of the outside post along the headgear strap path, the strap attachment surface being configured to be attached to a strap of the headgear.

[0021] The front opening may be formed adjacent the bottom face of the buckle, such that the front opening extends through both the bottom face and the inside face.

[0022] The outside opening may be formed a distance along the outside face so as to be spaced from the bottom face.

[0023] The friction loop opening may comprise top and bottom margins at least one of which is configured to frictionally engage the headgear strap loop by virtue of the angle of the return part of the headgear strap through the angled path.

[0024] According to a further aspect of the invention there is provided a closed loop headgear, comprising:

a buckle according to the aspect of the invention above;

a rear headgear section;

at least one strap extending forward from the rear headgear section, wherein the at least one strap passes through the friction loop opening between the inside post and the central post.

[0025] The strap preferably continues, passing through a hook connector of the headgear and doubles back to form the return part of the headgear, passing back through the angled headgear strap path.

[0026] The strap may include a grip strap end that extends through the buckle from the outside opening. The grip strap end may have a length long enough to grasp between a thumb and one or two fingers. A dimple may be provided for additional grip at a distal end of the grip strap end.

[0027] The rear headgear section may comprise a bifurcated rear section.

[0028] According to a further aspect of the invention there is provided an elbow for connecting a breathing gas delivery conduit to a patient mask assembly, the elbow comprising:

a ball joint section and a bottom portion;

an elongate tube section connecting the ball joint section and the bottom portion;

wherein

the elongate tube section is narrower than the bottom portion and a largest diameter of the ball joint section.

[0029] The elongate tube section may include a front section configured to face away from the user, in use, and a rear section configured to face towards the user, in use, the front section being longer than the rear section.

[0030] The elongate tube section may form a truncated top where the front section and rear section connect to the ball joint section.

[0031] The elongate tube section may form an elbow having an angle Θ between a longitudinal axis of the elongate tube section, and a longitudinal axis of the ball joint section.

[0032] The front section of the elongate tube section may include a plurality of bias flow holes configured to enable CO₂ washout during use. The plurality of bias flow holes may be arranged in columns along a length of the front section, and in one embodiment the plurality of bias flow holes is arranged in two arrays of two columns with a space between the

two arrays. The columns within each section may be offset, such that the bias flow holes of each row are nested with respect to each other, that is, the bias flow holes of one column are at least partially located in spaces between the bias flow holes of an adjacent column. One column may have a different number of bias flow holes from another column.

[0033] The elongate tube section may include side sections, each having a notch. The notches may be configured to receive a feature of a diffuser body having corresponding geometry.

[0034] In other aspects of the invention there is provided:

[0035] A: An apparatus as shown and described.

[0036] B: A mask frame, comprising: side arms having a 3-D curvature. The side arms may extend: outwardly from a center of the frame, rearwardly, towards the patients ears, and upwardly, along a vector passing from below the nose to a point between the temple the top of the ear. The side arms may twist along their length, such that bottom corner of the ends of the side arms are positioned further away from a central portion of the frame than the upper corners.

[0037] C: An elbow, comprising:

a ball section and a wide bottom portion;

an elongate tube section connecting the ball section and the wide bottom portion;

the elongate tube section is narrower than the wide bottom end and a largest diameter of the ball section. The elongate tube section may include a long front section (facing away from the user and mask, in use) and a short rear section (facing towards the user and mask frame, in use). The elongate tube section may form a truncated top where the long front section and short rear section connect to the ball section. The elongate tube section generally forms an elbow having an angle Θ . The long front section of the elongated tube section may include a plurality of bias holes for CO₂ washout during use. The plurality of bias holes may be arranged in columns along a length of the long front section. The plurality of bias holes may be arranged in two sections of two columns with a space between the two sections. The columns within each section may be offset, such that the bias holes of each row are nested with respect to each other. The elongated tube section may include side sections, each having

a notch. The notches may be configured to receive a corresponding geometry of a diffuser body.

[0038] D: A buckle for a closed loop headgear, the buckle comprising:
a bottom side and a top side;
an inside post, a central post, and an outside post, each extending between the top and bottom sides;
a friction loop opening between the inside post and the central post;
a path comprising a front opening and an outside opening between the outside post and the central post,
wherein the front opening and the outside are offset, forming an angled path. A strap attachment surface may be located on an inside of the outside post.

[0039] E: A closed loop headgear, may be provided comprising a buckle according to aspect D above and further comprising:

at least one strap extending forward from a rear section passes through the buckle between the inside post and the central post. The strap may continue, passing through the hook connector and doubles back, passing back through the central post and outside post of the buckle. The strap may include a grip strap end that extends through the buckle from the outside opening. The grip strap end may have a length long enough to grasp between a thumb and one or two fingers. A dimple may be provided for additional grip at a distal end of the grip strap end. The rear section may be a bifurcated rear section.

[0040] Various features, aspects and advantages of the present invention can be implemented in any of a variety of manners. For example, while several embodiments will be described herein, sets or subsets of features from any of the embodiments can be used with sets or subsets of features from any of the other embodiments.

[0041] The term “comprising” is used in the specification and claims, means “consisting at least in part of”. When interpreting a statement in this specification and claims that includes “comprising”, features other than that or those prefaced by the term may also be present. Related terms such as “comprise” and “comprises” are to be interpreted in the same manner.

[0042] In this specification where reference has been made to patent specifications, other external documents, or other sources of information, this is generally for the purpose of providing a context for discussing the features of the invention. Unless specifically stated otherwise, reference to such external documents is not to be construed as an admission that such documents, or such sources of information, in any jurisdiction, are prior art, or form part of the common general knowledge in the art.

BRIEF DESCRIPTION OF THE DRAWINGS

[0043] These and other features, aspects and advantages of the present invention will be described with reference to the following drawings.

[0044] Figure 1 is a top, front, and left side perspective view of a non-limiting exemplary embodiment of a nasal respiratory mask configured to provide a flow of pressurized breathing gases directly to a user's nares.

[0045] Figure 1a is a front view of a flexible gas supply conduit, elbow assembly and swivel assembly that can be used with the mask of Figure 1.

[0046] Figure 1b is a side view of the flexible gas supply conduit, elbow assembly and swivel assembly of Figure 1a.

[0047] Figure 1c is an enlarged perspective view of the elbow assembly and the flexible gas supply conduit of Figures 1a and 1b.

[0048] Figure 2a is a top, front, and left side perspective view of a non-limiting exemplary embodiment of a sealing cushion that can be incorporated into the mask of Figure 1.

[0049] Figure 2b is a bottom, rear, and right side perspective view of the sealing cushion of Figure 2a.

[0050] Figure 3a is a top, front, and left side perspective view of a non-limiting exemplary embodiment of a mask frame comprising a proximal side, a distal side, a central region, and a lateral arm that extends from each side of the central region and which can be incorporated with the sealing cushion of Figures 2a and 2b into the mask of Figure 1.

[0051] Figure 3b is a bottom, rear, and right side perspective view of the mask frame of Figure 3a.

[0052] Figure 4 shows an orthogonal front view of the mask frame of Figures 3a-3b.

[0053] Figure 5 shows a corresponding orthogonal top view of the mask frame of Figures 3a-3b.

[0054] Figure 6 shows a corresponding orthogonal side view of the mask frame of Figures 3a-3b.

[0055] Figure 7 is a side view of a respiratory mask in use on a user U.

[0056] Figures 8 and 8A-8F show a non-limiting exemplary embodiment of an elbow that can be incorporated into the mask of Figure 1, optionally with the sealing cushion of Figures 2a-2b and the mask frame of Figures 3a-3b.

[0057] Figures 9A-D show a non-limiting exemplary embodiment of a diffuser configured to connect to the elbow of Figures 8 and 8A-8F.

[0058] Figures 10A-10E show the elbow of Figures 8 and 8A-8F and diffuser assembly, wherein the diffuser is connected to the elbow such that the bias holes are covered.

[0059] Figures 11A-11B show a non-limiting exemplary embodiment of a mask assembly with a closed loop headgear.

[0060] Figures 12A-12F show a non-limiting exemplary embodiment of a buckle for use in a closed loop headgear.

[0061] Figures 13A-13B are external perspective views of the buckle and strap used in the closed loop headgear.

[0062] Figures 14A-14B the headgear strap passes through the buckle in cross-section.

[0063] Figures 15A-15B show the closed loop headgear in sliding and friction modes.

[0064] Figures 16A-16F show a non-limiting exemplary embodiment of a headgear connector assembly for connecting a headgear to a mask.

DETAILED DESCRIPTION

[0065] As used herein the term “retaining forces” refers to any force applied by a headgear to retain a respiratory mask on a user’s face.

[0066] Figure 1 shows a non-limiting exemplary embodiment of a nasal respiratory mask 1 configured to provide a flow of pressurized breathing gases directly to a user’s nares. The respiratory mask 1 comprises a sealing cushion 3, mask frame 5, elbow assembly 7,

flexible gas supply conduit 9, swivel assembly 11, headgear 13 and a pair of headgear clips 15.

Elbow and Flexible Gas Supply Conduit

[0067] With reference to Figures 1a to 1c an elbow assembly is configured to connect to an elbow connection aperture 77 of the mask frame 5 (see e.g., Figures 1 and 3a). The elbow assembly 7 includes a ball joint section 21 and a wide bottom portion 23. An elongate tube section 25 connects the ball joint section 21 and the wide bottom portion 23. In this example, the elongate tube section 25 is narrower than the wide bottom portion 23 and a largest diameter of the ball joint section 21. The elongated tube section 25 includes a long front section 27 (facing away from the user and mask 1, in use) and a short rear section 29 (facing towards the user and mask frame 5, in use). The elongated tube section 25 forms a truncated top 31 where the long front section 27 and short rear section 29 connect to the ball joint section 21. In this configuration, the elongated tube section 25 generally forms an elbow having a bend along its length, such that a longitudinal axis of a conduit receiving section to the elbow assembly 7 is not aligned with a longitudinal axis of the ball joint section 21.

[0068] The long front section 27 of the elongated tube section 25 includes a plurality of bias flow holes 35 for CO₂ washout during use. The plurality of bias flow holes 35 is arranged in columns along a length of the long front section, the columns generally being aligned with the longitudinal axis of the elongated tube section 25. In particular, in this example, the plurality of bias flow holes 35 is arranged in three central longer columns and two lateral shorter columns with a space between the two sections. Each long central column has twelve bias flow holes in this example, and each short lateral column has seven bias flow holes. The columns are arranged on a tapering, keyhole shaped region of the long front section 27.

[0069] The wide bottom portion 23 is a short tube section that is concentrically offset from a conduit receiving section, such that an annular channel is formed between the two. The conduit receiving section is configured to receive the flexible gas supply conduit 9 on its outer surfaces. The annular channel is configured to receive and retain the end of the flexible gas supply conduit 9. The conduit receiving section includes an

external thread, which is configured to retain the flexible gas supply conduit 9. The wide bottom portion 23 is configured to hide the end of the flexible gas supply conduit 9.

[0070] The flexible gas supply conduit 9 is a flexible tube comprising an external helical bead 41 and a thin conduit wall 43, supported by the bead 41. The bead 41 may contain an electrically conducting wire or strip for providing heating to the conduit 9, or for transferring data or sensor signals along the conduit 9. The thin wall 43 comprises a radially outwardly directed fold or bend 45 between each adjacent helical coil. This outwardly directed fold 45 does not project outwardly as far as the bead 41, such that the fold diameter is less than the bead diameter, when the conduit 9 is in a neutral condition, as shown in Figures 1a to 1c. The bead 41, and fold 45, are configured such that the conduit 9 is flexible such that it can bend and can extend or contract longitudinally. The fold 45 allows the conduit 9 to bend such that the conduit 9 is not straight in use. The fold 45 also allows the length of the conduit 9 to be varied. The bead 41 may be configured as a spring such that any flexing, extending or contracting of the conduit 9 is elastic, with the bead 41 and/or the fold, returning the conduit 9 to its neutral condition, in the absence of force applied to the ends of the conduit 9.

Sealing Cushion

[0071] The sealing cushion 3 is configured to engage with and form a substantially airtight seal with the nares and outwardly facing surfaces of a user's nose, such that pressurized breathable gases are delivered directly to the nasal passage. Such a seal is described in PCT/NZ2014/000150 (publication number WO2015009172), filed 17 July 2014, the entire contents of which are hereby incorporated by reference.

[0072] The sealing cushion 3 preferably comprises a seal body 51 and a mask frame connector 53. The seal body 51 can be formed of a soft and flexible material such that a supple pocket or envelope, that defines an inner cavity, is provided. The seal body 51 can be made of any appropriate material such as, but not limited to latex, vinyl, silicone or polyurethane.

[0073] Referring to Figures 2a and 2b the seal body 51 comprises a central portion 55 and first and second lateral portions 57 extending from each side of the central portion 55. The seal body 51 further comprises an internal side 59 (Figure 2b) and an external side 61

(Figure 2a). The internal side 59 is positioned proximal to the user's face in use and is configured to provide sealing, stabilizing and locating surfaces. The external side 61 is positioned distal to the user's face, relative to the internal side 59, in use, and is configured to provide structure to the sealing cushion 3.

[0074] The internal side 59 of the central portion 55 is configured to extend across a base of a user's nose and the internal side of each of the lateral portions 57 is configured to curve around and extend across a lateral side of the nose. These lateral portions 57 can form a perimeter seal on outwardly facing surfaces or flanks of the nose. The lateral portions 57 are outwardly flared away from the user's nose at the lower corners, such that they contact the user's cheeks without digging in. The contact between the lateral portions 57 and the user's cheeks provides a location through which retaining forces can be applied by the headgear 13 to the user's face, in order to stabilize the respiratory mask 1.

[0075] The internal side 59 has a thin wall thickness such that the seal body 51 is supple and capable of conforming to the geometry of the user's nose. The external side 61 comprises a greater wall thickness than the internal side 59, such that it provides structure and stability to the more supple internal side 59.

[0076] The internal side 59 of the central portion 55 further comprises a pair of prongs 62. The prongs 62 comprise air delivery openings 63 and locating surfaces 65. The air delivery openings 63 are configured to allow a flow of pressurized breathable gases to pass from within the seal body 51 to the user's airways. The locating surfaces 65 are configured to provide means of locating and sealing the prongs 62 within the user's nares and positioning the sealing cushion 3 on the nose.

[0077] The mask frame connector 53 is located within the external side 61 of the central portion 55, and comprises a substantially rigid ring that is permanently attached to the seal body 51, by any appropriate means. The mask frame connector 53 is configured to provide an inlet through which pressurized breathable air is delivered into the seal body 51. The mask frame connector 53 is further configured to provide a substantially airtight connection between the sealing cushion 3 and the mask frame 5; wherein the mask frame 5 and the sealing cushion 3 can be repeatedly assembled and disassembled. The connection between the mask frame 5 and the mask frame connector 53 may be achieved by any

appropriate means including but not limited to snap-fit, friction fit, threaded or bayonet mechanisms.

Mask Frame

[0078] As shown in Figures 3a and 3b the mask frame 5 comprises a proximal side 71 (Figure 3b), a distal side 73 (Figure 3a), a central region 75, and first and second lateral arms 97 that extend from each side of the central region 75. The lateral arms 97 each comprise generally oblong planar strips or bands having elongate top and bottom margins extending along the length of each arm 97. The lateral arms 97 are thus relatively wide when viewed from the front, but relatively narrow when viewed from above. The proximal side 71 is configured to be adjacent to the sealing cushion 3 and proximal to the user's face in use. The distal side 73 forms the external surface of the mask frame 5. The distal side 73 of the central region 75 comprises an elbow connection aperture 77 which can optionally be circular. The elbow connection aperture 77 is configured to receive the ball joint 21 of the elbow assembly 17. A planar surface 81 extends radially outwardly from the elbow connection aperture 77.

[0079] The proximal side 71 of the central region 75 comprises an annular wall 83 that projects in a rearward direction towards the sealing cushion 3, around the perimeter of the elbow connection aperture 77.

[0080] The annular wall 83 comprises an internal surface 85 and an external surface 87. The internal surface 85 comprises a concave spherical section, configured to form a ball joint socket. The ball joint socket is configured to connect to corresponding geometry on the elbow assembly 17, namely the ball joint section 21. The external surface 87 comprises one or more indentations 91 configured to be coupled to corresponding geometry on the mask frame connector 53 of the sealing cushion 3, such that a connection between the mask frame 5 and the cushioning seal is achieved.

[0081] Figure 4 shows an orthogonal front view of the mask frame 5. The view is perpendicular to a front plane 80 that is coincident with the planar surface 81 (see e.g., Figure 3a). The mask frame 5 is symmetrical about a central vertical plane 'y', which passed through a center of the elbow connection aperture 77. The mask frame 5 further comprises a top edge margin 93 and a bottom edge margin 95, both of which extend from one lateral arm 97 through the central region 75 to the other lateral arm 97. The top edge margin 93 is

positioned such that it is above the bottom edge margin 95 both in the view of Figure 4 and in use. Within the central region 75, the top edge margin 93 is offset from and substantially follows the curvature of the elbow connection aperture 77. The top edge margin 93 tapers outwardly (horizontally away from the central vertical plane 'y') in a largely downward direction as it transitions from the central region 75 to each of the lateral arms 97. The bottom edge margin 95 curves outwardly in a somewhat upward direction from the central vertical plane 'y' region. As it transitions from the ends of the central region 75 towards the end of each of the lateral arms 97 it curves in a slightly downward direction.

[0082] The tapered transitions of the top edge margin 93 and the bottom edge margin 95 form the lateral arms 97, which are substantially elongate tapered members extending outwardly from each side of the central region 75. The lateral arms 97 comprise a loop 99 and a post 101 configured to provide a connection point for the headgear clips (see e.g., Figure 14A). The loop 99 is a rectangular aperture that extends through the lateral arms 97 perpendicular to the distal side. In alternative embodiments the aperture may have any appropriate shape. The post 101 is formed by the outer wall of the loop 99 and forms the outer ends of the lateral arms 97, and is substantially cylindrical. The post 101 is angled in an upwards direction towards the central region 77. This is shown by the width w_1 of the bottom edge being wider than the width w_2 of the top edge.

[0083] The ends of the lateral arms 97 are positioned substantially below a horizontal mid plane 'x' that is perpendicular to the front plane and vertical plane y and passes through the center of the elbow connection aperture 77. Thus, the lateral arms 97 taper towards the bottom half of the mask frame 5.

[0084] Figure 5 shows a corresponding orthogonal top view of the mask frame 5. It shows that the lateral arms 97 also extend in a rearward direction (distal to proximal) from the planar surface 81.

[0085] Figure 6 shows a corresponding orthogonal side view of the mask frame 5. It can be seen that the end of the bottom edge margin 95 is closer to the front plane than the end of the top edge margin 93. This results in the length of the post 101 forming an acute angle α with the front plane.

[0086] Figure 7 is a side view of the respiratory mask 1 in use on a user U. It can be seen that, in use, the front plane is at an angle when the user U is upright. The angle of the posts 101 (noted above with reference to Figure 6) is such that the retaining force F applied by the headgear 13 is substantially perpendicular to the angle of the post 101. This minimizes torsional forces between the headgear 13 and the mask frame 5, and thus improves the stability of the respiratory mask 1 on the user U. The lateral arms 97 are angled upwards such they extend along a direction extending from the ends of the lateral arms 97 to an area between the user's temples and ears.

[0087] In other words, the lateral or side arms 97 have a 3-D curvature. In use, the lateral arms 97 extend: outwardly from the center of the frame 5, rearwardly, towards the patient's ears, and upwardly, along a vector passing from below the nose to a point between the temple and the top of the ear. Additionally, the lateral arms 97 "twist" along their length, such that bottom corners of the ends of the lateral arms 97 are positioned further away from the central vertical plane than the top corners, for example, as shown in Figure 5.

[0088] The positioning of the lateral arms 97 on the lower half of the mask frame 5 provides improved stability of the respiratory mask on the user's face. The retaining forces F applied by the headgear 13 to the mask frame 5 and sealing cushion 3 are predominantly applied through the lateral portions of the sealing cushion 3. This results in the retaining forces being applied predominantly to the lower surfaces of the user's nose, their upper lip and cheeks. This provides a greater surface area over which the forces can be spread and thus greater stability. The spreading of the forces over a greater surface area may also minimize any pressure points on the user's face, which may cause discomfort. If the lateral arms 97 were located higher on the mask frame 5 the force vector F would be predominantly applied to the tip of the user's nose, which may provide reduced stability to the respiratory mask 1. This may also cause discomfort to the user in the form of a pressure point on the tip of their nose.

[0089] The lower positioning of the lateral arms 97 provides the respiratory mask 1 with a more minimal appearance. Since the mask frame 5 is substantially positioned below the nose, in use, it is less visible and thus less dominating on the user's face. The lower positioning of the lateral arms 97 in combination with the angle of the post 99 also results in

the headgear 13 passing over the user's cheek at a greater distance below the eyes. This is beneficial in that the headgear 13 is less likely to fall within the user's peripheral vision, making the mask 1 less obtrusive and more comfortable to wear.

Elbow and Diffuser

[0090] Shown in Figures 8 and 8A-8F is an elbow 117 similar to the elbow 17 described above, and configured to connect to the elbow connection aperture 77 (see e.g., Figures 1 and 3a). The elbow 117 includes a ball joint section 121 and a wide bottom portion 123. An elongate tube section 125 connects the ball joint section 121 and the wide bottom portion 123. The elongate tube section 125 is narrower than the wide bottom portion 123 and a largest diameter of the ball joint section 121. The elongated tube section 125 includes a long front section 127 (facing away from the user and mask, in use) and a short rear section 129 (facing towards the user and mask frame 5, in use). The elongated tube section 125 forms a truncated top 131 where the long front section 127 and short rear section 129 connect to the ball joint section 121. In this configuration, the elongate tube section 125 generally forms an elbow having an angle \emptyset .

[0091] The long front section 127 of the elongate tube section 125 includes a plurality of bias flow holes 135 for CO₂ washout during use. The plurality of bias flow holes 135 is arranged in columns along a length of the long front section 127. In particular, as shown, the plurality of bias flow holes 135 is arranged in two sections or areas of two columns with a space between the two sections or areas of the elongate tube section 125. The columns within each section or area are offset, such that the bias flow holes of each row are nested with respect to each other, that is, the bias flow holes of one column are nested at least partially within the spaces between the bias flow holes of another column. The elongated tube section 125 further includes side sections 137, each having a notch 139. The notches 139 are configured to receive a part of a diffuser body having corresponding geometry.

[0092] The wide bottom portion 123 is short tube section that is concentrically offset from a conduit receiving section 141, such that an annular channel 143 is formed between the two. The conduit receiving section 141 is configured to receive the flexible gas supply conduit 9 on its outer surfaces. The annular channel 143 is configured to receive and retain the end of the flexible gas supply conduit 9. The conduit 9 receiving section includes a

retaining formation which may be a projection and which is in this example is a screw thread 145, which is configured to retain the flexible gas supply conduit 9. The wide bottom portion 123 is configured to hide the end of the flexible gas supply conduit 9. Thus, the end of the flexible conduit 9 is threaded onto the elbow 117 to retain the conduit 9 on the elbow 117.

[0093] Shown in Figures 9A-D is a diffuser 151 configured to connect to the elbow 117, covering the bias flow holes 135 such that gas exhausted from the bias flow holes 135 passes through the diffuser 151. The diffuser 151 comprises a diffuser body 153 and a region or regions of a diffuser material 155. The diffuser body 153 comprises a substantially rigid plastic component having two lateral sides 157 and a front region 159 there between. The diffuser body 153 is configured to have a curvature that compliments the curvature of the elongate tube section 125 of the elbow 117, extending from one side section across the long front section to the other side section. The diffuser body 153 further comprises one or more diffuser openings 161 and a pair of grip tabs 163. The diffuser openings 161 are located in the front region 159 such that they overlap the bias flow holes 135, in use. In this example embodiment of the present disclosure the diffuser openings 161 are separated by a grill member 165.

[0094] The grip tabs 163 extend approximately perpendicularly from the edges of each of the lateral sides 157 of the diffuser body 153, and have a substantially trapezoidal profile. They are configured to allow the diffuser 151 to be gripped between the thumb and index finger of a user, during removal of the diffuser 151 from the elbow 117.

[0095] The diffuser body 153 has an internal surface 167, which is configured to be proximal to the elongate tube section 125 of the elbow 117, in use. The internal surface 167 comprises a pair of engagement tabs 169. The engagement tabs 169 extend inwardly from each of the grip tabs 163, and are configured to engage with the notches 139 of the elbow 117, such that the diffuser 151 is retained on the elbow 117.

[0096] The regions of diffuser material 155 are configured to fill the diffuser openings 161, providing a torturous path for exhaled air to pass through. The diffuser material 155 can be any breathable or porous material. In use, the diffuser material 155 is flush with the bias flow holes 135, thus ensuring that air venting out of the bias flow holes 135 is diffused through the diffuser material 155.

[0097] Figures 10A-10D show the elbow 117 and diffuser 151, wherein the diffuser 151 is connected to the elbow 117 such that the bias flow holes 135 are covered. It can be seen that, due to the narrow elongate tube section 125 of the elbow 117, the diffuser 151 may now be configured to have a width that is substantially equal to the outer diameter of the wide bottom section 123 of the elbow 117. Additionally, the elongate tube section 125 of the elbow 117 allows for longer columns of bias flow holes 135, and thus allows the elbow 117, and therefore the elbow 117 and diffuser 151 to be narrower. This affords the elbow 117 and diffuser 151 assembly a smaller and less bulky appearance.

Headgear

[0098] As shown in Figures 1 and 7 the respiratory mask 1 is secured in place on a user's head by a headgear 13. The headgear 13 comprises a three part construction, wherein the three parts include a pair of side straps 171 and a rear portion 173. The side straps 171 are configured to join to the rear portion 173 at one end and be connected to a headgear clip 175 at the other end. The side straps 171 can be joined to the rear portion 173 by any suitable means including but not limited to ultrasonic welding, radiofrequency welding, adhesive(s) or sewing. The end of the side strap 171 that connects to the headgear clip 175 comprises a securement tab 177 for adjustment of the headgear size. The securement tab 177 comprises the hook element of a hook and loop connector such as but not limited to VelcroTM. The securement tab 177 is configured to attach to the outer surface of the side strap 171 in order to secure the length of the side strap 171, and thus the size of the headgear 13. The rear portion 173 comprises a bifurcated component having an upper and lower strap 173a, 173b, configured to engage a user's head in the occipital region. The headgear 13 can be made from any suitable non-stretch or stretch material known in the art, including but not limited to Neoprene, TPE, BreathopreneTM or knitted fabric, or any combination of materials. In a preferred embodiment the rear portion 173 and side straps 171 are made from a single material in contrasting colours. In alternative embodiments the rear portion 173 can be made from a different material to the side straps 171. In a further alternative embodiment the rear portion 173 and side straps 171 can be a single colour.

Closed Loop Headgear

[0099] Figures 11A-11B show perspective and top views, respectively, of a non-limiting exemplary embodiment of a mask assembly 1 with a closed loop headgear 13. The mask assembly 1 is attached to a bifurcated headgear 13. Forward straps 171 extend forward from a rear, bifurcated section 173. The forward straps 171 pass through a buckle 179 then pass through a hook 101 which is attached to the mask assembly 1. Each forward strap 171 is doubled back, passing through the buckle 179.

[0100] The headgear 13 shown in Figures 11A-11B is a closed loop headgear, meaning that the length of the headgear can be adjusted from minimum length to a maximum length, but cannot be fully disassembled. A closed loop configuration may be desirable because the headgear 13 cannot be disassembled, and thus cannot be re-assembled incorrectly. The headgear 13 can be made from any suitable non-stretch or stretch material known in the art, including but not limited to Neoprene, TPE, Breathoprene™ or knitted fabric.

[0101] Figures 12A-12F show a non-limiting exemplary embodiment of a buckle 179 for use in a closed loop headgear 13, such as shown in Figures 11A-11B. Figures 12A-12B show and in an inside view and an outside view, respectively, of the buckle 179. As shown, the buckle 179 includes a bottom face 181 and a top face 183. Extending between the top and bottom sides 181, 183 are an inside post 185, a central post 187, and an outside post 189. Between the inside post 185 and the central post 187 is a friction loop opening 191. Between the outside post 189 and the central post 187 is a path comprising a front opening 193 and an outside opening 195. The front opening 193 and the outside opening 195 are offset, forming an angled path. Additionally, there is a strap attachment surface 197 located on an inside of the outside post 189.

[0102] Shown in Figures 12C-12D are perspective cross-sections of the buckle 179, in particular to show internal features. On the central post 187 is a central post shoulder 199 and a central post recess 201.

[0103] Shown in Figures 12E-12F are front and back views, respectively of the buckle, in particular to show additional views of the above described features.

[0104] Figures 13A-13B are external perspective views of the buckle 179 and strap 171 used in the closed loop headgear 13. As shown, the strap 171 extending forward from the rear section 173 passes through the buckle 179 between the inside post 185 and the central post 187. The strap 171 continues, passing through the hook (see e.g., 11A) and doubles back, passing back through the central post 187 and outside post 189 of the buckle 179. The strap 171 includes a grip strap end 205 that extends through the buckle 179. The grip strap end 205 has a length long enough to grasp between a thumb and one or two fingers. A dimple 207 is provided for additional grip.

[0105] Figures 14A-B show a cross-section of the strap 171 passing through the buckle 179, forming an adjustable closed loop 209. The strap 171 passes through the friction loop opening 191 formed between the inside post 185 and the central post 187. The strap 171 passes back through the buckle 179, through the angled path formed between the front opening 193 to the outside opening 195.

[0106] As shown, the buckle 179 is relatively angled with respect to the strap 171. As a result of the angle in which the strap 171 passes through the friction loop opening 191, there is an interference corner 192 that generates a friction force that restricts the strap 171 from sliding through when under a tension. In particular, the plane of the strap 171 where the strap 171 passes through the friction loop opening is inclined relative to the plane of the buckle 179 so that the strap 171 is neither perpendicular nor parallel to the buckle 179.

[0107] The strap 171 is permanently attached to the buckle 179 at a strap attachment surface 211 located on an inside of the outside post 189 (see e.g., Figure 12A). Because the strap 171 is permanently attached to the buckle 179, the headgear 13 cannot be disassembled (i.e., the hooks on the adjustable closed loop cannot be removed). The strap 171 may be attached to the strap attachment surface 211 by any suitable means including but not limited to ultrasonic welding, radiofrequency welding, adhesive(s) or sewing.

[0108] Figures 15A-B show the closed loop headgear 13 in sliding and friction modes, respectively. In Figure 15A a pull force 204 is applied to the grip strap end 205. This pull force causes the buckle 179 to rotate 206 in the direction of the pull force (counter clockwise as shown). The “rotated” buckle 179 is represented in Figure 15A as a dashed rectangle. The buckle 179 rotates with the pull force because the strap 171 is attached to the

buckle 179 at the strap attachment surface 211. As the buckle 179 rotates, the buckle 179, in particular the friction loop opening 191 becomes more perpendicular with the strap 171 sliding 208 through the opening 191. As a result, the interference at the interference corner 192 (see e.g., Figure 14B), and therefore friction force, is decreased. This allows the strap 171 to pass freely (or at least with less resistance) through the friction loop opening 191, thus allowing for adjustment.

[0109] Alternatively, as shown in Figure 15B, a tension force 210 is applied, for example, when the mask assembly 1 is in use. The tension force 210 causes the buckle 179 to rotate 202 in the direction of the tension force (clockwise as shown). As the buckle 179 rotates, the buckle, in particular, the friction loop opening 191 becomes more angled with respect to the strap 171 passing through the opening 191. The “rotated” buckle 179 is represented in Figure 15B as a dashed rectangle. As a result, the interference at the interference corner (see e.g., Figure 14B) increases, and therefore the friction force between the friction loop opening 191 and the strap 171 passing through, increases.

Headgear Connector Assembly

[0110] With reference to Figures 16A-16F, headgear 13 be connected to the mask frame 5 using a hook and post type headgear connector assembly 221. In one example, the mask frame 5 comprises a post 101 on each lateral arm 97. Each headgear clip 15 comprises a hook 15a configured to receive a respective post 101 of the mask frame 5, to connect the headgear 13 to the mask frame 5.

[0111] In one embodiment, each headgear clip 15 is able to rotate freely about the respective post 101 on the mask frame 5. The post 101 is orientated generally vertically in normal use of the mask 1 and headgear 13, and the side straps 171 therefore rotate laterally about a generally vertical pivot axis. This can have the effect that prior to the mask 1 and headgear 13 being placed on the head of the user, the side straps 171 of the headgear 13 have pivoted around the posts 101 on the mask frame 5 to a position where part of the headgear 13 is adjacent the mask 1 and therefore impedes the mask 1 being located on the face of the user. The side straps 171 of the headgear 13 may therefore rotate around the posts 101 of the mask frame 5 such that the side straps 171 impede the internal side of the seal body 53. This can make the mask 1 and headgear 13 difficult or inconvenient to put on.

[0112] It may be desirable to be able to prevent, limit or control the extent of relative rotational movement between the headgear 13 and the mask frame 5, and particularly, to limit the extent of rotation of the side straps 171 of the headgear 13 relative to the mask frame 5.

[0113] With further reference to Figures 16A-16F, in one embodiment, the post 101 of the mask frame 5 and the hook 15a of the headgear clip 15 each comprise a respective movement limiting formation. These formations are arranged to engage to prevent, or at least limit the extent of, relative rotational movement between the mask frame 5 and the headgear 13, and more particularly, between the mask frame 5 and the side straps 171 of the headgear 13. The headgear connector assembly 221 between the mask 1 and headgear 13 therefore performs a rotation limiting function, to help prevent the side straps 171 of the headgear 13 rotating relative to the mask frame 5 to a position where they impede the mask 1, and particularly the internal side of the seal body 53.

[0114] In one embodiment each post 101 of the mask frame 5 comprises a recessed region, of reduced diameter as compared to the remainder of the post 101, which forms a groove or recess 225 extending partially around the post 101, in a plane perpendicular to the axis of the post 101. When viewed from above, that is, along the axis of the post 101, the groove or recess 225 extends around only a portion of the post 101, that is, the groove or recess 225 is part circumferential. The groove or recess 225 may extend through about 180° for example. The groove or recess 225 thus comprises two opposed ends 225a, 225b where the groove or recess 225 meets the non-recessed part of the post 101. These ends 225a, 225b are movement limiting formations comprising end stops.

[0115] Each hook 15a also comprises a movement limiting feature which in one example comprises a bump or protrusion 227 on the inside face of the hook 15a which functions as an end stop, that is, on the part of the hook 15a which receives the post 101 in use. When the post 101 is received in the hook 15a, which may be using a snap-fit type connection, relative rotation may occur between the post 101 and hook 15a with the bump 227 of the hook 15a moving within the groove or recess 225. This allows the side straps 171 of the headgear 13 to pivot about the post 101 of the mask frame 5 to a limited extent. When a side strap 171 has rotated a predetermined distance relative to the mask frame 5, the bump 227 reaches one end of the groove or recess 225 and abuts a groove or recess end stop 225a,

225b, this abutment preventing further relative rotation between the hook 15a and post 101. The bump 227 can thus travel a predetermined distance along the groove or recess 225 before further movement of the bump 227, and therefore rotation of the side strap 171 relative to the mask frame 5, is prevented.

[0116] It will be appreciated that in another embodiment, the hook 15a and post 101 could be reversed, with the hook 15a being provided on the mask frame 5 and the post 101 being provided on the headgear clip 15. Likewise, it is envisaged that the bump or protrusion 227 could be formed on the post 101, and the groove or recess 225 on the hook 15a.

[0117] The groove or recess 225 may be provided at any location along the length of the post 101, that is, at any axial position on the post 101. More than one groove or recess 225 and bump 227 may be provided. The length of the groove or recess 225 and/or the size of the bump 227 may be selected to achieve the desired degree of relative rotation between the post 101 and hook 15a.

[0118] In at least one embodiment, the groove or recess 225 is positioned on a left side post 101 at a first vertical spacing and the groove or recess 227 is positioned on a right side at a second vertical spacing. In some embodiments the first and second vertical spacing are different. The corresponding left and right hooks 15a include a protrusion 225, the protrusion 225 being at the first vertical height and the second vertical height such that the left and right hooks 15a are connectable to one of the left side post 101 or the right side post 101.

[0119] Unless the context clearly requires otherwise, throughout the description and the claims, the words “comprise”, “comprising”, and the like, are to be construed in an inclusive sense as opposed to an exclusive or exhaustive sense, that is to say, in the sense of “including, but not limited to”.

[0120] Reference to any prior art in this specification is not, and should not be taken as, an acknowledgement or any form of suggestion that that prior art forms part of the common general knowledge in the field of endeavour in any country in the world.

[0121] The inventions disclosed herein may also be said broadly to consist in the parts, elements and features referred to or indicated in the specification of the application,

individually or collectively, in any or all combinations of two or more of said parts, elements or features.

[0122] Where, in the foregoing description reference has been made to integers or components having known equivalents thereof, those integers are herein incorporated as if individually set forth.

[0123] It should be noted that various changes and modifications to the presently preferred embodiments described herein will be apparent to those skilled in the art. Such changes and modifications may be made without departing from the spirit and scope of the inventions and without diminishing its attendant advantages. For instance, various components may be repositioned as desired. It is therefore intended that such changes and modifications be included within the scope of the inventions. Moreover, not all of the features, aspects and advantages are necessarily required to practice the present inventions. Accordingly, the scope of at least some of the present inventions is intended to be defined only by the claims that follow.

WHAT IS CLAIMED IS:

1. A mask frame for a patient mask for delivering breathing gases to a patient, the mask frame comprising:
 - a central region comprising a conduit connection aperture configured to be connected to a breathing gas delivery conduit, a notional central vertical plane extending through the centre of the conduit connection aperture; and
 - first and second lateral arms each extending outwardly from the central region away from the central vertical plane;
 - each lateral arm having a length and terminating in a distal end remote from the central region, each lateral arm comprising a top and bottom margin; wherein
 - each lateral arm twists along its length such that the bottom margin at the end of each lateral arm is positioned further away from the notional central vertical plane than the top margin at the end of each lateral arm.
2. The mask frame of claim 1, wherein the lateral arms extend:
 - laterally outwardly from the central region of the frame;
 - rearwardly, towards the patients ears; and
 - upwardly, so that the lateral arms are angled upwards such that they extend along a direction extending from the ends of the lateral arms to an area between the user's temples and ears.
3. The mask frame of claim 2 wherein the lateral arms extend upwardly along a vector passing from below the nose to a point between the temple at the top of the ear.
4. The mask frame of any one of claims 1 to 3 wherein each lateral arm comprises a planar strip, the end of each strip defining top and bottom corners at the top and bottom margins respectively, wherein the side arms twist along their length such that the bottom corner of the ends of the lateral arms are positioned further away from the central region of the frame than the top corners.

5. The mask frame of claim 4 wherein each lateral arm is tapered along its length, that is, the distance between the top and bottom margins reduces along at least part of the length of each lateral arm.
6. The mask frame of any one of the preceding claims wherein the ends of the lateral arms are positioned below a notional horizontal mid plane that passes through the centre of the elbow connection aperture.
7. The mask frame of any one of the preceding claims wherein the end of each arm comprises a headgear connector configured to connect the frame to headgear.
8. The mask frame of claim wherein the headgear connector comprise a loop and a post configured to provide a connection point for a hook of a headgear clip attached to headgear.
9. The mask frame of claim 7 or claim 8 wherein the headgear connector comprises a rotation limiting formation configured to limit relative rotation between headgear connected to the headgear connector, and the mask frame.
10. The mask frame of claim 9 wherein the rotation limiting formation comprises an end stop against which the headgear abuts after a predetermined amount of relative rotation between the mask frame and headgear.
11. A mask assembly comprising a mask frame and a headgear configured to be connected to the mask frame, at least one of the mask frame and headgear comprising a connector comprising a post, the other of the mask frame and headgear comprising a connector comprising a hook configured to receive the post to connect the headgear to the mask frame such that the hook can rotate about the post towards and away from the mask frame, the mask assembly further comprising at least one rotation limiting formation configured to limit the extent of relative rotation between the hook and post.

12. The mask assembly of claim 11 wherein the rotation limiting formation comprises an end stop on one of the mask frame and headgear against which the other of the mask frame and headgear abuts after a predetermined amount of relative rotation between the mask frame and headgear.
13. The mask assembly of claim 12 comprising two end stops, one on the mask frame, the other on the headgear, the end stops being configured to abut after a predetermined amount of relative rotation between the mask frame and headgear.
14. The mask assembly of claim 13 wherein one end stop is provided on the hook, and the other end stop is provided on the post.
15. The mask assembly of claim 14 wherein at least one of the hook and post comprises two spaced apart end stops, relative movement between the hook and post being limited by the distance between the two spaced apart end stops.
16. The mask assembly of claim 14 wherein one of the end stops comprises a protrusion projecting from one of the hook and post, the other of the hook and post comprising a groove or recess having opposed ends, the opposed ends forming the two spaced part apart end stops, the protrusion being received in the groove or recess when the headgear is connected to the mask frame and being configured such that the protrusion moves within the groove or recess, between the opposed ends.
17. The mask assembly of claim 14 wherein the groove or recess is provided on the post, the protrusion being provided on the hook.

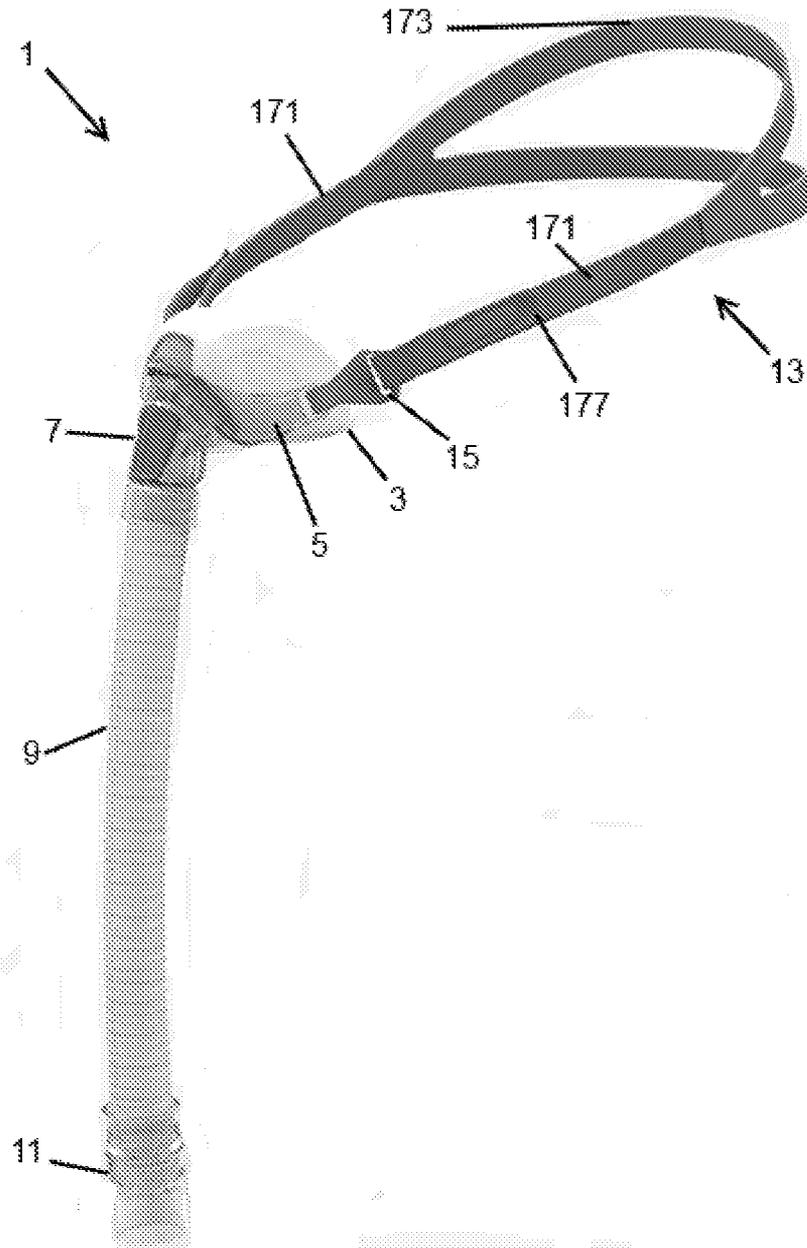


Figure 1

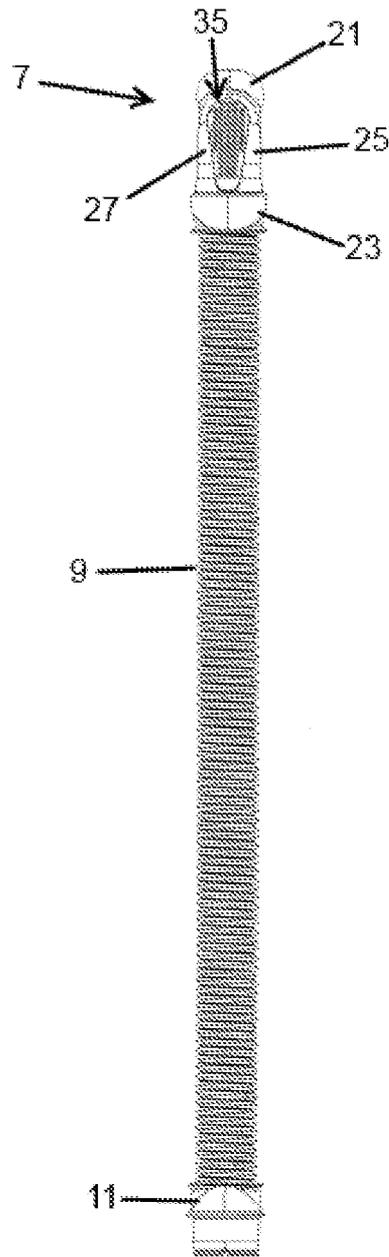


Figure 1a

3/33

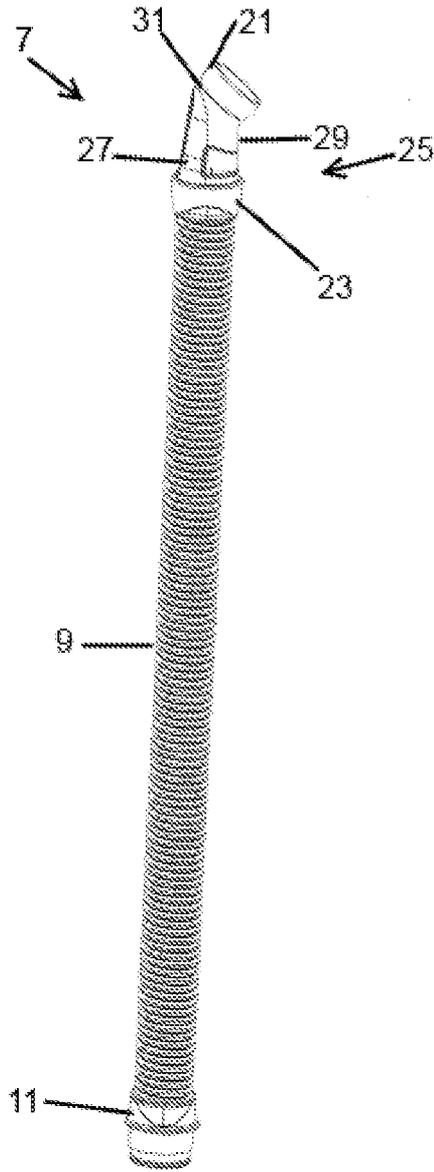


Figure 1b

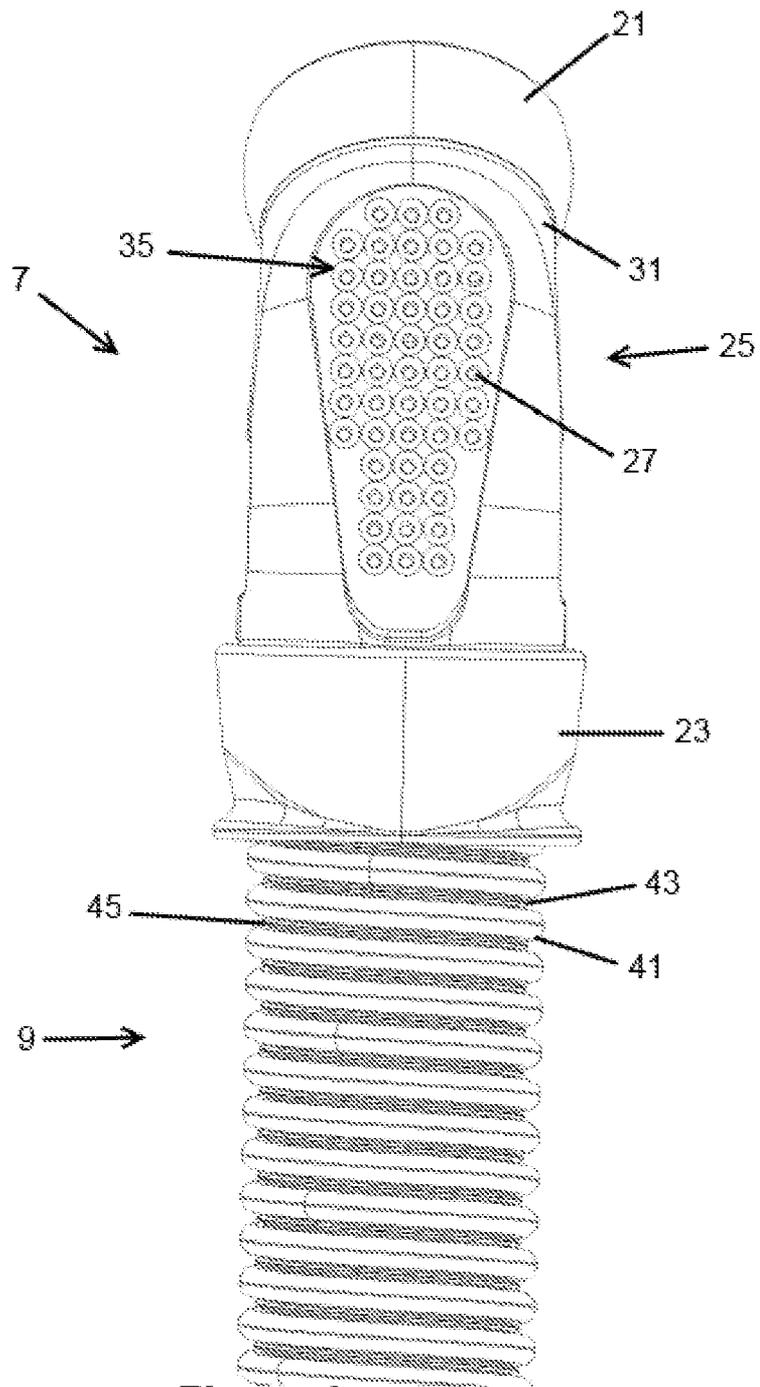
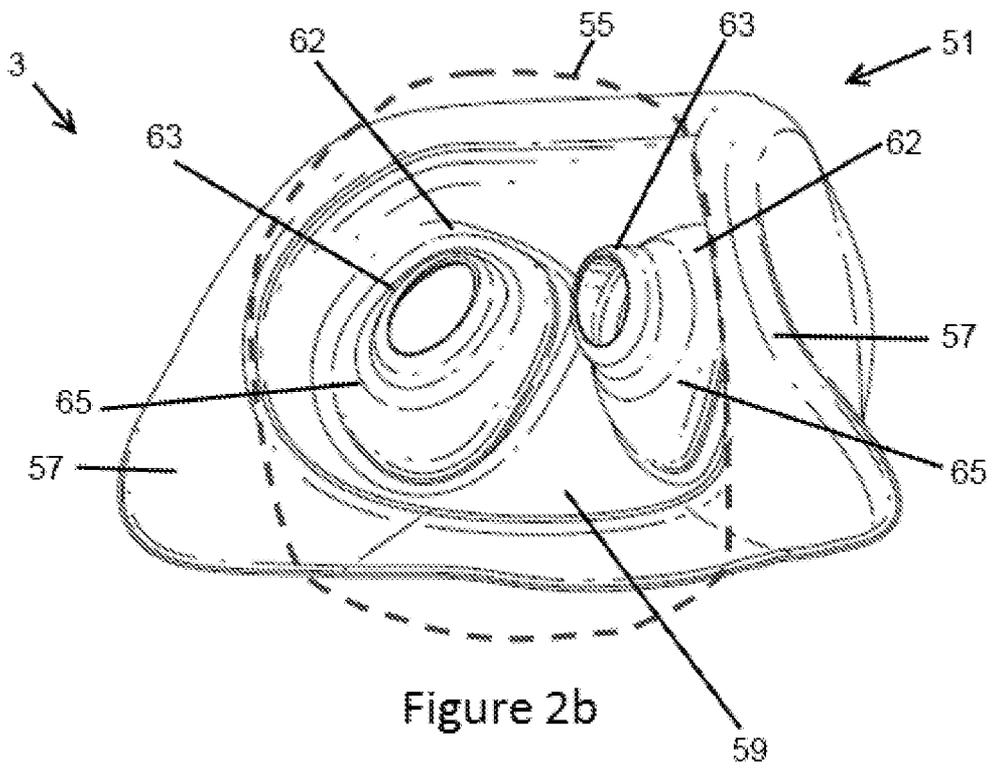
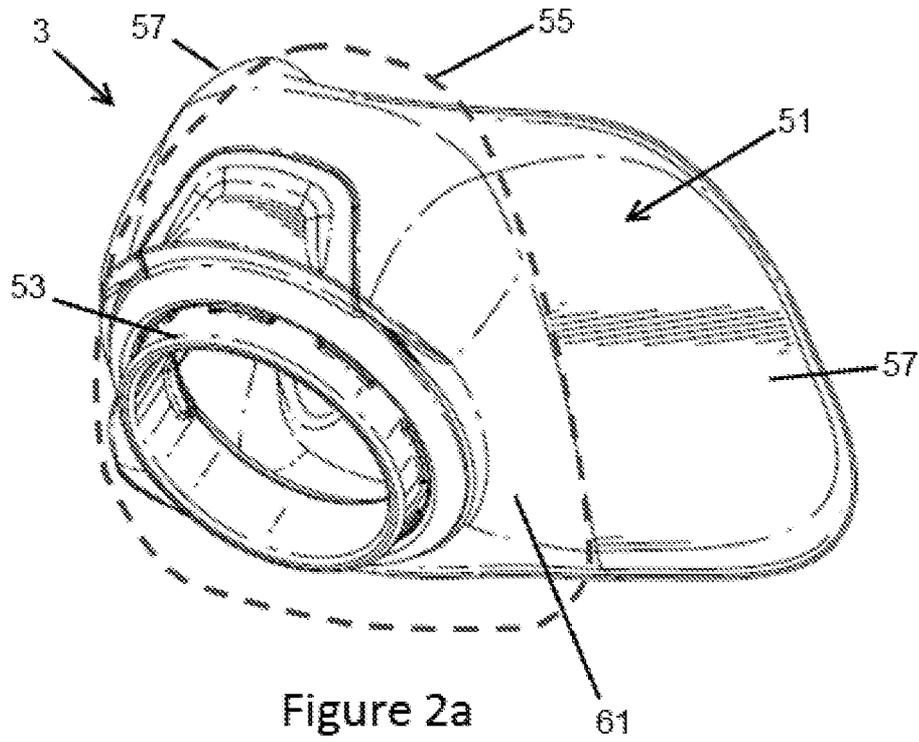


Figure 1c



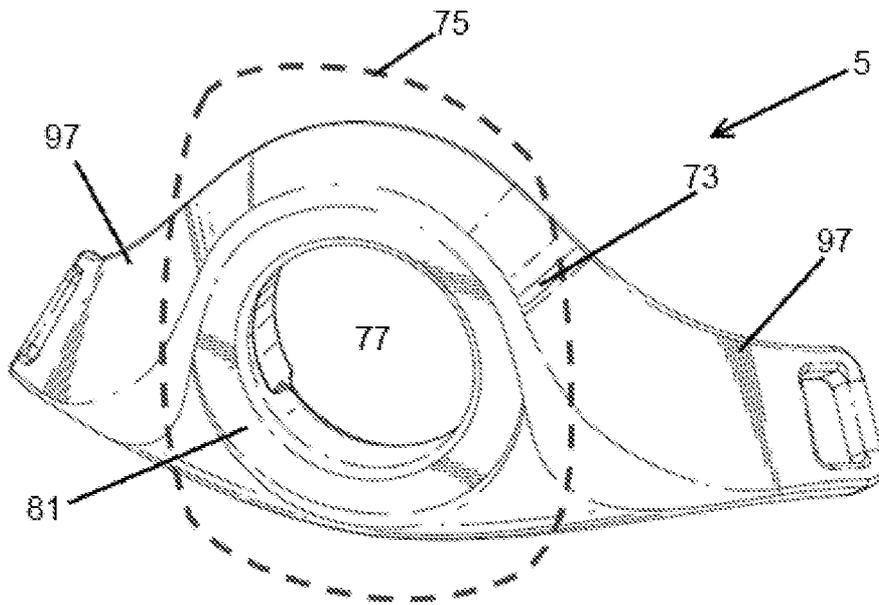


Figure 3a

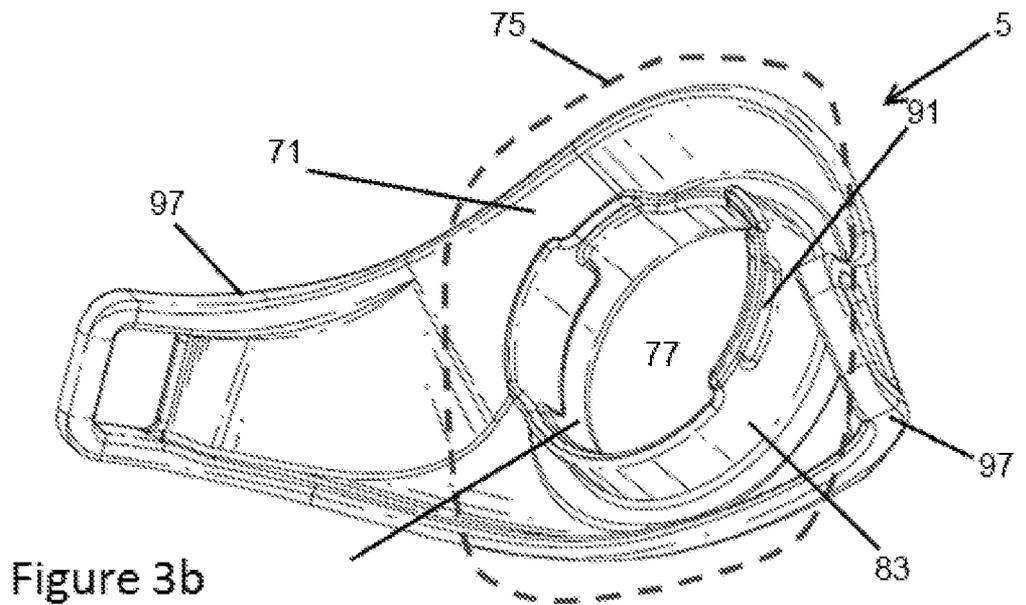


Figure 3b

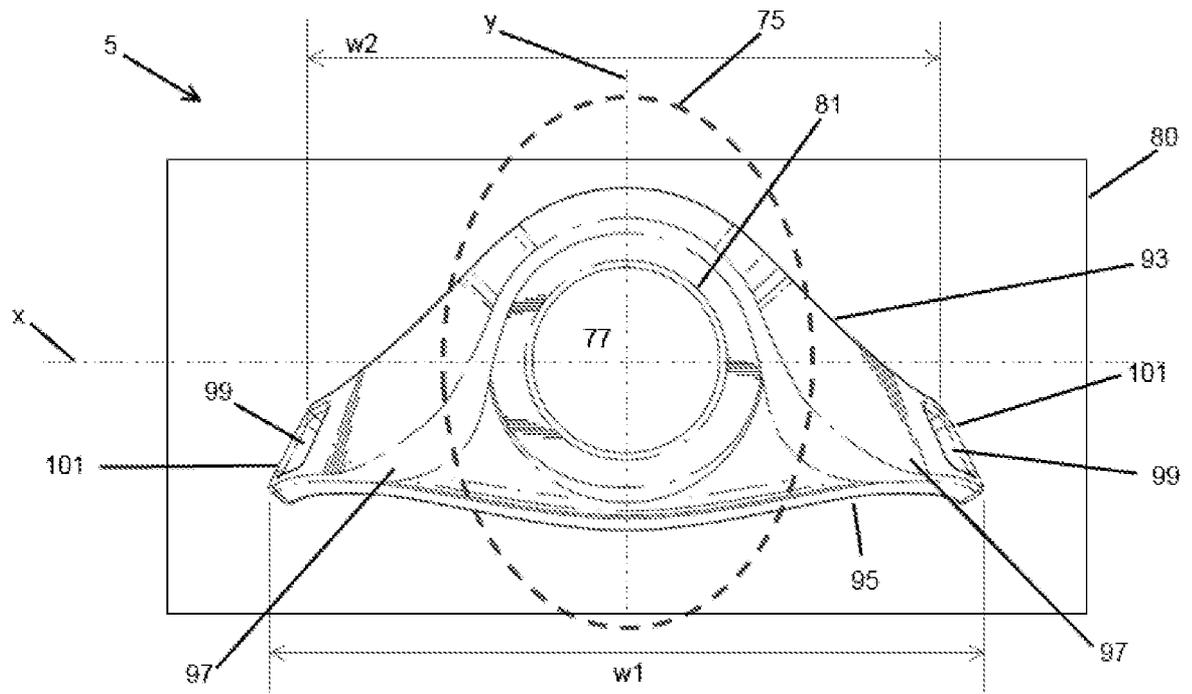


Figure 4

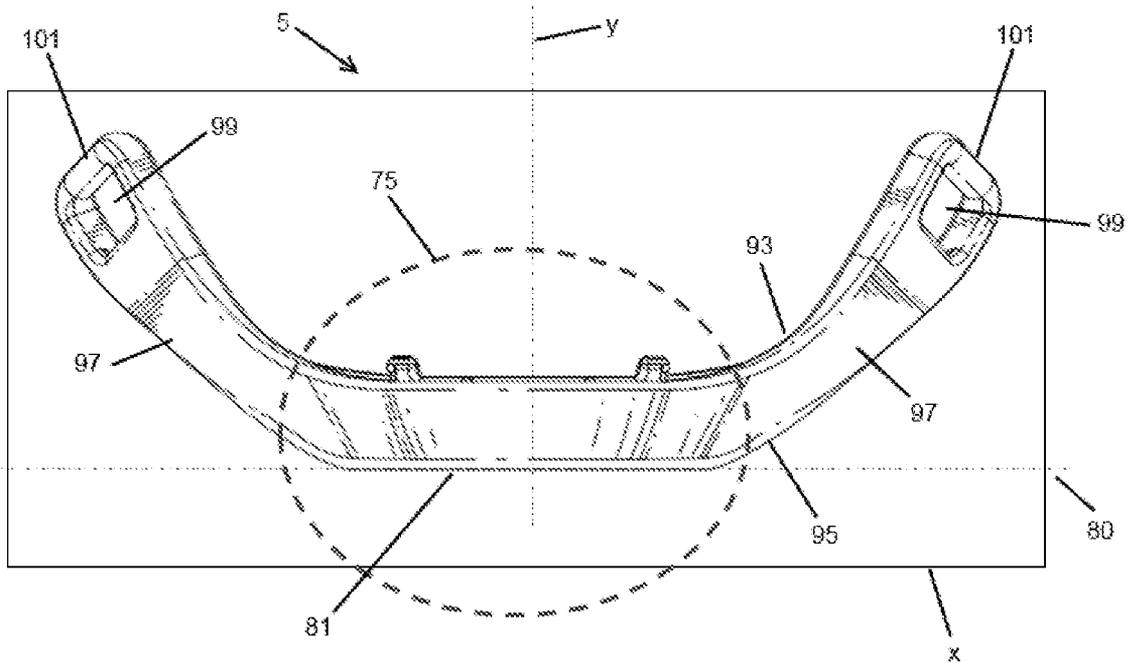


Figure 5

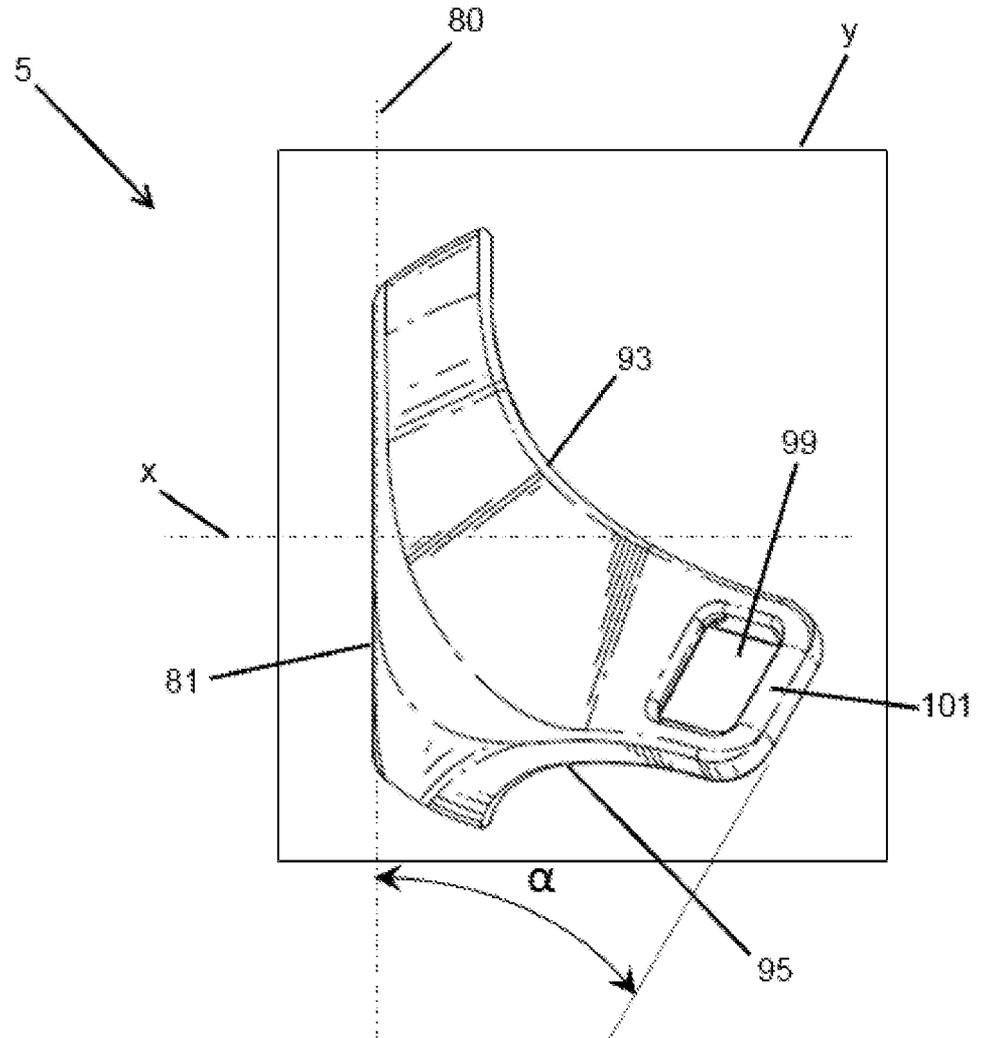


Figure 6

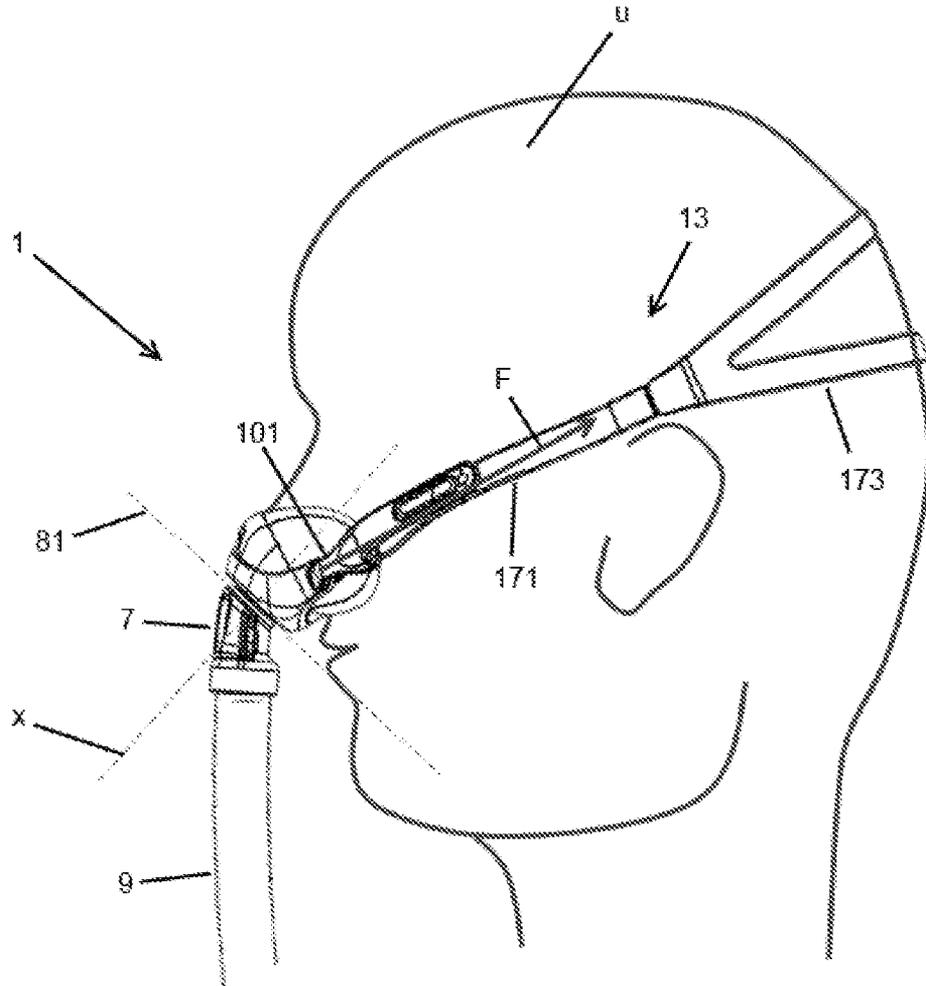


Figure 7

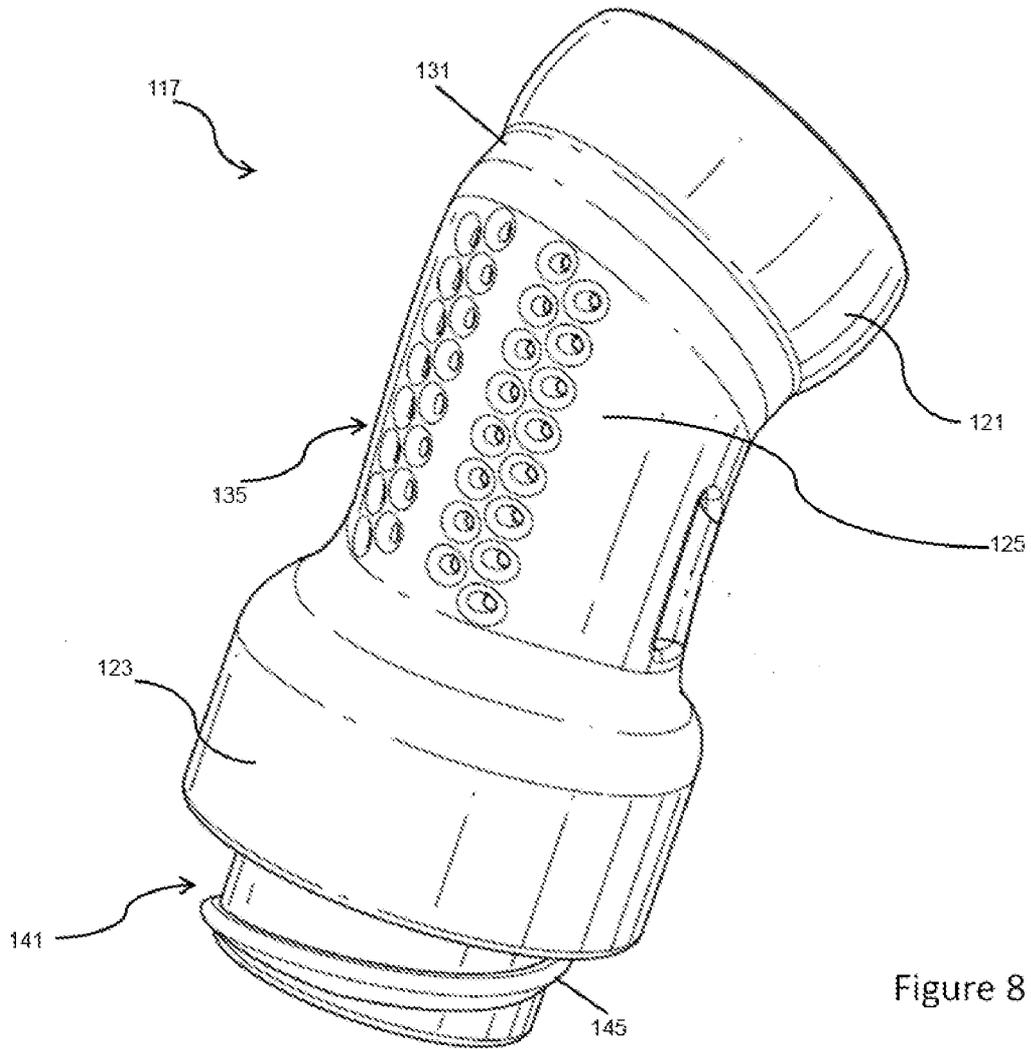


Figure 8

11/33

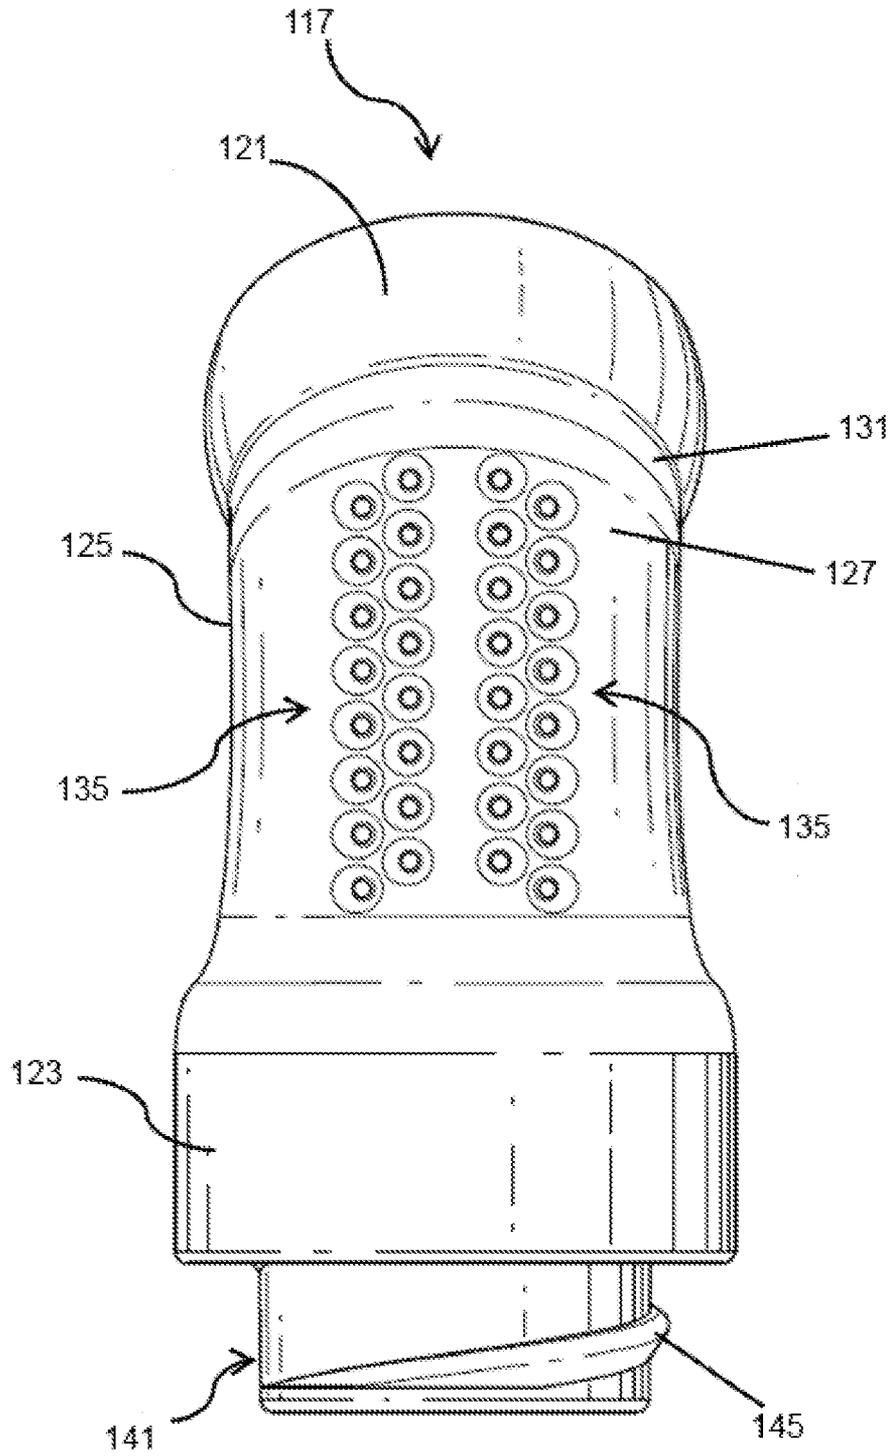


Figure 8A

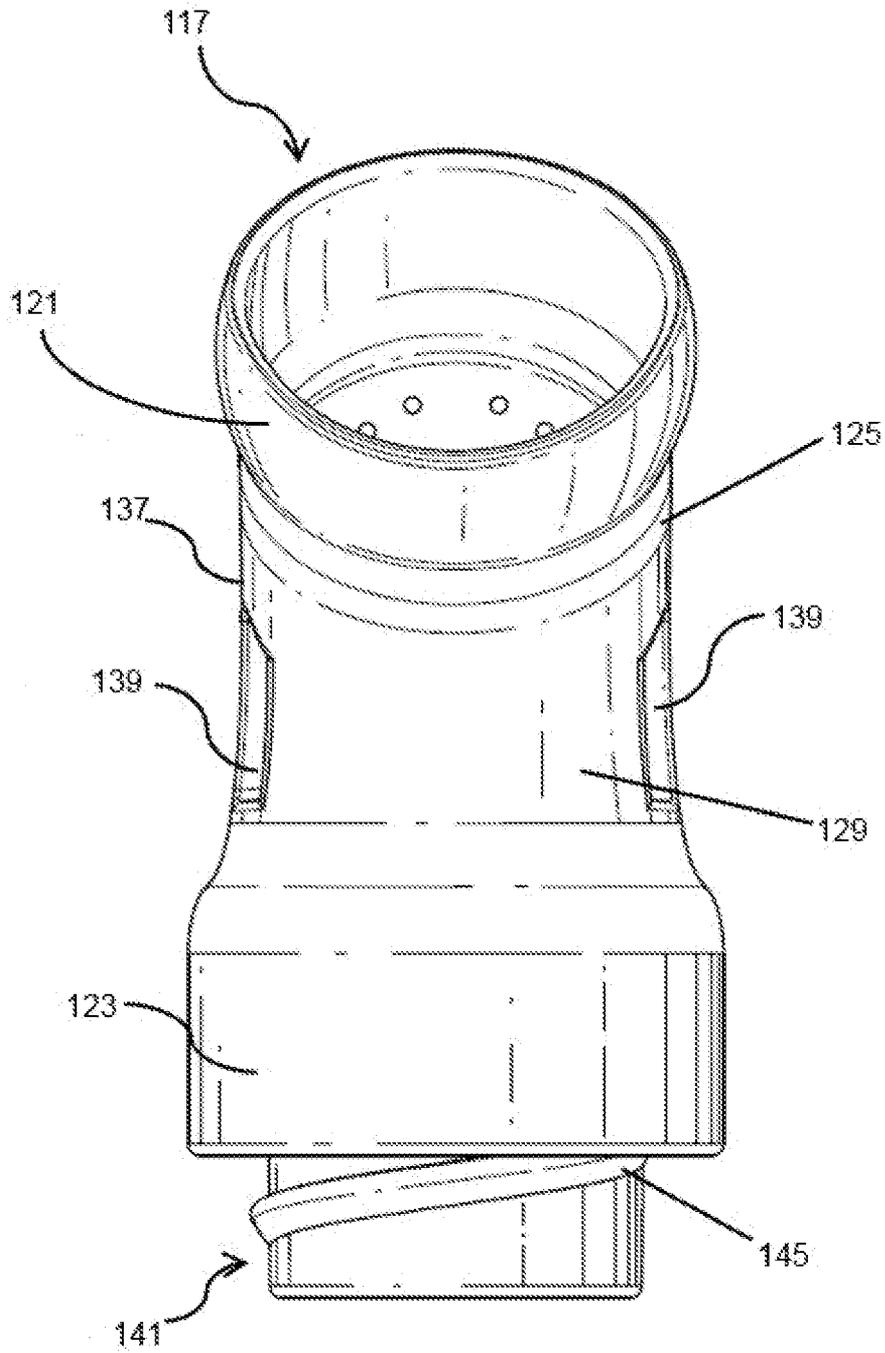


Figure 8B

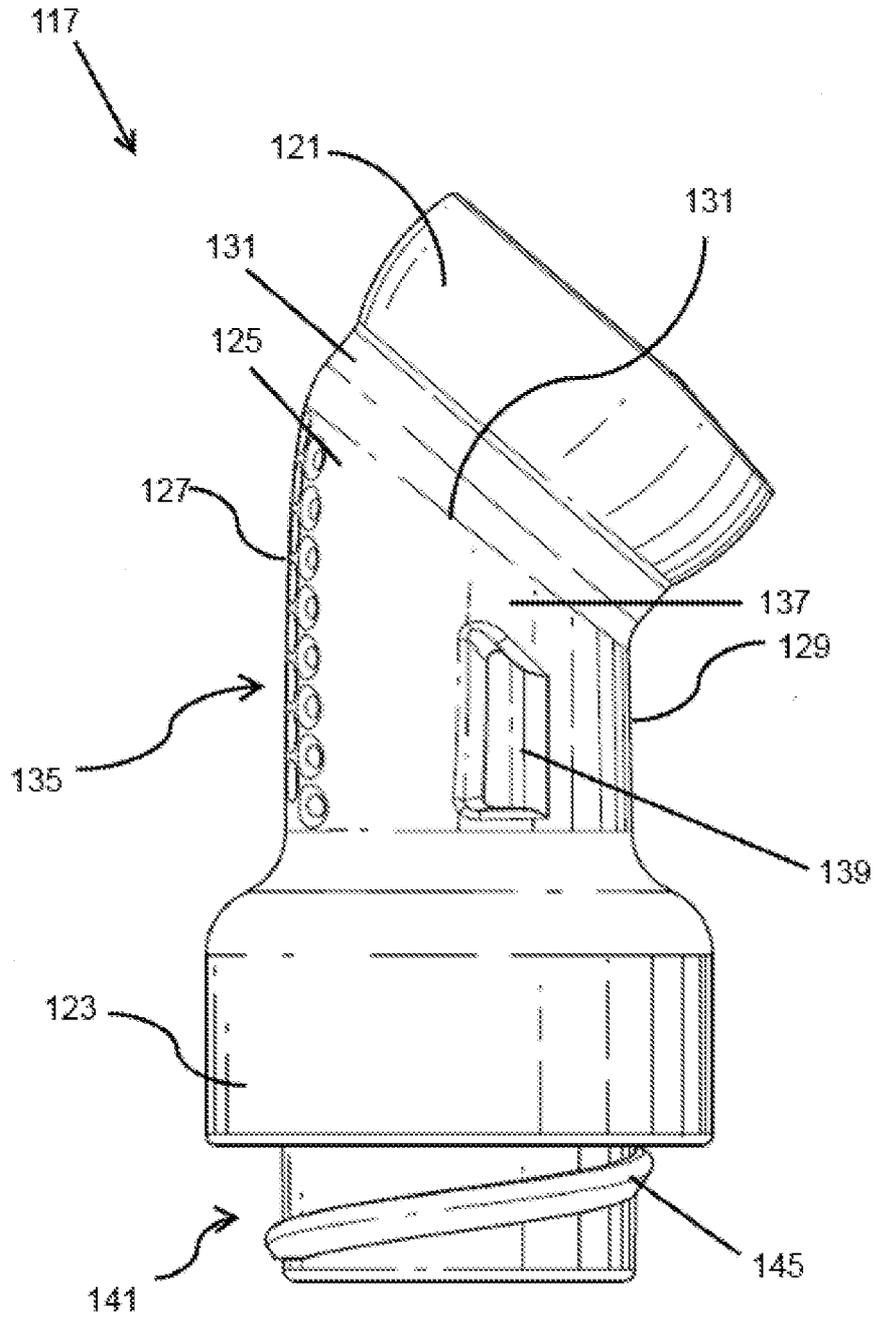


Figure 8C

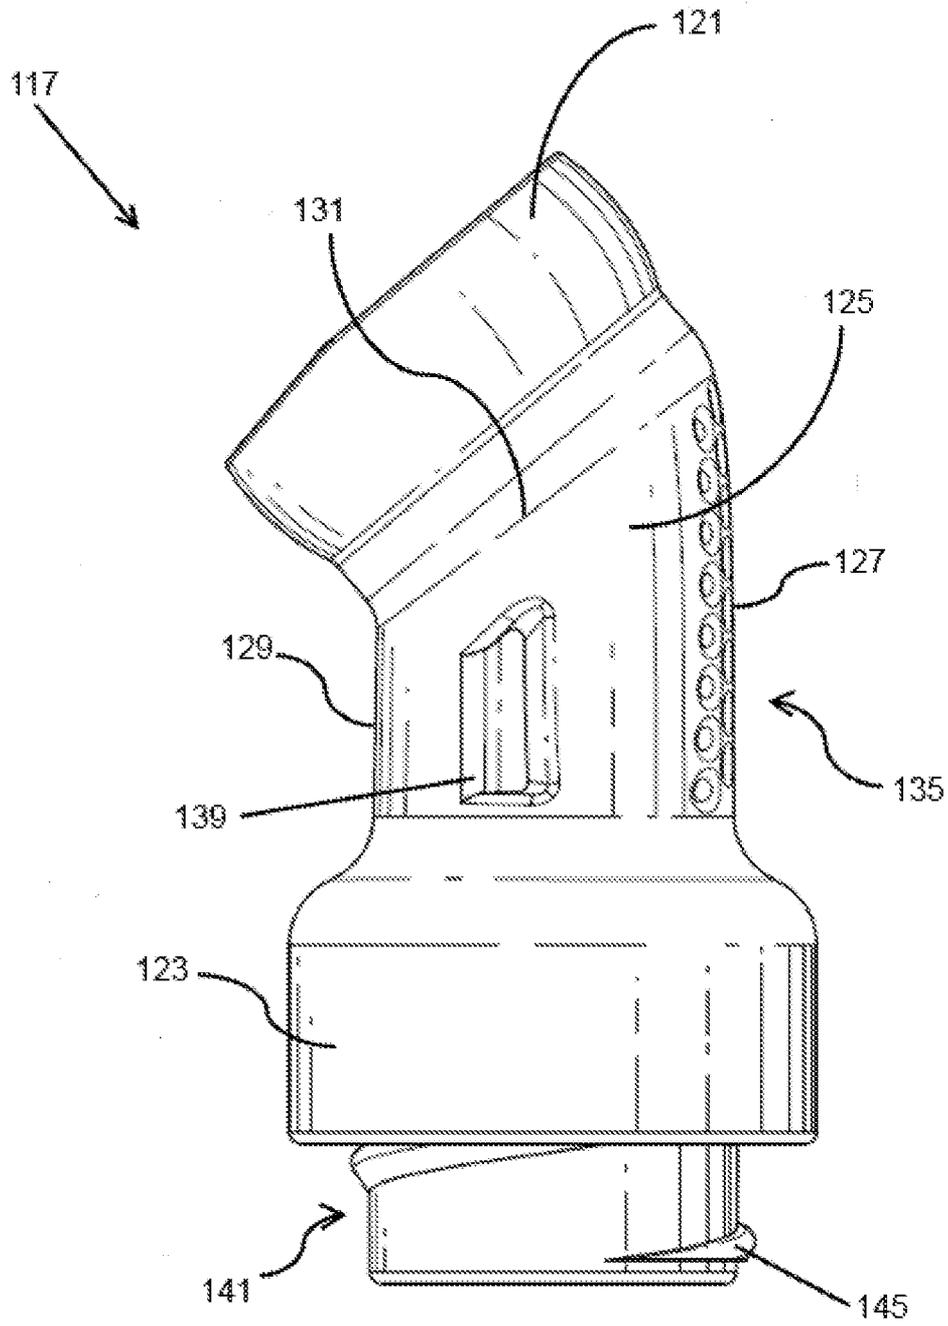


Figure 8D

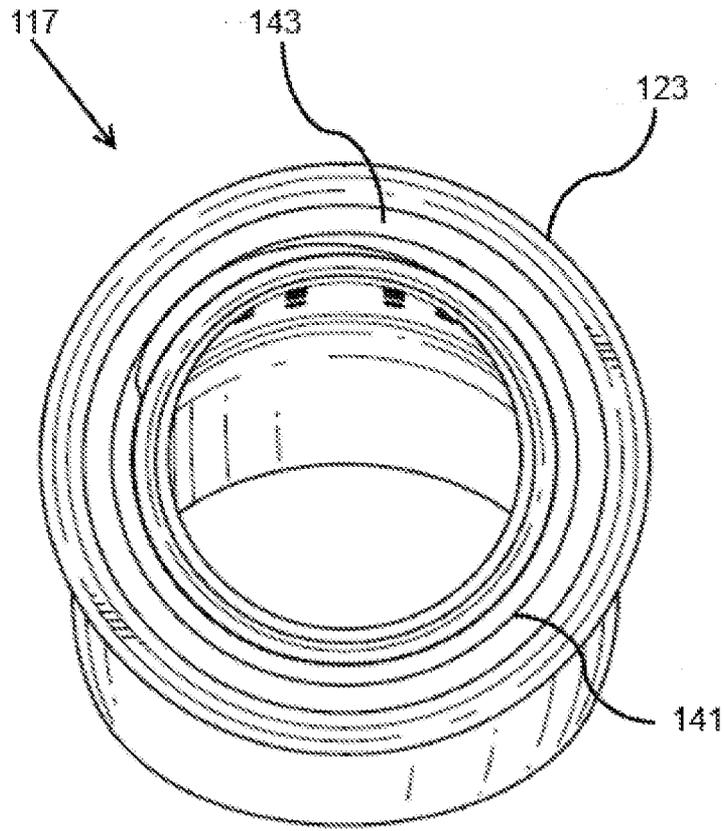


Figure 8E

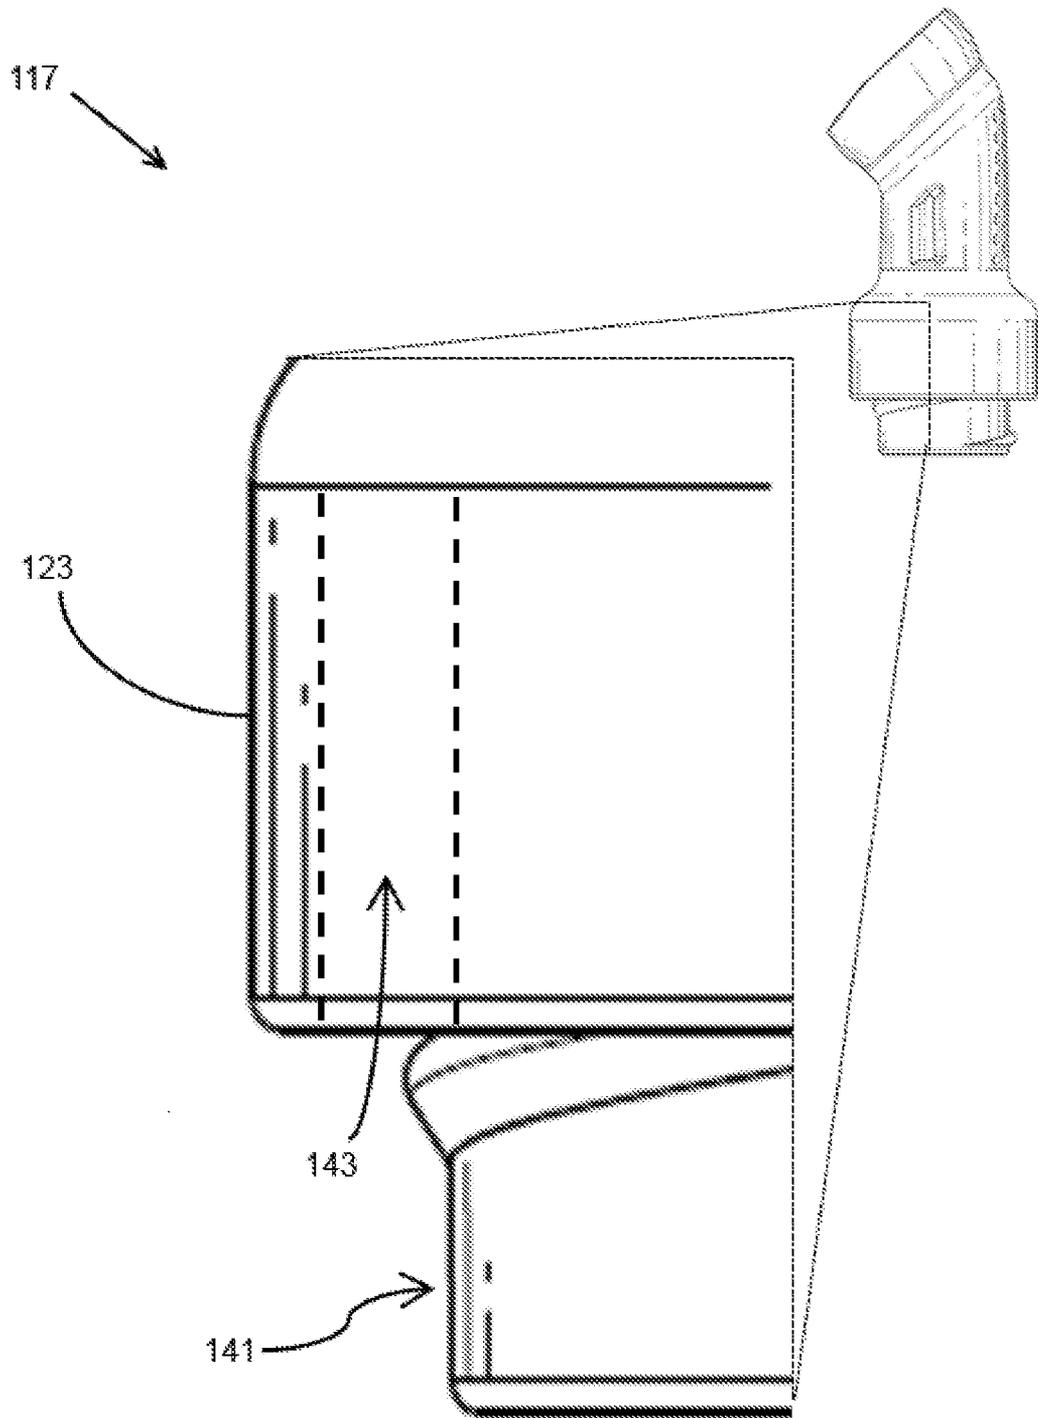


Figure 8F

17/33

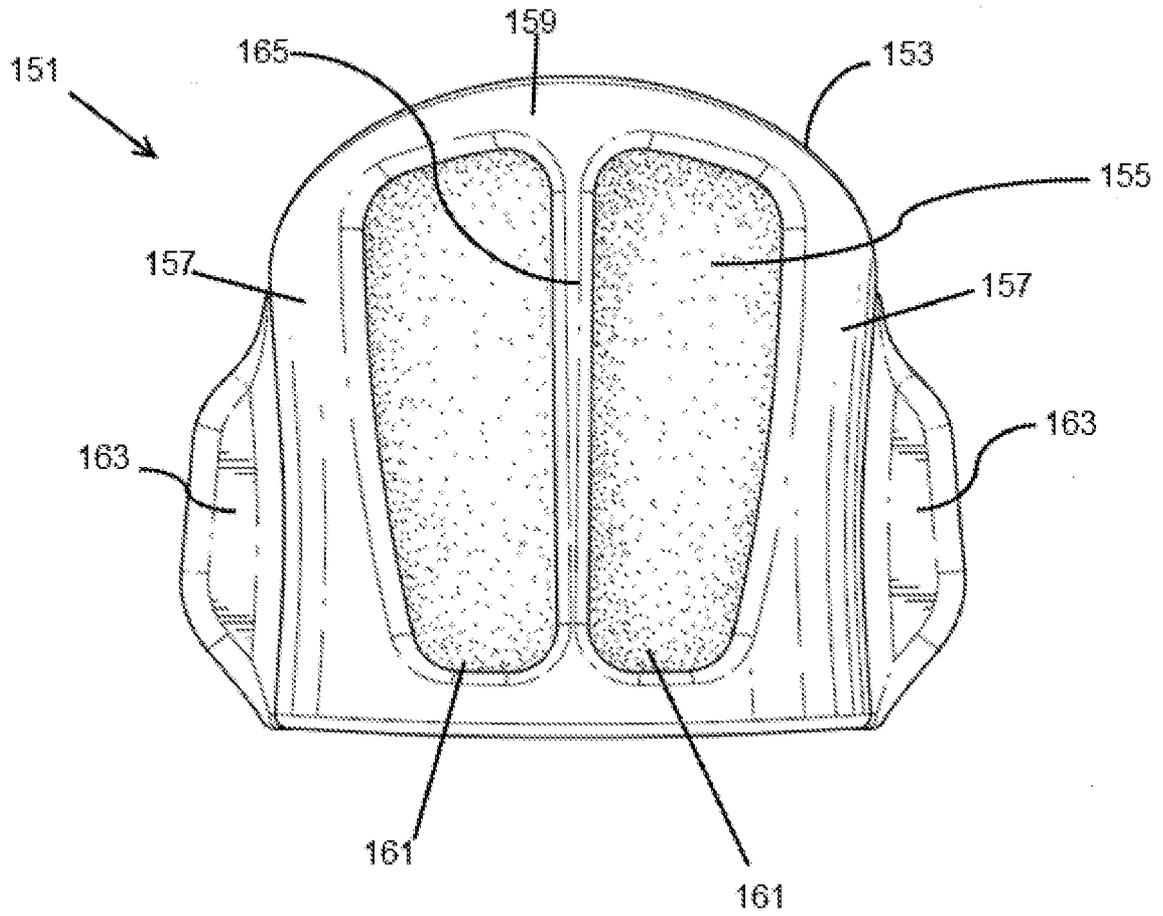


Figure 9A

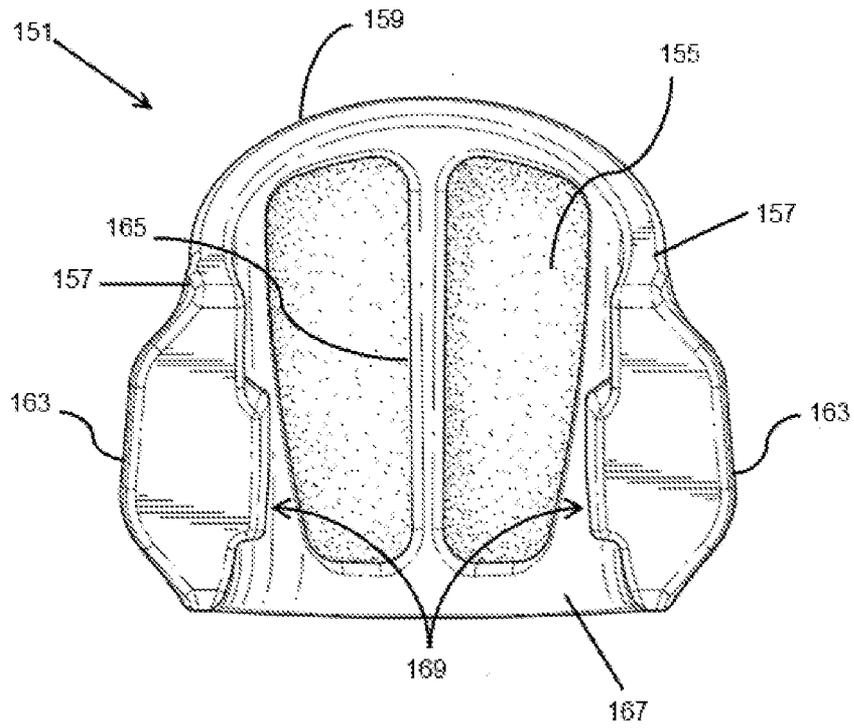


Figure 9B

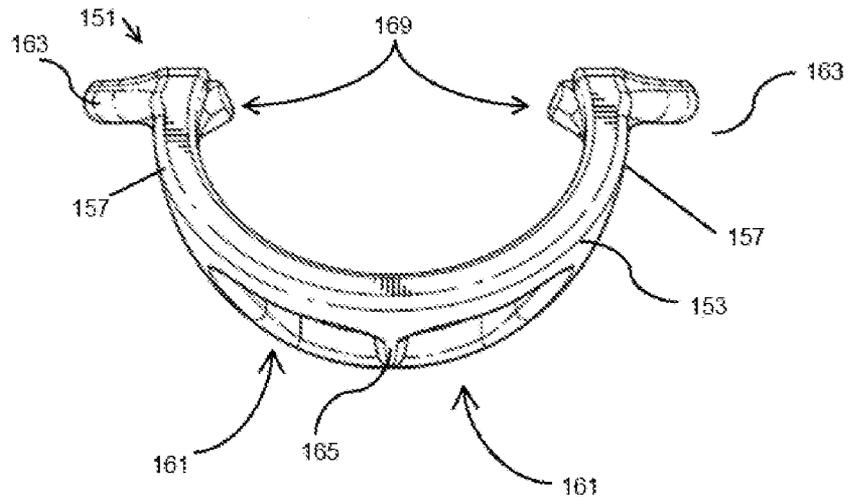


Figure 9C

19/33

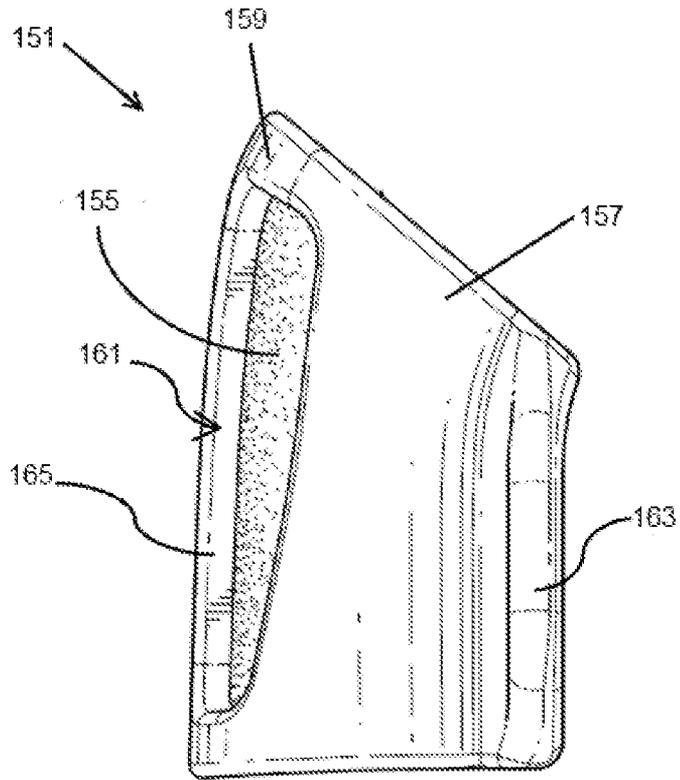


Figure 9D

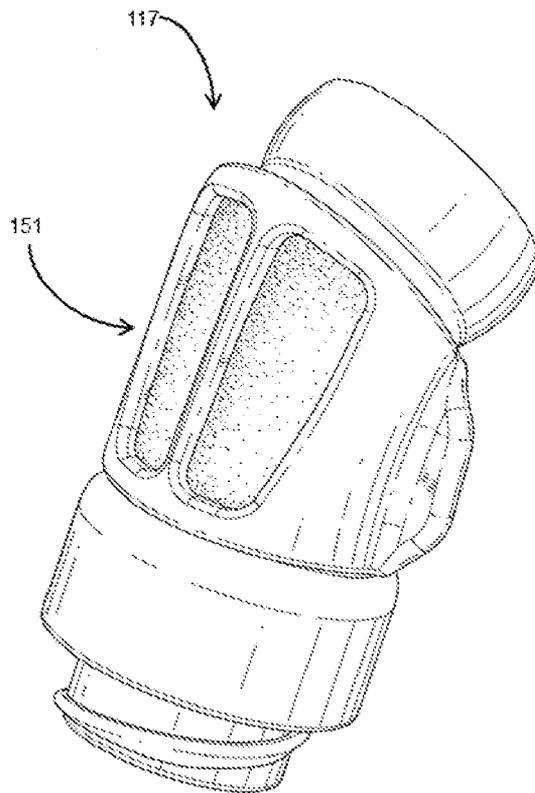


Figure 10A

20/33

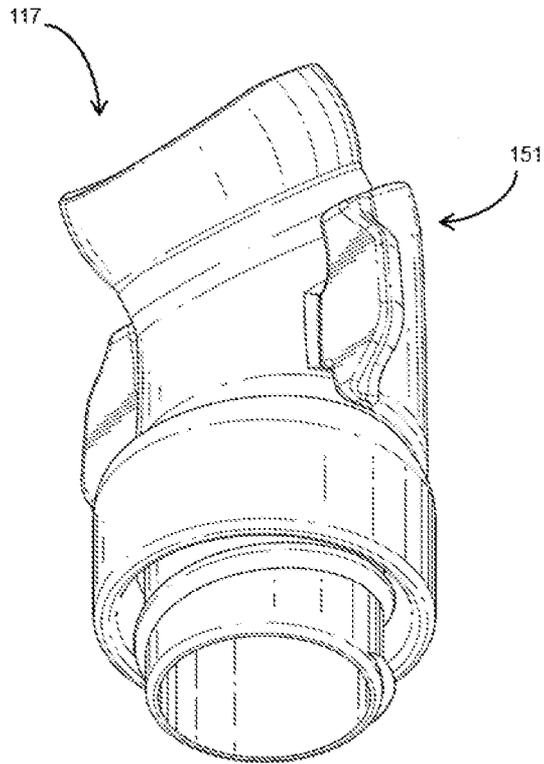


Figure 10B

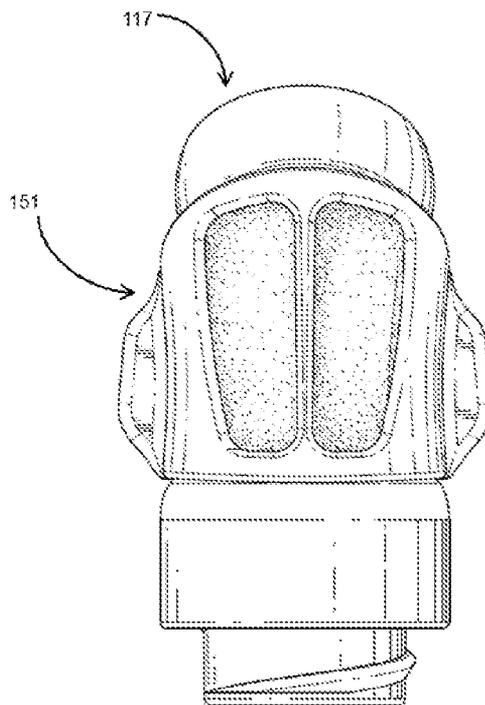


Figure 10C

21/33

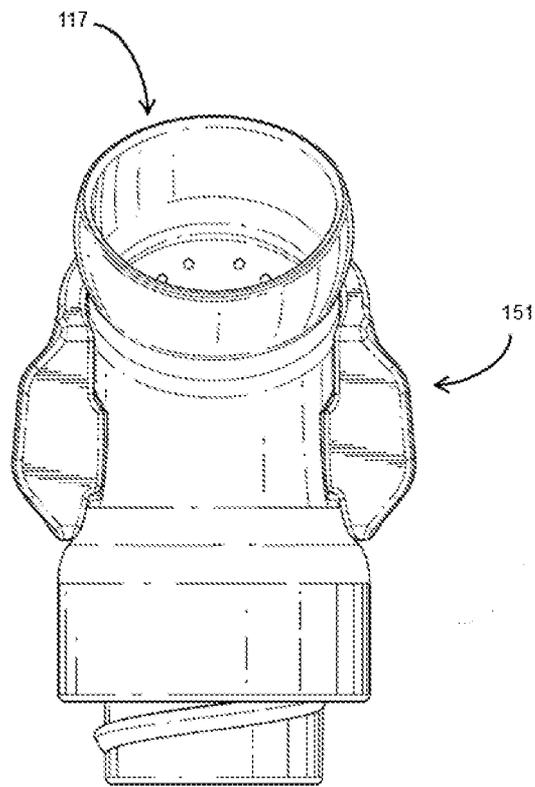


Figure 10D

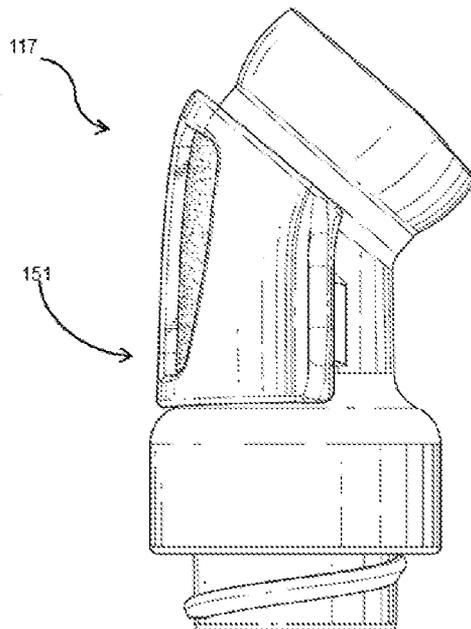


Figure 10E

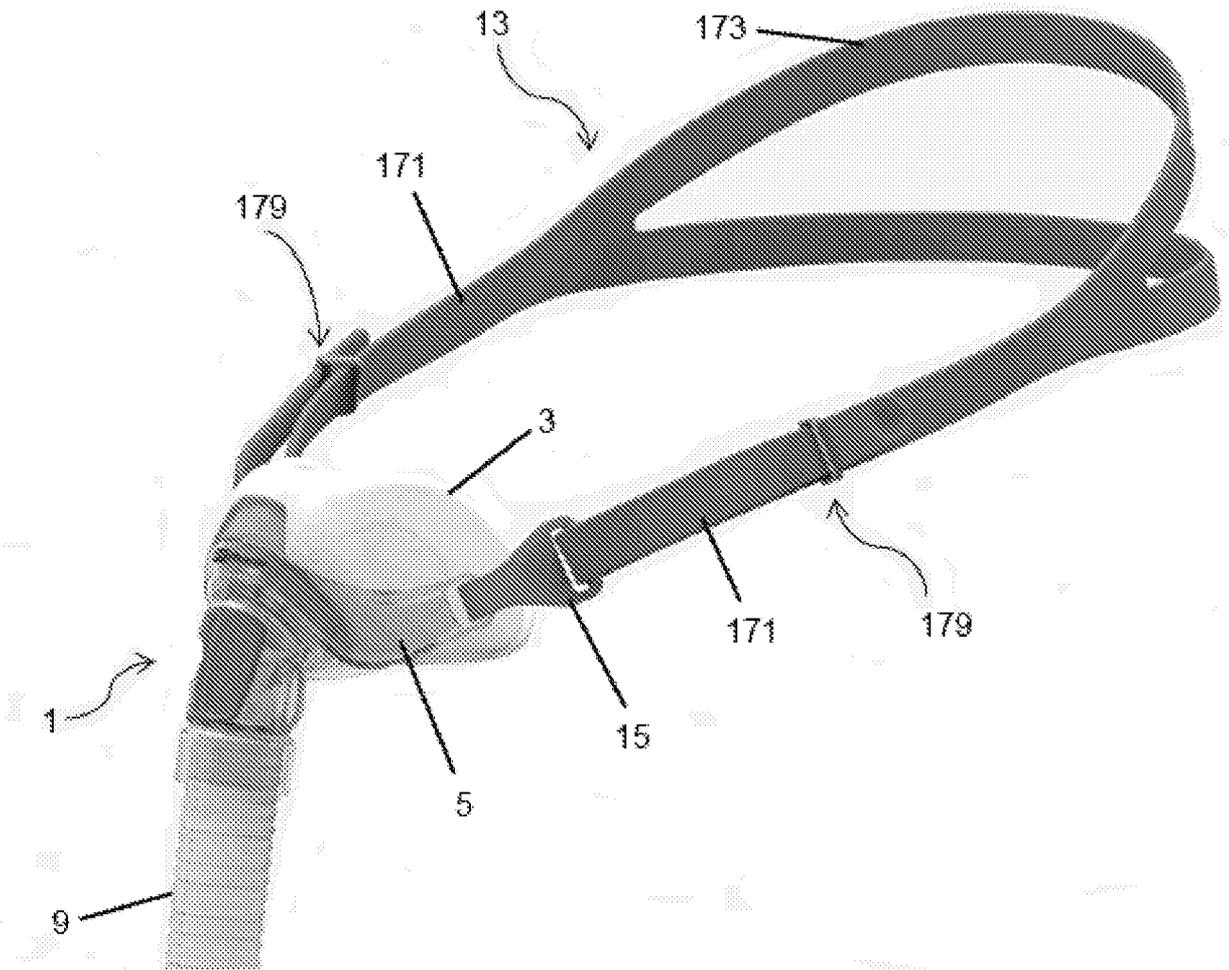


Figure 11A

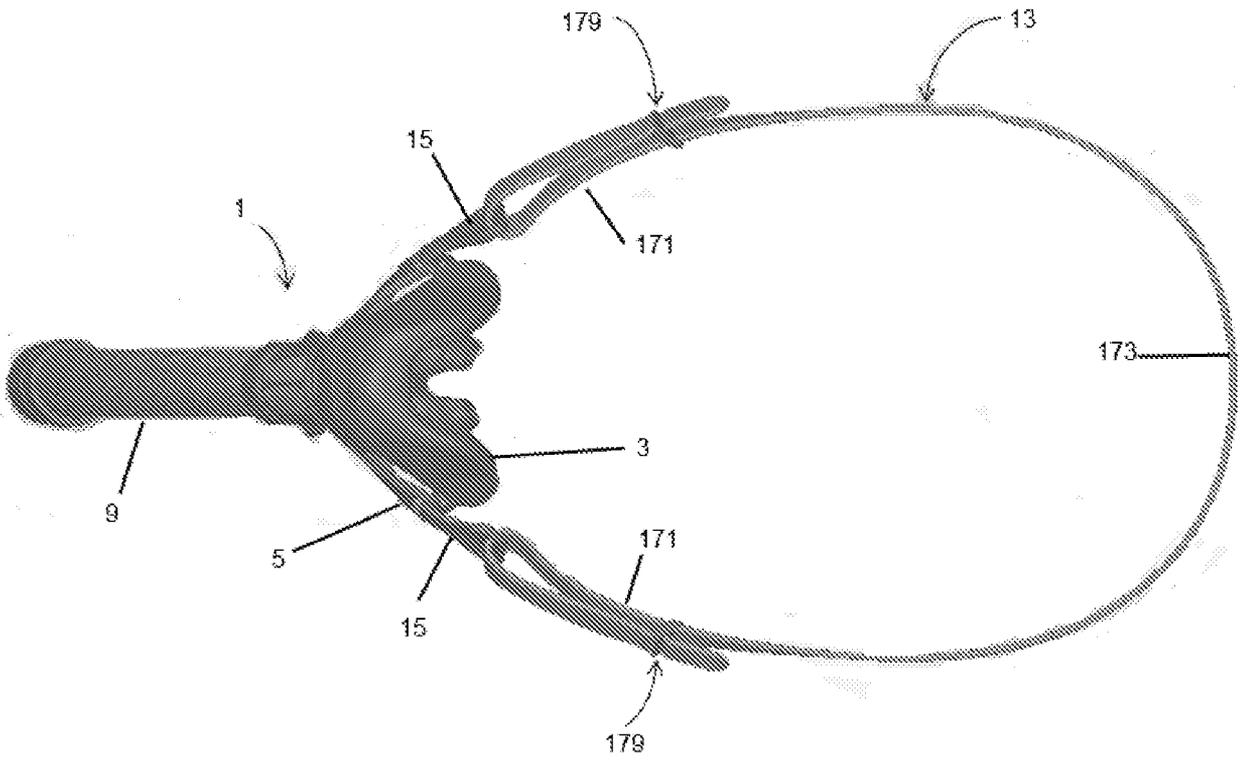


Figure 11B

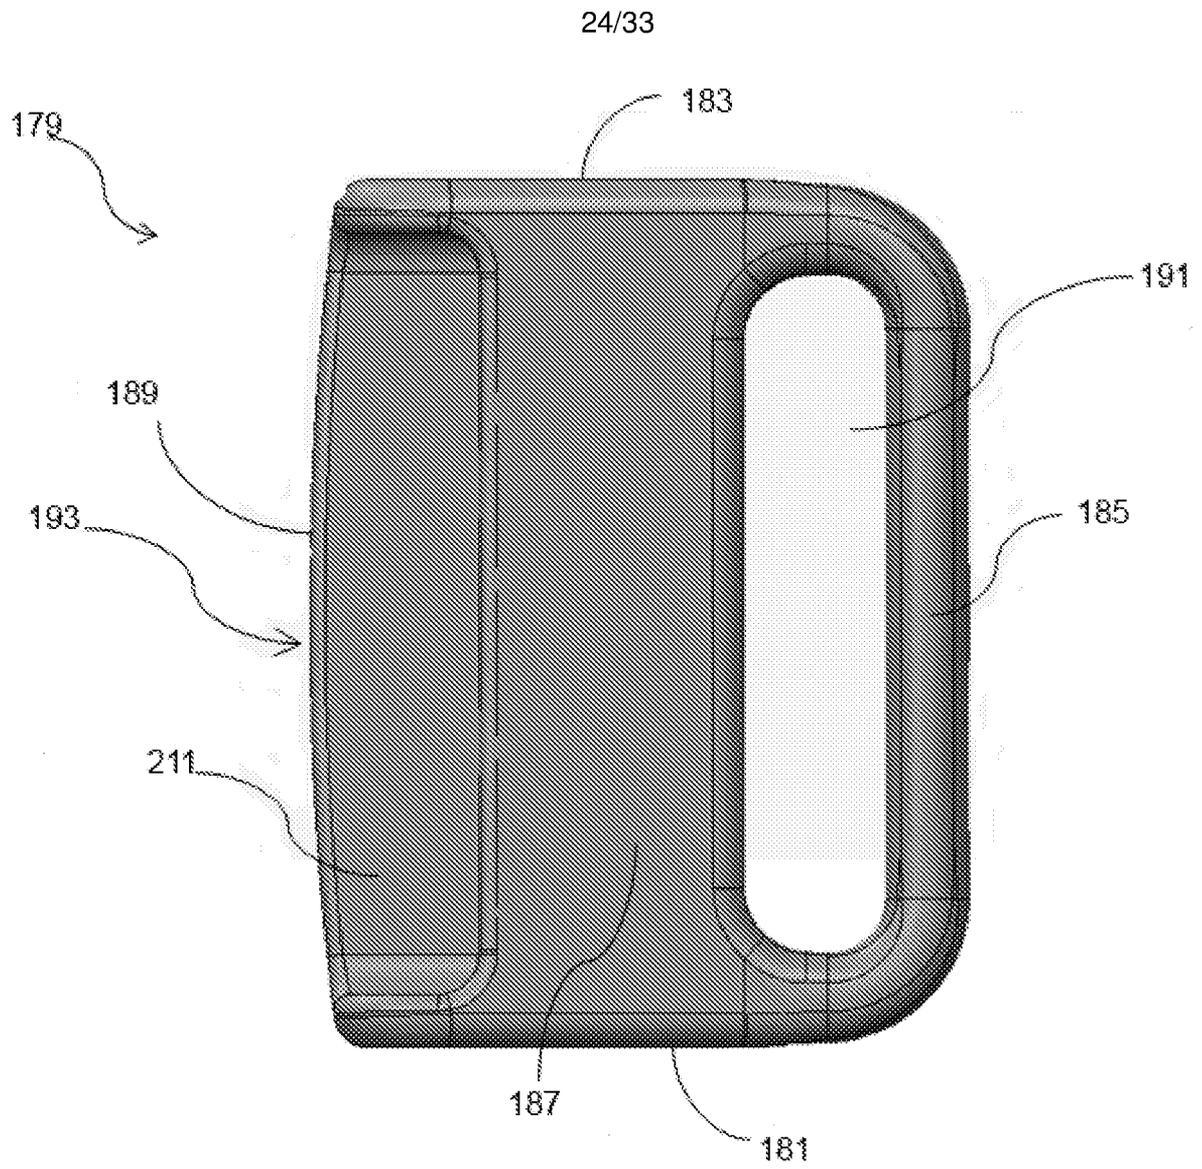


Figure 12A

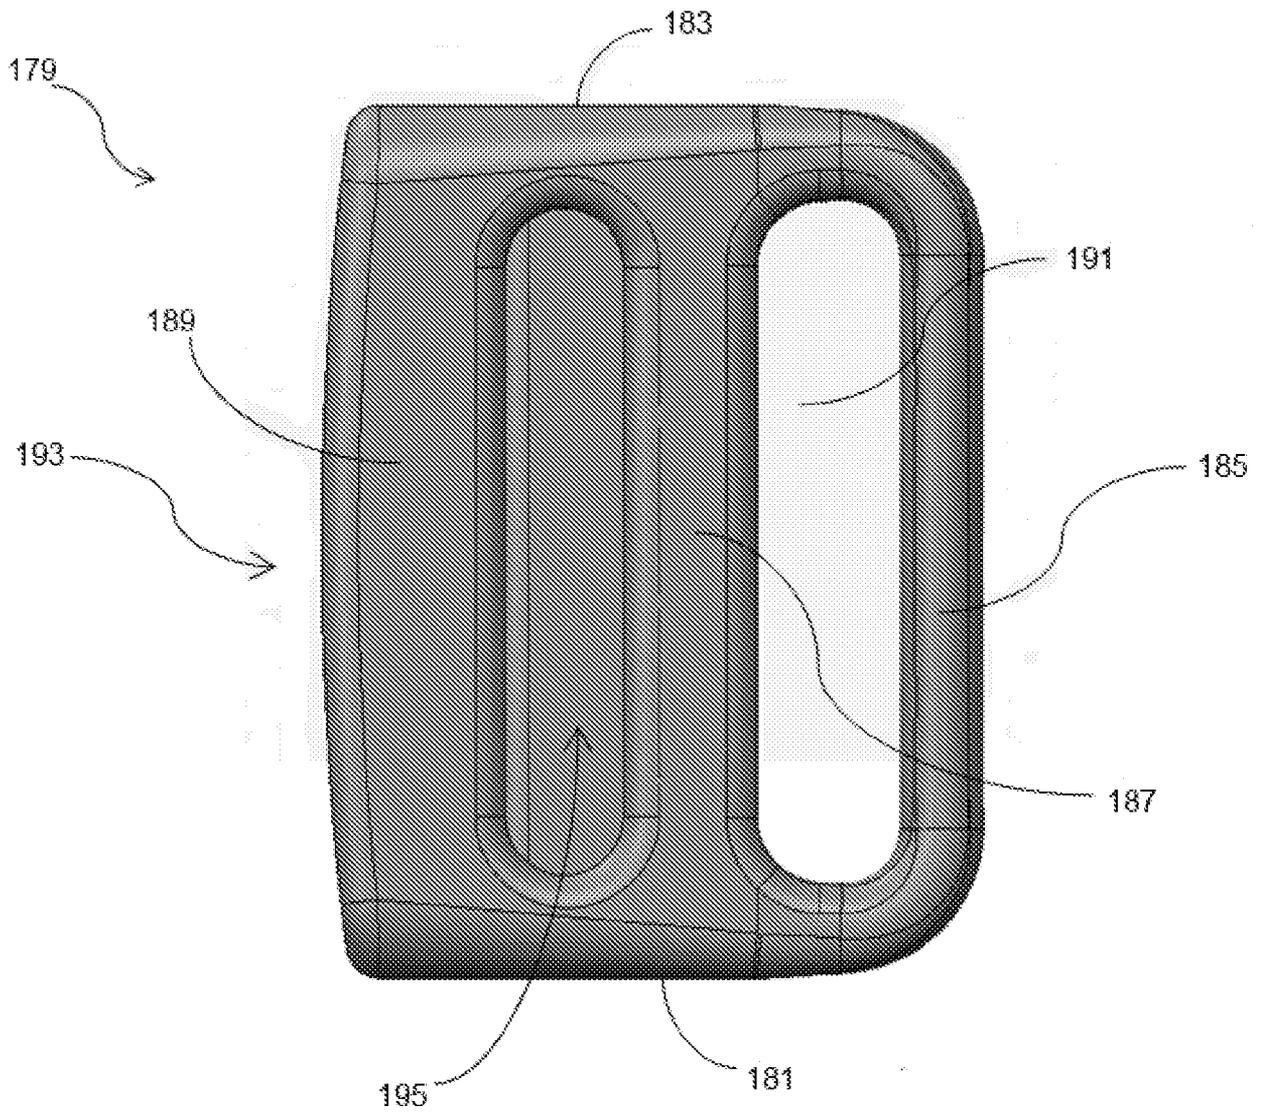


Figure 12B

26/33

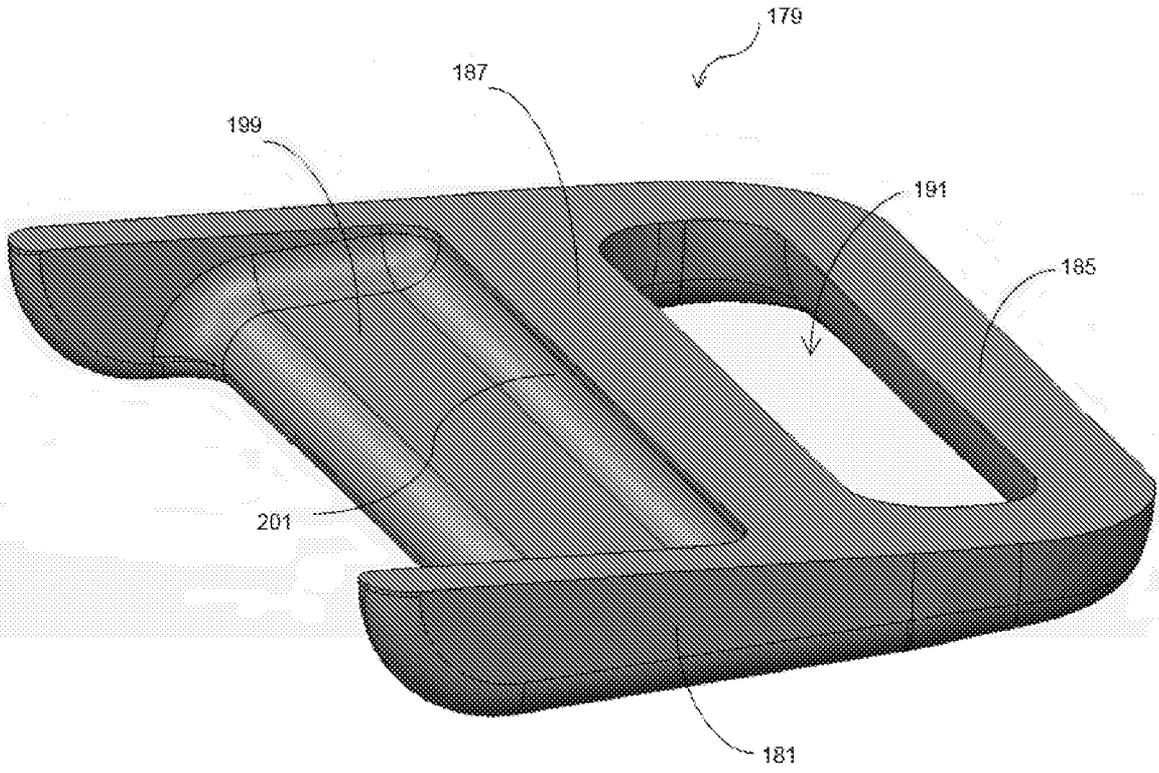


Figure 12C

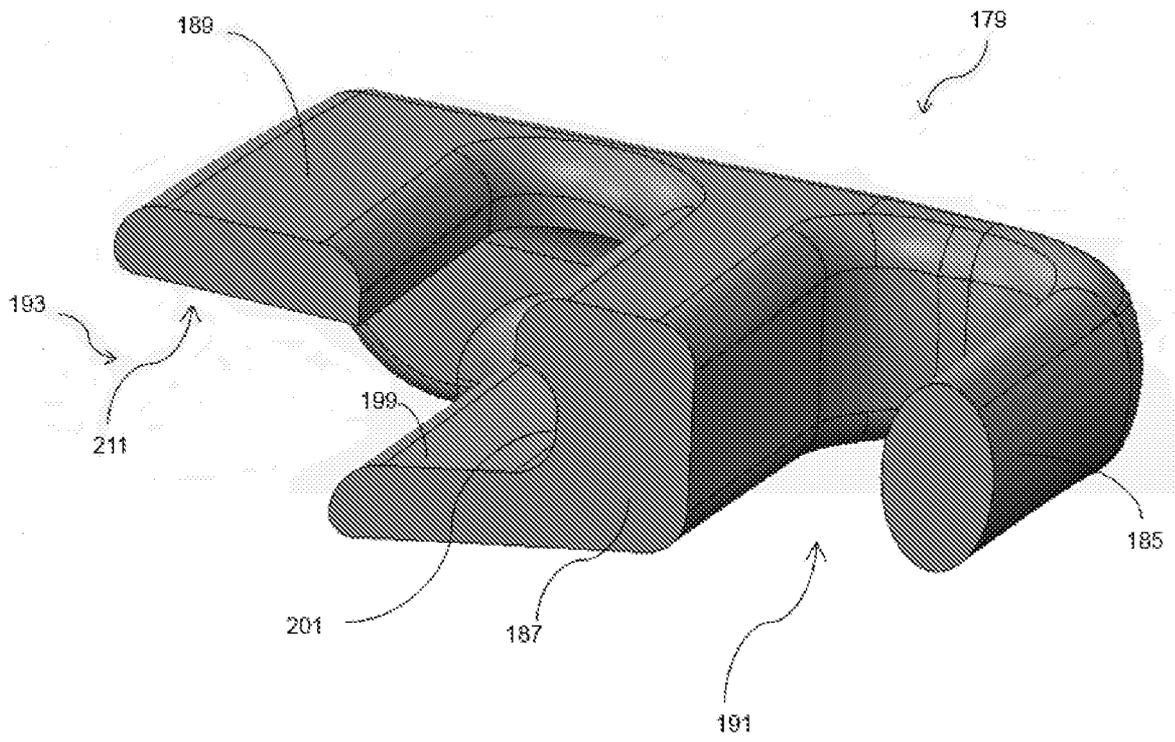


Figure 12D

27/33

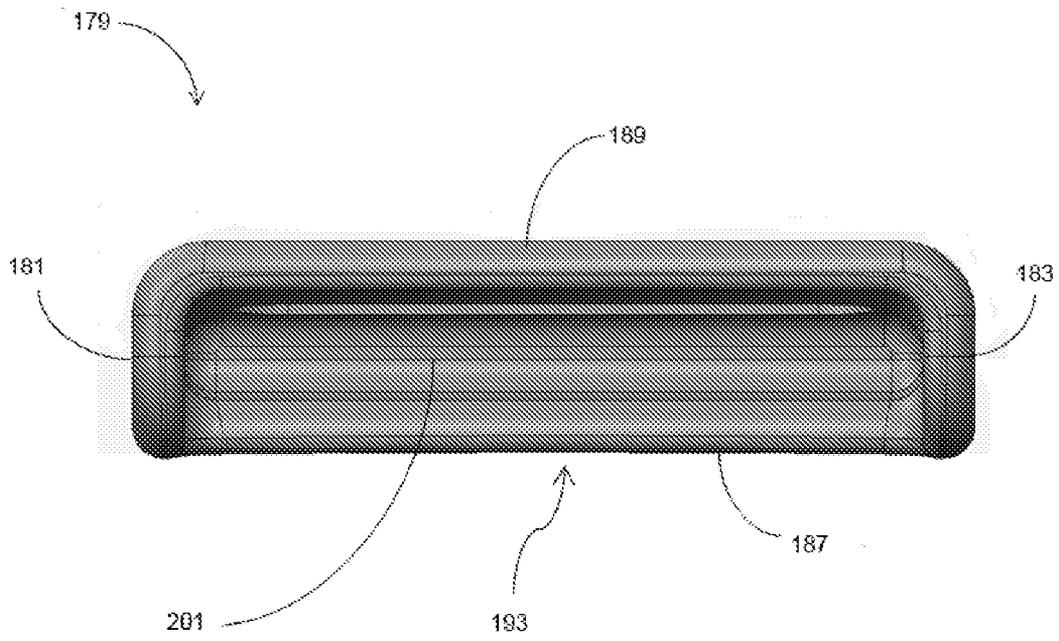


Figure 12E

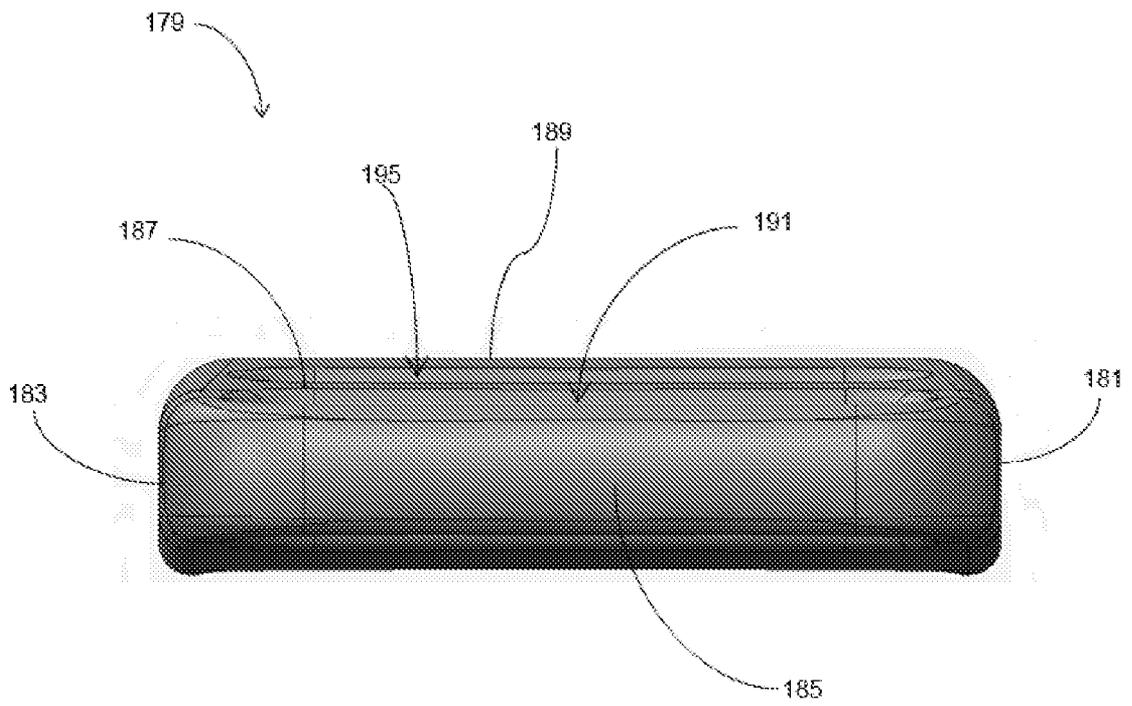


Figure 12F

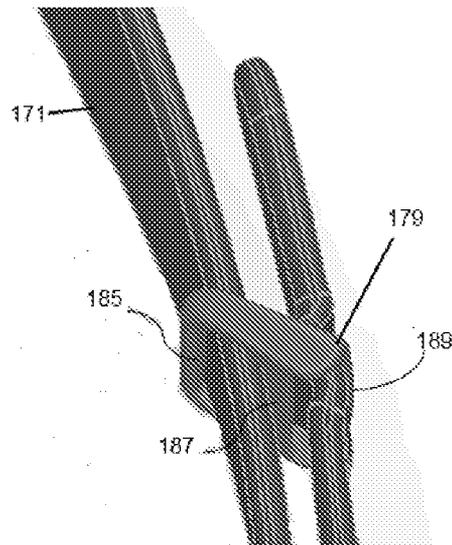


Figure 13A

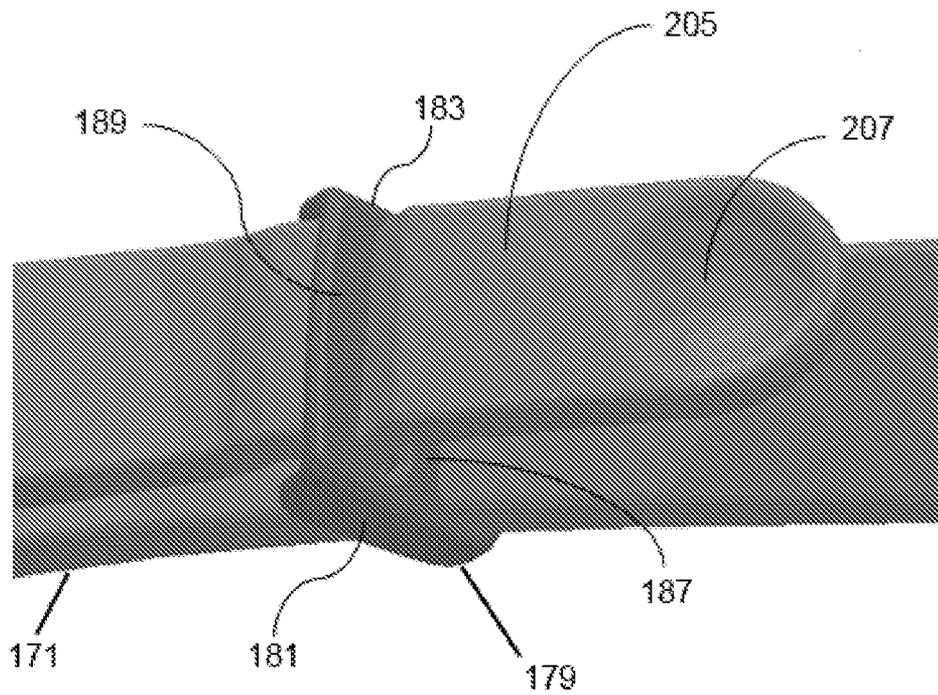


Figure 13B

29/33

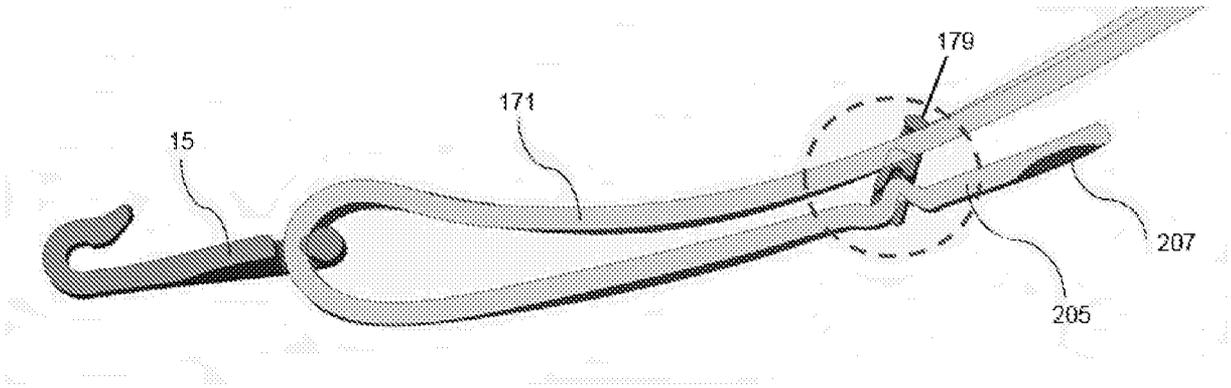


Figure 14A

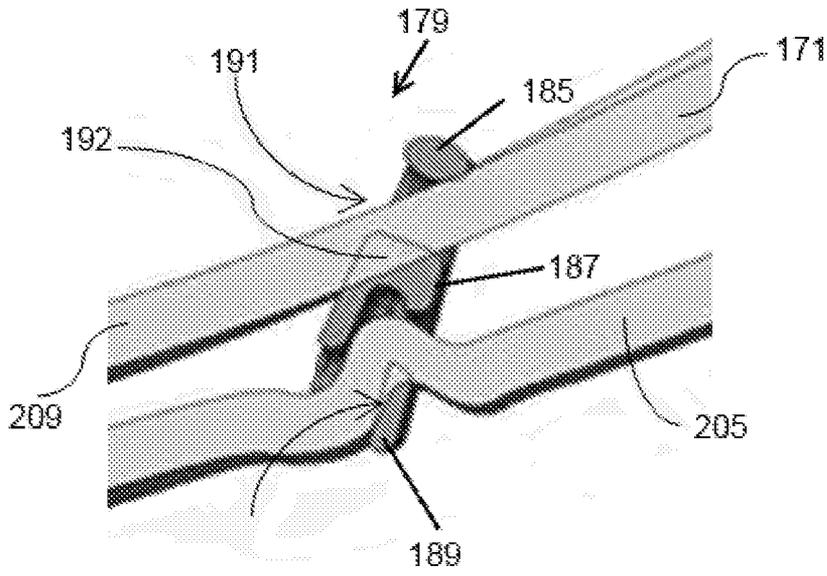


Figure 14B

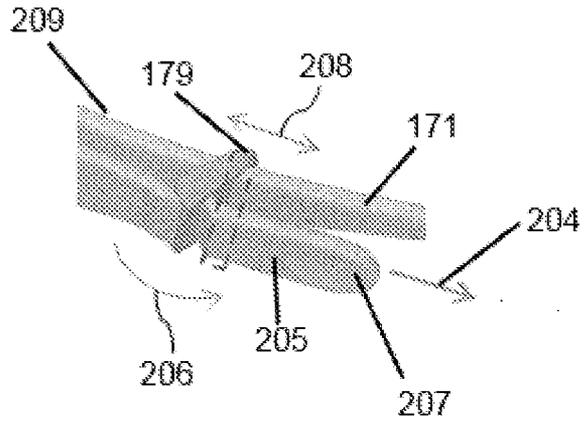


Figure 15A

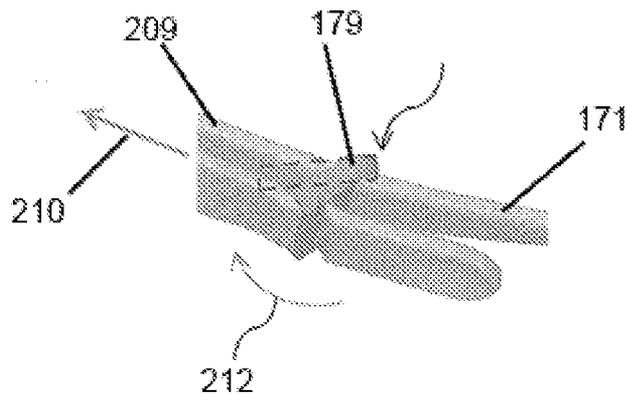
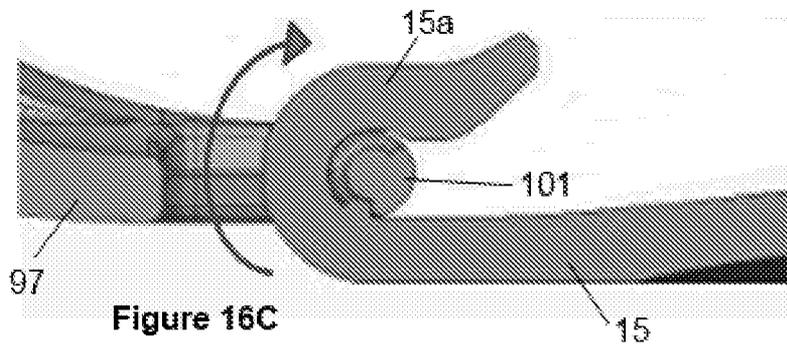
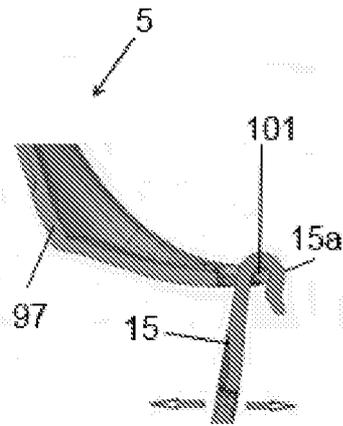
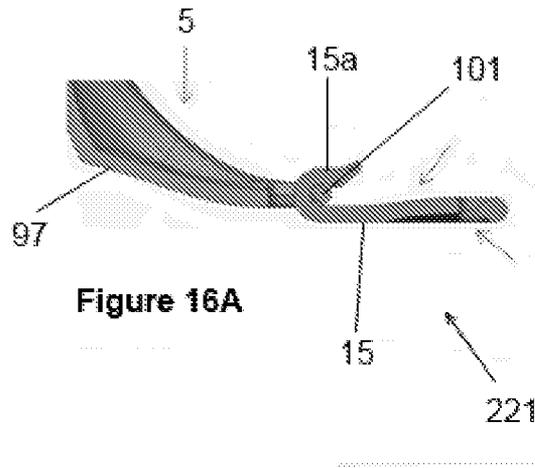


Figure 15B



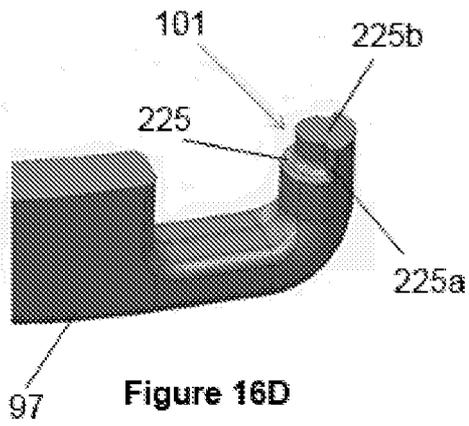


Figure 16D


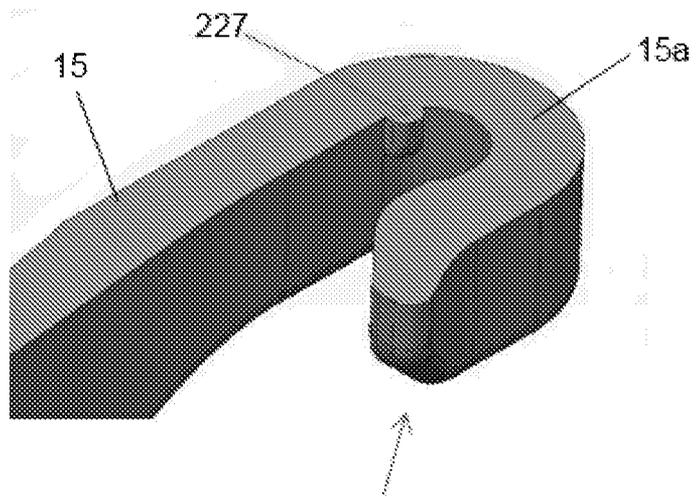


Figure 16E

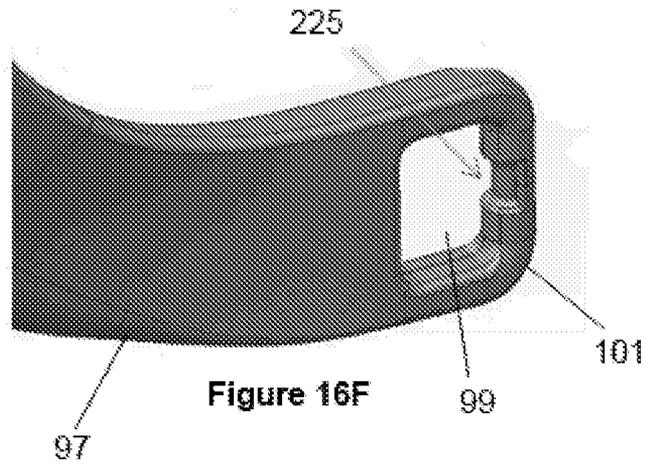

INTERNATIONAL SEARCH REPORT

International application No.
PCT/NZ2015/050186

A. CLASSIFICATION OF SUBJECT MATTER A61M 16/06 (2006.01) A44B 11/28 (2006.01)		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
EPODOC (IPC and CPC Marks): A61M16/0666, A61M16/0605, A61M16/0683, A61M2016/0661, A61M16/06/LOW, A44B11/2588, A44B11/28, Y10T24/LOW, A62B18/LOW, Y10T24/3416, Y10T24/45288 (Keywords): SIDE, LATERAL+, CHEEK+, STABIL+, RIGID+, ARM, EXTENSION+, SUPPORT+, TWIST+, ROTAT+, CONFORM+, HOOK, PREVENT+, STOP+, LIMIT+, RESTRICT+ and similar words WPIAP (IPC Marks): A61M16/IC (Keywords): SIDE+, LATERAL+, CHEEK+, STABIL+, ARM+, EXTENSION (Applicant and Inventor Search): "FISHER AND PAYKEL+", "FISHER & PAYKEL+", HUANG, GARDIOLA, STEPHENSON, LIM, WALLS, YOUNG		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
	Documents are listed in the continuation of Box C	
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C <input checked="" type="checkbox"/> See patent family annex		
* "A"	Special categories of cited documents: document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E"	earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O"	document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P"	document published prior to the international filing date but later than the priority date claimed	
Date of the actual completion of the international search 27 January 2016		Date of mailing of the international search report 27 January 2016
Name and mailing address of the ISA/AU AUSTRALIAN PATENT OFFICE PO BOX 200, WODEN ACT 2606, AUSTRALIA Email address: pct@ipaustalia.gov.au		Authorised officer Alma Lacken AUSTRALIAN PATENT OFFICE (ISO 9001 Quality Certified Service) Telephone No. 0262832897

INTERNATIONAL SEARCH REPORT		International application No.
C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		PCT/NZ2015/050186
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2006/130903 A1 (RESMED LIMITED) 14 December 2006 Para: [00297], [00312]-[00313], [00324]-[00325]; Figs 48, 120, 123, 124, 155-158, 171	1-4, 7, 8
X	WO 2008/007985 A1 (FISHER & PAYKEL HEALTHCARE LIMITED) 17 January 2008 Pg 10, ln 7-17, Pg 11, ln 5-20; Figs 20-22	1-5, 7
X	WO 2010/135785 A1 (RESMED LTD) 02 December 2010 Para: [00149]-[00152]; Figs 1-2, 2-1 to 2-3	1, 4, 6, 7
X	WO 2011/121466 A1 (KONINKLIJKE PHILIPS ELECTRONICS N.V.) 06 October 2011 Para [15], [16], [20]; Figs 1-5	1, 4-8
X A	US 2011/0232649 A1 (COLLAZO et al.) 29 September 2011 Para: [0076]-[0080]; Figs 1, 2, 6A-6C	11-17 9, 10
X A	WO 2005/086943 A2 (RIC INVESTMENTS, LLC) 22 September 2005 Para: [83]-[85]; Figs 13, 14	11-17 9, 10
X A	WO 2007/114492 A1 (TEIJIN PHARMA LIMITED) 11 October 2007 Abstract; Figs 5-7	11-17 9, 10
X	US 2004/0078943 A1 (HEDE et al.) 29 April 2004 Para: [0022], [0024]; Figs 1 - 4	11-17

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
the subject matter listed in Rule 39 on which, under Article 17(2)(a)(i), an international search is not required to be carried out, including
2. Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a)

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

See Supplemental Box for Details

1. As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. As all searchable claims could be searched without effort justifying additional fees, this Authority did not invite payment of additional fees.
3. As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- No protest accompanied the payment of additional search fees.

Supplemental Box**Continuation of: Box III**

This International Application does not comply with the requirements of unity of invention because it does not relate to one invention or to a group of inventions so linked as to form a single general inventive concept.

This Authority has found that there are different inventions based on the following features that separate the claims into distinct groups:

- Claims 1 to 10 are directed to mask frame. The features of a central region comprising a conduit connection aperture with a notional central vertical plane and first and second lateral arms extending outwardly from the central region is specific to this group of claims.
- Claims 11 to 17 are directed to mask assembly. The features of a mask frame and headgear comprising a connector with a post and hook such that the hook can rotate about the post is specific to this group of claims.

PCT Rule 13.2, first sentence, states that unity of invention is only fulfilled when there is a technical relationship among the claimed inventions involving one or more of the same or corresponding special technical features. PCT Rule 13.2, second sentence, defines a special technical feature as a feature which makes a contribution over the prior art.

When there is no special technical feature common to all the claimed inventions there is no unity of invention.

In the above groups of claims, the identified features may have the potential to make a contribution over the prior art but are not common to all the claimed inventions and therefore cannot provide the required technical relationship. Therefore there is no special technical feature common to all the claimed inventions and the requirements for unity of invention are consequently not satisfied a priori.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/NZ2015/050186

This Annex lists known patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document/s Cited in Search Report		Patent Family Member/s	
Publication Number	Publication Date	Publication Number	Publication Date
WO 2006/130903 A1	14 December 2006	WO 2006130903 A1	14 Dec 2006
		AU 2004308536 A1	14 Jul 2005
		AU 2004308536 B2	23 Jun 2011
		AU 2006255476 A1	14 Dec 2006
		AU 2006255476 B2	05 Jul 2012
		AU 2010214658 A1	16 Sep 2010
		AU 2010214658 B2	04 Aug 2011
		CN 1901961 A	24 Jan 2007
		CN 1901961 B	22 Dec 2010
		CN 1973914 A	06 Jun 2007
		CN 1973914 B	14 Jul 2010
		CN 101214402 A	09 Jul 2008
		CN 101214402 B	21 Aug 2013
		CN 101237902 A	06 Aug 2008
		CN 101237902 B	29 Feb 2012
		CN 101628142 A	20 Jan 2010
		CN 101628142 B	26 Mar 2014
		CN 102512741 A	27 Jun 2012
		CN 102512741 B	01 Jul 2015
		CN 103785090 A	14 May 2014
		CN 104645476 A	27 May 2015
		EP 1701759 A1	20 Sep 2006
		EP 1701759 B1	21 Jan 2015
		EP 1890755 A1	27 Feb 2008
		EP 2510968 A1	17 Oct 2012
		JP 2007516750 A	28 Jun 2007
		JP 5031375 B2	19 Sep 2012
		JP 2008541955 A	27 Nov 2008
		JP 5254787 B2	07 Aug 2013
		JP 2012086080 A	10 May 2012
		JP 5808265 B2	10 Nov 2015
		JP 2013223804 A	31 Oct 2013
		JP 2015116506 A	25 Jun 2015
		NZ 547748 A	30 Jul 2010
		NZ 563608 A	31 Mar 2011
		NZ 585133 A	25 Nov 2011

Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001.

Form PCT/ISA/210 (Family Annex)(July 2009)

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/NZ2015/050186

This Annex lists known patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document/s Cited in Search Report		Patent Family Member/s	
Publication Number	Publication Date	Publication Number	Publication Date
		NZ 591018 A	25 Jan 2013
		NZ 599406 A	20 Dec 2013
		US 2006237017 A1	26 Oct 2006
		US 7658189 B2	09 Feb 2010
		US 2007186930 A1	16 Aug 2007
		US 7708017 B2	04 May 2010
		US 2007144525 A1	28 Jun 2007
		US 7942148 B2	17 May 2011
		US 2006283461 A1	21 Dec 2006
		US 8136525 B2	20 Mar 2012
		US 2011056497 A1	10 Mar 2011
		US 8402971 B2	26 Mar 2013
		US 2012145158 A1	14 Jun 2012
		US 8915251 B2	23 Dec 2014
		US 2009277452 A1	12 Nov 2009
		US 9032955 B2	19 May 2015
		US 2013239973 A1	19 Sep 2013
		US 9032956 B2	19 May 2015
		US 2011209709 A1	01 Sep 2011
		US 9067033 B2	30 Jun 2015
		US 2010132717 A1	03 Jun 2010
		US 9220860 B2	29 Dec 2015
		US 2015196726 A1	16 Jul 2015
		US 2015224276 A1	13 Aug 2015
		WO 2005063328 A1	14 Jul 2005
		WO 2008040050 A1	10 Apr 2008

Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001.

Form PCT/ISA/210 (Family Annex)(July 2009)

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/NZ2015/050186

This Annex lists known patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document/s Cited in Search Report		Patent Family Member/s	
Publication Number	Publication Date	Publication Number	Publication Date
WO 2008/007985 A1	17 January 2008	None	
WO 2010/135785 A1	02 December 2010	WO 2010135785 A1	02 Dec 2010
		AU 2010251884 A1	19 Jan 2012
		AU 2010251884 B2	15 Aug 2013
		AU 2010256351 A1	08 Dec 2011
		AU 2010256351 B2	29 Aug 2013
		AU 2010282228 A1	19 Jan 2012
		AU 2010282228 B2	18 Apr 2013
		AU 2013206439 A1	11 Jul 2013
		AU 2013206439 B2	21 May 2015
		AU 2013257413 A1	28 Nov 2013
		AU 2013257413 B2	19 Mar 2015
		AU 2013257426 A1	28 Nov 2013
		AU 2013257426 B2	12 Mar 2015
		AU 2015202783 A1	11 Jun 2015
		AU 2015202999 A1	25 Jun 2015
		CN 102458547 A	16 May 2012
		CN 102458548 A	16 May 2012
		CN 102458548 B	20 May 2015
		CN 102596299 A	18 Jul 2012
		CN 102695536 A	26 Sep 2012
		CN 102725017 A	10 Oct 2012
		CN 103961775 A	06 Aug 2014
		CN 104888328 A	09 Sep 2015
		EP 2435120 A1	04 Apr 2012
		EP 2437837 A1	11 Apr 2012
		EP 2464404 A1	20 Jun 2012
		EP 2470246 A1	04 Jul 2012
		EP 2501425 A1	26 Sep 2012
		JP 2012528608 A	15 Nov 2012
		JP 5819817 B2	24 Nov 2015
		JP 2012527908 A	12 Nov 2012
		JP 5823378 B2	25 Nov 2015
		JP 2013501541 A	17 Jan 2013
		JP 2013511297 A	04 Apr 2013

Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001.

Form PCT/ISA/210 (Family Annex)(July 2009)

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/NZ2015/050186

This Annex lists known patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document/s Cited in Search Report		Patent Family Member/s	
Publication Number	Publication Date	Publication Number	Publication Date
		JP 2015144905 A	13 Aug 2015
		JP 2015157149 A	03 Sep 2015
		JP 2016000359 A	07 Jan 2016
		NZ 596486 A	30 Apr 2014
		NZ 597254 A	20 Dec 2013
		NZ 597256 A	29 Nov 2013
		NZ 598152 A	28 Feb 2014
		NZ 599679 A	30 May 2014
		NZ 612693 A	30 Jan 2015
		NZ 613721 A	27 Feb 2015
		NZ 615329 A	27 Mar 2015
		NZ 617661 A	29 May 2015
		NZ 618255 A	29 May 2015
		NZ 619966 A	31 Jul 2015
		NZ 628624 A	30 Oct 2015
		US 2014174448 A1	26 Jun 2014
		US 9044564 B2	02 Jun 2015
		US 2012067349 A1	22 Mar 2012
		US 9095673 B2	04 Aug 2015
		US 2012152255 A1	21 Jun 2012
		US 9132252 B2	15 Sep 2015
		US 2012138061 A1	07 Jun 2012
		US 9149593 B2	06 Oct 2015
		US 2012138058 A1	07 Jun 2012
		US 2012222680 A1	06 Sep 2012
		US 2014166018 A1	19 Jun 2014
		US 2015283347 A1	08 Oct 2015
		US 2015320960 A1	12 Nov 2015
		WO 2010139014 A1	09 Dec 2010
		WO 2011017763 A1	17 Feb 2011
		WO 2011022779 A1	03 Mar 2011
		WO 2011060479 A1	26 May 2011

Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001.

Form PCT/ISA/210 (Family Annex)(July 2009)

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/NZ2015/050186

This Annex lists known patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document/s Cited in Search Report		Patent Family Member/s	
Publication Number	Publication Date	Publication Number	Publication Date
WO 2011/121466 A1	06 October 2011	WO 2011121466 A1	06 Oct 2011
		AU 2011234099 B2	27 Nov 2014
		CN 102933245 A	13 Feb 2013
		EP 2552526 A1	06 Feb 2013
		JP 2013523241 A	17 Jun 2013
		US 2013008449 A1	10 Jan 2013
US 2011/0232649 A1	29 September 2011	US 2011232649 A1	29 Sep 2011
WO 2005/086943 A2	22 September 2005	WO 2005086943 A2	22 Sep 2005
		US 2006231103 A1	19 Oct 2006
		US 7370652 B2	13 May 2008
		US 2005199242 A1	15 Sep 2005
		US 7856982 B2	28 Dec 2010
		US 2008245369 A1	09 Oct 2008
		US 7900628 B2	08 Mar 2011
		US 2011126841 A1	02 Jun 2011
		US 8596271 B2	03 Dec 2013
		US 2014060544 A1	06 Mar 2014
WO 2007/114492 A1	11 October 2007	WO 2007114492 A1	11 Oct 2007
		AU 2007232702 A1	11 Oct 2007
		AU 2007232702 B2	09 Feb 2012
		CA 2647733 A1	11 Oct 2007
		CN 101410149 A	15 Apr 2009
		CN 101410149 B	24 Apr 2013
		EP 2000168 A1	10 Dec 2008
		HK 1128642 A1	24 Jan 2014
		JP 5052504 B2	17 Oct 2012
		KR 20080105122 A	03 Dec 2008
		MY 149510 A	13 Sep 2013
		TW 200800315 A	01 Jan 2008
		TW I486185 B	01 Jun 2015
		US 2009173343 A1	09 Jul 2009
US 8631793 B2	21 Jan 2014		
US 2004/0078943 A1	29 April 2004	US 2004078943 A1	29 Apr 2004
		US 6802109 B2	12 Oct 2004

Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001.

Form PCT/ISA/210 (Family Annex)(July 2009)

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/NZ2015/050186

This Annex lists known patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document/s Cited in Search Report		Patent Family Member/s	
Publication Number	Publication Date	Publication Number	Publication Date
		EP 1465507 A1	13 Oct 2004
		EP 1465507 B1	29 Nov 2006
		FR 2834870 A1	25 Jul 2003
		FR 2834870 B1	19 Mar 2004
		JP 2005514139 A	19 May 2005
		JP 4593111 B2	08 Dec 2010
		KR 20040076575 A	01 Sep 2004
		KR 100895229 B1	04 May 2009
		WO 03059107 A1	24 Jul 2003

End of Annex