

INSTRUCTIONS
(a) If Convention application insert "Convention"

(a) convention
AUSTRALIA 603108
Patents Act

(b) Delete one

APPLICATION FOR A (b) STANDARD ~~PETTY~~ PATENT

(c) Insert FULL name(s) of applicant(s)

~~XY~~/We (c) **OLIN HUNT SPECIALTY PRODUCTS, INC.**

(d) Insert FULL address(es) of applicant(s)

of (d) **350 Knotter Drive
Cheshire, Connecticut 06410-0586
UNITED STATES OF AMERICA**

(e) Delete one

hereby apply for the grant of a (e) Standard/~~Petty~~ Patent for an invention entitled

(f) Insert TITLE of invention

(f) **PERMANENT MASTER WITH A PERSISTENT LATENT IMAGE
FOR USE IN ELECTROSTATIC TRANSFER TO A
RECEIVING SUBSTRATE**

(g) Insert "complete" or "provisional" or "petty patent"

which is described in the accompanying (g) complete specification.

(Note: The following applies only to Convention applications)

Details of basic application(s)

(h) Insert number, country and filing date for the/or each basic application

	Application No.	Country	Filing Date
(h)	884,847	UNITED STATES OF AMERICA	11 July, 1986

APPLICATION ACCEPTED AND AMENDMENTS

ALLOWED 17-8-90


Address for Service:

**PHILLIPS ORMONDE AND FITZPATRICK
Patent and Trade Mark Attorneys
367 Collins Street
Melbourne, Australia 3000**

(i) Insert date of signing

Dated (i) **11 July, 1990**

(j) Signature of applicant(s) (For body corporate see headnote*)



(k) Corporate seal if any

(j) **PHILLIPS ORMONDE & FITZPATRICK
Attorneys for:**

OLIN HUNT SPECIALTY PRODUCTS, INC.

David B Fitzpatrick

Note: No legalization or other witness required

**PHILLIPS ORMONDE AND FITZPATRICK
Patent and Trade Mark Attorneys
367 Collins Street
Melbourne, Australia**

AUSTRALIA

Patents Act

DECLARATION FOR A PATENT APPLICATION

▼ INSTRUCTIONS

- (a) Insert "Convention" if applicable
 (b) Insert FULL name(s) of applicant(s)

In support of the (a) convention application made by
 (b) OLIN HUNT SPECIALTY PRODUCTS, INC.

- (c) Insert "of addition" if applicable
 (d) Insert TITLE of invention

(hereinafter called "applicant(s)" for a patent (c) for an
 invention entitled (d)

PERMANENT MASTER WITH A PERSISTENT LATENT IMAGE FOR USE IN
 ELECTROSTATIC TRANSFER TO A RECEIVING SUBSTRATE

- (e) Insert FULL name(s) AND address(es) of declarant(s) (See headnote*)

I/~~We~~ (e) Thomas P. O'Day, Assistant Secretary of Olin Hunt Specialty Products, Inc. of 350 Knotter Drive, Cheshire, Connecticut 06410-0586, United States of America

do solemnly and sincerely declare as follows:

1. ~~I am/We are the applicant(s).~~
 (or, in the case of an application by a body corporate)
1. I am/~~We are~~ authorized to make this declaration on behalf of the applicant(s).
2. ~~I am/We are the actual inventor(s) of the invention.~~
 (or, where the applicant(s) is/are not the actual inventor(s))
2. (f) David Patrick Bujese
 14 Stony Hill Road
 Butler, New Jersey 07405
 United States of America

- (f) Insert FULL name(s) AND address(es) of actual inventor(s)

- (g) Recite how applicant(s) derive(s) title from actual inventor(s) (See headnote**)

is/~~are~~ the actual inventor(s) of the invention and the facts upon which the applicant(s) is/~~are~~ entitled to make the application are as follows:

- (g) The applicant is the assignee of the invention from the said actual inventor.

(Note: Paragraphs 3 and 4 apply only to Convention applications)

- (h) Insert country, filing date, and basic applicant/for the/or EACH basic application

3. The basic application(s) for patent or similar protection on which the application is based is/~~are~~ identified by country, filing date, and basic applicant(s) as follows:

- (h) United States of America
 July 11, 1986
 David Patrick Bujese

4. The basic application(s) referred to in paragraph 3 hereof was/~~were~~ the first application(s) made in a Convention country in respect of the invention the subject of the application.

- (k) Insert PLACE of signing

Declared at (k) Cheshire, Connecticut U.S.A.

- (l) Insert DATE of signing

Dated (l) May 27th, 1987

- (m) Signature(s) of declarant(s)

(m) Thomas P. O'Day
 Thomas P. O'Day

Note: No legalization or other witness required

To: The Commissioner of Patents

Assistant Secretary

Olin Hunt Specialty Products, Inc.

(12) PATENT ABRIDGMENT (11) Document No. AU-B-74509/87
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 603108

(54) Title
PERMANENT MASTER FOR ELECTROSTATIC TRANSFER TO SUBSTRATE

International Patent Classification(s)
(51)⁴ **G03G 013/26 G03G 007/00 G03G 013/22 H05K 003/02**

(21) Application No. : **74509/87** (22) Application Date : **19.06.87**

(30) Priority Data

(31) Number (32) Date (33) Country
884847 11.07.86 US UNITED STATES OF AMERICA

(43) Publication Date : **19.05.88**

(44) Publication Date of Accepted Application : **08.11.90**

(71) Applicant(s)
OLIN HUNT SPECIALTY PRODUCTS, INC.

(72) Inventor(s)
DAVID PATRICK BUJESE

(74) Attorney or Agent
PHILLIPS ORMONDE & FITZPATRICK, 367 Collins Street, MELBOURNE VIC 3000

(56) Prior Art Documents
AU 591276 72290/87 G03G 5/026 13/22

(57) Claim

1. A method of making a permanent master with a persistent latent image for use in repeated electrostatic image transfer to receiving surfaces, comprising the steps of:

(a) coating a conductive substrate with a photosensitive material that will undergo a change in resistivity upon exposure to a source of actinic radiation, thereby forming an electrostatically imageable surface;

(b) forming a persistent latent image on the photosensitive material by exposing the photosensitive material to actinic radiation through a phototool to form non-imaged areas of less electrical resistivity and a latent image area of higher electrical resistivity;

(c) charging the electrostatically imageable surface to form electrostatically contrasted non-imaged areas and a latent image area corresponding to the non-imaged areas of less electrical resistivity and the latent image area of higher electrical resistivity; and

(d) mounting the conductive substrate to a rigid dielectric material.

17. A permanent master for use in repeated electrostatic image transfers to receiving surfaces, comprising in combination:

a. a conductive substrate mounted to a rigid dielectric material; and

b. a photosensitive material applied to the conductive substrate, the photosensitive material further having an electrostatic persistent latent image thereon after undergoing a change in electrical resistivity from exposure to actinic radiation, the photosensitive material thereby having non-imaged areas of lesser electrical resistivity and a latent image area of greater electrical resistivity;

c. a charged electrostatically imageable surface formed by the photosensitive material and the conductive substrate, the charged electrostatically imageable surface further having electrostatically contrasted non-imaged areas and a latent image area corresponding to the non-imaged areas of less electrical resistivity and the latent image area of higher electrical resistivity.

AUSTRALIA
Patents Act

603108

**COMPLETE SPECIFICATION
(ORIGINAL)**

Application Number:
Lodged:

Class

Int. Class

Complete Specification Lodged:
Accepted:
Published:

Priority

Related Art:

This document contains the
amendment made under
Section 49 and is correct for
printing.

APPLICANT'S REFERENCE: E884,847

Name(s) of Applicant(s):

Olin Hunt Specialty Products, Inc.

Address(es) of Applicant(s):

350 Knotter Drive
Cheshire, Connecticut 06410-0586
UNITED STATES OF AMERICA.

Address for Service is:

PHILLIPS ORMONDE & FITZPATRICK
Patent and Trade Mark Attorneys
367 Collins Street
Melbourne 3000 AUSTRALIA

Complete Specification for the invention entitled:

**PERMANENT MASTER WITH A PERSISTENT LATENT IMAGE FOR USE IN
ELECTROSTATIC TRANSFER TO A RECEIVING SUBSTRATE**

Our Ref : 58572
POF Code: 1439/65923

The following statement is a full description of this invention, including
the best method of performing it known to applicant(s):

-1A-

C-9441

PERMANENT MASTER WITH A PERSISTENT
LATENT IMAGE FOR USE IN ELECTROSTATIC TRANSFER
TO A RECEIVING SUBSTRATE

This application is a continuation-in-part of application Serial No. 848,669 filed April 4, 1986; which is a continuation-in-part of application Serial No. 655,346, filed September 27, 1984, now abandoned.

Background of the Invention

This invention relates generally to a method of high resolution electrostatic transfer of a high density image to a nonporous, nonabsorbent conductive receiving surface. More specifically, it pertains to the permanent master used to make such a transfer, the method of creating a persistent latent image on a permanent master employing a photosensitive material, such as a liquid or dry film photoresist, and the method of transferring from that master. The permanent master that may be repeatedly used to produce high resolution and high density images on receiving surfaces, such as printed circuit boards.

The production of conductive wiring patterns on an insulating substrate employing a dry film resist by use of photoimaging and other techniques to produce a printed circuit board typically employs a five

step process. Regardless of whether a tenting method or a hole-plugging method is employed, the five distinct steps have included laminating or coating a photosensitive dry film resist on at least one
5 conductive surface of an insulating substrate, forming a wiring pattern on the dry film resist by use of artwork or a phototool and exposing the dry film resist to actinic radiation through the transparent areas of the phototool, developing the circuit board by removing the
10 unexposed portions of the negative working dry film resist, etching the conductive substrate from the circuit board in all non-imaged areas not beneath the desired conductive wiring pattern which is still covered with the dry film resist, and finally stripping or
15 removing the dry film resist covering the desired wiring pattern from the non-etched portions of the conductive substrate. This five step process must be repeated for each circuit board produced.

During the exposure step in the standard dry
20 film process, sufficient radiation exposure levels and exposure times are desired to produce straight sidewalls in the dry film resist that are the result of a pattern of the cross-linking of polymers in the dry film. These straight sidewalls should be normal to the conductor
25 surface. Practically, however, for example in the standard negative working dry film photoresist print and etch process, either underexposure occurs, producing a sidewall edge that undercuts the desired resist pattern, or overexposure occurs, producing a sidewall edge in the
30 dry film photoresist that increases the width of the dry film photoresist at the base of the resist and the surface of the conductor causing a foot. Both of these conditions vary the width of the ultimate conductive
35 pattern from that which is desired, beyond the planned and engineered tolerance or overage of the line widths in the conductor surface.

The development step during this process ideally should dissolve away the unexposed and, therefore, uncross-linked areas of the negative working dry film resist to produce an edge in the dry film resist on the conductor surface that is equal in width to the pattern on the phototool and normal to the conductor surface. Practically, however, either underdevelopment or overdevelopment of the dry film photoresist occurs. Underdevelopment produces a buildup of resist residue in the sidewall zone or developed channels that is sloped toward the adjacent sidewall, resulting in smaller spaces between the adjacent lines than is desired. When overdevelopment occurs the unexposed film resist edge is undercut, producing larger than desired spacing between adjacent lines.

Additionally, there is the potential for some rounding at the top of the resist surface sidewall edges.

This inability to accurately reproduce the phototool throughout the thickness of the dry film resist affects the fine line resolution and reproduction characteristics of the reproduced circuit pattern. As circuit boards have become more complex and stacking of multiple boards has become prevalent, the need for higher density, finer resolution circuit patterns has evolved. Resolution has been viewed as the ability to reliably produce the smallest line and space between adjacent lines that can be reliably carried through the aforementioned five step processing. The thinness or smallness of the lines that can survive development and the narrowness of the gap or space between the adjacent lines in the circuit pattern have led to fine line resolution and reproduction standards in the printed circuit board industry calling for about 3.1 mil line and space dimensions or the development of about 6.3 line pairs per millimeter. These standards are used to define the desired density of the circuit board.

The attempt to apply the principles of xerography to transfer developed electrostatic latent images from a photoconductor's electrostatically imaged surface to a receiver surface with high resolution and high density images has encountered difficulty. The major source of this difficulty stems from the fact that circuit boards consist of a nonporous or nonabsorbent substrate, such as metal, like copper, or a plastic, like the polyester film sold under the tradename of MYLAR. This nonporous and nonabsorbent receiving surface causes the image being transferred, especially when attempted with a liquid toner, to become distorted or "squished".

Xerographic techniques solved the problem of transferring an image to absorbent receiving surfaces, such as paper, by transferring the images formed by toner particles across a gap. The gap has either been an air or a combination air-liquid gap. Attempts to translate this gap transfer technology to nonporous substrates, however, resulted in image "squish" and the realization that the gap space and the voltage must be carefully controlled to produce an acceptable transferred toner image with the proper resolution and density. If the voltage and the gap space or distance between the photoconductor or the electrostatically imageable surface and the conductive receiving surface are not carefully controlled, electrical arcing across the gap will occur. This can cause pin-holes in the transferred toner image by permanently damaging the electrostatically imageable surface. This is especially significant in print and etch applications used to manufacture printed circuit boards.

Also, it has been found with nonporous receiving substrates that both the photoconductor or electrostatically imageable surface and the receiving

conductive surface must be stationary at the point of transfer of the toner image to achieve a transferred image of high resolution.

5 An additional problem is presented in transferring the developed latent image electrostatically to a nonabsorbent substrate, such as copper. The metal or copper surface forming the conductive receiving surface, as well as the electrostatically imageable surface, is uneven so that
10 the spacing between the electrostatically imageable surface and the conductive receiving surface must be sufficient to avoid contact between the uneven surfaces of the photoconductor and the conductive receiving surface.

15 These problems are solved in the process of the present invention by providing a method of making a persistent latent image and a permanent master using a photosensitive material, such as a liquid or a dry film resist. The persistent latent image on the
20 photosensitive material is used to transfer an electrophotographically developed electrostatic latent image from the electrostatically imaged surface of the permanent master to a receiving surface which is preferably, but not exclusively, a conductive,
25 nonabsorbent, and nonporous receiving surface of the type used to produce multiple printed circuit boards with a desired conductive pattern. The permanent master does not have the uncross-linked areas of the photosensitive material dissolved away to obtain the
30 dielectric contrast necessary to effect the image transfer.

The present invention resides in a method of making a permanent master with a persistent latent image for use in repeated electrostatic image transfer to receiving surfaces, comprising the steps of:

(a) coating a conductive substrate with a photosensitive material that will undergo a change in resistivity upon exposure to a source of actinic radiation, thereby forming an electrostatically imageable surface;

(b) forming a persistent latent image on the photosensitive material by exposing the photosensitive material to actinic radiation through a phototool to form non-imaged areas of less electrical resistivity and a latent image area of higher electrical resistivity;

(c) charging the electrostatically imageable surface to form electrostatically contrasted non-imaged areas and a latent image area corresponding to the non-imaged areas of less electrical resistivity and the latent image area of higher electrical resistivity; and

(d) mounting the conductive substrate to a rigid dielectric material.

It is a feature of the present invention that the photosensitive material of the permanent master is charged after the latent image is formed and that the reusable permanent master is capable of resolving about 1.1 mil line and space, or the equivalent of 18 line pair per millimeter.

It is another feature of the present invention that the conductive backing material or the substrate supporting the permanent master is electrically grounded and the conductive receiving surface is electrically isolated from ground during the electrostatic transfer.



It is still another feature of the present invention that the difference in conductivity of the dry film photoresist between the imaged and non-imaged areas on the master is employed to form a persistent electrostatic latent image.

It is another feature of the present invention that the persistent latent image is electrostatically charged, developed and transferred to a conductive receiving surface across a liquid-filled gap.

It is another feature of the present invention that the distance or spacing of the gap between the electrostatically imageable surface and the conductive receiving surface is between about 3 mils and about 20 mils and the distance is maintained by the use between the two surfaces of spacer means which are electrically isolated from ground.

It is still another feature of the present invention with a permanent master used as the electrostatically imageable surface that the electrostatic latent image on the electrostatically imageable surface is persistent and reusable as a master to produce large quantities of printed circuit boards without the need to expose the dry film or liquid photoresist for each circuit board copy.

It is a further feature of the present invention that only the top surface of the dry film photoresist image on the master is used to form the developed image prior to transfer to the conductive receiving surface.

It is yet another feature of the present invention that the transfer of the developed electrostatic image to the conductive receiving surface is accomplished by directly applying D.C. voltage to the conductive receiving surface, rather than corona charging.

It is an advantage of the method of the present invention that high resolution transfer of the toner particles forming the developed latent image is obtained on the conductive receiving surface without image distortion.

It is another advantage of the present invention that there is no damage or abrasion to the permanent master that is the electrostatically imaged surface during the transfer process so that the surface may be continually reused.

It is still another advantage of the present invention that high resolution transfer is achieved because there is no contact between the developed toner particles on the permanent master that is the electrostatically imaged surface and the conductive receiving surface.

It is yet another advantage of the present invention that the power requirements can be reduced to accomplish the electrostatic transfer because of the use of direct applied voltage, rather than corona charging which causes air ionization.

It is still another advantage of the present invention that a faster and lower cost method of making printed circuit boards is achieved because of the elimination of the repeated exposure and development steps required of dry film or liquid photoresists for each circuit board.

These and other objects, features and advantages are obtained by the use of a permanent master and the method of fabricating a toned pattern on an electrically isolated nonabsorbent conductive surface by first establishing an electrostatic latent image on a photosensitive material on a permanent master that is an electrostatically imageable surface. The

electrostatically imageable surface is charged. Charged toner particles are then developed to a latent image area on the photosensitive material of the master and transferred to the conductive receiving surface.

A 5x5 grid of dots forming the number 10. The top row has dots at (1,1), (1,2), (1,3), (1,4), and (1,5). The second row has dots at (2,1), (2,2), (2,3), (2,4), and (2,5). The third row has dots at (3,1), (3,2), (3,3), (3,4), and (3,5). The fourth row has dots at (4,1), (4,2), (4,3), (4,4), and (4,5). The bottom row has dots at (5,1), (5,2), (5,3), (5,4), and (5,5).

Brief Description of the Drawings

The objects, features and advantages of the invention will become apparent upon consideration of the following detailed disclosure of the invention, especially when it is taken in conjunction with the accompanying drawings wherein:

FIGURE 1 is a diagrammatic illustration of the prior art print and etch printed circuit board fabrication steps; and

FIGURE 2 is a diagrammatic illustration of the process of the present invention employing a permanent master that is reusable to produce multiple copies of a desired conductive wiring pattern on an insulating dielectric layer by the migration of charged toner particles from the master across a liquid-filled gap to a conductive receiving surface.

Detailed Description of the Preferred Embodiment

FIGURE 1 shows the standard five step process that has been previously employed in the production of printed circuit boards. Each one of the circuit boards produced has routinely required the application of a dry film to a conductive substrate, such as copper, that is laminated to a nonconductive substrate, such as fiberglass epoxy, with pressure and heat. A mask is then applied over the dry film to permit selective exposure from a light source or other source of actinic radiation to produce the desired pattern. Development takes place by removing the uncross-linked dry film, leaving only cross-linked dry film with the desired pattern. Etching with an acid etchant removes the conductive copper substrate from between the areas of cross-linked dry film. Finally, stripping the dry film from the remaining conductive copper substrate exposes the desired circuit pattern. This is commonly known as the print and etch process.

In the process of the present invention, however, a permanent master is produced with the use of a photosensitive material or coating, such as a dry film or liquid photoresist over a conductive substrate. Thereafter, dry film or liquid photoresist is not employed to produce the desired conductive wiring patterns from the permanent master on the product circuit boards.

The permanent master is used as an electrostatically imageable surface as shown in FIGURE 2. A conductive backing has a photosensitive material, such as a dry film or liquid photoresist, applied to it on at least one side. This photosensitive material undergoes a change in resistivity upon exposure to actinic radiation because of the cross-linking of the polymers in the material. A persistent image is formed on the

photosensitive material by actinically radiating through a mask or by "writing" the desired pattern with a digital laser pen. Either method produces electrostatic contrasts or differences in the resistivity between imaged and non-imaged areas on the photosensitive material. The electrostatically imageable surface is isolated from ground and charged with a corona charging device to produce the charged latent image.

The electrostatically imageable surface is then developed by the application, through surface adsorption, of a liquid comprised at least partially of a nonpolar insulating solvent that serves as a liquid carrier for toner particles that are charged oppositely to the charge of the electrostatically imageable surface. This application can be accomplished by flooding, dipping or spraying the electrostatically imageable surface. The charged toner particles are directed to the latent image area of the electrostatically imageable surface to form or develop the latent image.

Thus developed, the image is formed on the electrostatically imageable surface according to the persistent latent image's pattern on the permanent master. The developed image thus is ready for transfer to an electrically isolated conductive receiving surface to produce a circuit board with the desired conductive wiring pattern.

The conductive receiving surface is first coated with a liquid that comprises at least partially a nonpolar insulating solvent. The solvent is the same as, or an equivalent to that which is applied to the electrostatically imageable surface and may be applied by sponge, squeegee, rubber roller or other means capable of applying a thin continuous film. The solvent should preferably have a high resistivity and a low viscosity

to permit the charged toner particles to migrate or flow through the solvent from the charged electrostatic latent image area on the electrostatically imageable surface to the conductive receiving surface. The solvents are generally mixtures of C_9 - C_{11} or C_9 - C_{12} branched aliphatic hydrocarbons sold under the tradename Isopar G and Isopar H, respectively, manufactured by the Exxon Corporation, or equivalents thereof. The electrical resistivity is preferably on the order of at least about 10^9 ohm-centimeters and the dielectric constant preferably is less than about 3 1/2. The use of nonpolar insulating solvents with these characteristics helps to ensure that the pattern of charged toner particles is not dissipated.

After a D.C. voltage optimally between about 200 to about 1200 volts is applied to the conductive receiving surface to establish an electric field between the electrostatically imageable surface and the conductive receiving surface, the surfaces are moved close enough together to create a completely liquid transfer medium by the contact of the two layers of nonpolar insulating solvent. The first liquid surface of the first layer of nonpolar insulating solvent on the electrostatically imageable surface and the second liquid surface of the second layer of nonpolar insulating solvent on the conductive receiver surface join together to fill the gap between the two surfaces. The voltage necessary to establish the electric field between the electrostatically imageable surface and the conductive receiving surface operably can be between about 200 to about 3500 volts, but is preferably between about 200 and about 1500 volts and optimally is as stated above. The ability to transfer a high resolution image is a function of the combined factors of the toner, the liquid carrier, the gap spacing and the

voltage applied. Generally, a greater gap spacing requires a higher voltage to effect a high quality, high resolution image transfer.

5 A uniform spacing across this gap is maintained by the use of spacer strips or gap spacers, seen in FIGURE 2, which are electrically isolated from ground. The developed image from the electrostatically imageable surface is transferred across the gap through the liquid medium to the conductive surface to form an imaged area in a pattern similar to that of the phototool where the transferred toner particles are present and non-imaged areas where the particles are absent.

10 The transfer of the developed image across the liquid-filled gap takes place at the point of transfer by maintaining a first plane taken through the electrostatically imageable surface parallel to a second plane taken through the conductive receiving surface. The electrostatically imageable surface and the conductive receiving surface at the point of transfer should have no relative motion occurring between them, although the point of transfer could be a stationary or rolling point of transfer. A drum or web, or a stationary flat surface could be employed for the electrostatically imageable surface, transferring the developed image across the gap to a flat and stationary, or a moving conductive receiving surface. The moving conductive receiving surface could be a rolling drum or a web or other appropriate means. The electrostatically imageable and conductive receiving surfaces must be held in place at the point of transfer, such as by a vacuum, or alternately could be accomplished by magnetically or electrostatically holding the surfaces in place across the gap.

15 This gap between the electrostatically imageable surface and the conductive receiving surface is preferably maintained between at least about 3 mils

(.003 inch) and about 10 mils (.010 inch) by the use of spacer strips of the desired thickness. By maintaining the gap greater than about 3 mils, the inconsistencies or irregularities in the two surfaces are separated sufficiently to prevent any contact from occurring between the two surfaces and any possible abrasion or scratching from occurring to the surface of the master or electrostatically imageable surface.

The spacer strips or gap spacers are selected from either conductive materials, such as metal, or nonconductive materials, such as polyester film sold under the tradename MYLAR, or cellophane. The strips must be electrically isolated from ground and be of uniform thickness. The uniform thickness insures that a uniform gap spacing is obtained between the electrostatically imageable surface and the conductive receiving surface. The spacer strips preferably should be placed outside of the image area.

By applying the first and second layers of nonpolar insulating solvent in sufficient thickness to the electrostatically imageable surface and the conductive receiving surface to fill the gap therebetween, the first liquid surface and the second liquid surface of the first and second layers of the nonpolar insulating solvent join together to form a continuous liquid transfer medium at the point of transfer of the charged toner particles between the electrostatically imageable surface and the conductive receiving surface. By traveling through a continuous sea of liquid transfer medium, there are no surface tension forces which the charged toner particles must

overcome that could hinder their migration from the electrostatically imageable surface to the conductive receiving surface. The charged toner particles are directed through the liquid transfer medium formed by the joining of the two layers of nonpolar insulating solvent at this point of transfer by the electric field that is applied at the point of transfer.

As is diagrammatically illustrated in FIGURE 2, the charged toner particles with their predetermined charge, migrate from the oppositely charged cross-linked imaged area with the photosensitive material on the electrostatically imageable surface to the conductive receiving surface as individual or grouped particles. The conductive receiving surface is laminated onto an insulating dielectric layer, such as a fiberglass epoxy. The applied electric transfer field causes the toner particles to migrate through the liquid transfer medium of the nonpolar insulating solvent and attach to the conductive receiving surface to create imaged areas where the toner particles are present and non-imaged areas where they are absent.

Since the photosensitive material, such as a dry film or liquid photoresist, on the electrostatically imageable surface acts as a master electrostatic image plate, and the resistivity difference between the imaged and non-imaged areas on the electrostatically imageable surface remains relatively constant in most instances for sustained periods of time dependent upon the photoresist used, multiple copies can be made by the electrostatic transfer method. To repeat the procedure, excess nonpolar insulating solvent and excess toner particles on the electrostatically imageable surface should be removed, such as by rinsing, followed by a physical wiping or squeegeeing. Any residual electric charge on the electrostatically imageable area should be

discharged, such as by charging the photosensitive material's surface with an alternating current corona.

5 The desired electrostatic latent image pattern remains in the photosensitive material by using the material's ability to retain differences in resistivity for relatively long periods of time after having been exposed to actinic radiation to form cross-linked imaged areas of increased resistivity and non-imaged areas unexposed to the actinic radiation which remain the less
10 resistive or background areas. The photosensitive material, such as a dry film resist, typically is formed of polymers which become cross-linked to form the imaged areas of greater electrical resistivity that should be an order of magnitude, or greater, more dielectric than
15 the background or unexposed areas, dependent upon the process speed of the image transfer. Faster process speeds will require greater resistivity differentials.

For fine line image transfer the resistivity of the photosensitive material can range between 10^{17} to
20 10^{11} ohm-centimeters, depending upon the material. The background or non-imaged areas should typically have an electrical resistivity of 10^{10} ohm-centimeters. For comparative purposes, the resistivity of various materials, including some traditionally considered as
25 insulating materials, are known. Electronic grade Mylar polyester film has a resistivity of about 10^{17} ohm-centimeters, aluminum oxide ceramic about 10^{16} ohm-centimeters, various grades of mica from 10^{13} to
30 10^{17} ohm-centimeters, unexposed Dynachem AX dry film about 10^{13} ohm-centimeters, and various grades of Union Carbide's Bakelite copolymer plastics from about 10^7 to 10^{16} ohm-centimeters. DuPont's Riston 3615 dry film has a resistivity of about 10^{10} ohm-centimeters.

These imaged areas, formed by the exposure of the photosensitive material to actinic radiation, are the only areas of increased resistivity that hold a high voltage charge when charged by a D.C. charge corona, if the conductive backing is electrically grounded. The non-imaged or background areas with the lesser electrical resistivity very rapidly release or leak the charge through the grounded conductive backing. The charged toner particles suspended in the nonpolar insulating solvent are oppositely charged to these latent imaged areas so that the charged toner particles are attracted to them. This then permits the transfer of these charged toner particles from the electrostatically imageable surface across the liquid gap to the conductive receiving surface as previously described.

Once the toner image is formed by the toner particles in the imaged area on a conductive receiver surface, the particles are fused to the conductive receiving surface by heating, as illustrated diagrammatically in FIGURE 2. The heat can be provided either by the use of an oven or directed warm air through an air slot so that the heat is supplied for a finite period of time sufficient to reach the temperature at which the binder or polymer forming the toner particles will solvate in the liquid which is entrained within the transferred image. The fusing, for example, can occur for about 15 to about 20 seconds at a temperature greater than about 100°C and up to about 180°C.

Thereafter the non-imaged areas are etched to produce the desired conductive wiring pattern in the unetched conductive receiver surface which is overcoated with the toner particles. The etching step utilizes a

5 solution that cannot remove the conductor material from
the areas of the conductive receiving surface protected
by the toner particles, but does attack and remove the
conductor material from the areas unprotected by the
toner particles. The particular type of etchant
employed depends, in part, on the conductor material
being etched and the type of resist being used, so that
both acid and very mild alkaline etching solutions are
possible for use. For example, when the conductive
10 receiving surface is copper, an etchant comprising
acidic cupric chloride is preferably used.

15 The final step in the electrostatic transfer
process to form the copy is the stripping step. During
this step the toner particles are appropriately removed
or stripped from the imaged areas, such as by rinsing
with methylene chloride, acetone, an alkaline aqueous
solution or other suitable solution.

20 In order to exemplify the results achieved, the
following examples are provided without any intent to
limit the scope of the instant invention to the
discussion therein. The examples are intended to
illustrate the manner in which a permanent master with a
persistent conductive latent image on the
electrostatically imageable surface can be obtained and
25 how the gap spacing and voltage levels can be varied to
achieve successful electrostatic image transfer. The
examples also illustrate, whether a photoconductor or a
permanent master is used as the electrostatically
imageable surface, how successful electrostatic image
30 transfer can be achieved without the need for the
application of a dry film or liquid resist to each
conductive receiving surface prior to the transfer of
the developed latent image from the electrostatically
imageable surface.

Example 1

A liquid toner was prepared for use by preparing the following raw materials in the amounts shown in a high speed disperser:

5	<u>Raw Material</u>	<u>Amount (grams)</u>	<u>Description</u>
	ISOPAR H	1248.6	solvent-carrier
	UNIREZ 7059 (Union Carbide)	439.2	alcohol insoluble maleic modified rosin ester
10	Allied AC Polyethylene 6A	307.8	linear polyethylene
	BAKELITE DPD 6169 (Union Carbide)	1584.0	ethylene- ethylacrylate copolymer 20% shock- cooled suspension in ISOPAR H
15	phthalocyanine green	229.2	coloring agent - pigment
20	Alkali Blue G	158.4	coloring agent - pigment

These components were mixed at a speed of 8000 rpm for 10 minutes while maintaining the temperature of the mixture between 160 and 220°F.

606 Grams of an amphipathic graft copolymer system was prepared by mixing 104.3 grams of lauryl methacrylate and 44.7 grams of methyl methacrylate, both available from Rohm and Haas, and 3.0 grams of azobis isobutonitrile, available from DuPont as Vazo 64.

Next 108.2 grams of an amphipathic copolymer stabilizer was prepared according to the procedure described hereafter. In a 1 liter reaction flask equipped with a stirrer, a thermometer and a reflux condensor is placed 400 grams of petroleum ether (b.p.

90°-120°C) and the same is heated at atmospheric pressure to a moderate rate of reflux. A solution is made of 194 grams lauryl methacrylate, 6.0 grams of glycidyl methacrylate and 3.0 grams of benzoyl peroxide paste (60 percent by wt. in dioctyl phthalate) and placed in a 250 ml. dropping funnel attached to the reflux condensor. The monomer mixture is allowed to drip into the refluxing solvent at such a rate that it requires 3 hours for the total amount to be added. After refluxing 40 minutes at atmospheric pressure beyond the final addition of monomer, 0.5 grams of lauryl dimethyl amine is added and the refluxing is continued at atmospheric pressure for another hour. Then 0.1 gram hydroquinone and 3.0 grams methacrylic acid are added and refluxing continued under a nitrogen blanket until about 52 percent esterification of the glycidyl groups is effected (about 16 hours). The resulting product is slightly viscous straw-colored liquid.

345.8 Grams of ISOPAR H from Exxon Corporation was added to the 108.2 grams of the amphipathic copolymer stabilizer and the aforementioned quantities of lauryl methacrylate, methyl methacrylate and azobis isobutnitrile to form the 606 grams of amphipathic graft copolymer system. Polymerization was effected by heating this solution to about 158°F under a nitrogen atmosphere for about 4 to about 20 hours.

606 Grams of additional ISOPAR H was added to the above solution and mixing was continued for 10 minutes at 8000 RPM while the temperature was maintained between about 160°F and 180°F.

Finally, 3578 grams of ISOPAR H was added, the mixer speed reduced to 1000-2000 RPM, and mixing continued for 30 minutes. During this last step, the temperature of the mixture was maintained between 120°F and 140°F.

Next a liquid toner concentrate was prepared by combining the following in a static attritor-type mill:

	<u>Material</u>	<u>Amount (grams)</u>	<u>Description</u>
5	Predispersion Mix	1022.7	liquid toner predispersion
	Carnauba wax	58.3	wax
10	polymer dispersion	83.3	amphipathic polymer dispersion as prepared in Ex. XI of Kosel U.S. Patent No. 3,900,412
15	Neocryl S-1004	62.4	amphipathic polymer dispersion available from Polyvinyl Chemical Industries, Div. of Beatrice 730 Main St. Wilmington, MA 01887
20	ISOPAR H	694.5	solvent-carrier

25. These components were milled for three hours at 300 RPM and a temperature of about 75°F to create a toner concentrate. The toner concentrate was further diluted to about 1 to about 2 percent solids to create the working solution for use in electrostatic imaging.

30. A cadmium sulfide photoconductor overcoated with a MYLAR polyester film layer (typical of the NP process type) was corona charged and then light exposed to a circuit trace pattern from about 0.75 to about 2.70 microjoules/square centimeter in a Canon Model 1824 copier to create a charged latent image. The charged latent image was developed by applying the liquid toner to the overcoated cadmium sulfide photoconductor that is the electrostatically imageable surface. The electrostatically imageable surface of this photoconductor is mounted over an inner aluminum substrate drum. The drum was removed

35.

from the copier. A high voltage power source had its ground lead connected to the interior of the drum and its positive lead connected to the copper surface of the conductive receiving surface. Cellophane spacer strips or gap spacers were used between the drum and the conductive surface. The conductive surface was coated with a liquid that included the nonpolar insulating solvent. The electrostatically imageable surface of the drum was coated during the development step. 1000 Volts D.C. current was applied and the gap was set at 10 mils.

The cadmium sulfide drum was manually rolled across the spacer strips to create points of transfer of the latent image from the electrostatically imageable surface to the conductive receiving surface of copper. The image transfer was successful with the image possessing excellent resolution and good density.


Example 2

5 The cadmium sulfide photoconductor drum of
Example 1 was cleaned and dried. The same liquid was
utilized with the same photoconductor latent image
obtained in the same apparatus as in Example 1. The
drum was wetted with the liquid transfer medium and the
steps Example 1 were repeated. The liquid transfer
medium was applied to the conductive receiving surface.
10 500 Volts of D.C. voltage was applied and the same gap
space was set as in Example 1. The image transfer was
successful, but the amount of the transferred toner
particles forming the transferred image was less than
the amount in Example 1 and was very light over the
entire image area. There appeared to be insufficient
15 voltage applied to transfer the majority of the toner
particles over a 10 mil gap.

Example 3

5 The same steps and liquid transfer medium as employed in Example 2 were repeated. The conductive receiving surface was wetted with the liquid transfer medium by applying to the conductive receiving surface with a squeegee. The spacer strips were set at 3 mils to achieve a uniform 3 mil separation between the two surfaces and a voltage of 1000 volts was employed.

10 A clear high resolution image with good density was obtained but some void areas appeared in the image. The image was uniform and distinct.



Example 4

5 The same steps and liquid transfer medium were
employed as in Example 3, but the gap spacers were 3 mil
thickness to establish the 3 mil gap between the
electrostatically imageable surface and the conductive
receiving surface. 200 Volts D.C. current was applied
to establish the electric field. A very clear high
resolution image was transferred from the
10 electrostatically imageable surface to the conductive
receiving surface, which exhibited good reflectance
image density. The density of the pad areas and line
traces, however, was somewhat less than that achieved in
Example 3 because all of the toner particles apparently
were not transferred.

Example 5

5 The same steps and liquid transfer medium were
employed as used in Example 2, but the liquid was
squeegeed on. The gap spacers were 1 mil thick to
establish a 1 mil gap between the electrostatically
imageable surface and the conductive receiving surface.
10 1000 Volts D.C. was applied to create the electric
field. The transferred image had good image density,
but there were many hollow spots due to arcing. Some
image distortion was present, apparently due to the
closeness of the two surfaces and the resultant
"squishing" of the toner particles. The use of a
system, such as a vacuum hold-down system, which permits
the receiving substrate to be held rigidly flat would
15 have reduced the image distortion. Most of the
transferred image was not distorted.

Example 6

5 A 4" x 5" electrically conductive substrate of
aluminum foil, CDA alloy #1145-H18, full hard temper
with a scratch brush finish, was selected as the
conductive substrate for use in making the
electrostatically imageable surface of the permanent
master. The aluminum substrate was checked for need of
cleaning or degreasing. If necessary, the substrate can
be cleaned with methyl chloride, methylene chloride or
10 trichloroethylene to promote good adhesion of the
photoresist to the cleaned surface during the subsequent
lamination step. In this particular instance cleaning
was not necessary. DuPont Riston 215 dry film
photoresist was laminated to the substrate as the
15 photosensitive material. The lamination was
accomplished with the use of a Western Magnum Model
XRL-360 laminator made by Dynachem of Tustin, CA. The
lamination was carried out at a roll temperature of
about 220°F and a speed of about six feet per minute.
20 A protective top layer of approximately .001 inch thick
polyethylene terephthalate, hereafter PET, film was
retained over the dry film photoresist of the aluminum
foil/Riston 215 laminate.

25 The laminate was exposed to actinic radiation
through a negative phototool using the Optic Beam 5050
exposure unit manufactured by Optical Radiation
Corporation. The exposure was accomplished after the
laminate cooled to room temperature following the
laminating process. The exposure level was
30 approximately 250 millijoules. The phototool was a
Microcopy Test Target T-10 resolution test chart, with
groups of bars varying from 1.0 cycles or line pairs per
millimeter to 18 cycles or line pairs per millimeter,
and is sold by Applied Image, Inc. of Rochester, New
35 York.

The master thus formed was allowed to stabilize for about 30 minutes to allow photogenerated cross-linking to be completed and then the protective layer of PET film was peeled away from the dry film photoresist. The aluminum foil under the electrostatically imageable surface was then grounded, and the surface was corona charged so that the imaged area received a positive charge. After a suitable time delay up to several seconds duration to allow the background areas to discharge, the charged latent image was then electrophotographically developed by applying the liquid toner of Example 1 to the electrostatically imageable surface. The electrostatically imageable surface was then rinsed with Isopar H solvent carrier to remove excess toner particles. The permanent master was then ready for transfer of the developed image from the master to a conductive receiving surface.

Example 7

5 A 4" x 5" electrically conductive substrate of
copper was mounted on a glass epoxy support substrate
known as FR 4. The conductive surface of the laminate
was checked to ensure that it was clean and not in need
of degreasing. If necessary, the substrate can be
cleaned with methyl chloride, methylene chloride or
trichloroethylene to promote good adhesion of the
photoresist to the cleaned surface during the subsequent
10 lamination step. In this particular instance cleaning
was not necessary. DuPont Riston 3615 dry film
photoresist was laminated to the surface, using the
Western Magnum Model XRL-360 run at a speed of six feet
per minute and a roll temperature of about 220°F. A
15 protective top layer of approximately .001 inch thick
PET film was retained over the dry film photoresist of
the copper/Riston 3615 laminate.

After allowing the laminate to cool to room
temperature for about 10 to 15 minutes the dry film was
20 exposed in two steps to actinic radiation to a negative
phototool. A pre-fogging for about five seconds by an
ADDALUX Model 1421-40 unit, produced by Berkeley
Technical Corporation of Woodside, NY was accomplished
at an energy level of about 25 millijoules. The second
25 step of the exposure process involved exposing the
negative phototool and the electrostatically imageable
surface to an energy level of approximately 475
millijoules or an exposure time of about 55 seconds.
The negative phototool was a Microcopy Test Target T-10
30 resolution test chart sold by Applied Image, Inc. of
Rochester, New York. The bar groups on the phototool
varied the line pairs from 1.0 cycles or line pairs per
millimeter to 18 line pairs per millimeter.

The exposed electrostatically imageable surface was then allowed to cool to room temperature for about 30 minutes, thereby permitting cross-linking in the dry film to complete. The protective layer of PET film was peeled away. The copper substrate was grounded and the electrostatically imageable surface was corona charged so that the imaged area received a positive charge. After a short delay of about a second or more to allow background areas to discharge, the charged persistent image was then electrophotographically developed with liquid toner of Example 1. Excess toner particles were rinsed from the developed permanent master with Isopar H solvent carrier without allowing the toner to dry. The developed persistent image on the electrostatic master was then ready for transfer to a conductive receiving surface.

The electrostatic master thus formed was laid flat on a generally flat working surface. Two three (03) mil thick MYLAR polyester spacer strips were placed along a pair of parallel and opposing edges of the master outside of the developed image area.


A flexible conductive receiving surface of 1/2 ounce copper foil laminated to a 1 mil thick Kapton polyimide insulating layer was wrapped around and secured by lap taping the edges to a 1 1/2 inch diameter drum. The receiving surface was wet with a layer of Isopar H solvent carrier by immersing the cylinder. Alternatively, the receiving surface could be coated by pouring the liquid thereover.

An electrical potential of about 800 volts was established to create an electric field across an approximately 3 mil gap. The conductive receiving surface of copper foil was charged with positive polarity with respect to the electrically conductive copper substrate of the master for use with the negatively charged toner particles.

5 The 1 1/2 inch diameter drum with the
conductive receiving surface secured thereto was rolled
over the spacer strips on the edges of the master. As
the roller passed over the master at each discrete point
of transfer the toner particles were transferred from
the master to the conductive receiving surface.

10 The conductive receiving surface was then
exposed to a fan for up to about 30 seconds to dry the
non-imaged areas that comprise the background areas.
The non-imaged areas should be dried while the imaged
areas remain wet so the polymers in the toner particles
can solvate in the solvent carrier and not run outside
of the imaged areas. An air knife can also be used to
effect the drying of the non-imaged areas.

15 The transferred image on the conductive
receiving surface was then fused by placing in an oven
for about 30 seconds. The temperature of the oven prior
to opening was about 180°C. The fusing is
accomplished through a temperature ramping that
20 effectively occurs when the oven door is opened to place
the conductive receiving surface inside because of the
resultant temperature drop within the oven. The oven
temperature gradually increases to the approximate
180°C temperature level after the oven door is closed
25 again.



While the preferred method in which the principles of the present invention have been incorporated is shown and described above, it is to be understood that the present invention is not to be limited to the particular details or methods thus presented, but, in fact, widely different means and methods may be employed in the practice of the broader aspects of this invention.

For example, to effect transfer the electric field established between the electrostatically imageable surface and the conductive receiving surface can be charged with either positive or negative polarity, depending upon the charge of the toner particles, to direct the charged toner particles across the liquid medium. Charged toner particles of negative polarity will be attracted to a positively charged conductive receiving surface or will be repelled by a negative back charging of the electrostatically imageable surface. If charged toner particles of positive polarity are used, they will be attracted to a negatively charged conductive receiving surface or repelled by a positive back charging of the electrostatically imageable surface.

Similarly, in the development of the electrostatically imageable master surface, alternate methods can be used. Negatively charged toner particles will be attracted to a positively charged latent image or vice versa. In the instance of reversal development where the background areas are exposed, the desired image areas on the electrostatically imageable surface will be uncharged and the surrounding non-image areas will be charged the same as the toner particles to cause the charged toner particles to be repelled from the non-image areas onto the desired image area. Also, the nonpolar insulating solvent can equally well be mineral spirits, as long as it possesses high resistivity and low viscosity.

The gap spacing can equally well employ a web-to-web arrangement that will hold the electrostatically imageable surface and the conductive receiving surface at the desired distance.

5 The electric field can be established in several ways. For example, with a conductive receiving surface, such as the copper laminate, or in the case of a dielectric material, such as MYLAR polyester film, backed by a conductive surface the electric field is
10 created by direct charging. Where a dielectric receiving surface, such as MYLAR polyester film, is used front or back charging via conventional corona charging or roller charging can be employed.

15 The electrostatically imageable surface can be a photoconductor, such as a cadmium sulfide surface with a MYLAR polyester film or a polystyrene or a polyethylene overcoating, a selenium photoconductor surface, or suitable organic photoconductors such as
20 carbazole and carbazole derivatives, polyvinyl carbazole and anthracene. Where the electrostatically imageable surface uses a persistent latent image as a permanent master, the surface can be zinc oxide, or organic
photoconductors developed with toner which is fused onto the master, or a dry film or liquid photoresist.

25 The type of photosensitive material applied to the conductive backing to make the permanent master may vary as long as it is permanently imageable and possesses the correct resistivity characteristics. For
30 example, where dry film resists are used, the films may be aqueous, semi-aqueous or solvent based. Photoconductive insulating films of zinc oxide dispersed in a resin binder may also be used.

35 The process disclosed herein has been discussed in the context of producing printed circuit boards. It should be noted, however, that the electrostatic image

transfer process from a permanent master is equally well acceptable for use in the production of labels, high speed production of documents and photochemical machining or milling. The permanent master can be employed with liquid or dry toners. Dry toners can be applied to the photosensitive material that is used to make the permanent master by magnetic brush, particle cascade or particle bed systems.

The scope of the appended claims is intended to encompass all obvious changes in the details, materials and arrangements of parts which will occur to one of skill in the art upon a reading of the disclosure.

Having thus described the invention, what is claimed is:

The claims defining the invention are as follows:

1. A method of making a permanent master with a persistent latent image for use in repeated electrostatic image transfer to receiving surfaces, comprising the steps of:

(a) coating a conductive substrate with a photosensitive material that will undergo a change in resistivity upon exposure to a source of actinic radiation, thereby forming an electrostatically imageable surface;

(b) forming a persistent latent image on the photosensitive material by exposing the photosensitive material to actinic radiation through a phototool to form non-imaged areas of less electrical resistivity and a latent image area of higher electrical resistivity;

(c) charging the electrostatically imageable surface to form electrostatically contrasted non-imaged areas and a latent image area corresponding to the non-imaged areas of less electrical resistivity and the latent image area of higher electrical resistivity; and

(d) mounting the conductive substrate to a rigid dielectric material.

2. The method according to claim 1 further comprising using a dry film photoresist as the photosensitive material.

3. The method according to claim 1 further comprising using a liquid photoresist as the photosensitive material.

4., A method of fabricating a toned pattern on an electrically isolated receiving surface, comprising the steps of:

(a) coating a conductive substrate with a photosensitive material that will undergo a change in resistivity upon exposure to a source of actinic radiation;



(b) forming a persistent latent image on the photosensitive material by exposing to an actinic radiation source to form electrostatically contrasted non-imaged areas and a latent image area, thereby forming an electrostatically imageable surface;

(c) charging the latent image area on the electrostatically imageable surface;

(d) developing the electrostatic latent image area by applying to the electrostatically imageable surface charged toner particles, the charged toner particles being directed to the latent image area of the electrostatically imageable surface to form a developed latent image;

(e) establishing an electric field between the electrostatically imageable surface and the receiving surface;

(f) placing the receiving surface adjacent to the electrostatically imageable surface;

(g) transferring the developed latent image from the electrostatically imageable surface at a point of transfer to the receiving surface to form non-imaged areas and a transferred toner particle image in an imaged area; and

(h) fusing the transferred toner particle image to the receiving surface;

(i) mounting the conductive substrate to a rigid dielectric material.

5. The method according to claim 4 further comprising the steps after step (h) of;

(a) etching the non-imaged areas of the conductive surface to remove the conductive surface from the non-imaged areas of the receiving surface; and the non-imaged areas of the receiving surface; and

(b) removing the toner particles from the imaged area of the receiving surface.

6. The method according to claim 4 further comprising applying to the receiving surface a liquid comprised at least partially of a nonpolar insulating solvent.



7. The method according to claim 4 further comprising maintaining a gap between the receiving surface and the electrostatically imageable surface during transfer of the point of transfer.

8. The method according to claim 4 further comprising using a conductor laminate on which is mounted the receiving surface.

9. The method according to claim 8 further comprising using a conductive receiving surface as the receiving surface.

10. The method according to claim 6 further comprising suspending the charged toner particles in a liquid.

11. The method according to claim 10 further comprising using a liquid comprised at least partially of a nonpolar insulating solvent as the liquid in which the charged toner particles are suspended.

12. A method of fabricating a toned pattern on an electrically isolated receiving surface, comprising the steps of:

(a) coating a conductive substrate with a photosensitive material that will undergo a change in resistivity upon exposure to a source of actinic radiation;

(b) forming a persistent latent image on the photosensitive material by exposing to an actinic radiation source to form electrostatically contrasted non-imaged areas and a latent image area, thereby forming an electrostatically imageable surface;

(c) charging the latent image area on the electrostatically imageable surface;

(d) developing the electrostatic latent image area by applying to the electrostatically imageable surface charged toner particles suspended in a liquid comprised at least



partially of a nonpolar insulating solvent to form a first liquid layer with a first liquid surface, the charged toner particles being directed to the latent image area of the electrostatically imageable surface to form a developed latent image;

(e) applying to the receiving surface a liquid comprised at least partially of a nonpolar insulating solvent to form a second liquid layer with a second liquid surface;

(f) establishing an electric field between the electrostatically imageable surface and the receiving surface;

(g) placing the receiving surface adjacent to the electrostatically imageable surface so that a gap is maintained therebetween;

(h) transferring the developed latent image from the electrostatically imageable surface at a point of transfer through the liquid to the receiving surface to form non-imaged areas and a transferred toner particle image in an imaged area;

(i) maintaining the gap between the electrostatically imageable surface and the receiving surface at the point of transfer during the transfer step;


(j) fusing the transferred toner particle image to the receiving surface;

(k) etching the non-imaged areas of the conductive surface to remove the conductive surface from the non-imaged areas of the receiving surface; and

(l) removing the toner particles from the imaged area of the receiving surface.

13. The method according to claim 12 further comprising using a conductive receiving surface as the receiving surface.

14. The method according to claim 13 further comprising maintaining the gap so that the first liquid surface contacts the second liquid surface to create a liquid transfer medium across the gap.



15. The method according to claim 14 further comprising maintaining the gap between the electrostatically imageable surface and conductive surface at the point of transfer during transfer between about 3 mils and about 20 mils.

16. The method according to claim 13 further comprising using a conductor laminate on which is mounted the conductive receiving surface.

17. A permanent master for use in repeated electrostatic image transfers to receiving surfaces, comprising in combination:

a. a conductive substrate mounted to a rigid dielectric material; and

b. a photosensitive material applied to the conductive substrate, the photosensitive material further having an electrostatic persistent latent image thereon after undergoing a change in electrical resistivity from exposure to actinic radiation, the photosensitive material thereby having non-imaged areas of lesser electrical resistivity and a latent image area of greater electrical resistivity;

c. a charged electrostatically imageable surface formed by the photosensitive material and the conductive substrate, the charged electrostatically imageable surface further having electrostatically contrasted non-imaged areas and a latent image area corresponding to the non-imaged areas of less electrical resistivity and the latent image area of higher electrical resistivity.

18. The permanent master according to claim 17 wherein the latent image area further has a charged polarity.

19. The permanent master according to claim 18 wherein the latent image area further has charged toner particles opposite in polarity to the polarity of the latent image area.



20. The permanent master according to claim 17 wherein the non-imaged areas further have a charged polarity.

21. The permanent master according to claim 20 wherein the latent image area further has charged toner particles of the same polarity as the polarity of the non-imaged areas.

22. The permanent master according to claim 17 wherein the photosensitive material is selected from the group consisting of a dry film photoresist or liquid photoresist.

23. A permanent master according to claim 1 substantially as hereinbefore described with reference to any one of the examples or drawings.

DATED: 19 June, 1990

PHILLIPS ORMONDE & FITZPATRICK

Attorneys for:

OLIN HUNT SPECIALTY PRODUCTS, INC.


David P. Fitzpatrick

WDP

4398N



10 887 74509

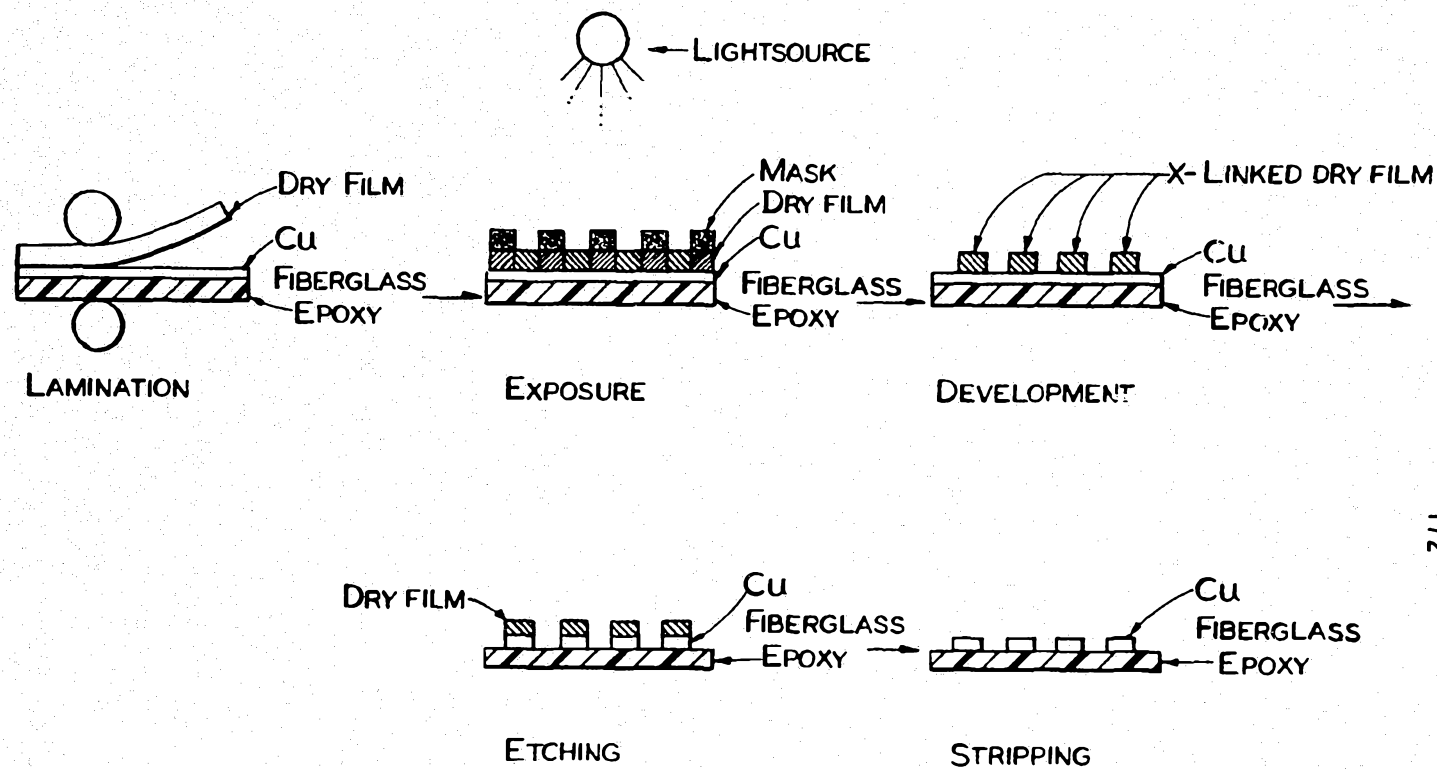

1/2

PRIOR ART STANDARD DRY FILM PRINT & ETCH PROCESS

FIG-1

10 00 74500

