




US 20170024904A1

(19) **United States**(12) **Patent Application Publication**
SAMARASEKERA et al.(10) **Pub. No.: US 2017/0024904 A1**(43) **Pub. Date: Jan. 26, 2017**(54) **AUGMENTED REALITY VISION SYSTEM
FOR TRACKING AND GEOLOCATING
OBJECTS OF INTEREST**(60) Provisional application No. 61/675,734, filed on Jul.
25, 2012, provisional application No. 61/790,715,
filed on Mar. 15, 2013.(71) Applicant: **SRI INTERNATIONAL**, Menlo Park,
CA (US)(72) Inventors: **Supun SAMARASEKERA**, Princeton,
NJ (US); **Taragay OSKIPER**, East
Windsor, NJ (US); **Rakesh KUMAR**,
West Windsor, NJ (US); **Mikhail
SIZINTSEV**, Plainsboro, NJ (US);
Vlad BRANZOI, Lawrenceville, NJ
(US)(73) Assignee: **SRI INTERNATIONAL**(21) Appl. No.: **15/286,161**(22) Filed: **Oct. 5, 2016****Related U.S. Application Data**(63) Continuation of application No. 13/916,702, filed on
Jun. 13, 2013, now Pat. No. 9,495,783.**Publication Classification**(51) **Int. Cl.****G06T 11/00** (2006.01)**H04N 5/225** (2006.01)**G06T 11/60** (2006.01)(52) **U.S. Cl.**CPC **G06T 11/00** (2013.01); **G06T 11/60**
(2013.01); **H04N 5/2258** (2013.01)

(57)

ABSTRACT

Methods and apparatuses for tracking objects comprise one or more optical sensors for capturing one or more images of a scene, wherein the one or more optical sensors capture a wide field of view and corresponding narrow field of view for the one or more images of a scene, a localization module, coupled to the one or more optical sensors for determining the location of the apparatus, and determining the location of one more objects in the one or more images based on the location of the apparatus and an augmented reality module, coupled to the localization module, for enhancing a view of the scene on a display based on the determined location of the one or more objects.

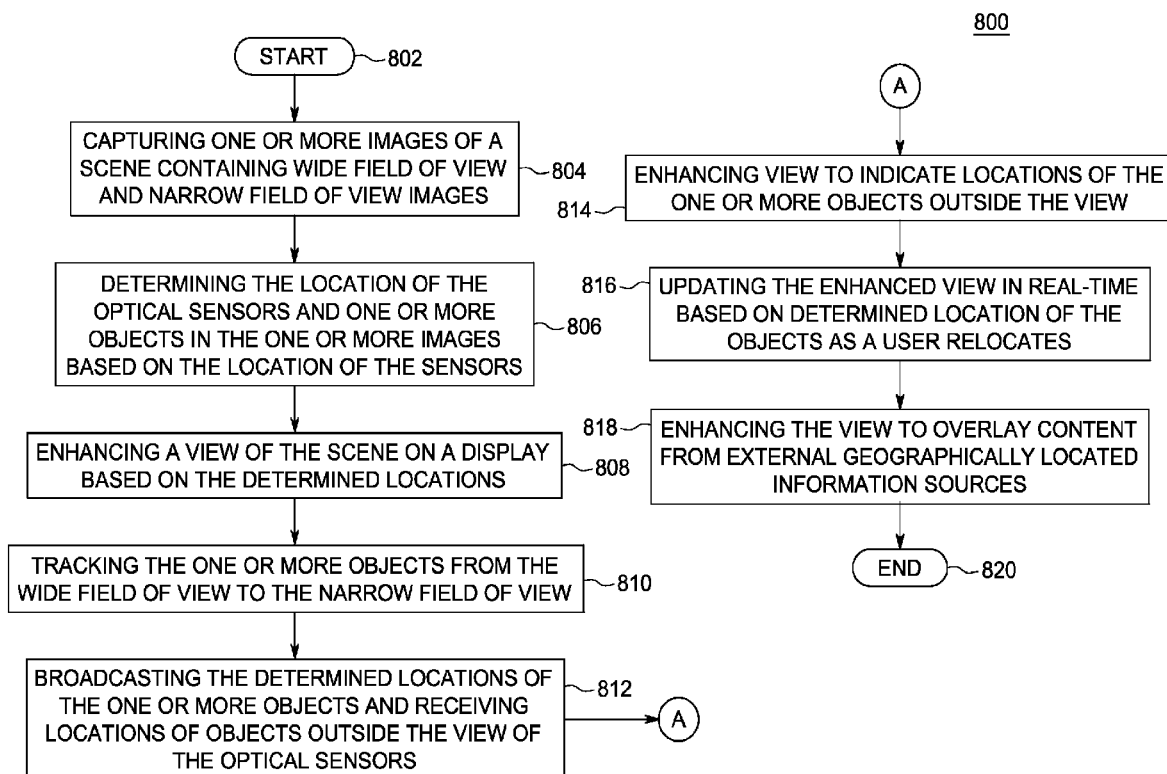

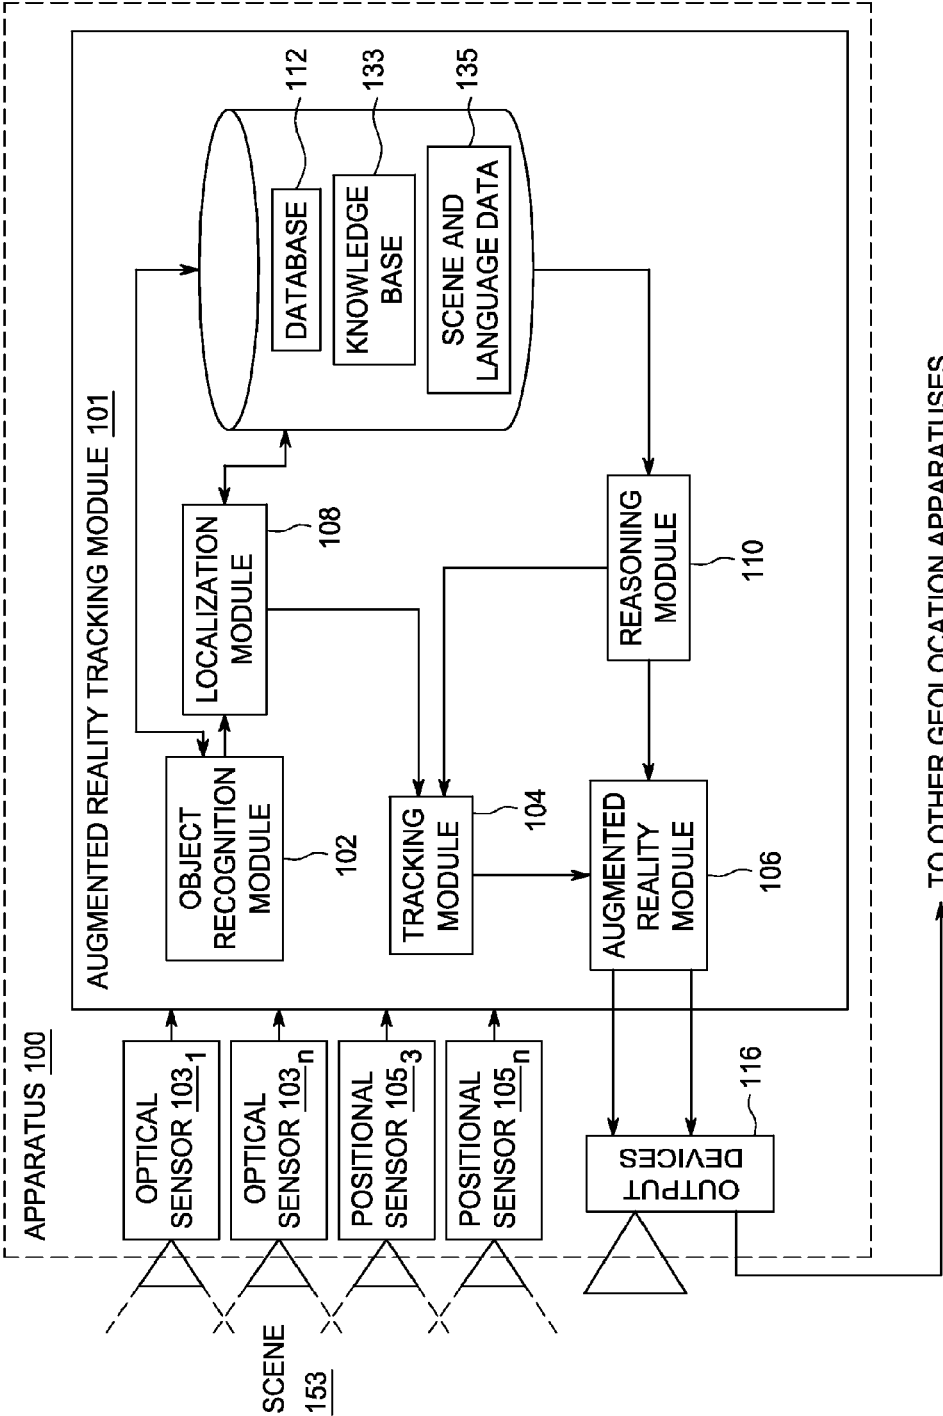


FIG. 1

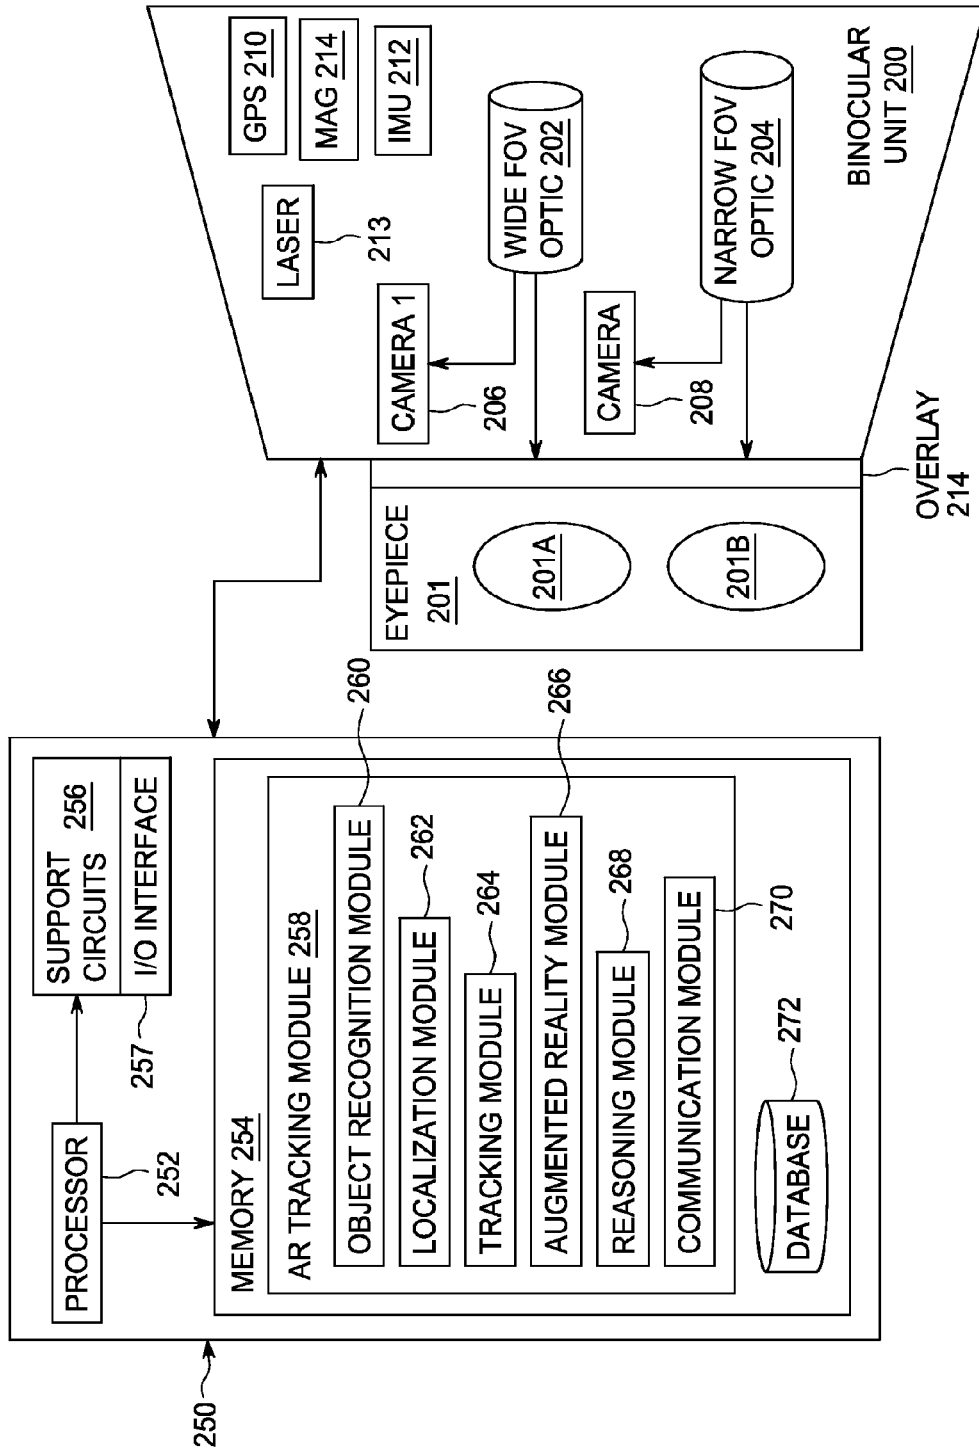


FIG. 2

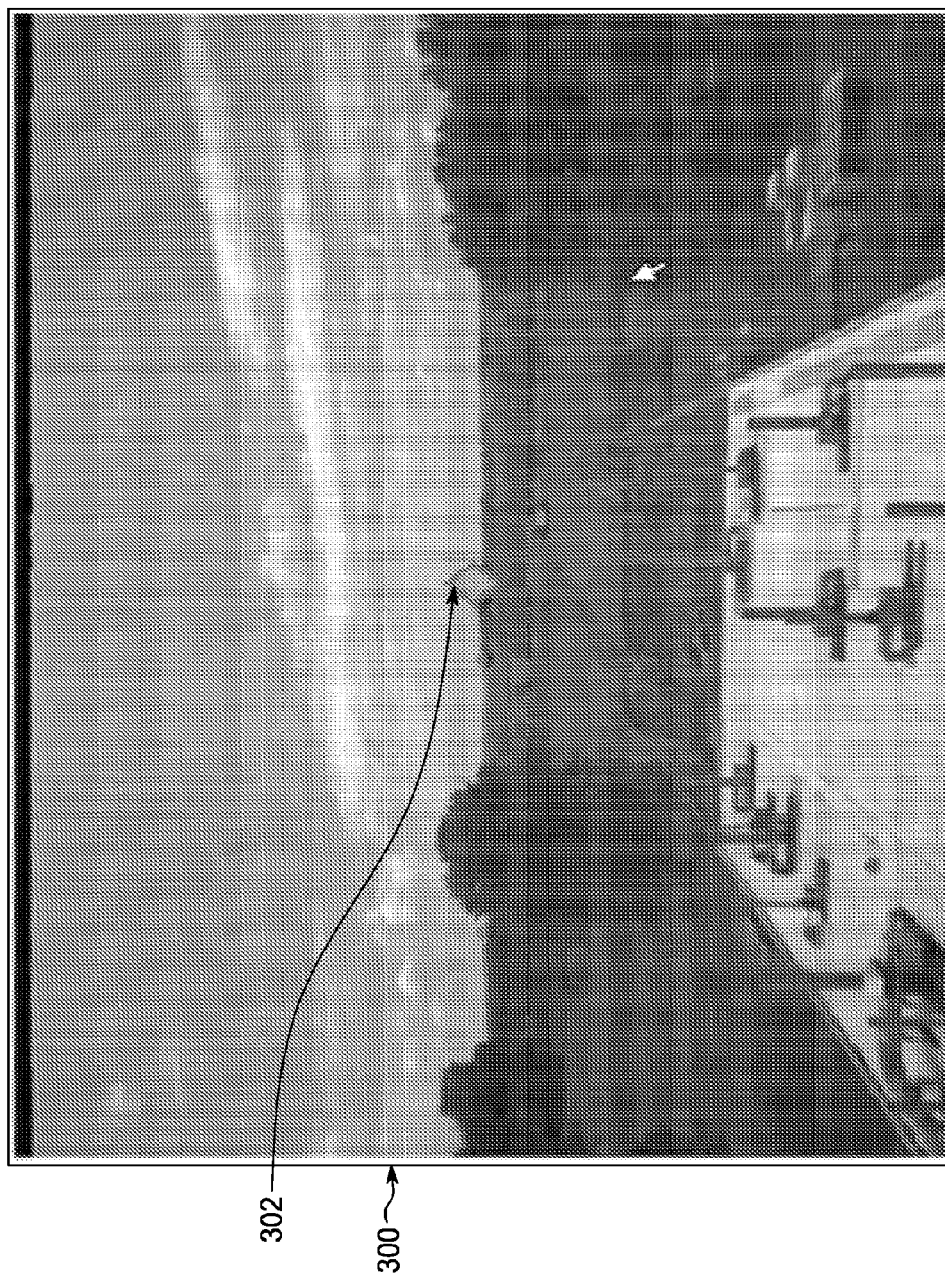


FIG. 3

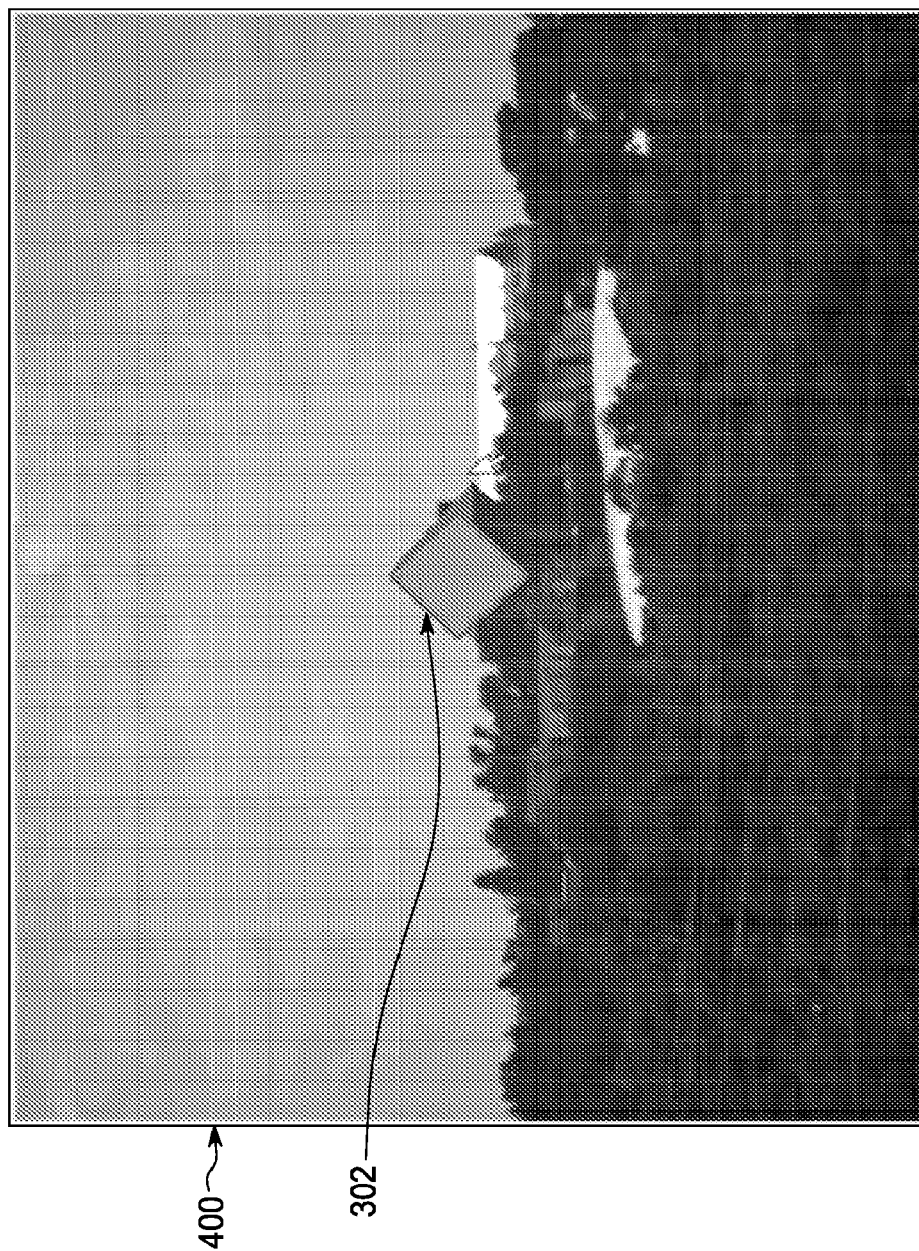


FIG. 4

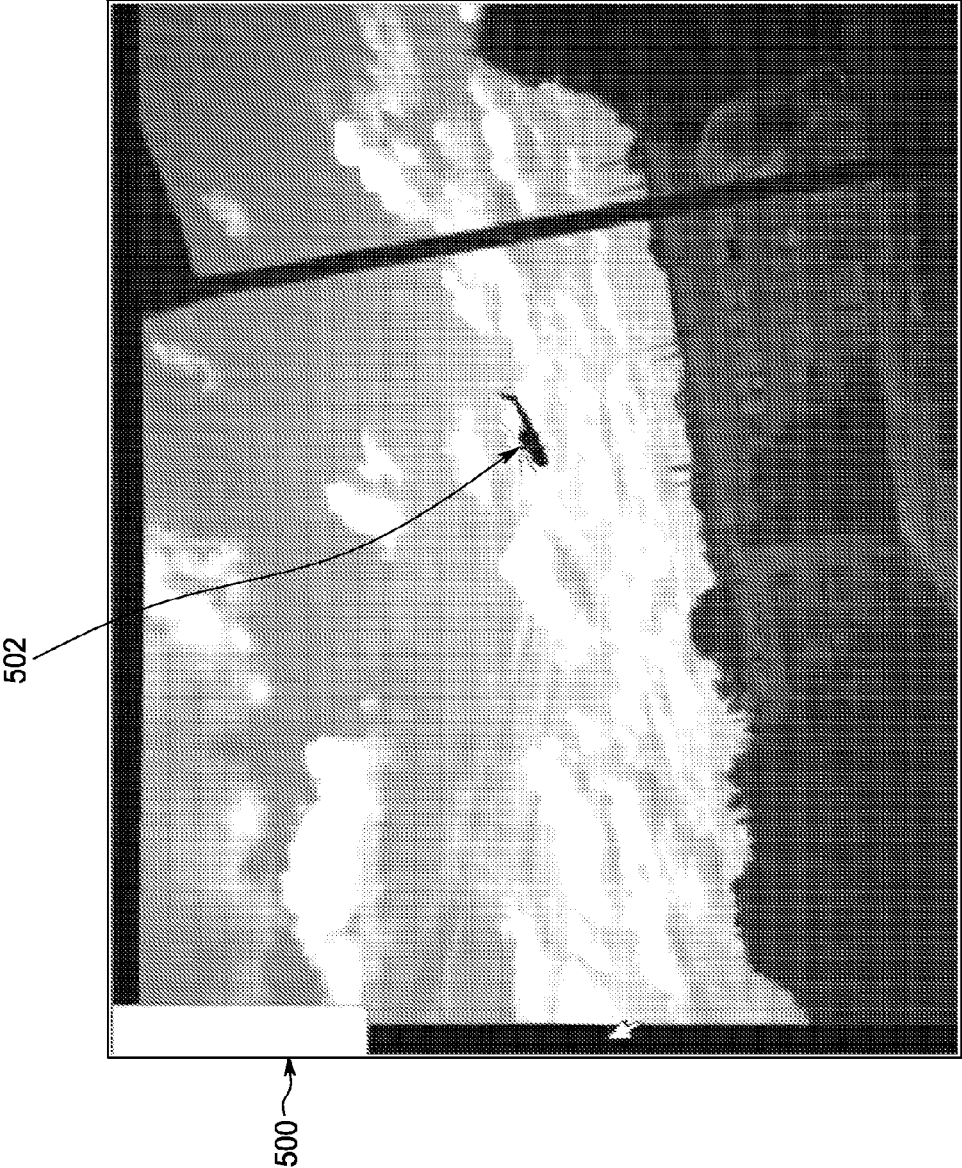


FIG. 5

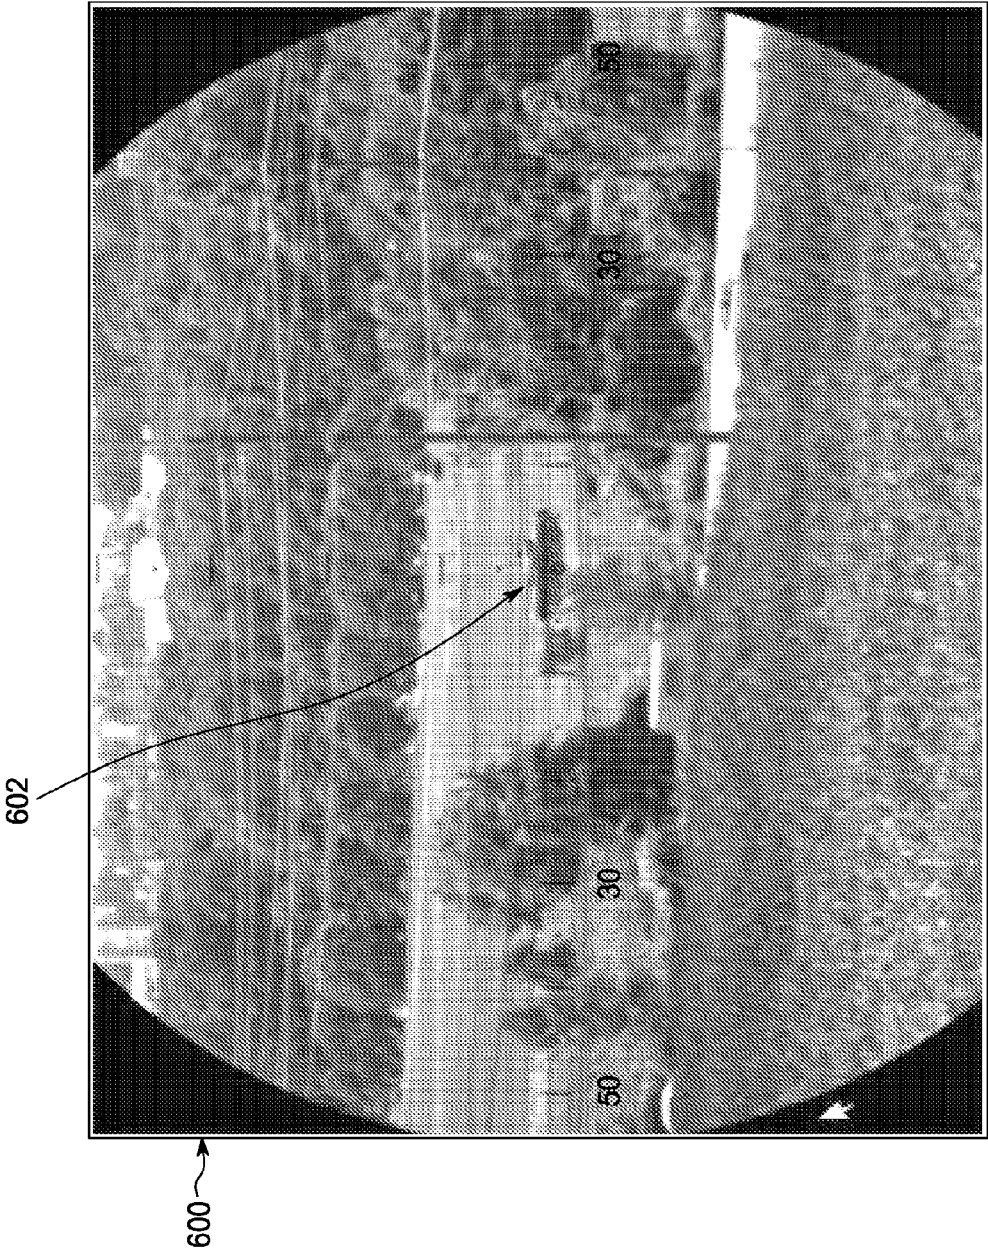


FIG. 6

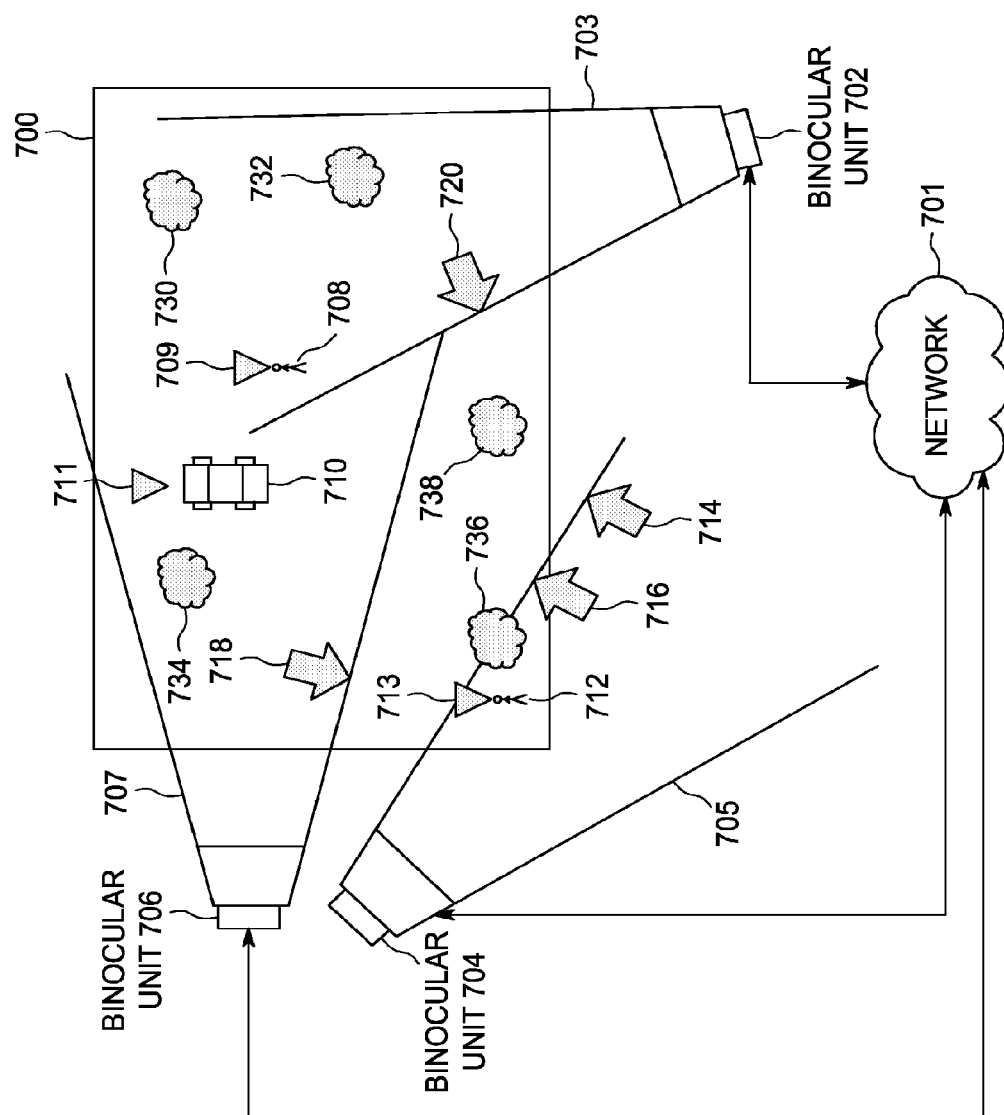


FIG. 7A


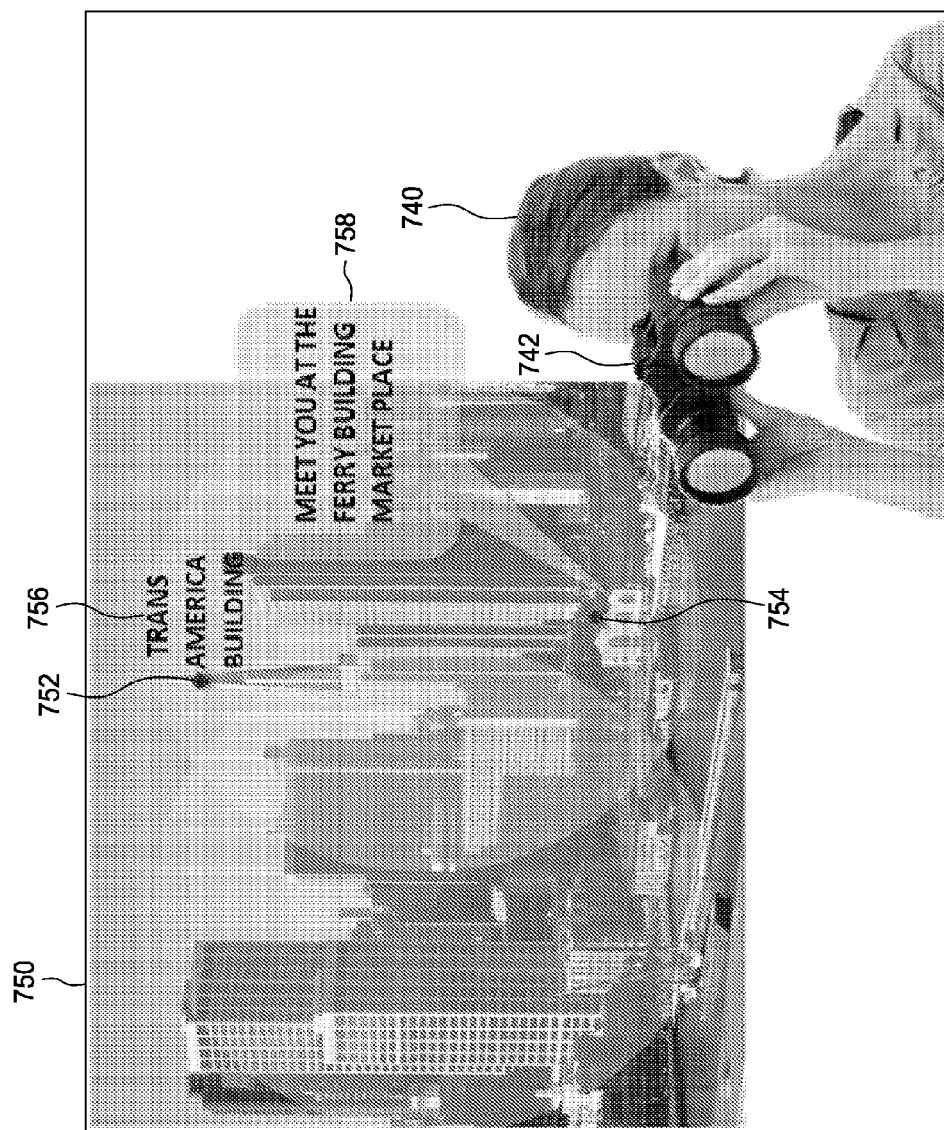


FIG. 7B

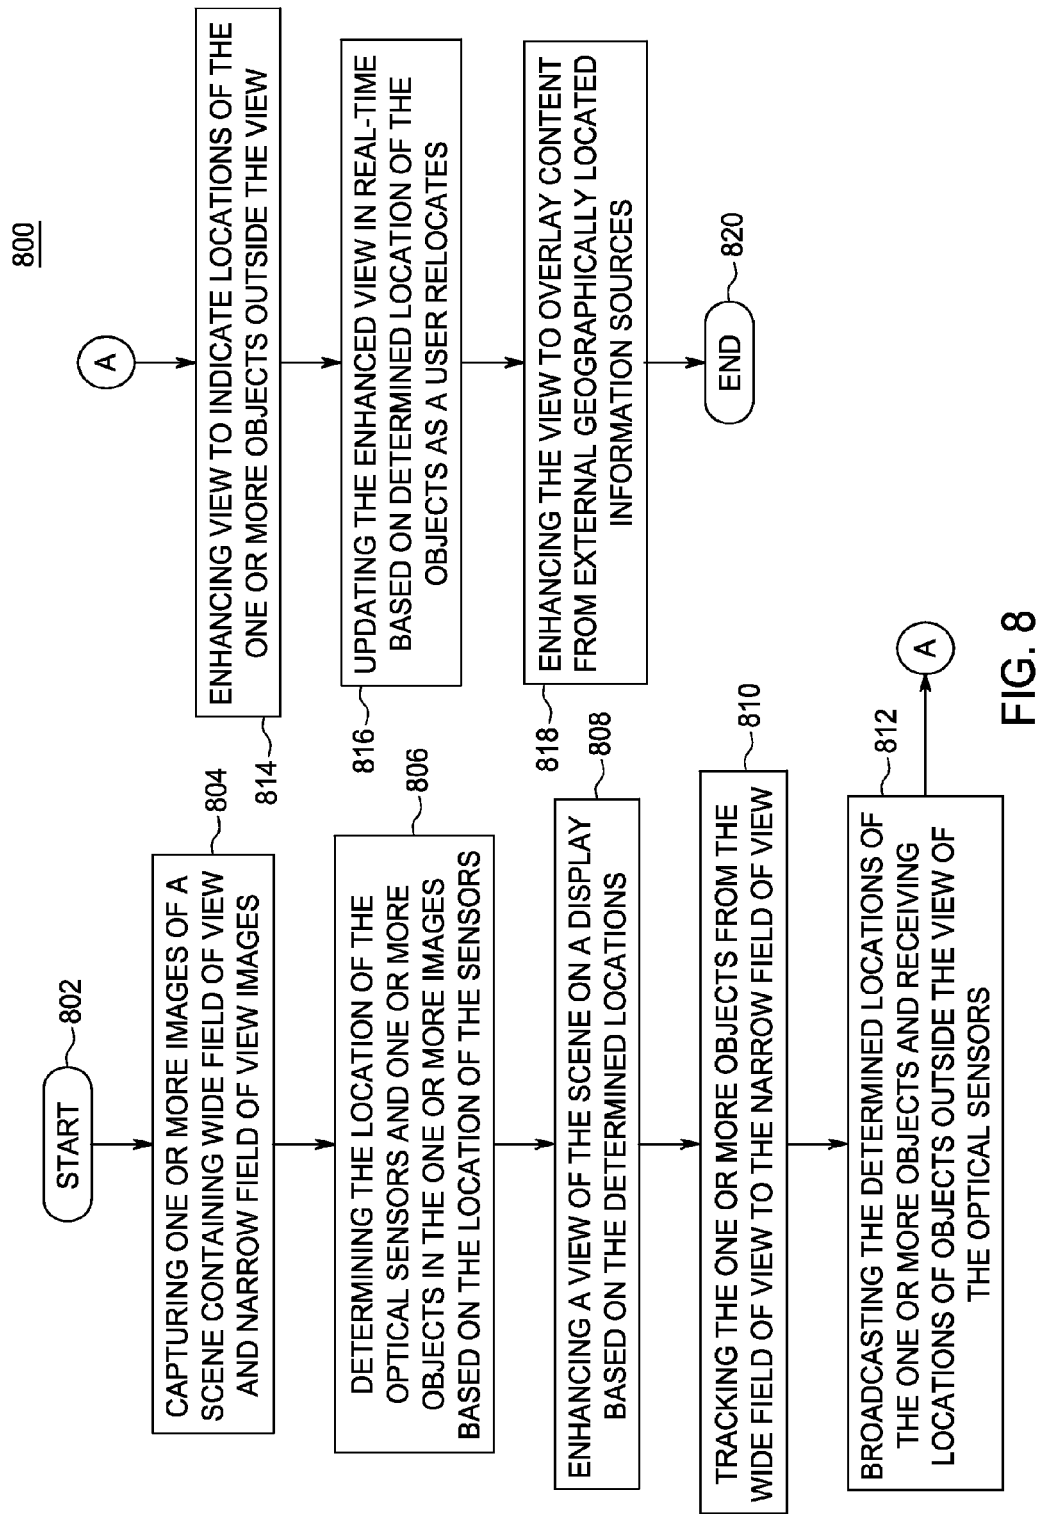

AUGMENTED REALITY VISION SYSTEM FOR TRACKING AND GEOLOCATING OBJECTS OF INTEREST

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application is a continuation of and claims priority to and the benefit of U.S. patent application Ser. No. 13/916,702, filed Jun. 13, 2013, which is and claims priority to and the benefit of U.S. provisional patent application No. 61/675,734 filed Jul. 25th, 2012 and U.S. provisional patent application No. 61/790,715 filed on Mar. 15th 2013, the disclosures of which are herein incorporated by reference in their entirety.

GOVERNMENT RIGHTS IN THIS INVENTION

[0002] This invention was made with U.S. government support under contract number N00014-11-C-0433. The U.S. government has certain rights in this invention.

BACKGROUND OF THE INVENTION

[0003] Field of the Invention

[0004] Embodiments of the present invention generally relate to augmented reality and, more particularly, to a method and apparatus for tracking and geolocating objects of interest.

[0005] Description of the Related Art

[0006] Currently, binoculars are entirely optical devices allowing users to zoom in on a particular real world area from a long distance. If a user is attempting to view precise movements of an object at a distance, such as a car, truck or person, the user is able to use a binocular lens switching mechanism to change to a different magnification. In other binoculars, a “zooming” function is provided which can vary magnification ranges using a switch or lever. However, once the user increases magnification level, the user may experience difficulty in finding the object of interest within the “zoomed” scene.

[0007] Further, in conventional binocular system, if there are several binocular users in communication and one user has identified one or more objects of interest such as interesting wildlife, people, or the like, difficulty arises in signaling the location of the object of interest to other binocular users. The user who sighted the object of interest may use landmarks, but this method is imprecise and landmarks may not be in view of other user’s binocular systems. In addition there may be several similar landmarks, making it more difficult to identify the precise location of objects of interest.

[0008] Therefore, there is a need in the art for a method and apparatus for precisely determining the geolocation of distant objects, in addition to tracking and sharing of the location for those objects.

SUMMARY OF THE INVENTION

[0009] An apparatus and/or method for tracking and geolocating objects of interest comprising one or more optical sensors for capturing one or more images of a scene, wherein the one or more optical sensors capture a wide field of view and corresponding narrow field of view for the one or more mages of a scene, a localization module, coupled to the one or more optical sensors for determining the location of the apparatus, and determining the location of one more

objects in the one or more images based on the location of the apparatus, and an augmented reality module, coupled to the localization module, for enhancing a view of the scene on a display based on the determined location of the one or more objects.

[0010] Various advantages, aspects and features of the present disclosure, as well as details of an illustrated embodiment thereof, are more fully understood from the following description and drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] So that the manner in which the above recited features of the present invention can be understood in detail, a more particular description of the invention, briefly summarized above, may be had by reference to embodiments, some of which are illustrated in the appended drawings. It is to be noted, however, that the appended drawings illustrate only typical embodiments of this invention and are therefore not to be considered limiting of its scope, for the invention may admit to other equally effective embodiments.

[0012] FIG. 1 depicts an apparatus for tracking objects in accordance with exemplary embodiments of the present invention;

[0013] FIG. 2 depicts an embodiment of the apparatus as a binocular unit in accordance with exemplary embodiments of the present invention;

[0014] FIG. 3 depicts an image captured by narrow field of view optics in accordance with exemplary embodiments of the present invention;

[0015] FIG. 4 depicts an image captured by wide field of view optics in accordance with exemplary embodiments of the present invention;

[0016] FIG. 5 depicts a wide field of view image, where a helicopter is placed at a particular location in accordance with exemplary embodiments of the present invention;

[0017] FIG. 6 depicts a wide field of view image, where a tank is placed at a particular location in accordance with exemplary embodiments of the present invention;

[0018] FIG. 7A depicts a plurality of binocular units viewing portions of a scene in accordance with exemplary embodiments of the present invention;

[0019] FIG. 7B depicts an exemplary use of the apparatus 100 in accordance with exemplary embodiments of the present invention; and

[0020] FIG. 8 depicts a method for object detection in accordance with exemplary embodiments of the present invention.

DETAILED DESCRIPTION

[0021] Embodiments of the present invention generally relate to a method and apparatus for tracking and geolocating objects of interest. According to one embodiment, an apparatus for tracking objects of interest comprises an optical sensor used in conjunction with positional sensors such as inertial measurement units (IMU) and global navigation satellite systems (such as geographical positioning satellite (GPS) systems, Glonass and Galileo) to locate the apparatus and a laser rangefinder, to geographically localize objects in reference to the location of the optical sensor. Objects of interest are tracked as a user zooms the optical sensors, or the user switches from a wide field of view to a narrow field of view. Embodiments of the present invention preserve a location of an object of interest within the user’s

view throughout a change in zoom or field of view. Additionally, if the object of interest escapes the user's view during a zooming function, an augmented reality system may provide the user with indicia of the location of the object within the user's view, as well as other pertinent information. An observed scene is augmented with information, labels of real world objects and guidance information on moving a camera unit or binocular unit to view objects of interest in a user's field of view. The augmentation appears stable with respect to the observed scene.

[0022] FIG. 1 depicts an apparatus for tracking objects **100** in accordance with exemplary embodiments of the present invention. The apparatus **100** comprises an object recognition module **102**, sensors **103₁** to **103_n**, and **105₁** to **105_n**, a tracking module **104**, an augmented reality module **106**, a localization module **108**, a reasoning module **110**, a database **112**, and output devices **116**. According to exemplary embodiments, the database **112** further comprises a knowledge base **133** and scene and language data **135**.

[0023] According to one embodiment, the sensors **103₁** to **103_n** are optical sensors and the sensors **105₁** to **105_n** are positional sensors. In some embodiments, sensors **103₁** to **103_n** may comprise infrared (IR) sensors, visible sensors, night-vision sensors, radiation signature sensors, radio-wave sensors or other types of optical sensors. Sensors **103₁** to **103_n** simultaneously capture one or more images of a scene **153**, while the sensors **105₁** to **105_n** capture data about the geographic location and orientation of the apparatus **100**. According to an exemplary embodiment, all of the sensors are physically coupled to the apparatus **100**. In some embodiments, the one or more sensors **103₁** to **103_n** may be housed in a telescope, a binocular unit, a headset, bifocals, or the like. In some instances, the sensors may be remotely located from the apparatus.

[0024] One or more of the sensors **103₁** to **103_n** comprise a sensor for capturing wide field of view images, e.g. 50 degrees to 80 degrees horizontal field of view, and one or more of the sensors **103₁** to **103_n** comprise a sensor for capturing a narrow field of view images, e.g. 1 degree to 10 degrees. A wide angle image of the scene **153** provides context for narrower field of view images. The images captured by sensors **103₁** to **103_n** are coupled to the object recognition module **102**. The object recognition module **102** performs object recognition on the wide field of view images and the narrow field of view images to recognize objects in all of the images. According to exemplary embodiments, invariant image features are used to recognize objects in the images as described in commonly assigned and issued U.S. Pat. No. 8,330,819 filed on Apr. 12th, 2012, commonly assigned U.S. Pat. No. 8,345,988 B2 filed on Jun. 22nd, 2005 and U.S. Pat. No. 8,243,991 B2, filed on Aug. 14, 2012, herein incorporated by reference in their entirety.

[0025] Simultaneously capturing narrow field of view images with wide field of view images of the scene **153** allow the vision algorithms to have additional context in recognizing objects of interest in a scene. The narrow and wide FOV images in conjunction with various positional sensors aid in high-fidelity localization, i.e., highly accurate geolocation of objects of interest can be achieved. Further, the object recognition module **102** is coupled to database **112** to receive invariant feature records and the like to assist in object recognition. The object recognition module **102** may also receive scene and language data **135** from the database **112** to localize wide angle images, as described in

commonly assigned, co-pending U.S. patent application Ser. No. 13/493,654 filed Jun. 11th, 2012, herein incorporated by reference in its entirety.

[0026] For example, a GNSS received provides an initial bearing of apparatus **100** and an IMU can provide relative movements of the apparatus **100** such as rotation and acceleration. Together, six degrees of freedom (6DOF) can be obtained using the various sensors. In some instances, a GPS signal may only be sporadically available. According to some embodiment, the apparatus **100** can still provide tracking of objects of interest during periods of sporadic GNSS reception. The signals previously received from the GNSS may be stored in a memory of the apparatus **100**. The localization module **108** calculates a projected geographical location of the apparatus **100** based on the previously stored GNSS location and trajectory of the apparatus **100** in conjunction with the trajectory of the objects of interest.

[0027] The localization module **108** couples the localized object and apparatus information to the tracking module **104**. The tracking module **104** correlates the objects in the wide field of view images and the narrow field of view images. For example, in wide field of view images, a dog and cat are recognized at a distance. In narrow field of view images, the dog and cat are recognized and correlated with the dog and cat in the wide field of view images because the location of the dog and cat are known from the localization module **108**. The tracking module **104** tracks the location of the dog and cat when a user switches from viewing a wide field of view of the scene to a narrow field of view of the scene **153**. This process is referred to as visual odometry, as described in commonly assigned, co-pending U.S. patent application Ser. No. 13/217,014 filed on Aug. 24th, 2011, herein incorporated by reference in its entirety. Accordingly, the visual odometry is performed on both the wide field of view and the narrow field of view simultaneously or in parallel. The wide field of view provides robustness, while the narrow field of view provides accuracy. Users may be provided with preset field of view angles; for example, a lens with ten steps of fields of view may be provided to the user. According to some embodiments, to support multiple fields of view, prior geometric calibration may be performed between images taken with different fields of view.

[0028] According to other embodiments, a high resolution camera, e.g., a camera that can capture greater than 50 MegaPixels (MP) may be used instead of two views of a scene with differing field of view. According to this embodiment, the camera enables a user to capture the wide field of view with a very high resolution, for example, 50 MP or more, and as the user zooms into a particular area of the wide field of view of the scene, there is enough pixel data to represent the narrow field of view of the scene also. The object recognition module **102** uses the wide field of view image to detect objects of interest, and the localization module **108** may use a laser rangefinder to calculate precise geographic coordinates of the objects of interest. The tracking module **104** enables a user of the apparatus **100** to track the objects of interest as the zoom on the camera is changed.

[0029] According to exemplary embodiments, the sensors **105₁** to **105_n** may comprise navigation sensors such as a GNSS receiver, an IMU unit, a magnetometer, pressure sensors, a laser range-finder and the like. The localization module **108** localizes the apparatus **100** using the sensors **105₁** to **105_n** and the narrow/wide field of view images captured by sensors **103₁** to **103_n**. A three-dimensional

location and orientation is established for the apparatus **100** with more accuracy than with the positional sensors **105₁** to **105_n** alone. Refer to commonly assigned, co-pending U.S. patent application Ser. No. 13/217,014 filed on Aug. 24th 2011, and commonly assigned U.S. Pat. No. 8,174,568 filed on Dec. 3rd, 2007, herein incorporated by reference in their entireties, for more detail regarding calculating **30** coordinates based on an image and navigational sensors.

[0030] Once the location of the apparatus **100** is calculated, the object recognition module **102** may recognize objects within the wide field of view and narrow field of view of the scene **153**. A user of the apparatus **100** may select objects of interest by manually inputting selections in the field of view using a laser rangefinder or the like. In other instances, the object recognition module **102** scans both fields of views and detects objects automatically, based on training data stored in database **112**. While a user pans the optical sensors **103₁** . . . **103_n**, the object recognition module **102** detects objects of interest, for example, facial recognition, movement recognition, bird recognition, or the like. According to exemplary embodiments, the localization module **108** further receives object recognition information from the object recognition module **102** to aid in localization. For example, if the object recognition module **102** recognizes an oak tree at a distance **d1** from a park bench at a known location in scene **153** in a wide angle image, and a distance **d2** from the apparatus **100**, the localization module **108** uses the location of the park bench to determine the accuracy of the estimated distance **d1** of the oak tree from the apparatus **100**.

[0031] The localization module **108** also locates objects of interest in the user's fields of view and generates guides to locate objects of interest. For example, the apparatus **100** may automatically detect different types of birds in a scene **153** and automatically guide a user towards the birds, as well as augmented a user display with information regarding the birds. The user may mark a target bird, stationary or moving, while in a "zoomed out" field of view, and be guided by the registration of images on how to move the camera while zooming in without losing the target object, ensuring the target is still in view.

[0032] The reasoning module **110** uses the localization knowledge and the object recognition knowledge from the database **112** to generate relevant content to be presented to the user. A word model consisting of geo-spatial information such as digital terrain, geographical tags and 3D models can be used in the reasoning module **110**. Similarly dynamic geographic data can be transmitted to the reasoning module **110** from an external source to augment the reasoning generated by the reasoning module **110**. Based on geo-location and context, overlay content can be customized in the reasoning module **110**. The overlay is also used in aiding in navigation of a user of the apparatus **100**.

[0033] The overlay content is then projected using the augmented reality module **106** in the accurate coordinate system of the narrow field of view optical sensors as derived by the localization module **108**. Additionally the world model may be used by the reasoning module **110** to determine occlusion information during the rendering process. According to one embodiment, the apparatus **100** is a video see-through system, i.e., a system with an optical sensor as well as an optical viewfinder where content is rendered on the optical viewfinder as the user of apparatus **100** views a scene through the optical viewfinder. In this embodiment,

the content is fused with the captured images from the sensor **103₁** to **103_n** for display on the viewfinder, allowing the user to view the augmented content overlaid on the scene **153**.

[0034] Overlaid content may include dynamic information such as weather information, social networking information, flight information, traffic information, star-map information, and other external geographically located information fed into the system. Another example of geographically located information may include overlaying real-estate house and commercial sales information, tourist attractions, and the like on a view of the apparatus **100**.

[0035] According to one embodiment, a visually impaired person wearing a single head or body mounted camera may be aided using the apparatus **100**. As a visually impaired individual pans his or her head, an implicit image mosaic or landmark images are generated by the AR tracking module **101** and stored in database **112**. An object of interest can be designated in a certain view by image processing by the object recognition module **102** or manually by the user. The visually impaired user is then able to move around, but be guided back to the designated view-point or location based on the geolocated apparatus **100** as well as through alignment of images from the camera with landmark and mosaic images stored in the database **112**.

[0036] According to other embodiments, the database **112** may store images or videos of people of interest, such as celebrities, athletes, news-worthy figures, or the like. The object recognition module **102** may then perform object recognition while a user is scanning a scene and match against the people of interest stored in database **112** to identify people of interest in the scene.

[0037] FIG. 2 depicts an embodiment of the apparatus **100** as a binocular unit **200** in accordance with exemplary embodiments of the present invention. The binocular unit **200** comprises a wide field of view optic **202** and a narrow field of view optic **204**, i.e., a wide field of view lens and a narrow field of view lens, an eyepiece **201**, a GNSS **210**, a magnetometer **214**, an IMU **212** and a laser rangefinder **213**. According to some embodiments, the laser rangefinder **213** may be replaced with an ultrasonic rangefinder or by estimating range from ray tracing to a **3D** model of the scene given the user's location and view-point.

[0038] According to some embodiments, the computer system **250** may be housed internally in the binocular unit **200**. In other embodiments, the computer system **250** is remote from the binocular unit **200** and the binocular unit **200** transmits and receives data from the computer system **250** through wired transmission lines, or wirelessly.

[0039] The wide FOV optic **202** is coupled to the camera **206**. The narrow FOV optic is coupled to the camera **208**. The camera **206** and camera **208** are coupled to a computer system **250**. The wide FOV optic **202** and the narrow FOV optic **204** are both coupled to the eyepiece **201**. The eyepiece **201** comprises, according to one embodiment, a first lens **201A** and a second lens **201B**. In other embodiments, the eyepiece **201** may comprise only a single viewing lens, or more than two viewing lenses.

[0040] In some embodiments, a user of the binocular unit **200** is able to switch between viewing the wide FOV optic view and the narrow FOV optic view in the eyepiece **201**. The laser rangefinder **213** outputs a laser towards a direction aligned with the orientation of the binocular unit **200**. The laser rangefinder **213** establishes distances to objects within the field of view of the binocular unit **200**. In addition, the

laser rangefinder may be used to map the terrain into three-dimensional space, and store the **30** terrain map in the database **272**.

[0041] The computer system **250** includes a processor **252**, various support circuits **256**, and memory **254**. The processor **252** may include one or more microprocessors known in the art. The support circuits **256** for the processor **252** include conventional cache, power supplies, clock circuits, data registers, I/O interface **257**, and the like. The I/O interface **257** may be directly coupled to the memory **254** or coupled through the supporting circuits **256**. The I/O interface **257** may also be configured for communication with input devices and/or output devices such as network devices, various storage devices, mouse, keyboard, display, video and audio sensors and the like.

[0042] The memory **254**, or computer readable medium, stores non-transient processor-executable instructions and/or data that may be executed by and/or used by the processor **252**. These processor-executable instructions may comprise firmware, software, and the like, or some combination thereof. Modules having processor-executable instructions that are stored in the memory **254** comprise an augmented reality (AR) tracking module **258**. The AR tracking module **258** further comprises an object recognition module **260**, a localization module **262**, a tracking module **264**, an augmented reality module **266**, a reasoning module **268** and a communication module **270**.

[0043] The computer **250** may be programmed with one or more operating systems (generally referred to as operating system (OS)), which may include OS/2, Java Virtual Machine, Linux, SOLARIS, UNIX, HP/UX, AIX, WINDOWS, WINDOWS95, WINDOWS98, WINDOWS NT, AND WINDOWS2000, WINDOWS ME, WINDOWS XP, WINDOWS SERVER, WINDOWS 8, Mac OS X, IOS, ANDROID among other known platforms. At least a portion of the operating system may be disposed in the memory **404**.

[0044] The memory **254** may include one or more of the following random access memory, read only memory, magnetoresistive read/write memory, optical read/write memory, cache memory, magnetic read/write memory, and the like, as well as signal-bearing media as described below.

[0045] The camera **206** and the camera **208** are coupled to the support circuits **256** and the I/O interface **257** of the computer system **250**. The I/O interface **257** is further coupled to an overlay **214** of the eyepiece **201**. The object recognition module **260** recognizes objects within the wide FOV optic **202** and the narrow FOV optic **204** as the images are received by the cameras **206** and **208**, i.e., in real-time as the user of the binocular unit **200** scans a viewing area. According to one embodiment, the user can scan a larger area than that visible in the wide FOV optic **202** and have the object recognition module **260** scan for objects in the larger area. Additionally, the user can identify, using the laser rangefinder **213**, or other visual means, an object of interest to track or recognize, and the object recognition module **260** will perform object recognition on that particular object, or the user designated area.

[0046] The objects recognized by the object recognition module **260** are localized using the localization module **262** and tracked by the tracking module **264**. The tracking module **264** may also notify the augmented reality module **266** that a visual indication should be rendered to indicate the location of a particular recognized object, even if the object moves out of view of the binocular unit **200**. The

augmented reality module **266** then creates an overlay for the narrow field of view based on the recognized object, requested content by the user, markers indicating the location of recognized objects, amongst additional augmented reality content known to those of ordinary skill in the art. The content is then coupled from the augmented reality module **266** to the binocular unit **200** and, in particular, to the eyepiece **201** as overlay **214**. According to this embodiment, the overlay **214** overlays the real-time view through the lenses **201A** and **201B**, i.e., as the user surveys a scene through the lenses **201A** and **201B**, the overlay **214** is also visible through the lenses **201A** and **201B**. The augmented reality module **266** generates the overlay **214** in geometrical and geographical correspondence with the terrain visible to the user through the binocular unit **200**.

[0047] For example, a binocular unit **200** may observe, with the wide FOV optic **202**, a scene depicted by the image **300** shown in FIG. 3 and with the narrow FOV optic **204** observe a scene depicted by the image **400** shown in FIG. 4. In image **300**, a user has marked a landmark as a landmark of interest after the object recognition module **260** has recognized the objects in the image **300** and the localization module **262** localized the landmark of interest. When the user zooms or alternates views to the narrow field of view from the eyepiece **201**, the augmented reality module **266** places the marker **302** appropriately to indicate the landmark of interest according to the modified view, because the localization module **262** has precisely located the landmark in geographic space. According to other embodiments, the object may be tracked so that when a user of the unit **200** moves, the tracked objects of interest remain centered in the near field of view.

[0048] According to another embodiment, the augmented reality module **266** can overlay the view from a binocular unit **200** to create a simulation. For example, FIG. 5 depicts a wide FOV image **500**, where a user of a binocular unit **200** indicates that a helicopter **502** should be placed at a particular location. The augmented reality module **266** places the helicopter in the preferred location, and overlay the helicopter in real time on overlay **214**, where the position of the helicopter in the user's view changes as the user adjusts the binocular unit **200**. The AR module **266** scales, rotates and translates the helicopter simulation based on the geographic localization data of the binocular unit **200** and the rotational movement of the IMU **212**. FIG. 6 depicts another example of inserting simulated objects into a scene for aiding in simulated operations. Image **600** depicts a narrow field of view scene with a tank object **602** inserted into the scene. According to exemplary embodiments, the tank **602** may be animated by the augmented reality module **266**, with a size, location and orientation corresponding to the other objects recognized by the object recognition module **260** and the orientation of the device according to the localization module **262** to create a mixed reality and simulated environment to aid in user training, such as procedural training, strategic training or the like.

[0049] Additionally, the reasoning module **268** may occlude the tank as it is animated to conform to the terrain depicted in image **600**. According to another embodiment, a user of the binocular unit **200** may scan a scene by spatially moving the binocular unit **200** to geographically locate the entire scanned contents of the scene. The reasoning module **268** can then generate a three-dimensional terrain based on the geographically located objects, terrain, and the like. The

wide field of view and narrow field of view images can be used to construct a 3D map of an observed area by imaging the area based on multiple images, and then estimating the 3D by a motion stereo process accurately using the geographic location provided by the various sensors 210-214, as described in U.S. patent application Ser. No. 13/493,654 filed on Jun. 11th, 2012, herein incorporated by reference in its entirety.

[0050] FIG. 7A depicts a plurality of binocular units viewing portions of a scene 700 in accordance with exemplary embodiments of the present invention. In accordance with exemplary embodiments, FIG. 7 depicts a guidance system based on image processing and alignment of wide and narrow imagery. In this embodiment, the binocular unit (BU) 702, BU 704 and BU 706 comprises an augmented tracking module as depicted in FIG. 2, communicating wired or wirelessly, between each other through the network 701. In other embodiments, each binocular unit is coupled, wired or wirelessly, to a remote computer system such as computer system 250 through the network 701.

[0051] The scene 700 comprises one or more objects, the one or more objects comprising a first person 708, a vehicle 710 and a second person 712. The scene 700 is being observed by three users: a first user operating BU 702, a second user operating BU 704 and a third user operating BU 706, each oriented in a different direction. Though not shown in FIG. 7, each of the BU 702, 704 and 706 may be oriented in three-dimensional space, as opposed to the 2D plane depicted. For example, BU 704 may be positioned at a height above BU 706, and BU 704 may be looking at an area in scene 700 lower in height than the area in scene 700 being viewed by BU 706.

[0052] The BU 706 has person 708 and vehicle 710 in view. The operator of BU 706 identifies person 708 and vehicle 710 as objects of interest using a laser rangefinder, or in some other manner well known in the art such as delimiting a particular area wherein the person 708 and the vehicle 710 are located and directing the unit 706 to perform object recognition.

[0053] The BUs are all coupled to the network 701. According to some embodiments, the BUs 702, 704 and 706 create an ad-hoc network and communicate directly with each other.

[0054] The scene 700 is an example view of a field containing several objects: a person 708, a vehicle 710, a second person 712 and several trees and bushes 732-736. According to one embodiment of the present invention, the user of binocular unit 706 may mark the location using a laser rangefinder, or other means, of the person 708 and the vehicle 710. A marker 709 identifies the location of the first person 708 and the marker 711 identifies the location of the vehicle 711. The marker and location are shared across the network 701 with the other BUs 702 and 704. Similarly, the BU 705 marks the location of the second person 712 with a marker 713.

[0055] The first person 708 and the vehicle 710 are in the view 707 of BU 707; however they are out of the view of BU 704. If the operator of BU 706 directs the attention of the user of the BU 704 towards the vehicle 710 and the first person 708, the user will have indications in their view 705 showing where to turn their BU 704 to view the person 708 and the vehicle 710. For example, indicator 714 is shown as pointing in the direction that the BU unit 704 must turn in order to see person 708. Indicator 716 indicates the direction

the BU 704 must turn to view vehicle 710. According to this embodiment, since the localization module of BU unit 706 has localized vehicle 710 and first person 708, the location is available to all units on the network 701. The AR module of each of the BU units generates the indicators 716 and 714.

[0056] Similarly, the AR module of the BU unit 706 generates an indicator 718 pointing in the direction of the person 712 and the AR module of the BU unit 702 generates a marker 720 pointing in the direction of the location of person 712.

[0057] The BU 702 also has first person 708 in its view 703. The user of BU 702 may also mark the location of first person 708 using the laser rangefinder. Since both BU unit 702 and BU unit 706 have marked the location of person 708, the localization module may localize person 708 more accurately given two perspectives and two distances from the BUs. In addition, when a user of any of the BUs pan their own view, they do not lose sight of the objects in the scene 700 because of the indicators 714, 716, 718 and 720, as well as the markers 709, 711 and 712.

[0058] According to other embodiments, the AR modules of each BU may augment the BU view of the scene based on the determined location of the objects with many other types of data such as distance, motion estimation, threat level, or the like. In other instances, facial and object recognition may be applied in an urban setting for recognizing faces and well-known structures to aid in guidance towards a particular landmark. A user of the BU 702, or even a mobile phone with a camera, may designate and identify real world objects in wide and narrow field of views, while panning the phone or keeping the device still. The object is then located according to the discussion above geographically in world space, and in local view. The AR module 106 then provides audio and/or visual guidance to another user on how to move their device to locate the target object. In addition, users performing the object tagging may attach messages to their tagged objects, or other tags such as images, video, audio or the like.

[0059] Other users of mobile devices may then have objects of interest highlighted on their displays, or have directions towards the highlighted objects on their displays. In some embodiments, one of the viewers of a scene may be viewing the scene aerially, while other viewers of a scene are on the ground and either party may tag/highlight objects of interest for the users to locate or observe.

[0060] Those of ordinary skill in the art would recognize that the Binocular units 702, 704 and 706 may be replaced with, for example, a head-mounted display/vision unit, a mobile camera or the like. A head-mounted display or vision unit may be wearable by a user, who can view the surrounding scene through the visor or glasses in the head-mounted unit, and also view the AR enhancements in the visor or glasses overlaid on top of the user's view of the scene.

[0061] For example, several users of head-mounted units 702, 704 and 706 may be engaged in a session of gaming (i.e., playing a video game) where objects are rendered onto each user's field of view with regard to each unit's frame of reference, view and angle. In this embodiment, the scene can become a virtual gaming arena where users can view and use real-world objects with simulated objects to achieve particular goals, such as capturing a flag or scoring a point in a sport. In these embodiments, as well as other embodi-

ments, virtual advertisements may be displayed on each user's view in a geographically sensible position as in-game advertisements.

[0062] FIG. 7B depicts an exemplary use of the apparatus **100** in accordance with exemplary embodiments of the present invention. A user **740** uses the apparatus **100**, here shown as binocular unit **742**, to observe a scene **750** of a cityscape containing several landmarks and objects of interest. For example, the view of unit **742** may have an augmented display showing the building **752** tagged with a tag **756** indicating that building **752** is the "Trans America Building". The building **754** may also be tagged as the "Ferry Building Market Place". In addition, the user **740** may attach a geographical tag (geo-tag) to the building **754** stating "Meet you at the Ferry Building Place" for members of their party as a coordination point. Accordingly, embodiments of the present invention may apply to tourism. Users may augment the view from their viewing units with landmarks and points of interest. Geo-tags may be left for friends. In addition, markups can be left on GOOGLE Earth or other mapping services. In exemplary embodiments, different detection algorithms can be plugged in to the object detection of the binocular units, or may be available in the cloud. The images captured by the binocular units may be processed by a local plug-in module or may be sent to a remote cloud for analysis. Alternatively, tracking by another system such as a unmanned aerial vehicle (UAV) may be sent to the binocular units for display. For moving objects, the user **740** may mark a moving object, while a second user using another viewing unit may perform an object detection search to detect the moving object and recognize the moving object.

[0063] According to some instances, when users create Geo-tags, they may be stored in a local ad-hoc network created by similar viewing units throughout a particular area, or units manually synced together. Geo-tags and other messages may then be shared directly from one binocular unit another binocular unit. In other embodiments, the geo-tags and other landmark/objects of interest tags and markings are stored on external servers, "cloud servers" for example, and each unit may access the cloud to access geo-tags associated with them (i.e., tags within the user's group), or global geo-tags depending on their preference. In this embodiment, a second user's location is determined to be in the same vicinity as one of the geo-tags and the cloud server transmits the tags within the user's area. Geo-tags, objects of interest and guided directions towards objects of interest may then be downloaded from the external cloud servers and used to overlay an AR display on an AR viewing unit. In other embodiments, users can share geo-tags, objects of interest, landmarks, and the like, with other users by giving an input command, such as a speech command or at the press of a menu item.

[0064] According to exemplary embodiments, the apparatus **100** may have an application programming interface (API) which allows developers to plug-in particular applications of object detection such as in recreational sports, bird-watching, tourism, hunting, hiking, law enforcement and the like.

[0065] FIG. 8 depicts a method **800** for object detection in accordance with exemplary embodiments of the present invention. The method **800** depicts the functionality of the inferencing module augmented reality tracking module **258**

of FIG. 2, as executed by the processor **252**. The method begins at step **802** and proceeds to step **804**.

[0066] At step **804**, one or more optical sensors capture one or more images of a scene containing wide field of view and narrow field of view images. In some embodiments, the images are captured and processed in real-time, i.e., as a user views a scene in the narrow field of view, a larger field of view image containing the scene is also being captured by the optical sensors.

[0067] At step **806**, the localization module **262**, determines the location of the optical sensors. In this embodiment, the user is directly holding, or otherwise coupled with, the location of the optical sensors, so that the location of the optical sensors is essentially equivalent to the location of the user of BU **200**, for example. The object recognition module recognizes objects in the images and, using the laser rangefinder **213** of the BU **200**, the distance between the optical sensor and the objects can be determined. Since the location of the BU **200** has been determined, and the distance to the objects has been determined, the location of the objects can also be accurately determined. In addition, if several binocular units observe the same objects, another degree of accuracy is added to the determined location of the objects.

[0068] At step **808**, the AR module **266** enhances the view through the BU **200** based upon the determined locations of the objects. As described above, the AR module **266** overlays content on the user's view. The content may include markers of objects of interest, indicators directing the user of BU **200** to objects of interest outside of the current field of view, weather information, flight map information, and other information.

[0069] At step **810**, the tracking module **264** tracks the one or more objects from the wide field of view to the narrow field of view as a user switches between the two fields of view. For example, the user of BU **200** may view the wide FOV scene and sight a bird of interest. However, in order to see the bird in more detail, the user of BU **200** switches to a narrow field of view.

[0070] Under ordinary circumstances, the user would have difficulty in finding the bird again in the narrow field of view. However, the tracking module **264** tracks the objects from the wide FOV to the narrow FOV, so the user will be presented with a narrow FOV already containing the bird. According to another embodiment, when a user switches from a wide FOV to a narrow FOV, the AR module **266** overlays an indication of the direction in which to rotate the BU **200** to locate the bird of interest.

[0071] At step **812**, the BU **200** may use the communication module **270** to broadcast the determined locations of the BU **200** in addition to the objects of interest found, to other people in the area with mobile devices, binocular units, mobile computers or the like. In addition, the other people in the area may send the location of objects of interest outside of the user's field of view to the communication module **270**. At step **814**, accordingly, the AR module **266** updates the overlay on the enhanced view indicating the direction in which to look to find those objects of interest outside the user's field of view.

[0072] Subsequently, the method **800** moves to step **816**. At step **816**, the enhanced view is updated in real-time based on the determined location of the one or more detected objects as the user relocates the BU **200**. At step **818**, the view is further enhanced to incorporate external sources of

geographically located information sources. For example, traffic may be overlaid on the BU 200 view, weather information, social media information, or the like. According to some embodiments, based on the determined location of the BU 200 and selected objects of interest, the AR module 266 may overlay virtual advertisements relevant to the user location. The method terminates at step 820.

[0073] Various elements, devices, modules and circuits are described above in association with their respective functions. These elements, devices, modules and circuits are considered means for performing their respective functions as described herein. While the foregoing is directed to embodiments of the present invention, other and further embodiments of the invention may be devised without departing from the basic scope thereof, and the scope thereof is determined by the claims that follow.

1.-22. (canceled)

23. A user-carried or user-worn apparatus for tracking objects, the apparatus comprising:

one or more optical sensors for capturing images of a scene, wherein the images include a wide field of view image of the scene and a narrow field of view image of the scene;

a display for displaying a displayed view of the scene; and
a processor coupled to a storage medium, the storage medium storing processor-executable instructions, which when executed by the processor, performs a method comprising:

geolocating the one or more optical sensors and a location of one or more objects depicted in the captured images based on a location of the one or more optical sensors;

recognizing an object of interest in the wide field of view image;

recognizing the object of interest in the narrow field of view image;

correlating a location of the recognized object of interest in the wide field of view image and the narrow field of view image; and

enhancing the displayed view of the scene on the display based on the geolocating of the one or more objects, wherein the enhanced, displayed view comprises overlay content for the recognized object of interest.

24. The apparatus of claim 23, wherein the method performed by the processor based on the processor-executable instructions further comprises:

broadcasting the tracked location of the one or more objects and receiving tracked location information of objects outside a field of view of the one or more optical sensors, the received, tracked location information being received from other apparatuses.

25. The apparatus of claim 23, wherein the user-carried or user-worn apparatus is configured to exchange tracked location information of the one or more objects with at least one other user-carried or user-worn apparatus and enhance the displayed view of the scene on the display based on the geolocating of the one or more objects by the apparatus and also based on tracked location information received from the at least one other user-carried or user-worn apparatus.

26. The apparatus of claim 23, wherein the apparatus is in communication with one or more similar apparatuses such that users of the apparatuses utilize the apparatuses in a gaming activity in a physical area.

27. The apparatus of claim 23, wherein when there are multiple instances of the apparatus in remote locations,

geolocation is performed with respect to all of the sensors included in the multiple instances of the apparatus.

28. The apparatus of claim 23, wherein the enhancing of the displayed view further comprises augmenting the displayed view to indicate location of the one or more objects outside the field of view of the one or more optical sensors.

29. The apparatus of claim 28, wherein the augmentation of the displayed view includes insertion of one or more markers of objects of interest.

30. The apparatus of claim 28, wherein the augmentation of the displayed view includes insertion of one or more indicators associated with one or more objects of interest.

31. The apparatus of claim 30, wherein the one or more indicators provide direction to the one or more objects of interest.

32. The apparatus of claim 31, wherein the one or more indicators provide direction to the one or more objects of interest outside of the current field of view outside a field of view of the one or more optical sensors.

33. The apparatus of claim 23, wherein the correlating is performed by tracking the location of the recognized object of interest during transition from the wide field of view image to the narrow field of view image.

34. The apparatus of claim 33, wherein the overlay content for the recognized object of interest is scaled in accordance with the tracking of the location of the recognized object of interest from the wide field of view to the narrow field of view.

35. The apparatus of claim 23, wherein the method performed by the processor based on the processor-executable instructions further comprises:

maintaining the enhanced, displayed view consistent in real-time with determined location of the recognized object of interest as a user of the apparatus relocates the apparatus.

36. The apparatus of claim 23, wherein the method performed by the processor based on the processor-executable instructions further comprises:

inserting objects into the enhanced, displayed view based on geographic data that indicates that the inserted object is to be occluded by another object in the enhanced, displayed view.

37. The apparatus of claim 23, wherein enhancing the displayed view comprises overlaying geographically located information from external sources onto the displayed view.

38. A method for tracking objects by a user-carried or user-worn apparatus, the method comprising:

capturing, using one or more optical sensors, images of a scene, wherein the images include a wide field of view image of the scene and a narrow field of view image of the scene;

geolocating the one or more optical sensors, and a location of one or more objects depicted in the captured images based on a location of the one or more optical sensors;

recognizing an object of interest in the wide field of view image;

recognizing the object of interest in the narrow field of view image;

correlating a location of the recognized object of interest in the wide field of view image and the narrow field of view image; and

enhancing a displayed view of the scene on a display of the user-carried or user-worn apparatus based on the

geolocating of the one or more objects, wherein the enhanced, displayed view comprises overlay content for the recognized object of interest.

39. The method of claim **38**, further comprising broadcasting the tracked location of the one or more objects and receiving tracked location information of objects outside a field of view of the one or more optical sensors, the received, tracked location information being received from other apparatuses.

40. The method of claim **38**, wherein the user-carried or user-worn apparatus is configured to exchange tracked location information of the one or more objects with at least one other user-carried or user-worn apparatus and enhance the displayed view of the scene on the display based on the geolocating of the one or more objects by the apparatus and also based on tracked location information received from the at least one other user-carried or user-worn apparatus.

41. The method of claim **38**, wherein when there are multiple instances of the apparatus in remote locations, geolocation is performed with respect to all of the sensors included in the multiple instances of the apparatus.

42. The method of claim **38**, wherein the enhancing of the displayed view further comprises augmenting the displayed view to indicate location of the one or more objects outside the field of view of the one or more optical sensors.

43. The method of claim **42**, wherein the augmentation of the displayed view includes insertion of one or more markers of objects of interest.

44. The method of claim **42**, wherein the augmentation of the displayed view includes insertion of one or more indicators associated with one or more objects of interest.

45. The method of claim **44**, wherein the one or more indicators provide direction to the one or more objects of interest.

46. The method of claim **44**, wherein the one or more indicators provide direction to the one or more objects of interest outside of the current field of view outside a field of view of the one or more optical sensors.

47. The method of claim **38**, wherein the correlating is performed by tracking the location of the recognized object of interest during transition from the wide field of view image to the narrow field of view image.

47. The apparatus of claim **47**, wherein the overlay content for the recognized object of interest is scaled in accordance with the tracking of the location of the recognized object of interest from the wide field of view to the narrow field of view.

48. The method of claim **38**, further comprising maintaining the enhanced, displayed view consistent in real-time with determined location of the recognized object of interest as a user of the apparatus relocates the apparatus.

49. The method of claim **38**, further comprising inserting objects into the enhanced, displayed view based on geographic data that indicates that the inserted object is to be occluded by another object in the enhanced, displayed view.

50. The method of claim **38**, wherein enhancing the displayed view comprises overlaying geographically located information from external sources onto the displayed view.

51. The method of claim **38**, further comprising:

capturing, using a first lens of the one or more optical sensors, the wide field of view image; and
capturing, using a second lens the one or more optical sensors, the narrow field of view image.

* * * * *