

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
13 November 2008 (13.11.2008)

PCT

(10) International Publication Number  
WO 2008/135304 A1(51) International Patent Classification:  
H04L 29/08 (2006.01)(74) Agents: ONSHAGE, Anders et al.; Ericsson AB, Nya  
Vattentornet, S-221 83 Lund (SE).(21) International Application Number:  
PCT/EP2008/053141(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA,  
CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE,  
EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID,  
IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC,  
LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN,  
MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH,  
PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV,  
SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN,  
ZA, ZM, ZW.

(22) International Filing Date: 17 March 2008 (17.03.2008)

(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,  
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,  
FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL,  
NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG,  
CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(25) Filing Language: English

**Published:**

(26) Publication Language: English

— with international search report

(30) Priority Data:  
11/744,576 4 May 2007 (04.05.2007) US(71) Applicant (for all designated States except US): TELE-  
FONAKTIEBOLAGET LM ERICSSON (publ)  
[SE/SE]; S-164 83 Stockholm (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): SOUZA, Victor  
[BR/SE]; Näckrosvägen 30, 1tr c/o Torheim, S-169 37  
Solna (SE). WELIN, Annikki [SE/SE]; Wiboms Väg 10,  
S-171 60 Solna (SE).

(54) Title: MOBILE DEVICE FILE SHARING METHOD AND APPARATUS

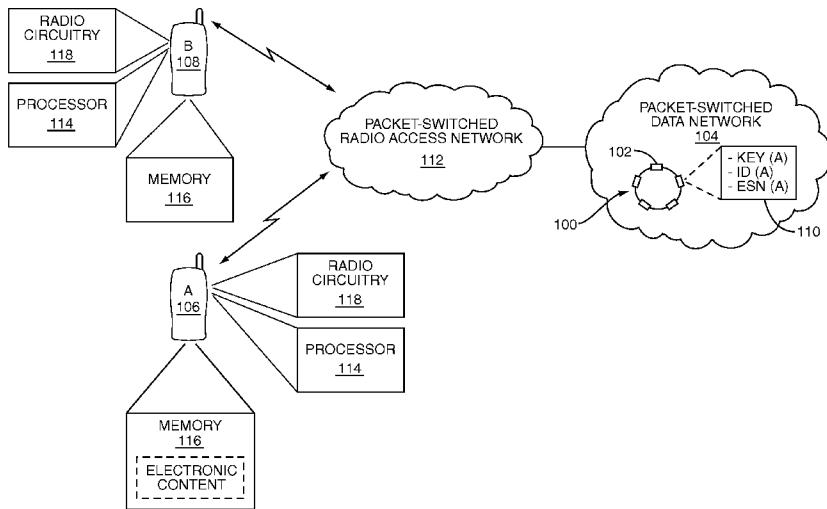


FIG. 1

(57) **Abstract:** File sharing between mobile devices is enabled using a hierarchical Distributed Hash Table (DHT) based message routing system. According to one embodiment, mobile device electronic content is shared via an overlay network of computer nodes arranged according to a hierarchical DHT by a mobile device generating a message. The message includes a key configured to identify mobile device electronic content and to enable routing of the message based on the hierarchical DHT through the overlay network upon reception of the message at any of the computer nodes. The message is transmitted to a packet-switched radio access network, the packet-switched radio access network configured to send the message to one or more of the computer nodes. The message is eventually routed to the computer node responsible for the key. The responsible computer node processes the message, e.g., by registering electronic content, deregistering electronic content or responding to an electronic content request.

**MOBILE DEVICE FILE SHARING METHOD AND APPARATUS****BACKGROUND**

The present invention generally relates to file sharing between mobile devices, and particularly relates to mobile device file sharing via an overlay network of computer nodes arranged

5 according to a hierarchical Distributed Hash Table (DHT).

File sharing between mobile devices such as mobile phones, portable computers, PDAs, portable media players and the like is conventionally achieved by manual user interaction or by forming peer-to-peer (P2P) connections. Manual user interaction is tedious and often requires the end user to have advanced knowledge of the mobile device's file system and file transfer

10 protocols such as FTP to transfer a file from one mobile device to another. P2P-based mobile device file sharing techniques utilize the computing power and bandwidth of the participating mobile devices rather than servers to form ad hoc connections between mobile devices. Files are transferred directly between mobile devices over the ad hoc connections. A mobile device simultaneously functions as both a client and server to other mobile devices participating in a

15 P2P network.

Several factors adversely impact the performance, dependability and cost associated with conventional P2P mobile device file sharing networks. For example, a mobile device must 'know' or be aware of other mobile devices to share content. Correspondingly, significant processing and memory bandwidth is consumed maintaining links to other nodes in order to

20 participate in a conventional P2P network. Further, P2P connections cannot be formed unless devices are connected to an accessible network such as the Internet. Mobile devices are often disconnected from the Internet when idle to reduce mobile network access charges. This is particularly true for mobile phones which use a packet-switched radio access network for network connectivity such as Wideband Code Division Multiple Access (WCDMA), Universal  
25 Mobile Telecommunications System (UMTS) or General Packet Radio Service / Enhanced GPRS (GPRS/EDGE). File transfers cannot be initiated with disconnected mobile devices using a conventional P2P network.

Mobile devices may also lack the processing power and memory bandwidth to reliably function as a P2P node. Further, the network access charges imposed on a mobile device for establishing P2P connections may be prohibitive, particularly for mobile phones which are charged based on the amount of network resources consumed. Breaks in a conventional P2P

5 overlay network become more widespread as the number of participating mobile devices increases, e.g., due to intermittent radio service, low battery power, devices being powered off, etc. Yet another concern with conventional P2P networks is security. A mobile device that functions as a P2P node is more prone to security attacks since it directly communicates with other mobile devices. Many mobile devices cannot be trusted, yet files are transferred

10 regardless. No intermediary device filters nefarious content in conventional P2P networks because the participating nodes interact directly with each other. As such, mobile devices are more prone to malicious attacks.

## SUMMARY

According to the methods and apparatus taught herein, file sharing between mobile devices is

15 enabled using a hierarchical Distributed Hash Table (DHT) based message routing system. Mobile devices do not form nodes within the message routing system. Instead, a separate overlay network of computer nodes is arranged according to the hierarchical DHT. Each computer node included in the overlay network maintains a set of links to neighbor nodes, thus forming logical 'rings' of computer nodes. The manner in which the computer nodes are linked

20 is determined by the hierarchical DHT. Each computer node is responsible for a range of key values. The keys represent mobile device electronic content. In one embodiment, key values are generated by hashing at least part of the file name and/or file extension associated with mobile device electronic content.

Mobile devices register, deregister and request mobile device electronic content by sending file

25 sharing messages to the overlay network. The messages are routed through the overlay network based on the key value included in the messages. The computer node responsible for a particular key value maintains records identifying mobile devices that have registered electronic content corresponding to the key value. However, registered electronic content

remains locally stored at the mobile devices. To retrieve registered electronic content, the overlay network provides mobile device identification information such as mobile phone numbers to a device requesting the registered electronic content. The requesting device uses the mobile device identification information to contact one or more mobile devices storing the

5 desired content. The electronic content is then transferred over a connection such as an IP formed between the mobile devices independent of the overlay network. Thus, the overlay network provides a mechanism for identifying the location of shared mobile device electronic content based on a hierarchical DHT, but the overlay network does not store the electronic content.

10 According to one embodiment, mobile device electronic content is shared via an overlay network of computer nodes arranged according to a hierarchical DHT by a mobile device generating a message. The message includes a key configured to identify mobile device electronic content and to enable routing of the message based on the hierarchical DHT through the overlay network upon reception of the message at any of the computer nodes. The message is

15 transmitted to a packet-switched radio access network, the packet-switched radio access network configured to send the message to one or more of the computer nodes. The message is routed through the overlay network to the computer node responsible for the key included in the message. The responsible computer node processes the message, e.g., by registering electronic content, deregistering electronic content or responding to an electronic content

20 request.

Of course, the present invention is not limited to the above features and advantages. Those skilled in the art will recognize additional features and advantages upon reading the following detailed description, and upon viewing the accompanying drawings.

#### BRIEF DESCRIPTION OF THE DRAWINGS

25 Figure 1 is a block diagram of one embodiment of a mobile device file sharing network. Figure 2 is a block diagram of an embodiment of an overlay network of computer nodes included in the file sharing network of Figure 1. Figure 3 is a block diagram of one embodiment of a mobile device file sharing message.

Figure 4 illustrates an embodiment of processing logic for generating and transmitting a mobile device file sharing message.

Figure 5 illustrates an embodiment of processing logic for processing a mobile device file sharing message.

5 Figure 6 illustrates an embodiment of processing logic for routing a mobile device file sharing message.

Figure 7 is a block diagram of another embodiment of a mobile device file sharing network.

#### DETAILED DESCRIPTION

Figure 1 illustrates an embodiment of an overlay network 100 of computer nodes 102 (e.g.,

10 servers) arranged according to a hierarchical Distributed Hash Table (DHT). All or part of the overlay network 100 is dispersed throughout a packet-switched data network (PSDN) 104 such as the Internet. Each computer node 102 included in the overlay network 100 maintains a set of links (i.e., a routing table) to neighbor nodes 102, thus forming logical 'rings' of computer nodes.

The overlay network 100 is hierarchical in that lower-level rings (not shown) such as those

15 managed by different network operators are logically collapsed into a single, merged ring as will be described in more detail later. The manner in which the computer nodes 102 are linked is determined by the hierarchical DHT. Each computer node 102 is responsible for a range of key values. Messages are routed within individual rings and between rings based on the key included in the messages. A message is processed by the computer node 102 responsible for

20 the key included in the message.

Electronic content stored locally by mobile devices 106, 108 may be shared by registering the

content with the overlay network 100 of computer nodes 102. Electronic content may be

reregistered each time the mobile devices 106, 108 power on to account for mobile device

configuration changes such as a new phone number. Electronic content is registered by

25 sending a message to one or more computer nodes 102 included in the overlay network 100.

The message identifies the mobile device 106, 108 that stores the electronic content to be

shared and a key identifying the content. The message is routed based on the hierarchical DHT to the computer node 102 responsible for the key included in the message. The electronic

content is registered by the computer node 102 responsible for the key included in the message by creating a record 110 including the mobile device identifier (ID) and key retrieved from the message.

This way, mobile device electronic content may be shared by sending the appropriate messages

- 5 to the overlay network 100. The records 110 maintained by the overlay network 102 provide information for contacting mobile devices 106, 108 that have registered electronic content. However, the electronic content is not stored in the overlay network 100. Instead, shared electronic content remains locally stored at the mobile devices 106, 108 that registered the content. Once registered, the electronic content is available for subsequent distribution directly
- 10 from the mobile devices 106, 108. If access to registered electronic content is requested, the overlay network 100 provides to the requesting device the identity of the mobile device 106, 108 storing the desired electronic content. The requesting device may use the contact information received from the overlay network 100 to directly contact the mobile device 106, 108 storing the electronic content and request access to the content.
- 15 For example, electronic content stored locally at a first mobile device 106 is shared by registering the electronic content with the overlay network 100. The first mobile device 106 registers the electronic content by generating a message identifying the first mobile device (ID(A)) and the content to be shared. In one embodiment, the electronic content is identified by hashing at least part of the filename and/or file extension of the electronic content to be shared.
- 20 The hash value functions as a key (key(A)) for routing the message to the computer node 102 responsible for the key. The message is transmitted from the first mobile device 106 to a packet-switched Radio Access Network (RAN) 112 servicing the device 106. The packet-switched RAN 112 sends the message to one or more of the computer nodes 102 included in the overlay network 100 which are maintained by or otherwise associated with the packet-switched RAN 112. Upon entering the overlay network 100, the message is routed to the responsible computer node 102 based on the key included in the message.
- 25

The responsible computer node 102 processes the message by generating a record 110 including the information provided in the message (key(A), ID(A), etc.). This way, the location of

the registered electronic content is readily available when other devices request access to the same electronic content. For example, a second mobile device 108 requests access to the electronic content previously registered by the first mobile device 106. The second mobile device 108 generates a message identifying the desired electronic content. The desired

5 electronic content may be identified by hashing at least part of the filename and/or file extension of the desired electronic content. The hash value is included in the message and transmitted to the same packet-switched RAN 112 or a different RAN (not shown). Regardless, the message is eventually routed to the responsible computer node 102 in the overlay network 100 based on the key value. The responsible computer node 102 performs a record lookup based on the key

10 included in the message. Because the identical key was previously registered by the first mobile device 106, the responsible computer node 102 sends a reply message to the second mobile device 108.

The reply message includes the identity of the first mobile device 106 (ID(A)). The second mobile device 108 may then directly contact the first mobile device 106 using the identifier

15 included in the reply message. The first mobile device 106 may not be connected to the PSDN 104 when contacted by the second mobile device 108. Accordingly, the first mobile device 106 may be instructed to establish a network connection. The cost associated with forcing the first mobile device 106 to establish a network connection may be charged to the second mobile device 108. Regardless, the IP address allocated to the first mobile device 106 when the

20 network connection is established is provided to the second mobile device 108. A network connection is then formed between the two mobile devices 106, 108 using the IP address of the first device 106. The electronic content stored by the first mobile device 106 is transferred over the IP connection to the second mobile device 108, e.g., using the IP messaging protocol.

Thus, the overlay network 100 provides a mechanism for identifying the location of shared

25 mobile device electronic content based on a hierarchical DHT, but the overlay network 100 does not store the electronic content.

In more detail, the mobile devices 106, 108 may comprise any type of mobile device such as a mobile phone, portable computer, PDA, portable media player and the like having access to the

PSDN 104 via a packet-switched interface such as GPRS/EDGE, UMTS, WCDMA, etc. The mobile devices 106, 108 share locally stored electronic content such as text files, source code, program code, image files, audio files, multimedia files and the like based on file sharing

messages sent between the mobile devices 106, 108 and the overlay network 100. File sharing

5 messages are routed in the overlay network 100 based on a hierarchical DHT. The number of different hierarchical levels represented by the overlay network 100 depends on the size of the network and number of subscribers, among other considerations.

Figure 2 illustrates one embodiment of the overlay network 100. According to this embodiment, each participating network operator maintains a local ring 200 of computer nodes 102. Each

10 local ring 200 may be maintained remotely from the operator's network 112 or may be included in the network 112 as will be described in more detail later. Regardless, each local ring 200 includes a plurality of computer nodes 102 each assigned a range of key values. Messages are routed within the local rings 200 based on the key value included in the messages. The local rings 200 are collapsed into geographic-centric rings 202, e.g., based on country codes as

15 defined by the ITU Telecommunication Standardization Sector's recommendation E.164. This way, the local rings 200 associated with the same country code are collapsed into a single countrywide ring 202.

Each countrywide ring 202 is a logical representation of the computer nodes 102 included in the local network operator rings 200 that form the countrywide ring 202. That is, no new computer

20 nodes 102 are created or added at the countrywide level. Instead, new links are formed between computer nodes 102 at the countrywide level. This way, messages may be routed at the countrywide level and between the network operator level and the countrywide level. The countrywide rings 202 may be further collapsed into a single, merged worldwide ring 204. The worldwide ring 204 has links to the lower-level countrywide rings 202. This way, messages are

25 easily routed between each of the levels represented by the overlay network 100. Additional levels may be included. In other embodiments, the local rings 200 are further segmented based on locality, e.g., by postal code, state, province, area code, etc. Regardless, the links used to

form the overlay network 100 are based on a hierarchical DHT representing any number of desired levels.

In one embodiment, the hierarchical DHT used to arrange the overlay network 100 is based on the Canon framework. That is, the hierarchical DHT may be Crescendo-based for Chord rings,

5 Cacophony-based for Symphony rings, Can-Can-based for CAN rings or Kandy-based for Kademlia rings. According to the Canon framework, computer nodes 102 included in two different rings (e.g., two different local network operator rings 200) retain their original links when the two rings are merged. In addition, each computer node  $m$  in one ring creates a link to a computer node  $m'$  in the other ring if and only if equations (1) and (2) below are satisfied:

10  $m'$  is the closest node that is at least distance  $2^k$  away for some  $0 \leq k < N$

(1)

$m'$  is closer to  $m$  than any node in  $m$ 's ring

(2)

where  $k$  is a node index and  $N$  is the total number of participating computer nodes. Equation (1)

15 is the standard Chord rule for creating links, applied to the union of the nodes in the two rings.

Equation (2) further requires computer node  $m$  to create only a subset of the links, specifically,

only the links to those nodes closer to  $m$  than any other node in  $m$ 's ring. Messages are routed to the responsible computer node 102 in approximately  $O(\log M)$  hops based on the Canon

framework, where  $M$  is the total number of participant computer nodes. Further, the routing

20 table used by the overlay network 100 to route file sharing messages is approximately  $O(\log M)$  in size. Of course, other hierarchical DHTs may be used to enable mobile device file sharing.

Turning now to the mobile devices 106, 108, each device 106, 108 includes a processor 114,

memory 116 and radio circuitry 118. The processor 114 generates and processes file sharing messages, e.g., by executing software such as a daemon stored in memory 116. The radio

25 circuitry 118 transmits and receives file sharing messages to and from the packet-switched RAN 112 and may include components such as a transceiver, frequency converter, demodulator, etc.

The memory 116 stores electronic content. The mobile device processor 114 generates three

basic file sharing message types – content registration messages, content deregistration messages, and content request messages. The mobile device processor 114 also processes reply messages received from the overlay network 100.

Figure 3 illustrates one embodiment of an exemplary file sharing message 300. The message

- 5 300 includes a header 302 and a body 304. The message 300 can be based on the Short Message Service (SMS), Multimedia Messaging Service (MMS), and/or Enhanced Messaging Service (EMS). The header 302 is modified to include a flag bit or other indicator 306. The flag bit or other indicator 306 indicates to the packet-switched RAN 112 that the message 300 is not a conventional SMS, MMS or EMS message, respectively. Instead, the flag bit or other indicator
- 10 306 indicates the message 300 is related to file sharing. The packet-switched RAN 112 sends file sharing messages generated by the mobile devices 106, 108 to one or more of the computer nodes 102 included in the overlay network 100. The file sharing messages are then routed within the overlay network 100 based on the key included in the messages. Similarly, the packet-switched RAN 112 sends file sharing messages received from one or more of the
- 15 computer nodes 102 included in the overlay network 100 to the identified mobile devices 106, 108. Otherwise, the message is processed according to conventional approaches. This way, a preexisting messaging scheme such as SMS, MMS, or EMS is modified to accommodate mobile device file sharing.

The message body 304 includes information enabling mobile device file sharing when the flag

- 20 bit or other indicator 306 is set. A message type field 308 included in the message body 304 indicates message type, e.g., content registration, deregistration, request or reply. A key field 310 is included for content registration, deregistration, and request messages. The key field 310 contains the key generated from the electronic content being registered, deregistered or requested, respectively. A mobile device identifier field 312 contains the identity of the mobile
- 25 device 106, 108 attempting to register or deregister electronic content. The mobile device identifier field 312 is also included in a reply message for identifying the mobile device 106, 108 that stores electronic content requested by another mobile device.

A second identifier field 314 contains the Electronic Serial Number (ESN) or Media Access Control (MAC) address associated with a mobile device 106, 108. The second identifier field 314 is used by the overlay network 100 to maintain previously created records 110. For example, if the SIM card included in a mobile phone 106, 108 is changed, the second identifier field 314 enables the overlay network 100 to recognize that electronic content has already been registered by the mobile phone 106, 108. Accordingly, only the new mobile phone number is updated in the preexisting record 110 instead of creating a new record 110.

5 A routing level field 316 is included in content request messages for indicating the hierarchical DHT level beyond which key searching is not permitted. The routing level field 316 may be used

10 to limit the cost associated with searching for electronic content. For example, a mobile device user may limit key searching to the local ring managed by the user's network operator (e.g., one of the local rings 200 illustrated in Figure 2). This way, the user does not incur costs associated with searching outside the operator's network 112. Alternatively, key searching may be allowed at the countrywide or worldwide levels illustrated in Figure 2. The routing level field 316 also

15 improves security when used to limit key searching to a known ring of computer nodes 102, e.g., the local ring 200 maintained by the mobile device user's network operator. Security is provided in that electronic content may only be retrieved from mobile devices 106, 108 permitted access to a particular operator network 112 when key searching is limited to the operator's network 112.

Mobile device file sharing is enabled based on the content registration, deregistration, request

20 and reply message types. Of course, other file sharing message types may be supported such as acknowledgment messages, error messages, etc. For ease of explanation only, a detailed description of the four message types is provided next with reference to the first mobile device 106 shown in Figure 1 registering electronic content and the second mobile device 108

subsequently requesting access to the registered content. Of course, any number of mobile

25 devices 106, 108 may participate in file sharing. In fact, the hierarchical DHT-based file sharing teachings disclosed herein are well suited for accommodating large numbers of mobile devices 106, 108.

With this in mind, the processor 114 included in the first mobile device 106 generates a content registration message automatically or in response to user action, e.g., as illustrated by Step 400 of Figure 4. In one embodiment, the message is automatically generated when the electronic content is newly listed in a predetermined file folder associated with shared electronic content,

5 e.g., a public file folder or the like. Regardless, the processor 114 includes a key in the key field 310 of the content registration message for identifying the electronic content. In one embodiment, the key is generated by hashing at least part of the filename and/or file extension of the shared content, e.g., using the MD, SHA or other hash algorithm. A device identifier (ID) is included in the device identifier field 312 for uniquely identifying the first mobile device 106. In 10 one embodiment, the identifier is the phone number of the first mobile device 106 if the device 106 is a mobile phone. In another embodiment, the IP address of the first mobile device 106 is provided. The processor 114 also sets the flag bit or other indicator 306 in the message header 302 so that the packet-switched RAN 112 identifies the message as a file sharing message.

Regardless, the content registration message is then transmitted to the packet-switched RAN 112 by the radio circuitry 118 included in the first mobile device 106, e.g., as illustrated by Step 15 402 of Figure 4. The packet-switched RAN 112 recognizes the message as a file sharing message by inspecting the flag bit or other indicator 306, e.g., as illustrated by Step 404 of Figure 4. Accordingly, the packet-switched RAN 112 sends the message to one of the computer nodes 102 included in the overlay network 100, e.g., as illustrated by Step 406 of Figure 4. The 20 message may be sent to the overlay network 100 using any conventional packet-based messaging protocol such as IP. Preferably, the packet-switched RAN 112 sends the message to a computer node 102 maintained by or otherwise associated with the RAN 112.

The content registration message is routed over the overlay network 100 to the computer node 102 responsible for the key value included in the message, e.g., as illustrated by Step 500 of 25 Figure 5. The responsible computer node 102 inspects the message type field 308 and determines that the message is a content registration message, e.g., as illustrated by Step 502 of Figure 5. Correspondingly, the responsible computer node 102 generates a record 110 associated with the message, e.g., as illustrated by Step 504 of Figure 5. The record 110

identifies the key and device identifier (ID) extracted from the received message as well as any other information included in the message such as the ESN or MAC address associated with the first mobile device 106.

The electronic content is available for distribution after it has been registered. For example, the

- 5 second mobile device 108 may request access to the electronic content. The processor 114 included in the second mobile device 108 generates a content request message identifying the newly shared content, e.g., as illustrated by Step 400 of Figure 4. The key included in the content request message matches the key stored in the record 110 previously created by the overlay network 100. The routing level field 316 included in the message body 304 may be set
- 10 to indicate the highest level at which key searching is permitted. The flag bit or other indicator 306 is set to indicate the message is a file sharing message. The content request message is then transmitted to the packet-switched RAN 112 by the radio circuitry 118 included in the second mobile device 108, e.g., as illustrated by Step 402 of Figure 4. The packet-switched RAN 112 recognizes the message as a file sharing message by inspecting the flag bit or other
- 15 indicator 306, e.g., as illustrated by Step 404 of Figure 4. Accordingly, the packet-switched RAN 112 sends the message to one or more of the computer nodes 102 included in the overlay network 100, e.g., as illustrated by Step 406 of Figure 4.

The content request message is received by the computer node 102 coupled to the packet-

switched RAN 112, e.g., as illustrated by Step 600 of Figure 6. The local ring including the

- 20 computer node 102 that received the message determines whether the key included in the message is stored by the local ring, e.g., as illustrated by Step 602 of Figure 6. If the local ring maintains the key, the message is processed by the responsible computer node 102 and message routing is terminated, e.g., as illustrated by Steps 604 and 606 of Figure 6. In this example, a previous record 110 was created having a matching key value. Accordingly, a reply
- 25 message is generated by the responsible computer node 102 and sent to the second mobile device 108 as part of processing the content request message. The reply message includes the identifier for the first mobile device 106 which can be used by the second mobile device 108 to contact the first device 106.

The local ring of computer nodes determines whether the message may be routed outside the local ring if none of the computer nodes 102 is responsible for the key included in the message, e.g., as illustrated by Step 608 of Figure 6. The routing level field 316 included in the message body 304 is inspected to determine whether the message may be routed outside the local ring if

- 5 the computer node responsible for the key does not have a record matching the key included in the message, e.g., to one of the countrywide rings 202 shown in Figure 2. The content request message is routed outside the local ring if higher-level routing is permitted, e.g., as illustrated by Step 610 of Figure 6. Otherwise, routing is terminated, e.g., as illustrated by Step 606 of Figure 6. A reply message is sent to the second mobile device 108 indicating no matching key was
- 10 found when message routing is terminated before a record 110 having a matching key is found.

The reply message is routed to the computer node 102 associated with the packet-switched RAN 112 and then transmitted from the RAN 112 to the second mobile device 108.

The first mobile device 106 may deregister the shared electronic content by sending a content deregistration message to the RAN 112. The mobile device identifier field 312 included in

- 15 message body 304 identifies the first mobile device 106. The key field 310 identifies the electronic content to be deregistered. Electronic content may be deregistered automatically, e.g., in response to the electronic content being deleted or removed from a public folder.

Alternatively, a user may manually deregister shared electronic content by initiating a deregistration routine. Regardless, the content deregistration message is transmitted to the

- 20 packet-switched RAN 112 which sends the message to the overlay network 100. The computer node 102 responsible for the key eventually receives the deregistration message and deletes the record 110 associated with the mobile device identifier included in the message.

Each computer node 102 coupled to or otherwise associated with the packet-switched RAN 112 may be remotely located or locally maintained by the RAN 112. Each computer node 102

- 25 coupled to or otherwise associated with the RAN 112 provides a communication bridge for the flow of file sharing messages between the mobile devices 106, 108 and the overlay network 100. The RAN 112 communicates with remote computer nodes 102 using a packet-based communication protocol such as IP as is well known in the art. Alternatively, the RAN 112

locally maintains one or more of the computer nodes 102 forming part of the overlay network 100.

Figure 7 illustrates an embodiment of the packet-switched RAN 112 where a local ring 700 of computer nodes 102 is locally maintained by the RAN 112. The local ring 700 has one or more

5 links 702 to remote computer nodes 102 included in the overlay network 100. This way, the local ring 700 forms part of the hierarchical DHT overlay network 100 while also functioning as a messaging interface between the RAN 112 and the overlay network 100.

According to this embodiment, the packet-switched RAN 112 comprises a GPRS/EDGE-based RAN. However, the RAN 112 may conform to other radio access topologies such as WCDMA,

10 UMTS or a High-Speed Packet Access (HSPA) mobile telephony protocol. The RAN 112 includes a GSM Gateway Mobile Switching Center (GMSC) 704 for providing a gateway between the RAN 112 and the Public-Switched Telephone Network (PSTN) 706. The RAN 112 also includes a Mobile services Switching Center (MSC) and a Visitor Location Register (VLR) 708 for supporting circuit-switched communication. The MSC/VLR 708 performs circuit

15 switching functions, provides connections to the PSTN 706, and contains subscriber information necessary for providing circuit switched services. A central database 710 maintains the Home Location Register (HLR) which contains information associated with each mobile phone subscriber authorized to use the RAN 112.

The RAN 112 further includes complimentary components for supporting packet switched

20 communication. A radio access node 712 such as a Base Station Subsystem (BSS) handles traffic and signaling between the mobile devices 106, 108 and the RAN 112. The BSS 712 transcodes speech channels, allocates radio channels, performs paging, manages quality of transmission and reception over the air interface and many other tasks related to the RAN 112 as is well known in the art. A first packet-switched communication support node 714 such as a

25 Serving GPRS support node (SGSN) controls connections between the RAN 112 and the mobile devices 106, 108. The SGSN 714 performs session management and GPRS mobility management such as handovers and paging. The SGSN 714 has access to a GPRS register maintained by the central database 710 which stores SGSN addresses and maintains GPRS

subscriber data and routing information. A second packet-switched communication support node 716 such as a Gateway GPRS Support Node (GGSN) provides a gateway between the RAN 112 and the PSDN 104 and/or other GPRS networks (not shown). The GGSN 716 implements authentication and location management functions.

- 5 The GGSN 716 also maintains the local ring of computer nodes 700 included in the packet-switched RAN 112. The GGSN 716 directs file sharing messages to the local ring 700 for routing. Particularly, the GGSN 716 inspects messages received from mobile devices 106, 108 to determine whether the flag bit or other indicator 306 has been set to indicate that the messages are file sharing related. The GGSN 716 forwards received messages to the local ring 10 700 when the flag bit or other indicator 306 is set. The local ring 700 routes file sharing messages provided by the GGSN 716 based on the key included in the messages as previously described. If the computer node 102 responsible for the key in the local ring 700 has a record matching the key included in a particular message, the message is routed to a different ring 15 external to the RAN 112 based on the hierarchical DHT. That is, if the message permits routing outside the local ring 700 maintained by the RAN 112, the message is routed to a different ring of computer nodes 102 included in the overlay network 100. File sharing messages are routed outside the local ring 700 according to a hierarchical DHT protocol in the application level. For example, a protocol such as IP can be used in the layer 3 level to route file sharing messages. Messages are routed through the overlay network 100 as previously described.
- 20 With the above range of variations and applications in mind, it should be understood that the present invention is not limited by the foregoing description, nor is it limited by the accompanying drawings. Instead, the present invention is limited only by the following claims, and their legal equivalents.

## CLAIMS

1. A method of sharing mobile device electronic content via an overlay network of computer nodes arranged according to a hierarchical distributed hash table (DHT), comprising:

generating a message by a mobile device, the message including a key configured to  
5 identify mobile device electronic content and to enable routing of the message  
based on the hierarchical DHT through the overlay network upon reception of the  
message at any of the computer nodes; and  
transmitting the message to a packet-switched radio access network, the packet-  
switched radio access network configured to send the message to one or more of  
10 the computer nodes.

2. The method of claim 1, wherein generating the message comprises generating a content registration message configured to identify the mobile device and electronic content stored by the mobile device which the mobile device is configured to share.

15

3. The method of claim 2, wherein generating the content registration message comprises automatically generating the content registration message responsive to a predetermined folder in the mobile device newly listing the electronic content.

20 4. The method of claim 2, further comprising regenerating the content registration message responsive to the mobile device powering on.

25 5. The method of claim 1, wherein generating the message comprises generating a content deregistration message configured to identify the mobile device and electronic content stored by the mobile device which the mobile device is no longer configured to share.

6. The method of claim 1, wherein generating the message comprises generating a content request message configured to identify electronic content requested by the mobile device.

7. The method of claim 6, wherein generating the content request message comprises indicating in the content request message a level of the hierarchical DHT beyond which key searching is not permitted.

5

8. The method of claim 7, wherein indicating in the content request message the level of the hierarchical DHT beyond which key searching is not permitted comprises indicating whether key searching is permitted at a network operator level, a countrywide level or a worldwide level.

10 9. The method of claim 1, further comprising processing a reply message received from the overlay network at the mobile device, the reply message configured to indicate whether one or more of the computer nodes maintains a record matching the key.

10. The method of claim 9, wherein processing the reply message comprises:  
15 retrieving a mobile device identifier from the reply message, the mobile device identifier configured to identify a mobile device storing electronic content indicated by the key;  
sending a message to the mobile device identified by the mobile device identifier, the message configured to request access to the electronic content;  
20 receiving a response from the mobile device identified by the mobile device identifier, the response including an IP address identifying the mobile device that transmitted the response; and  
receiving the electronic content over a network connection established between the mobile devices based on the IP address.

25

11. A mobile device for sharing mobile device electronic content via an overlay network of computer nodes arranged according to a hierarchical distributed hash table (DHT), comprising:

a processor configured to generate a message including a key configured to identify mobile device electronic content and to enable routing of the message based on the hierarchical DHT through the overlay network upon reception of the message at any of the computer nodes; and

5 radio circuitry configured to transmit the message to a packet-switched radio access network, the packet-switched radio access network configured to send the message to one or more of the computer nodes.

12. The mobile device of claim 11, wherein the processor is configured to generate a content  
10 registration message configured to identify the mobile device and electronic content stored by  
the mobile device which the mobile device is configured to share.

13. The mobile device of claim 12, wherein the processor is configured to automatically generate the content registration message responsive to a predetermined folder in the mobile device newly listing the electronic content.

14. The mobile device of claim 12, wherein the processor is further configured to regenerate the content registration message responsive to the mobile device powering on.

20 15. The mobile device of claim 11, wherein the processor is configured to generate a content  
deregistration message configured to identify the mobile device and electronic content stored by  
the mobile device which the mobile device is no longer configured to share.

16. The mobile device of claim 11, wherein the processor is configured to generate a content  
25 request message configured to identify electronic content requested by the mobile device.

17. The mobile device of claim 16, wherein the processor is configured to indicate in the content request message a level of the hierarchical DHT beyond which key searching is not permitted.

5 18. The mobile device of claim 17, wherein the processor is configured to indicate whether key searching is permitted at a network operator level, a countrywide level or a worldwide level.

19. The mobile device of claim 11, wherein the processor is further configured to process a reply message received from the overlay network, the reply message configured to indicate 10 whether one or more of the computer nodes maintains a record matching the key.

20. The mobile device of claim 19, wherein the processor is configured to:  
retrieve a mobile device identifier from the reply message, the mobile device identifier 15 configured to identify a mobile device storing electronic content indicated by the key;

generate a message directed to the mobile device identified by the mobile device identifier, the message configured to request access to the electronic content;  
process a response received from the mobile device identified by the mobile device identifier, the response including an IP address identifying the mobile device that 20 transmitted the response; and  
process electronic content received over a network connection established between the mobile devices based on the IP address.

21. The mobile device of claim 11, wherein the mobile device comprises a mobile phone.

25 22. A method of sharing mobile device electronic content via an overlay network of computer nodes arranged according to a hierarchical distributed hash table (DHT), comprising:

processing at a packet-switched radio access network a message generated by a mobile device, the message including a key configured to identify mobile device electronic content and to enable routing of the message based on the hierarchical DHT through the overlay network upon reception of the message at any of the computer nodes; and

5 sending the message to one or more of the computer nodes associated with the packet-switched radio access network.

23. The method of claim 22, wherein processing the message comprises processing a content registration message configured to identify the mobile device and electronic content stored by the mobile device which the mobile device is configured to share.

10

24. The method of claim 22, wherein processing the message comprises processing a content request message configured to identify electronic content requested by the mobile device.

15

25. The method of claim 22, wherein processing the message comprises processing a content deregistration message configured to identify the mobile device and electronic content stored by the mobile device which the mobile device is no longer configured to share.

20

26. The method of claim 22, further comprising processing at the packet-switched radio access network a reply message received from the overlay network, the reply message configured to indicate whether one or more of the computer nodes maintains a record matching the key.

25

27. The method of claim 22, wherein sending the message to one or more of the computer nodes comprises forwarding the message to a packet-switched communication support node included in the packet-switched radio access network, the packet-switched communication

support node configured to form part of the overlay network and to route the message based on the key.

28. The method of claim 27, further comprising preventing the message from leaving the

5 packet-switched radio access network responsive to the message indicating key searching is not permitted outside the packet-switched radio access network.

29. A packet-switched radio access network for sharing mobile device electronic content via

an overlay network of computer nodes arranged according to a hierarchical distributed hash

10 table (DHT), comprising:

a radio access node configured to receive a message generated by a mobile device, the message including a key configured to identify mobile device electronic content and to enable routing of the message based on the hierarchical DHT through the overlay network upon reception of the message at any of the computer nodes;

15 and

a packet-switched communication support node configured to process the message and send the message to one or more of the computer nodes associated with the packet-switched radio access network.

20 30. The packet-switched radio access network of claim 29, wherein the packet-switched

communication support node is configured to process a content registration message configured to identify the mobile device and electronic content stored by the mobile device which the mobile device is configured to share.

25 31. The packet-switched radio access network of claim 29, wherein the packet-switched

communication support node is configured to process a content request message configured to identify electronic content requested by the mobile device.

32. The packet-switched radio access network of claim 29, wherein the packet-switched communication support node is configured to process a content deregistration message configured to identify the mobile device and electronic content stored by the mobile device which the mobile device is no longer configured to share.

5

33. The packet-switched radio access network of claim 29, wherein the packet-switched communication support node is further configured to process a reply message received from the overlay network, the reply message configured to indicate whether one or more of the computer nodes maintains a record matching the key.

10

34. The packet-switched radio access network of claim 29, wherein the packet-switched communication support node is further configured to form part of the overlay network and to route the message based on the key.

15 35. The packet-switched radio access network of claim 34, wherein the packet-switched communication support node is configured to prevent the message from leaving the packet-switched radio access network responsive to the message indicating key searching is not permitted outside the packet-switched radio access network.

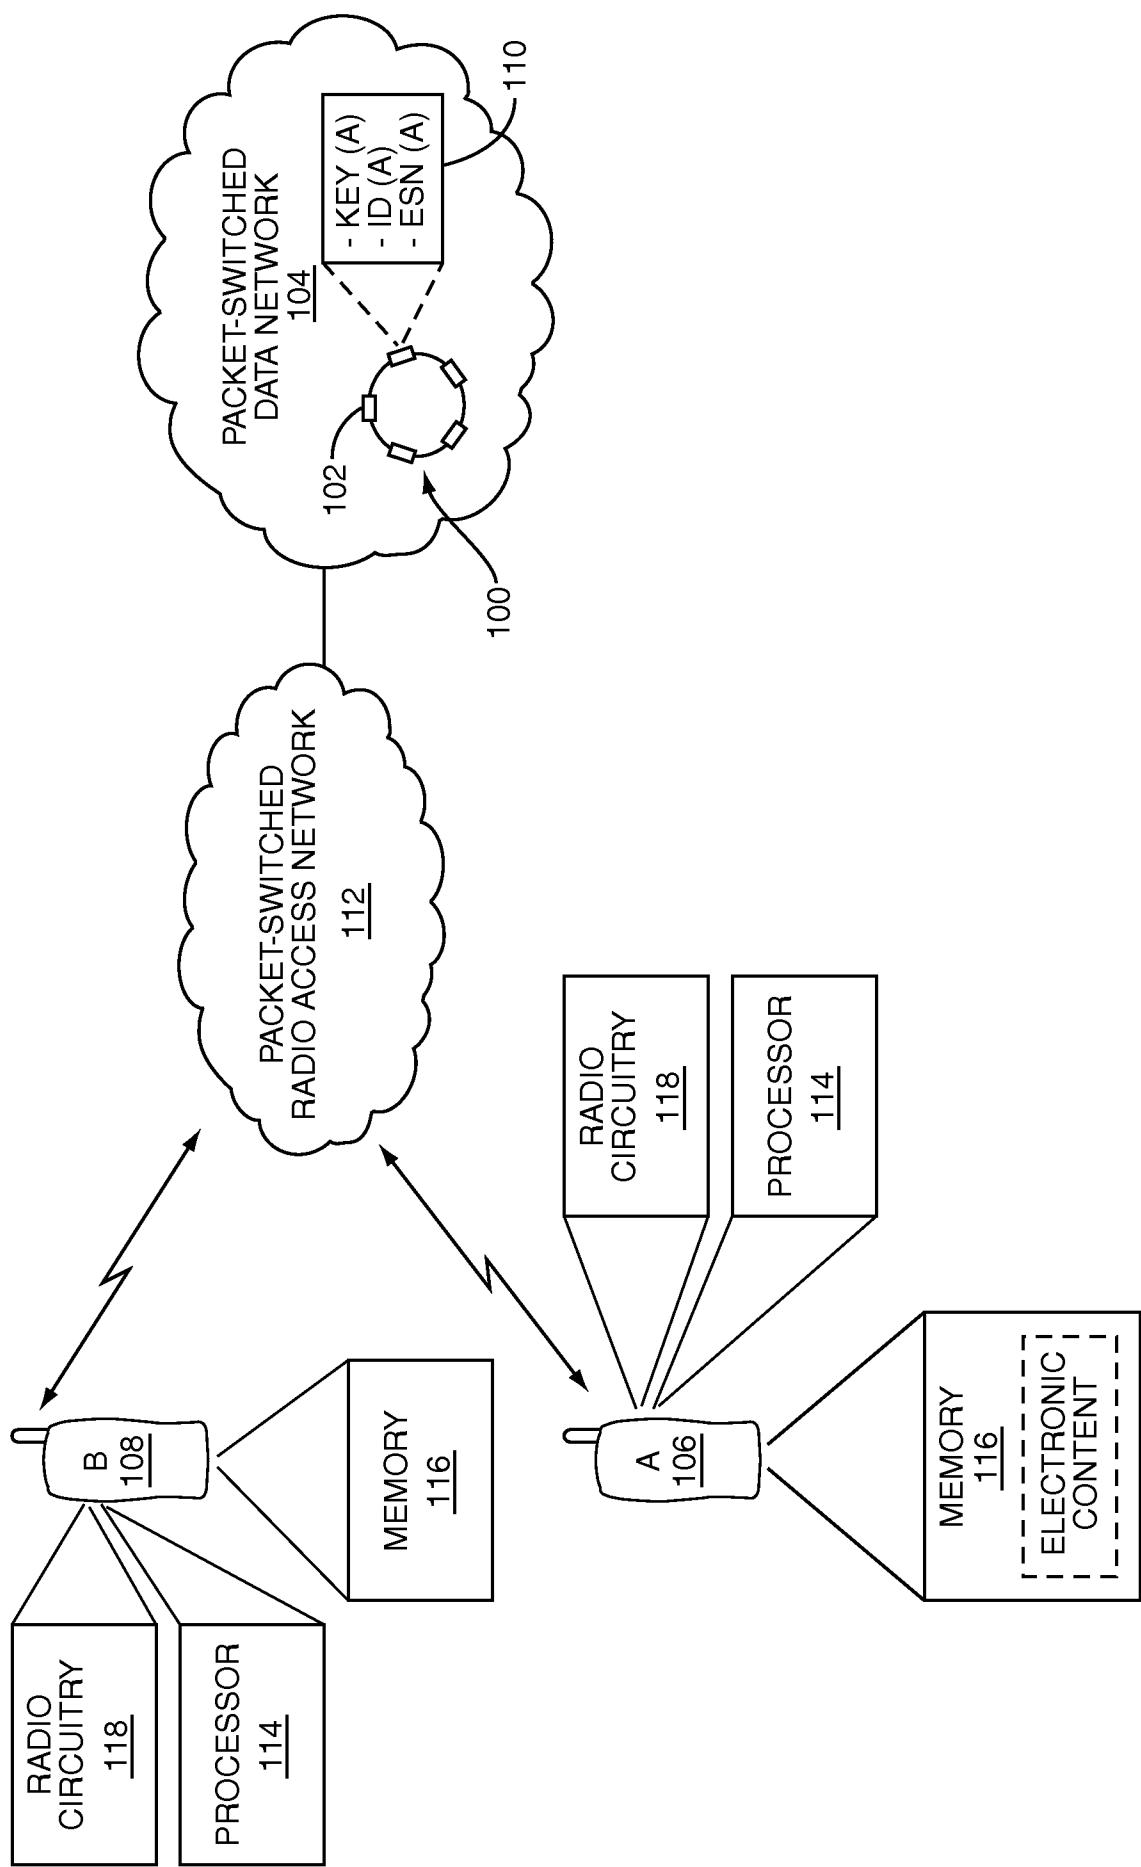


FIG. 1



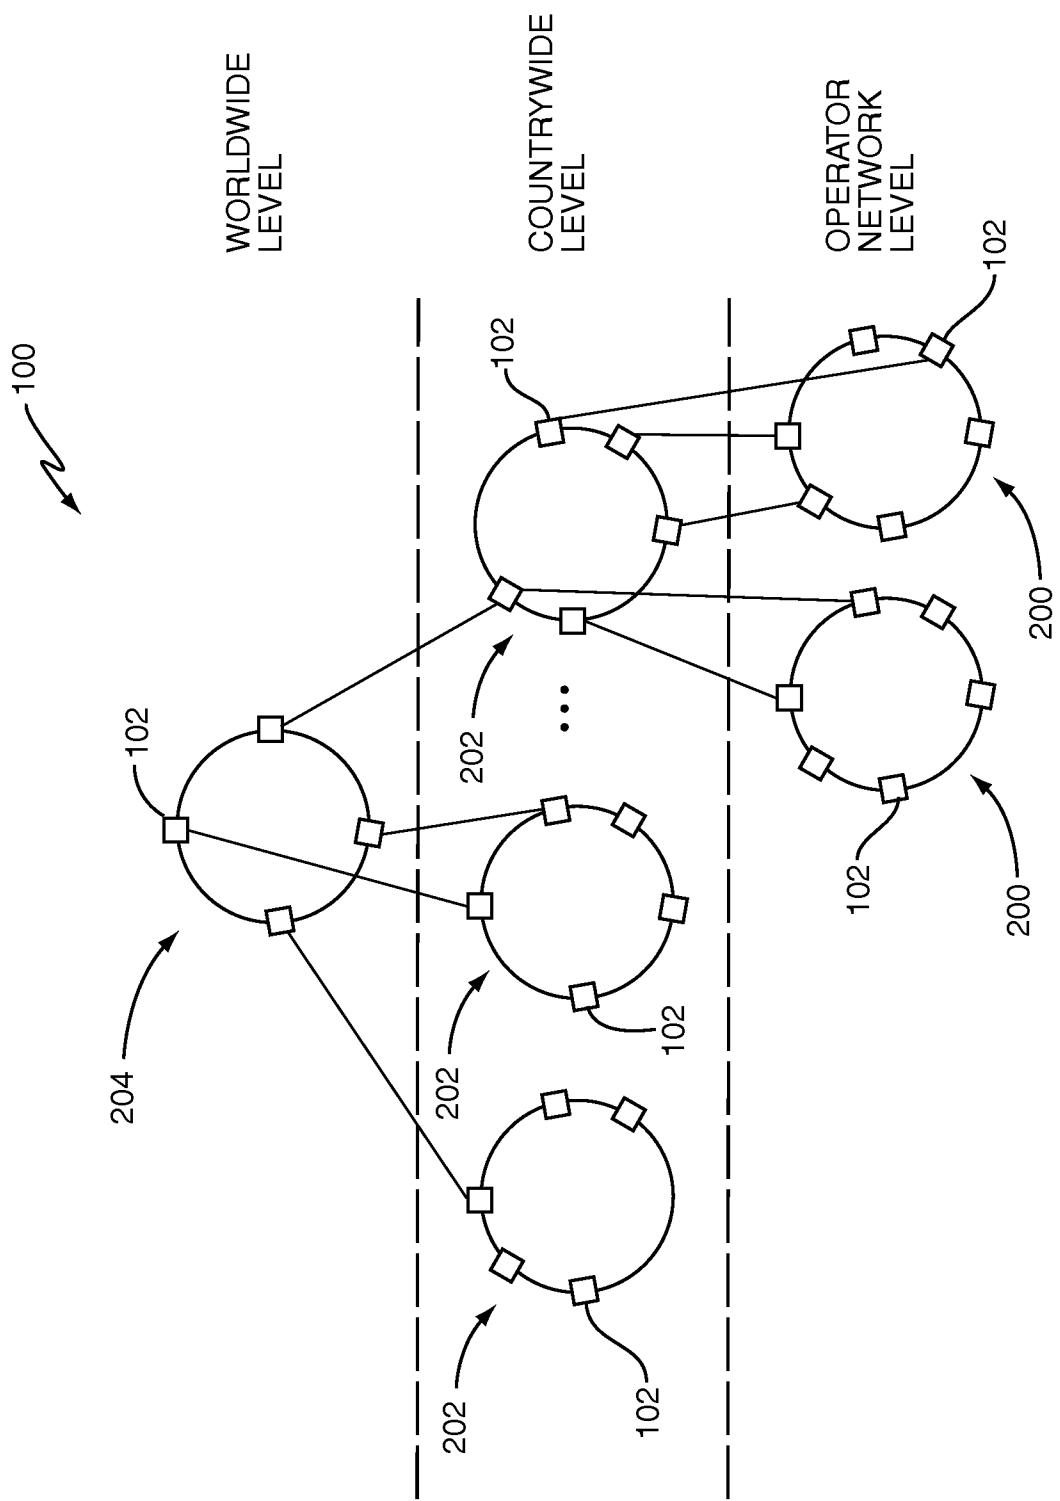



FIG. 2

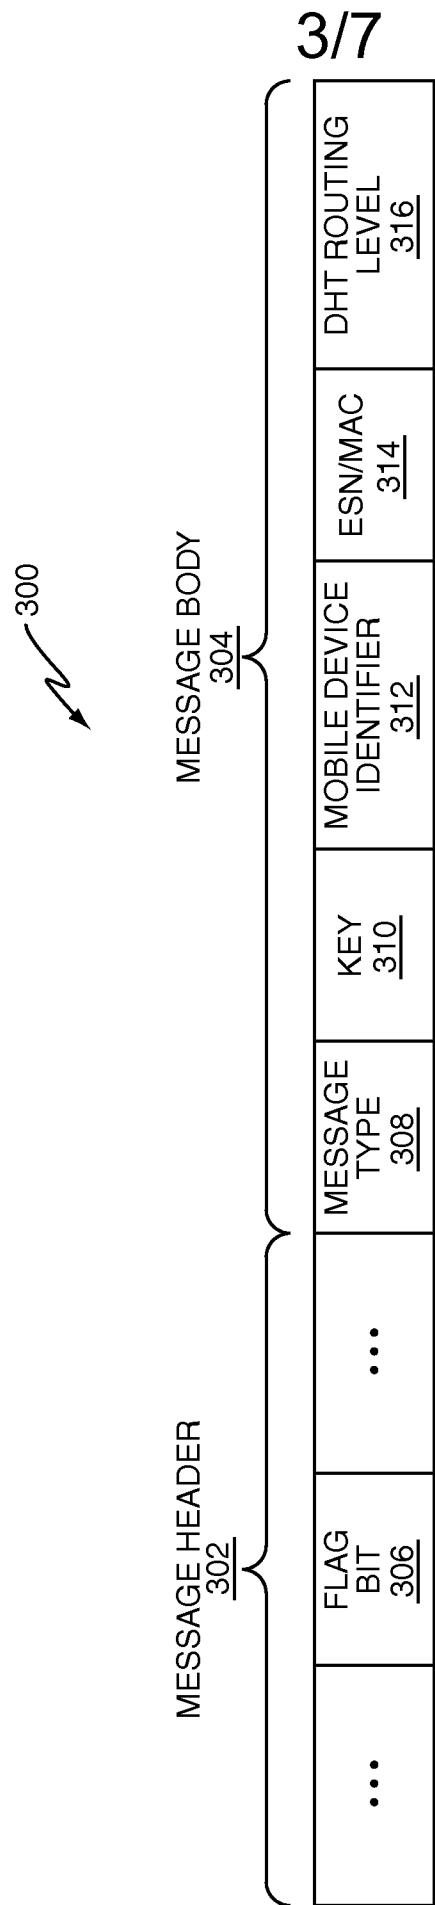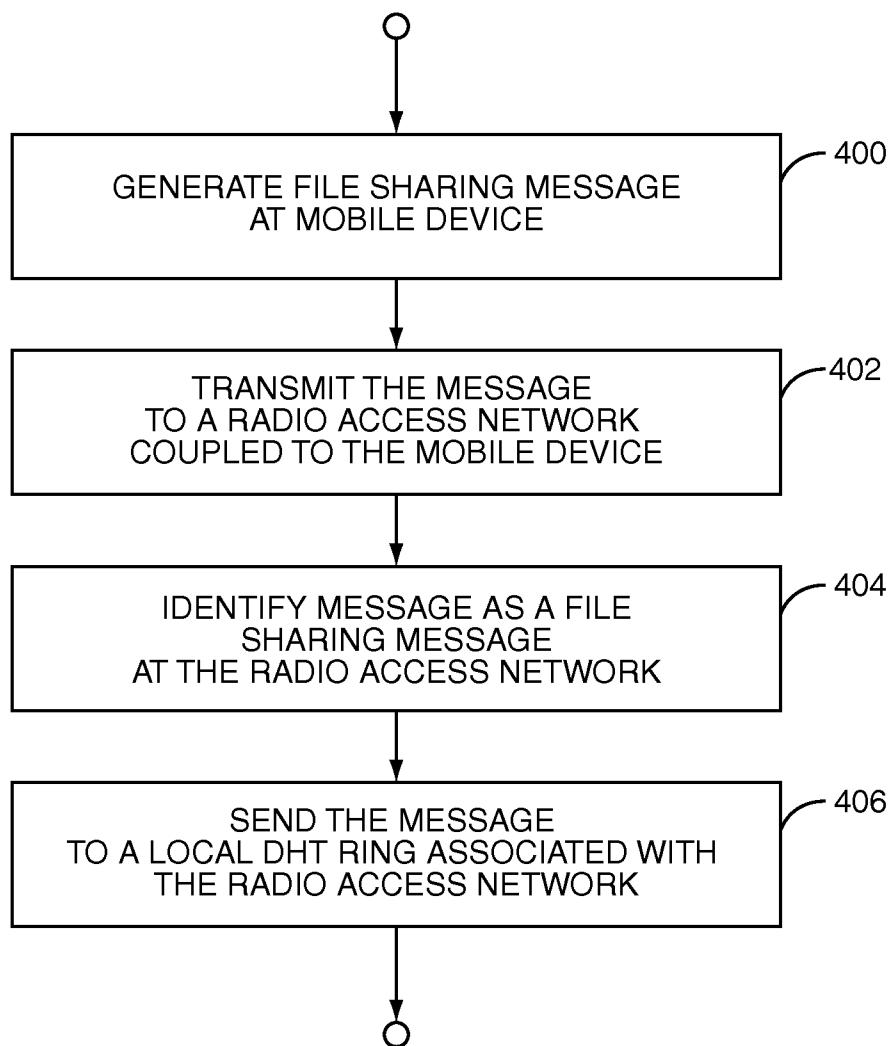


*FIG. 3*

4/7

**FIG. 4**

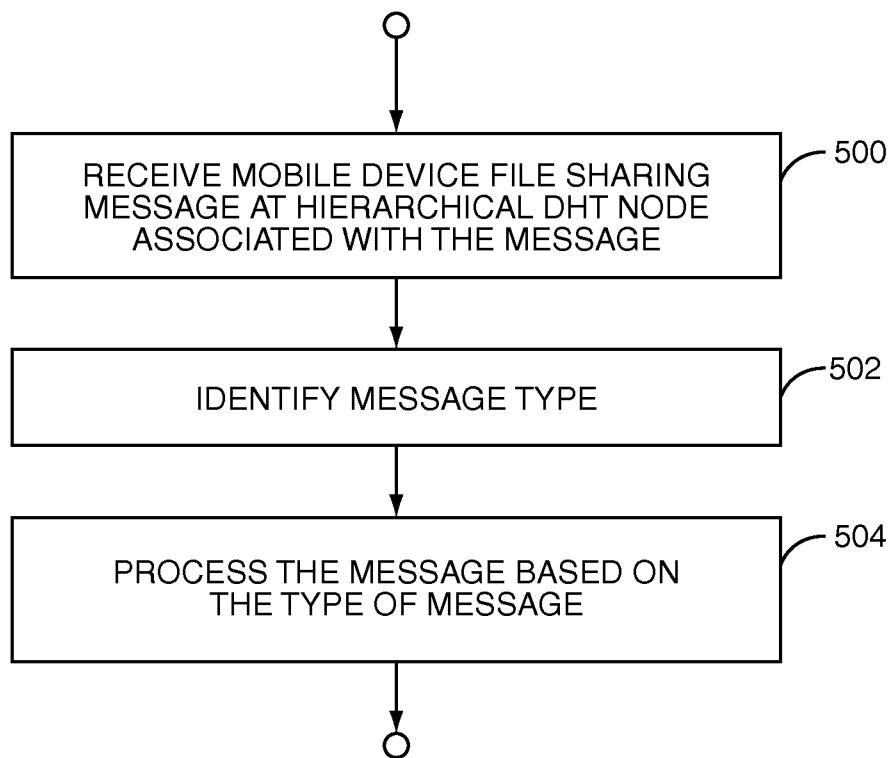**FIG. 5**

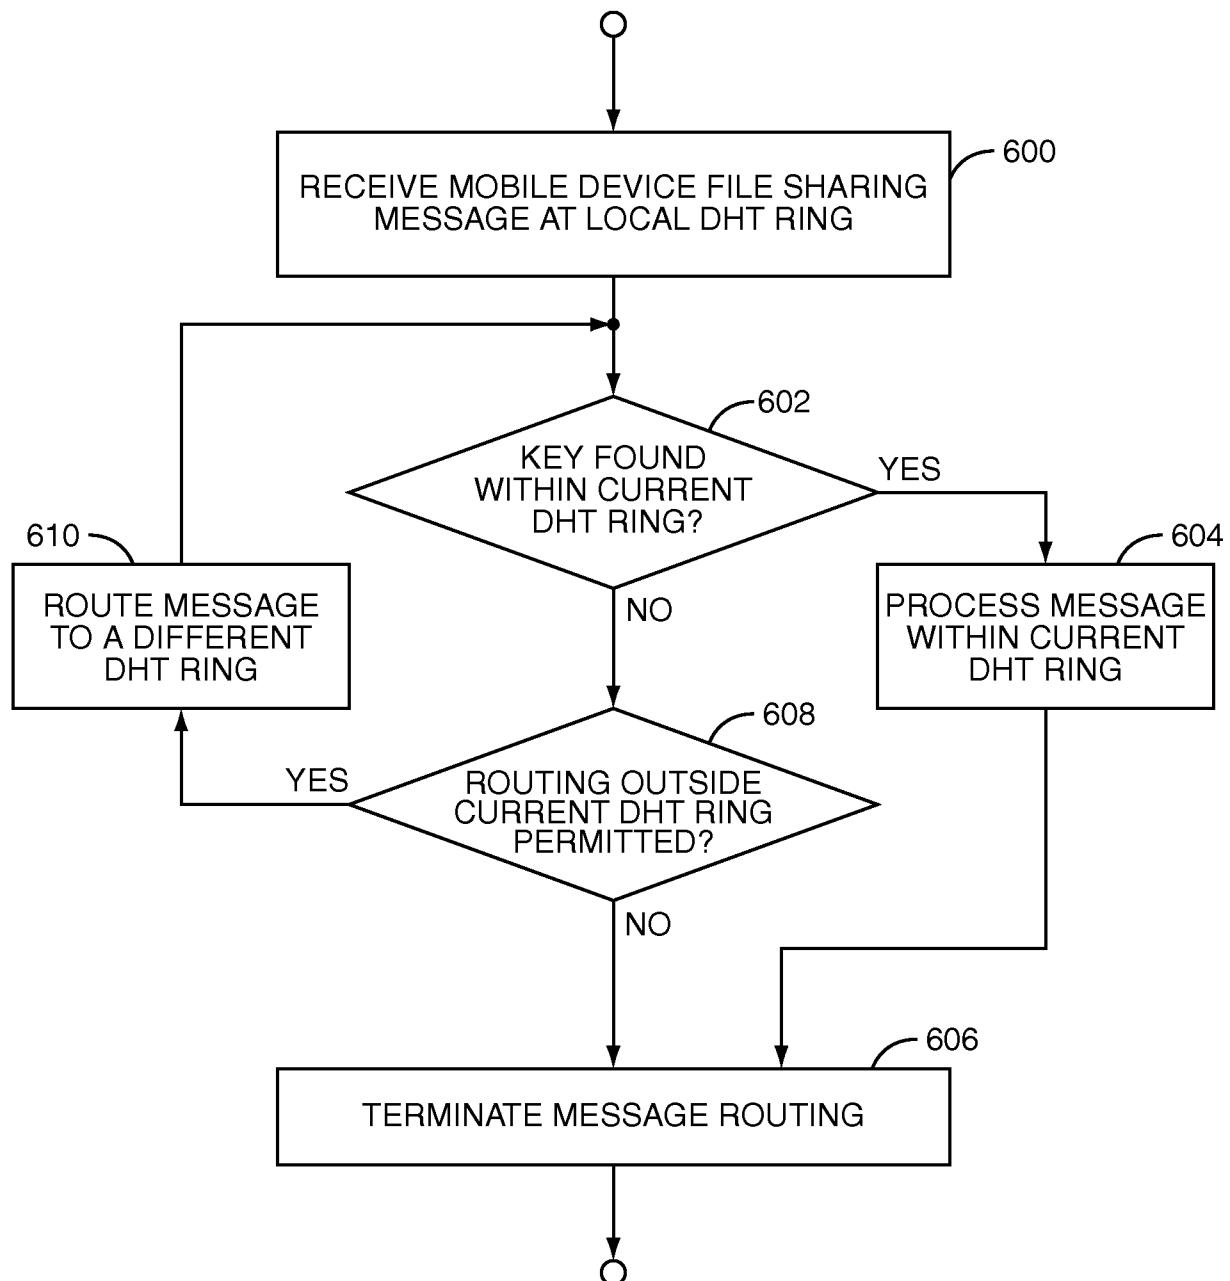**FIG. 6**

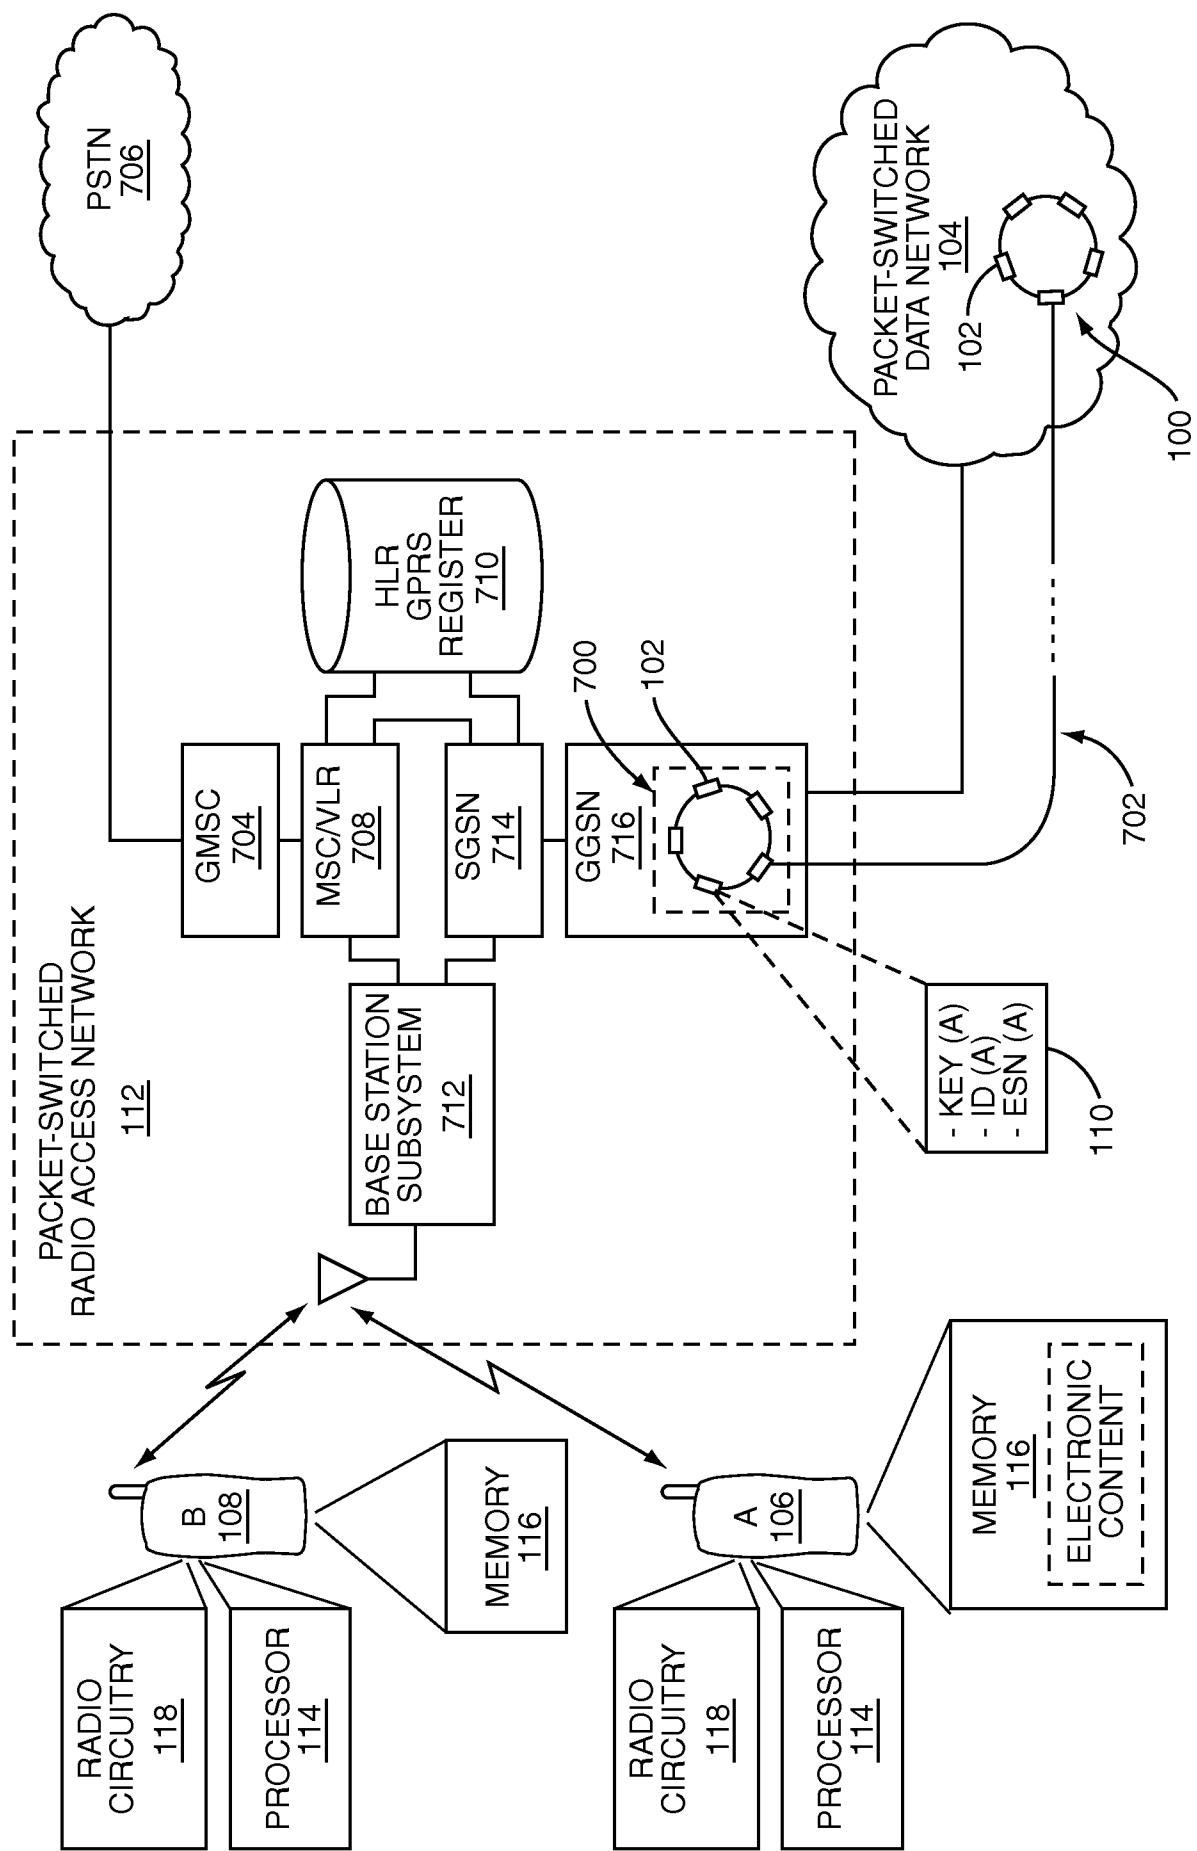


FIG. 7

# INTERNATIONAL SEARCH REPORT

International application No  
PCT/EP2008/053141

**A. CLASSIFICATION OF SUBJECT MATTER**  
INV. H04L29/08

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, INSPEC, IBM-TDB, COMPENDEX

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2006/053580 A (NTT DOCOMO INC [JP]; KELLERER WOLFGANG [DE]; TARLANO ANTHONY [DE]; ZOE) 26 May 2006 (2006-05-26)	1-6, 9-16, 19-27, 29-34
A	<p>abstract</p> <p>page 3, line 31 – page 4, line 4</p> <p>page 5, line 31 – page 7, line 20</p> <p>page 8, line 27 – line 30</p> <p>page 11, line 29 – page 12, line 32</p> <p>page 13, line 29 – line 33</p> <p>page 14, line 7 – line 17</p> <p>page 15, line 8 – line 30</p> <p>page 24, line 30 – page 25, line 14</p> <p>page 27, line 9 – line 11</p> <p>page 28, line 20 – line 35</p> <p>page 31, line 1 – line 5</p> <p>page 32, line 13 – page 33, line 10</p> <p>–/–</p>	7, 8, 17, 18, 28, 35

Further documents are listed in the continuation of Box C.

See patent family annex.

\* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the International filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the International filing date but later than the priority date claimed

"T" later document published after the International filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the Invention

"X" document of particular relevance; the claimed Invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed Invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the International search

Date of mailing of the International search report

15 July 2008

22/07/2008

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2  
NL – 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Hes, Ronald

## INTERNATIONAL SEARCH REPORT

International application No PCT/EP2008/053141
---

## C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>-----</p> <p>WOLFGANG KELLERER ET AL: "Towards a Mobile Peer-to-Peer Service Platform" APPLICATIONS AND THE INTERNET WORKSHOPS, 2007. SAINT WORKSHOPS 2007. INTERNATIONAL SYMPOSIUM ON, IEEE, PI, 1 January 2007 (2007-01-01), pages 2-2, XP031044094 ISBN: 978-0-7695-2757-4 paragraph [0004]</p> <p>-----</p>	1-35
A	<p>EP 1 587 282 A (MICROSOFT CORP [US]) 19 October 2005 (2005-10-19) abstract paragraph [0009] – paragraph [0011]</p> <p>-----</p>	1-35
A	<p>MARCIN MATUSZEWSKI ET AL: "Social Distributed Hash Table" WIRELESS COMMUNICATIONS AND NETWORKING CONFERENCE, 2007. WCNC 2007. IEE E, IEEE, PI, 1 March 2007 (2007-03-01), pages 2812-2818, XP031097660 ISBN: 978-1-4244-0658-6 paragraphs [0003], [004A], [0005], [0006]</p> <p>-----</p>	1-35

**INTERNATIONAL SEARCH REPORT****Information on patent family members**

International application No

PCT/EP2008/053141

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
WO 2006053580	A 26-05-2006	EP	1813074 A1	01-08-2007
EP 1587282	A 19-10-2005	AT 369693 T		15-08-2007
		CN 1708026 A		14-12-2005
		DE 602005001883 T2		20-12-2007
		JP 2005353039 A		22-12-2005
		KR 20060045788 A		17-05-2006
		US 2005243740 A1		03-11-2005