

(19)



(11)

EP 2 636 822 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
31.10.2018 Bulletin 2018/44

(51) Int Cl.:
E05B 47/00 ^(2006.01) **E05B 45/06** ^(2006.01)
E05B 47/06 ^(2006.01) **G08B 25/00** ^(2006.01)

(21) Application number: **12183956.7**

(22) Date of filing: **11.09.2012**

(54) **Lock mechanism**

Verriegelungsmechanismus

Mécanisme de verrouillage

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GR
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL
PT RO RS SE SI SK SM TR**

(30) Priority: **07.03.2012 GB 201204033**

(43) Date of publication of application:
11.09.2013 Bulletin 2013/37

(73) Proprietor: **Moose Junction Limited
Kidderminster, West Midlands DY10 2SH (GB)**

(72) Inventors:
• **Ogden, David**
Kidderminster, West Midlands DY10 2SH (GB)
• **Powell, Simon**
76790 Etretat (FR)

(74) Representative: **Barker Brettell LLP**
100 Hagley Road
Edgbaston
Birmingham B16 8QQ (GB)

(56) References cited:
EP-A2- 1 953 774 FR-A1- 2 757 204
US-A- 5 699 686 US-B1- 6 619 085

EP 2 636 822 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] This invention relates to a lock mechanism. It also relates to a lock incorporating the lock mechanism.

[0002] A typical lock comprises a lock bolt that is received within a keep when the lock is activated. When the lock is deactivated the lock bolt can be withdrawn from the keep. A lock mechanism is typically used to selectively restrict or control movement of a lock and/or control the lock bolt.

[0003] Certain locks and lock mechanisms, such as those for key boxes or safes and the like, are required to be particularly robust. These types of locks must be able to withstand large forces, particularly when attacked, yet still operate smoothly and reliably. We are aware of:

- United States Patent no 6 619 085, which uses a motor to rotate an actuating member relative to a passive member;
- the European Patent Application published as EP 1 953 774, which discloses an electromagnetically actuated bistable magnetic latching pin lock; and
- the French Patent Application published as FR 2 757 204, which shows an electrically operated lock with a rotating drum carrying helical ramps.

[0004] According to a first aspect of the invention we provide a lock mechanism comprising a control element arranged for rotation about an axis between an active position and an inactive position, the control element including a control head having at least one axially extending projection, the lock mechanism further comprising a lock element that is axially aligned with the control element and includes a lock element head, the lock element head having at least one axially extending projection, the projection(s) of the control head and the projection(s) of the lock element head arranged such that in the active position, the lock element and control element are held apart by the projections and in the inactive position, the projections can mesh together to permit axial movement of the lock element relative to the control element, the control element and the lock element are received within a housing and are axially slidable therein, the lock mechanism including a biasing element to urge the control element and lock element apart. The housing forms a guide such that the control element and lock mechanism can move axially relative to one another. This arrangement is advantageous as the lock element and control element can "float" in the housing, which has been found to result in a more reliable mechanism as tolerances do not need to be strictly controlled.

[0005] This is advantageous as the lock mechanism can be constructed such that it is very robust for its size. The intermeshing projections provide an easy to manufacture and reliable way to control the motion of the lock element.

[0006] Preferably the lock element comprises an elongate body having the at least one projection at one end

and a lock bolt at an opposed end, the lock bolt adapted to be received within a keep of a lock. Alternatively, the lock element or lock bolt may be adapted to actuate a further mechanism of greater strength, for example.

[0007] Preferably, at least one of the projections includes a narrower tip that is narrower than the remainder of the projection or tapers. This will allow the projections to mesh together more easily as the tip, which could be conical or frustoconical, guides the projections to intermesh.

[0008] Preferably the control head has at least two axially extending projections and the lock element head may have a complementary number of axially extending projections. Preferably, the control head is castellated and thus the castellations form the at least one projection. Preferably the lock element head is castellated, the castellations on the lock element head being complementary to the castellations on the control head. Preferably the castellations are arranged in a ring.

[0009] Alternatively, one of the control head and lock element head may comprise a single projection having bores therein, the bores arranged to receive complementary pins on the other of the control head and lock element head when in the inactive position such that the pins are received within the bores and thus mesh together, and in the active position, the pins are not aligned with the bores and the control element and lock element are held apart.

[0010] Preferably the projection on the control head or the projection on the lock element head is shaped such that the rotational motion of the control element is converted to axial motion of the lock element. Thus, the projection may have a lead-in portion inclined to the axial direction arranged to bear against the other projection such that rotation of the control element moves the lock element in the axial direction. This is advantageous as rotation of the control element can be arranged to drive the control element and lock element apart so that the lock element can engage a lock keep, for example.

[0011] Preferably the housing comprises an abutment end plate at one end arranged to contact the control element. Preferably the abutment end plate is adapted to form a mount for a motor for rotating the control element between the active and inactive positions. The end plate is advantageous as it transfers forces applied to the control element to the housing rather than the forces being transferred to the motor.

[0012] Preferably the control element comprises a tubular body having the control head at one end.

[0013] Preferably, the tubular body of the control element is arranged to receive a motor for rotating the control element between the active and inactive positions, wherein the motor is mounted to an abutment end plate of the housing. This is advantageous because any force applied to the control element, will be transferred to the abutment plate rather than through the motor.

[0014] Preferably the motor comprises a spindle to engage an aperture in the control element, the aperture and

spindle being arranged such that the spindle is axially slidable within the aperture. This is advantageous as the spindle is shaped such that it can rotate the control element, but it can also slide axially. This helps to isolate the motor from any forces experienced by the control element, when the lock mechanism is attacked, for example.

[0015] Alternatively, the abutment plate may include an aperture for receiving a rod that, at a first end, engages the control element and at a second end is coupled to a motor for rotating the control element that is mounted outside of a housing of the lock mechanism. This is advantageous as the motor is separate from the remainder of the lock mechanism. This isolates the motor from forces subjected to the lock mechanism, especially when the rod is slidably received within the control element. Preferably the housing comprises an aperture in one end to allow the lock element to project from the housing.

[0016] Preferably the lock mechanism includes a withdrawal means for withdrawing the lock element when the control element is in the inactive position. The withdrawal means may comprise a slider projecting from the lock element, the slider adapted to be moved by a user to withdraw the lock element. The slider may be actuated by a handle. Alternatively, the withdrawal means may comprise a withdrawal motor arranged to withdraw the lock element. This is advantageous as the withdrawal motor can be controlled in combination with the motor that operates the control element so that the two motors can operate together or sequentially.

[0017] In a further embodiment, the lock mechanism may include two lock elements adapted to project from opposed ends and the control element may include at least one projection at both ends and a middle support plate may provide support to a midsection of the control element. This is advantageous as the middle support plate can be connected to a housing and engage a groove in the midsection of the control element. The middle support plate may provide a mount for a motor.

[0018] According to a second aspect of the invention we provide a lock having the lock mechanism of the first aspect of the invention, the lock element comprising a lock bolt at one end, opposed the lock element head, for engaging a keep.

[0019] This is advantageous because the lock mechanism can easily be integrated into a lock. The lock may be integrated in a door, a strong box, an electronic padlock, a deadbolt, a deadbolt lock or a key box, for example.

[0020] Preferably the lock includes withdrawal means for withdrawing the lock bolt from the keep.

[0021] Preferably, the lock element and control element are arranged such that the throw of the lock bolt is determined by the depth of the projections. Thus, the amount the projections can mesh together controls the throw of the lock bolt. This is advantageous as the lock mechanism only requires a simple modification to suit the desired throw of the lock bolt. Preferably the lock bolt

is fixedly secured to or integral with the lock element.

[0022] Preferably the lock bolt comprises a rod having a substantially flat edge for engaging the keep; a cylindrical member; or a ball bearing.

[0023] There now follows by way of example only a detailed description of the present invention with reference to the accompanying drawings, in which;

Figure 1 shows a cross sectional view of an embodiment of the lock mechanism;

Figure 2 shows a side view of the lock mechanism with the control element in an active position;

Figure 3 shows a side view of the lock mechanism with the control element in an inactive position; and

Figure 4 shows an embodiment of a locking system incorporating the lock mechanisms of Figures 1 to 3.

[0024] A lock mechanism 1 is shown in the Figures 1 to 3, which is arranged to be integrated into a key box. It will be appreciated that the lock mechanism 1 is perfectly suited for integration into other arrangements where a robust and reliable lock mechanism is required.

[0025] The lock mechanism 1 comprises a control element 2 arranged for rotation about an axis A between an active position (shown in Figure 2) and an inactive position (shown in Figure 3). The control element 2 includes a control head 3 at one end having four circumferentially spaced projections 4a-d extending axially therefrom. Thus, the four projections have four gaps therebetween.

[0026] The lock mechanism 1 further comprises a lock element 5 that is axially aligned with the control element 2 and includes a lock element head 6. The lock element head 6 faces the control head 3. The lock element head 6 has, at its end, four circumferentially spaced projections 7a-d extending axially therefrom. Thus, the four projections have four gaps therebetween. The projections 4a-d of the control head 3 and the projections 7a-d of the lock element head 6 are arranged such that in the active position, the lock element 5 and control element 2 are held apart by the projections 4, 7 and in the inactive position, the projections 4 and 7 can mesh together to permit axial movement of the lock element 6 relative to the control element 2.

[0027] The control element 2 comprises a substantially tubular body 8 of circular cross-section that is closed at one end by the control head 3. At the opposite end, the control element 2 comprises an abutment rim 10. The abutment rim 10 includes a part-circumferential cut-out 11, which is used to limit the rotational movement of the control element 2, as will be described in more detail below. The projections 4 of the control head 3 form a ring of castellations. The ring of castellations define a central region 12 of the control head 3 adapted to receive a biasing element 13 comprising a coil spring. The control

head 3 also includes an aperture 14 that connects the inside of the tubular body 8 to the central region 12. The aperture 14 is keyed and in this embodiment is semicircular in cross-section.

[0028] The lock element 5 comprises a substantially cylindrical body 16. The lock element head 6 extends from a first end of the body 16. The opposed second end of the body comprises a bolt 17. The bolt 17 is arranged to fit within a keep (not shown) of the key box lock that the lock mechanism is mounted. The lock element 5 includes withdrawal means (not visible) that allows the bolt 17 of the lock element 5 to be withdrawn. The withdrawal means comprises a withdrawal rod that extends radially so that the bolt 17 can be withdrawn by a user. The lock element 5 also includes an axially facing ledge 19 that surrounds the bolt 17.

[0029] The control element 2 and lock element 5 are slidably mounted within a housing 18. In particular, the housing 18 provides a guiding channel in which the control element 2 and lock element 5 can slide axially. The control element 2 and lock element 5 are biased apart by the biasing element 13 and therefore "float" within the housing 18. The housing 18 has a bolt aperture 17' that allows the bolt 17 to project from the housing 18 so that it can engage the keep of the lock when in use. The bolt aperture 17' and bolt 17 are keyed to restrict rotation of the bolt 17 and therefore the lock element 5. The housing also includes a longitudinal slot (not visible) that allows the radially extending withdrawal rod to extend through the housing and move the lock element 5 when required.

[0030] The housing 18, at an end opposed to the aperture 17', includes an abutment end plate 20. The end plate 20 includes a mounting area 21 for a motor 22. The housing 18 is formed integrally with the abutment end plate 20, although they are shown as separate items in the Figures for clarity. The contents of the housing 18 is thus loaded therein through the end opposed to the abutment end plate 20 and then an end cap including the aperture 17' is affixed to the housing by welding, for example. The motor 22 includes a spindle 23 that is received within the keyed aperture 14. The spindle 23 is also keyed so that the motor 22 can rotate the control element 2. The spindle 23, although keyed for rotation, is axially slidable in the aperture 14. The mounting area 21 is surrounded by a support track 25, which is arranged to abut the abutment rim 10. The support track 25 is annular and includes a stop peg 24. The stop peg 24 is arranged to project into the cut-out 11 and thus limits the amount that the control element 2 can rotate, as the stop peg 24 will contact the sides of the cut-out 11. This arrangement is particularly advantageous as any force that is subjected to the housing 18 is transferred via the end plate 20 to the housing 18. The motor 22 is isolated from the force as the control element 2 is arranged to abut the end-plate and not bear on the motor 2 and the spindle 23 is axially slidable in the aperture 14.

[0031] Figures 2 and 3 show the lock mechanism 1 with the housing 18 removed to reveal the position of the

control element 2 and lock element 5 in use. Figure 2 shows the active position in which the control element 2 and lock element 5 are biased apart by the biasing element 13. Accordingly, the control element 2 abuts the support track 25 and the ledge 19 of the lock element 5 abuts the housing 18 adjacent the bolt aperture 17'. The control element 2 is at a rotational position where the projections 4a-d of the control head 2 are aligned with the projections 7a-d of the lock element head 6. Thus, the control element 2 and lock element 5 are restricted from moving further axially toward one another. The bolt 17 is maintained in its extended position where it extends into the keep of the key box lock (not shown). The stop peg 24 abuts a first side of the cut-out 11 in the active position. Any force that is applied to the bolt 17, such as if the lock is attacked, will be transferred to the housing 18 or through the control element 8 and the end plate 20 to the housing 18. The force on the motor 22 and spring 13 is kept to a low level so that they are not damaged. Therefore, it is relatively easy and cost effective to manufacture the housing 18, end plate 20, lock element 5 and control element 2 of robust materials. The arrangement of the lock mechanism 1 is particularly advantageous as it reduces the forces on the more delicate components, which ensures reliable operation. As the structure transfers force to the housing 18, the housing can be made of a strength or thickness to suit the intended use for the lock mechanism.

[0032] Upon actuation of the motor 22, the control element 2 is rotated through approximately 45° such that it adopts the inactive position. Accordingly the stop peg 24 now abuts an opposed side of the cut-out 11. In the inactive position, the projections 4a-d of the control head 2 are aligned with the gaps between the projections 7a-d of the lock element head 6. Likewise, the projections 7a-d of the lock element head 6 are aligned with the gaps between the projections 4a-d of the control head 2 so that the projections can move into the respective gaps. The withdrawal means rod can then be used to withdraw the lock element 5 axially towards the control element 2 such that the projections 4a-d mesh between the projections 7a-d and vice-versa. Withdrawal of the lock element 5 withdraws the bolt 17 out of the keep of the key box, allowing the key box to be opened.

[0033] To lock the lock mechanism, the bolt 17 is returned to the keep, perhaps with manipulation of the withdrawal means. The biasing element 13 urges the control element 2 and lock element 5 apart and thus the bolt 17 adopts its extended position through the bolt aperture 17'. The projections 4a-d and 7a-d are thus no longer meshed together. The motor 22 can then be actuated to rotate the control element 2 to the active position in which the projections are aligned end to end.

[0034] It will be appreciated that although the control element 2 and the lock element 5 have been shown having four projections each, they may have more or less projections or different numbers of projections. Further, the housing and thus the control element 2 and lock el-

ement 5 are described as substantially cylindrical, although they could be alternative shapes provided that relative movement in the axial direction is possible and the control element is able to rotate about its axis. Further, the embodiment of the lock mechanism 1 described above is for integration into a key box. It will be appreciated that the mechanism 1 can be used in any appropriate lock where a high strength, attack resistant, simple and reliable mechanism is required. The lock bolt 17 may comprise a ball bearing that projects through an aperture 17'. In the inactive position, the ball bearing operates as a strike mechanism and can ride into and out of the keep against the force of spring 13. When the lock mechanism is in the active position, the ball bearing is held, projecting from the lock mechanism, in the keep.

[0035] Figure 4 shows a locking system 40 that uses the lock mechanism 1 described above. The locking system 40 is a security device for remote locking of the internal or external doors of a property, possibly in response to the detection of an unauthorised intrusion into the building. The locking system 40 in this embodiment comprises a lock control panel 41, a first lock mechanism 42 loaded into a first internal door 43 of a building and a second lock mechanism 44 loaded into a second internal door 45 of a building.

[0036] The lock control panel 41 includes a key panel 46 for receiving the input of a code, a controller 47 and an antenna 48. The controller 47 is arranged to receive a code from the key panel 46 in order to "arm" and "disarm" the controller 47. The controller 47 also receives input from an intrusion detection device 50, which may comprise a Passive Infra Red (PIR) sensor. When the controller is armed, it is adapted to act on the input from the intrusion detection device 50. When it is disarmed it does not act on the input from the intrusion detection device 50. The controller acts on the input by sending command signals, via the antenna 48, to the first and second lock mechanisms 42, 44. Accordingly, the controller includes wireless communication means to communicate with the lock mechanisms 42, 44.

[0037] The lock mechanisms 42, 44 are similar and therefore only one lock mechanism will be described and the same reference numerals are used to describe corresponding parts but with an additional dash when applied to the second lock mechanism 44 and second door 45. The lock mechanism 42, 44 has a withdrawal means in the form of a handle 51, 51'. The handle 51, 51' is able to withdraw the lock bolt 52, 52' from its keep 53, 53' when the lock mechanism is inactive. The keep is mounted in a door frame 54, 54'. When the lock mechanism is active, the lock bolt 52, 52' is held in the keep 53, 53'. The lock mechanism 42, 44 includes a lock mechanism controller 55, 55'. The lock mechanism controller is arranged to receive command signals from the controller 47 via an antenna 56, 56'. Thus, the lock mechanism controller 55, 55' includes wireless communication means. It will be appreciated that the controllers 55, 55' and antennas 56, 56' are contained within a lock unit that

can be retrofitted to existing doors in place of the existing lock. This is advantageous as the lock unit can be installed simply, with no modification to the door or the aperture in the door for the lock. The small size and high strength of the lock mechanism allows the lock unit to be a suitable size for retrofit applications.

[0038] In use, the lock mechanisms 42, 44 are normally inactive and therefore the doors 43, 45 can be opened by their handles 51, 51'. When a user arms the locking system 40 by entering a predetermined code, the controller 47 waits for input from the intrusion detection device 50. If an intrusion is detected, the controller 47 sends a control signal to the lock mechanisms 42, 44, which is received by their associated lock mechanism controllers 55, 55'. The lock mechanism controllers 55, 55' cause the motors 22 in the lock mechanisms to actuate to move the control element 2 to the active position, whereby the doors 43, 45 are locked and the withdrawal of the lock bolts 52, 52' from their respective keeps 53, 53' is prevented. This will isolate rooms in the building from the intruder as the intruder will not be able to move freely between the rooms secured by the locking system 40. The locking system 40 can be disarmed and the doors 43, 45 opened by input of the predetermined code into the key panel 46. The controller 47 then sends control signals to cause the lock mechanism controllers 55, 55' to deactivate their respective lock mechanisms.

[0039] It will be appreciated that the above description is only an example of how such a locking system could be implemented. For example, there may be more or less doors secured; more or less intrusion detection devices; different types of intrusion detection device; the use of encrypted control signals; the incorporation of anti-tampering features; the incorporation into a burglar alarm system; the use of safety systems and panic buttons to prevent legitimate occupants of the building from becoming trapped and other changes or enhancements that will be clear to those skilled in the art. The main advantage of the locking system is that the locking mechanism of the invention, due to its small size and high strength, can be incorporated into doors and windows to form locking systems that were previously impractical and/or expensive.

Claims

1. A lock mechanism comprising a control element (2) arranged for rotation about an axis between an active position and an inactive position, the control element (2) including a control head (3) having at least one axially extending projection (4a-4d), the lock mechanism further comprising a lock element (5) that is axially aligned with the control element (2) and includes a lock element head (6), the lock element head (6) having at least one axially extending projection (7a-7d), the projection(s) (4a-4d) of the control head (3) and the projection(s) (7a-7d) of the lock

element head (6) arranged such that in the active position, the lock element (5) and control element (2) are held apart by the projections (4a-4d, 7a-7d) and in the inactive position, the projections (4a-4d, 7a-7d) can mesh together to permit axial movement of the lock element (5) relative to the control element (2);

characterised in that the control element (2) and the lock element (5) are received within a housing (18) and are axially slidable therein, the lock mechanism including a biasing element (13) to urge the control element (2) and lock element (5) apart.

2. A lock mechanism according to claim 1, in which the lock element (5) comprises an elongate body having the at least one projection (7a-7d) at one end and a lock bolt (17) at an opposed end, and wherein the lock bolt (17) may be adapted to be received within a keep of a lock.
3. A lock mechanism according to claim 1 or claim 2, in which at least one of the projections (4a-4d, 7a-7d) includes a narrower tip than the remainder of the projection.
4. A lock mechanism according to any preceding claim, in which the control head (3) has at least two axially extending projections (4a-4d) and the lock element head (6) may have a complementary number of axially extending projections (7a-7d).
5. A lock mechanism according to any preceding claim, in which the control head (3) and/or lock element head (6) is castellated and thus the castellations form the at least one projection (4a-4d, 7a-7d) and optionally; the castellations are arranged in a ring.
6. A lock mechanism according to any one of claims 1 to 4, in which one of the control head (3) and lock element head (6) comprises a single projection having bores therein, the bores arranged to receive complementary pins on the other of the control head and lock element head when in the inactive position such that the pins are received within the bores and thus mesh together, and in the active position, the pins are not aligned with the bores and the control element and lock element are held apart.
7. A lock mechanism according to any preceding claim, in which the projection (4a-4d) on the control head (3) or the projection (7a-7d) on the lock element head (6) is shaped such that the rotational motion of the control element (2) is converted to axial motion of the lock element (5), and wherein, optionally, the projection (4a-4d, 7a-7d) has a lead-in portion inclined to the axial direction arranged to bear against the other projection (4a-4d, 7a-7d) such that

rotation of the control element (2) moves the lock element (5) in the axial direction.

8. A lock mechanism according to any preceding claim, in which the housing (13) comprises an abutment end plate (20) at one end arranged to contact the control element (2), wherein the abutment end plate (20) may be adapted to form a mount for a motor (22) for rotating the control element (2) between the active and inactive positions.
9. A lock mechanism according to any preceding claim, in which the control element (2) comprises a tubular body having the control head (3) at one end and is arranged to receive a motor (22) for rotating the control element (2) between the active and inactive positions, wherein the motor (22) is mounted to an abutment end plate (20) of the housing (13).
10. A lock mechanism according to claim 10, in which the motor (22) includes a spindle (23) to engage an aperture (14) in the control element (2), the aperture (14) and spindle (23) being arranged such that the spindle (23) is axially slidable within the aperture (14).
11. A lock mechanism according to any preceding claim, in which the lock mechanism includes a withdrawal means (51, 51') for withdrawing the lock element when the control element (2) is in the inactive position.
12. A lock having the lock mechanism of claims 1 to 11, the lock element comprising a lock bolt (17) at one end, opposed the lock element head (6), for engaging a keep of the lock and withdrawal means (51, 51') for withdrawing the lock element (5) when the control element (2) is in the inactive position.
13. A locking system for securing doors or windows of a building incorporating a controller and at least one lock mechanism according to any one of claims 1 to 13, the controller adapted to control the or each lock mechanism.
14. A locking system according to claim 13, in which the controller is arranged to control the or each locking mechanism in response to input from an intrusion detection device and wherein the controller may be adapted to actuate the or each locking mechanism wirelessly.

Patentansprüche

1. Verriegelungsmechanismus, umfassend ein Steuerelement (2), das zur Rotation um eine Achse zwischen einer aktiven Position und einer inaktiven Po-

- sition angeordnet ist, wobei das Steuerelement (2) einen Steuerkopf (3) enthält, der mindestens einen axial verlaufenden Vorsprung (4a-4d) aufweist, wobei der Verriegelungsmechanismus weiterhin ein Verriegelungselement (5) umfasst, das axial mit dem Steuerelement (2) ausgerichtet ist und einen Verriegelungselement-Kopf (6) enthält, wobei der Verriegelungselement-Kopf (6) mindestens einen axial verlaufenden Vorsprung (7a-7d) aufweist, wobei der/die Vorsprung/Vorsprünge (4a-4d) des Steuerkopfs (3) und der/die Vorsprung/Vorsprünge (7a-7d) des Verriegelungselement-Kopfs (6) so angeordnet sind, dass das Verriegelungselement (5) und das Steuerelement (2) in der aktiven Position durch die Vorsprünge (4a-4d, 7a-7d) auseinander gehalten werden und in der inaktiven Position die Vorsprünge (4a-4d, 7a-7d) ineinander greifen können, um eine axiale Bewegung des Verriegelungselements (5) relativ zum Steuerelement (2) zu ermöglichen;
dadurch gekennzeichnet, dass das Steuerelement (2) und das Verriegelungselement (5) in einem Gehäuse (18) aufgenommen sind und darin axial verschiebbar sind, wobei der Verriegelungsmechanismus ein Vorspannelement (13) enthält, um das Steuerelement (2) und das Verriegelungselement (5) auseinander zu drücken.
2. Verriegelungsmechanismus nach Anspruch 1, in dem das Verriegelungselement (5) einen länglichen Körper umfasst, der den mindestens einen Vorsprung (7a-7d) an einem Ende aufweist und einen Schlossriegel (17) am entgegengesetzten Ende aufweist, und wobei der Schlossriegel (17) angepasst werden kann, um in einem Schließblech aufgenommen zu werden.
 3. Verriegelungsmechanismus nach Anspruch 1 oder Anspruch 2, in dem mindestens einer der Vorsprünge (4a-4d, 7a-7d) eine schmalere Spitze enthält als der Rest des Vorsprungs.
 4. Verriegelungsmechanismus nach einem der vorhergehenden Ansprüche, in dem der Steuerkopf (3) mindestens zwei axial verlaufende Vorsprünge (4a-4d) aufweist und der Verriegelungselement-Kopf (6) eine komplementäre Anzahl von axial verlaufenden Vorsprüngen (7a-7d) aufweisen kann.
 5. Verriegelungsmechanismus nach einem der vorhergehenden Ansprüche, in dem der Steuerkopf (3) und/oder der Verriegelungselement-Kopf (6) kastelliert ist/sind, und die Kastellierungen somit den mindestens einen Vorsprung (4a-4d, 7a-7d) bilden, und optional die Kastellierungen in einem Ring angeordnet sind.
 6. Verriegelungsmechanismus nach einem der Ansprüche 1 bis 4, in dem einer vom Steuerkopf (3) und Verriegelungselement-Kopf (6) einen einzelnen Vorsprung umfasst, der Bohrungen darin aufweist, wobei die Bohrungen so angeordnet sind, dass sie komplementäre Stifte auf dem jeweils anderen von Steuerkopf und Verriegelungselement-Kopf in der inaktiven Position aufnehmen, so dass die Stifte in den Bohrungen aufgenommen werden und somit miteinander im Eingriff sind, und in der aktiven Position die Stifte nicht mit den Bohrungen ausgerichtet sind und das Steuerelement und das Verriegelungselement auseinander gehalten werden.
 7. Verriegelungsmechanismus nach einem der vorhergehenden Ansprüche, in dem der Vorsprung (4a-4d) auf dem Steuerkopf (3) oder der Vorsprung (7a-7d) auf dem Verriegelungselement-Kopf (6) so ausgebildet ist, dass die Rotationsbewegung des Steuerelements (2) in eine axiale Bewegung des Verriegelungselements (5) umgesetzt wird, und wobei, optional, der Vorsprung (4a-4d, 7a-7d) einen Einführungsteil aufweist, der in der axialen Richtung geneigt ist und so angeordnet ist, um gegen den anderen Vorsprung (4a-4d, 7a-7d) zu drücken, so dass die Rotation des Steuerelements (2) das Verriegelungselement (5) in die axiale Richtung bewegt.
 8. Verriegelungsmechanismus nach einem der vorhergehenden Ansprüche, in dem das Gehäuse (13) eine Anschlagsendplatte (20) an einem Ende umfasst, so angeordnet, dass sie Kontakt mit dem Steuerelement (2) hat, wobei die Anschlagsendplatte (20) angepasst werden kann, um eine Halterung für einen Motor (22) zur Rotation des Steuerelements (2) zwischen der aktiven und inaktiven Position zu bilden.
 9. Verriegelungsmechanismus nach einem der vorhergehenden Ansprüche, in dem das Steuerelement (2) einen rohrförmigen Körper aufweist, der den Steuerkopf (3) an einem Ende aufweist und derart angeordnet ist, dass er einen Motor (22) zur Rotation des Steuerelements (2) zwischen der aktiven und inaktiven Position aufnimmt, wobei der Motor (22) an einer Anschlagsendplatte (20) des Gehäuses (13) angebracht ist.
 10. Verriegelungsmechanismus nach Anspruch 10, in dem der Motor (22) eine Spindel (23) zum Eingriff in eine Öffnung (14) im Steuerelement (2) enthält, wobei die Öffnung (14) und die Spindel (23) so angeordnet sind, dass die Spindel (23) innerhalb der Öffnung (14) axial verschiebbar ist.
 11. Verriegelungsmechanismus nach einem der vorhergehenden Ansprüche, in dem der Verriegelungsmechanismus eine Rückzieheinrichtung (51, 51') zum Zurückziehen des Verriegelungselements enthält, wenn das Steuerelement (2) in der inaktiven Position

ist.

12. Verriegelung, die den Verriegelungsmechanismus nach Anspruch 1 bis 11 aufweist, wobei das Verriegelungselement einen Schlossriegel (17) an einem Ende, entgegengesetzt vom Verriegelungselement-Kopf (6), umfasst, und zwar zum Eingriff in ein Schließblech und eine Rückzieheinrichtung (51, 51') zum Zurückziehen des Verriegelungselements (5), wenn sich das Steuerelement (2) in der inaktiven Position befindet.
13. Verriegelungssystem zur Sicherung von Türen oder Fenstern eines Gebäudes, das einen Controller und mindestens einen Verriegelungsmechanismus nach einem der Ansprüche 1 bis 13 enthält, wobei der Controller zur Steuerung des oder jedes Verriegelungsmechanismus angepasst ist.
14. Verriegelungssystem nach Anspruch 13, in dem der Controller zur Steuerung des oder jedes Verriegelungsmechanismus in Reaktion auf eine Eingabe von einer Einbruchserkennungsvorrichtung ausgelegt ist, und wobei der Controller angepasst werden kann, um den oder jeden Verriegelungsmechanismus drahtlos zu betätigen.

Revendications

1. Mécanisme de verrouillage comprenant un élément de commande (2) agencé pour tourner autour d'un axe entre une position active et une position inactive, l'élément de commande (2) comprenant une tête de commande (3) ayant au moins une saillie s'étendant axialement (4a-4d), le mécanisme de verrouillage comprenant en outre un élément de verrouillage (5) qui est aligné axialement avec l'élément de commande (2) et comprend une tête d'élément de verrouillage (6), la tête d'élément de verrouillage (6) ayant au moins une saillie s'étendant axialement (7a-7d), la ou les saillies (4a-4d) de la tête de commande (3) et la ou les saillies (7a-7d) de la tête d'élément de verrouillage (6) étant agencées de telle sorte que, dans la position active, l'élément de verrouillage (5) et l'élément de commande (2) sont maintenus écartés par les saillies (4a-4d, 7a-7d) et, dans la position inactive, les saillies (4a-4d, 7a-7d) peuvent s'engrener ensemble pour permettre un mouvement axial de l'élément de verrouillage (5) par rapport à l'élément de commande (2) ;
caractérisé par le fait que l'élément de commande (2) et l'élément de verrouillage (5) sont reçus à l'intérieur d'un boîtier (18) et sont aptes à coulisser axialement dans celui-ci, le mécanisme de verrouillage comprenant un élément de sollicitation (13) pour écarter l'élément de commande (2) et l'élément de verrouillage (5).

2. Mécanisme de verrouillage selon la revendication 1, dans lequel l'élément de verrouillage (5) comprend un corps allongé ayant l'au moins une saillie (7a-7d) à une extrémité et un pêne (17) à une extrémité opposée, et le pêne (17) pouvant être adapté pour être reçu à l'intérieur d'une gâche d'un verrou.
3. Mécanisme de verrouillage selon la revendication 1 ou la revendication 2, dans lequel au moins une des saillies (4a-4d, 7a-7d) comporte une pointe plus étroite que le reste de la saillie.
4. Mécanisme de verrouillage selon l'une quelconque des revendications précédentes, dans lequel la tête de commande (3) a au moins deux saillies s'étendant axialement (4a-4d) et la tête d'élément de verrouillage (6) peut avoir un nombre complémentaire de saillies s'étendant axialement (7a-7d).
5. Mécanisme de verrouillage selon l'une quelconque des revendications précédentes, dans lequel la tête de commande (3) et/ou la tête d'élément de verrouillage (6) est crénelée et, de ce fait, les créneaux forment l'au moins une saillie (4a-4d, 7a-7d) et, facultativement, les créneaux sont disposés en un anneau.
6. Mécanisme de verrouillage selon l'une quelconque des revendications 1 à 4, dans lequel l'une parmi la tête de commande (3) et la tête d'élément de verrouillage (6) comprend une unique saillie ayant des alésages dans celle-ci, les alésages étant agencés pour recevoir des broches complémentaires sur l'autre parmi la tête de commande et la tête d'élément de verrouillage dans la position inactive, de telle sorte que les broches sont reçues à l'intérieur des alésages et, de ce fait, s'engrènent, et, dans la position active, les broches ne sont pas alignées avec les alésages et l'élément de commande et l'élément de verrouillage sont maintenus écartés.
7. Mécanisme de verrouillage selon l'une quelconque des revendications précédentes, dans lequel la saillie (4a-4d) sur la tête de commande (3) ou la saillie (7a-7d) sur la tête d'élément de verrouillage (6) est formée de telle sorte que le mouvement de rotation de l'élément de commande (2) est converti en mouvement axial de l'élément de verrouillage (5) et, facultativement, la saillie (4a-4d) a une partie avant inclinée vers la direction axiale, agencée pour être en appui contre l'autre saillie (4a-4d, 7a-7d) de telle sorte qu'une rotation de l'élément de commande (2) déplace l'élément de verrouillage (5) dans la direction axiale.
8. Mécanisme de verrouillage selon l'une quelconque des revendications précédentes, dans lequel le boîtier (13) comprend une plaque de butée d'extrémité

de butée (20) à une extrémité agencée pour entrer en contact avec l'élément de commande (2), la plaque d'extrémité de butée (20) pouvant être adaptée pour former un support pour un moteur (22) afin de faire tourner l'élément de commande (2) entre les positions active et inactive. 5

9. Mécanisme de verrouillage selon l'une quelconque des revendications précédentes, dans lequel l'élément de commande (2) comprend un corps tubulaire ayant la tête de commande (3) à une extrémité et est agencé pour recevoir un moteur (22) pour faire tourner l'élément de commande (2) entre les positions active et inactive, le moteur (22) étant monté sur une plaque d'extrémité de butée (20) du boîtier (13). 10 15
10. Mécanisme de verrouillage selon la revendication 10, dans lequel le moteur (22) comprend une tige (23) pour s'engager dans une ouverture (14) dans l'élément de commande (2), l'ouverture (14) et la tige (23) étant agencées de telle sorte que la tige (23) est apte à coulisser axialement à l'intérieur de l'ouverture (14). 20 25
11. Mécanisme de verrouillage selon l'une quelconque des revendications précédentes, dans lequel le mécanisme de verrouillage comprend un moyen de retrait (51, 51') pour retirer l'élément de verrouillage lorsque l'élément de commande (2) est dans la position inactive. 30
12. Verrou ayant le mécanisme de verrouillage selon les revendications 1 à 11, l'élément de verrouillage comprenant un pêne (17) à une extrémité, opposée à la tête d'élément de verrouillage (6), pour engager une gâche du verrou et des moyens de retrait (51, 51') pour retirer l'élément de verrouillage (5) lorsque l'élément de commande (2) est dans la position inactive. 35 40
13. Système de verrouillage pour sécuriser des portes ou des fenêtres d'un bâtiment incorporant un dispositif de commande et au moins un mécanisme de verrouillage selon l'une quelconque des revendications 1 à 13, le dispositif de commande étant adapté pour commander le ou chaque mécanisme de verrouillage. 45
14. Système de verrouillage selon la revendication 13, dans lequel le dispositif de commande est agencé pour commander le ou chaque mécanisme de verrouillage en réponse à une entrée à partir d'un dispositif de détection d'intrusion, et le dispositif de commande pouvant être adapté pour actionner le ou chaque mécanisme de verrouillage de manière sans fil. 50 55

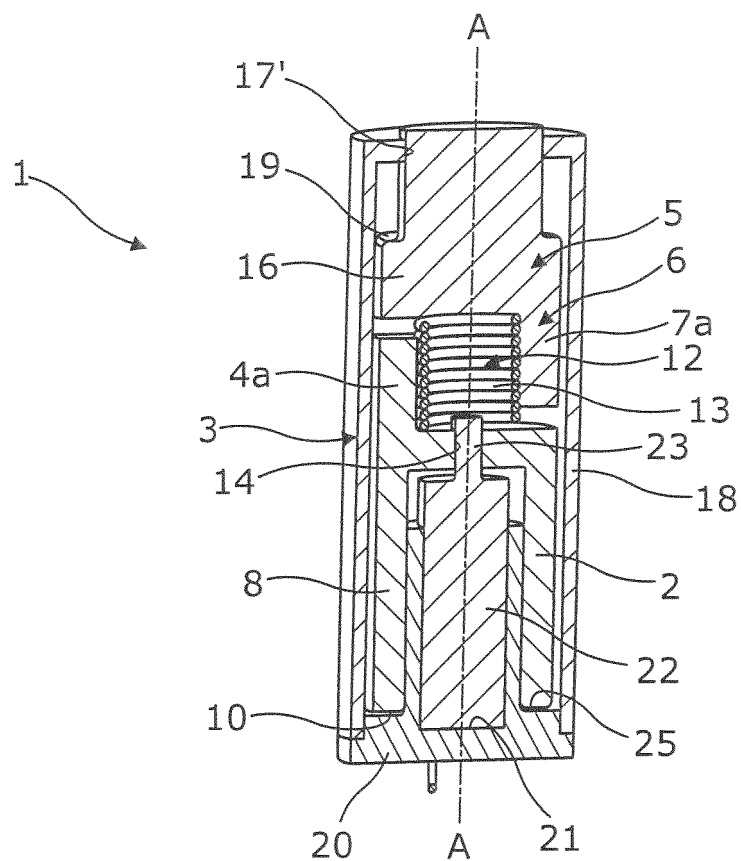


Fig. 1

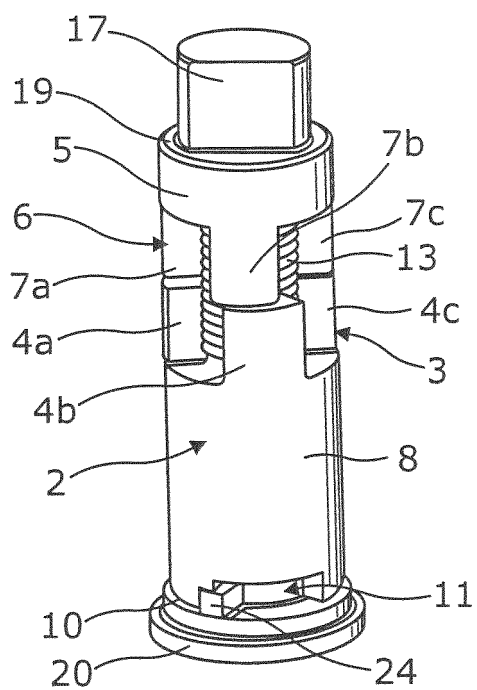


Fig. 2

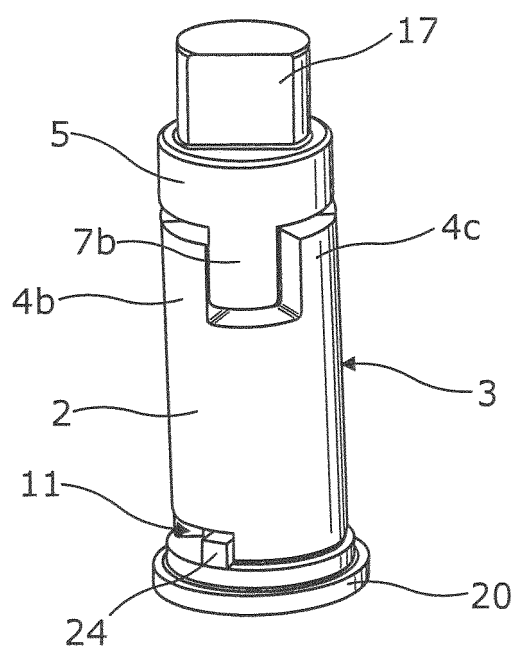


Fig. 3

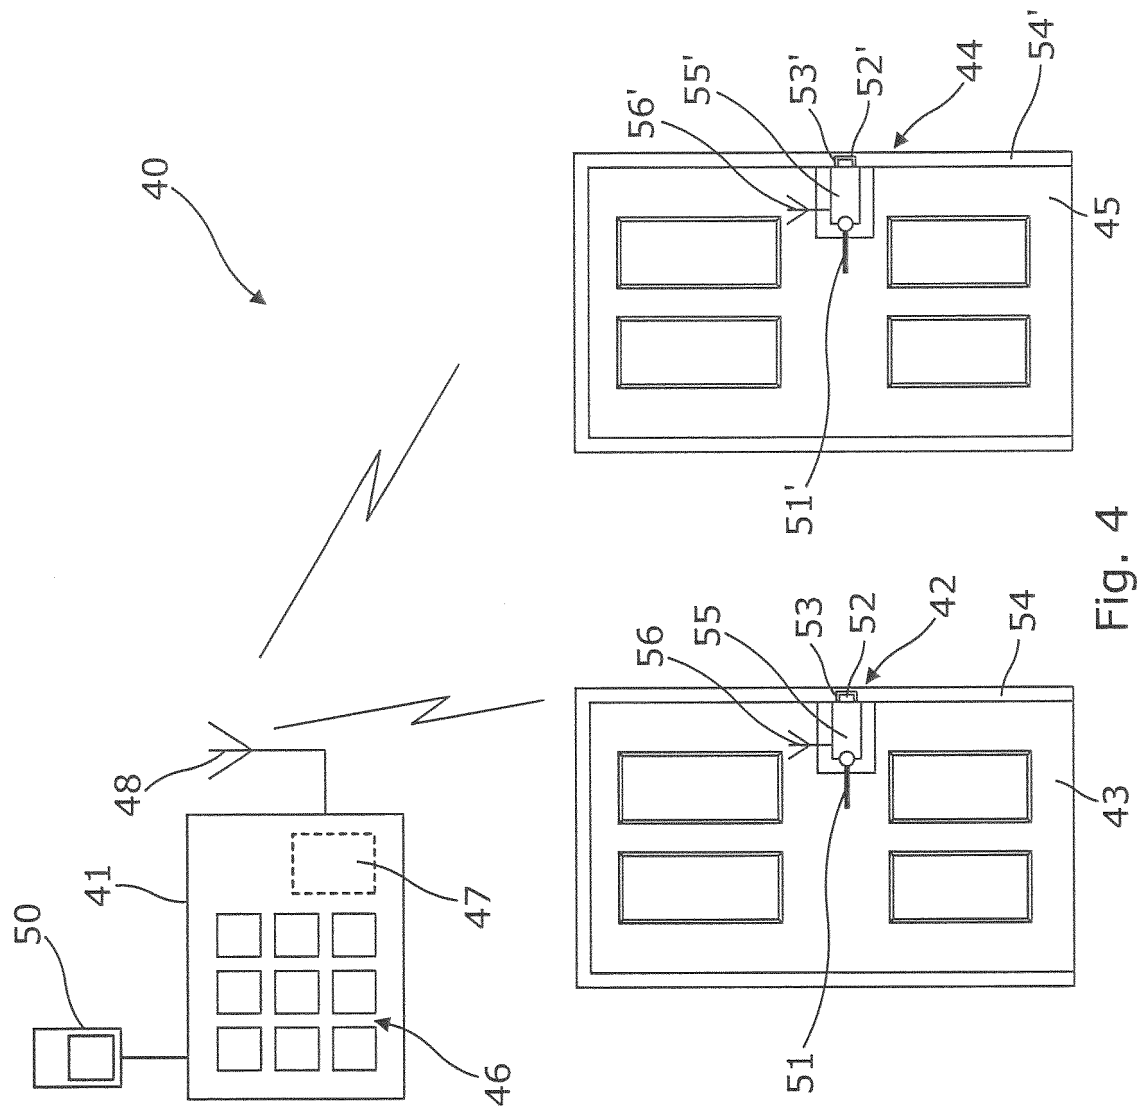


Fig. 4

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 6619085 B [0003]
- EP 1953774 A [0003]
- FR 2757204 [0003]