




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>7</sup> :</b> <b>G11B 7/00, 19/04</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 00/28532</b> <b>(43) International Publication Date:</b> 18 May 2000 (18.05.00)
<b>(21) International Application Number:</b> PCT/EP99/08330 <b>(22) International Filing Date:</b> 28 October 1999 (28.10.99) <b>(30) Priority Data:</b> 98203756.6      9 November 1998 (09.11.98)      EP <b>(71) Applicant:</b> KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL). <b>(72) Inventor:</b> WIERENGA, Harm, A.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). <b>(74) Agent:</b> KOPPEN, Jan; Internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).		<b>(81) Designated States:</b> BR, CN, JP, KR, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> <i>With international search report.</i>

**(54) Title:** METHOD OF RECORDING A MULTI-LAYER OPTICALLY RECORDABLE INFORMATION CARRIER

**(57) Abstract**

The application relates to a method of and an apparatus for writing information onto a multi-layer optical information carrier (1). In an optical recording system, information can be written onto a selected layer (41) of a multi-layer carrier (1) by focusing the laser beam (2) onto the selected layer. Intermediate layers (42) interact with the laser beam (2). An important property in writing information onto a multi-layer carrier (1) is the transmission coefficient of these intermediate layers (42). The transmission coefficient depends on the physical properties of the intermediate layer (42) and on whether or not information has been recorded. The apparatus includes a circuit (55) which derives information (711) about the changes of the transmission coefficients of the layers (41 through 43) when information is written onto these layers. On the basis of this information (711) a circuit determines the sequence in which the layers (41 through 43) are to be recorded. The sequence can be selected so as to minimize the intensity of the laser beam (2), thereby precluding unnecessary heating of the carrier (1) and allowing comparatively simple and cheap laser beam sources (3) to be used.

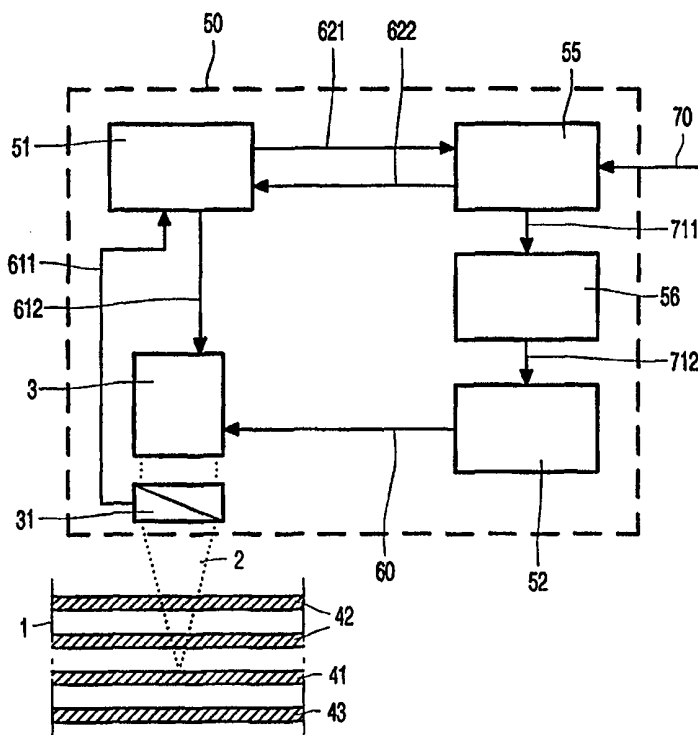

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

Method of recording a multi-layer optically recordable information carrier.

The invention relates to a method of recording information onto an optically recordable information carrier having at least two superposed optically recordable layers, comprising a first step in which information is recorded on a first one of the optically recordable layers by means of laser light to which the information carrier is exposed from a first side, followed by a second step in which information is recorded on a second one of the optically recordable layers, which second layer differs from the first layer, by means of laser light to which the information carrier is also exposed from the first side.

The invention further relates to a recording apparatus for the recording of information on an optically recordable information carrier having at least two superposed optically recordable layers, comprising a device adapted to record information on a first one of the optically recordable layers by means of laser light to which the information carrier is exposed from a first side, and to record information on a second one of the optically recordable layers, which second layer differs from the first layer, by means of laser light to which the information carrier is also exposed from the first side.

Optically recordable information carriers are generally known and are used in recording apparatuses which record data on the information carrier by means of a laser beam. The laser beam is focused onto a recording layer in the information carrier. In the case of an adequate laser beam intensity the optical properties of the recording layer at the location of the focal spot will change, as a result of which a mark is produced in the recording layer. By varying the laser beam intensity a pattern of marks can be formed in the recording layer. The recorded pattern contains the data to be recorded in coded form. An example of such an optically recordable information carrier is the CD-R (Compact Disc Recordable).

In order to extend the storage capacity of optically recordable information carriers information carriers have been introduced which comprise a plurality of superposed recording layers. Examples of such multi-layer optically recordable information carriers are described in U.S. 5,761,188 and U.S. 5,202,875. Each recording layer in a multi-layer optically recordable information carrier can be inscribed separately by focusing the laser beam onto the relevant recording layer. The recording apparatuses use a high numerical aperture (NA). Owing to this high numerical aperture the diameter of the laser beam at the location of

the recording layers situated between the source of the laser beam (laser light source) and the recording layer to be inscribed (hereinafter referred to as the intermediate layers) is comparatively large. As a result of this, the intensity of the laser beam at the location of the intermediate layers will be inadequate intensity to produce marks on these layers, whereas  
5 producing marks on the layer to be inscribed is possible. Also at the location of each of the recording layers having a distance between the respective layer and the laser light source which is larger than the distance between the recording layer to be inscribed and the laser light source the intensity of the laser beam is inadequate to produce marks in these layers owing to the comparatively large diameter of the beam.

10 Although the intermediate layers cannot be inscribed, they have an influence on the laser beam. A part of the laser beam will be reflected, diffused and absorbed by the intermediate layers. The remainder of the laser beam, quantified by the transmission coefficient, will be transmitted by the intermediate layers. The magnitude of the transmitted part depends on the optical properties of the intermediate layers. However, the optical  
15 properties of the intermediate layers change when these layers are inscribed. The intensity of the laser beam should be so high that in all cases each recording layer in the multi-layer optically recordable information carrier can be inscribed.

It is an object of the invention to provide a method of writing information onto an optically recordable information carrier, which allows the sequence in which the recording  
20 layers are inscribed to be selected in an optimum manner.

A method in accordance with the invention is characterized in that the method comprises a first preparatory step in which the changes of the effective transmission properties of the optically recordable layers before the recording of information on the layers with respect to the effective transmission properties of the optically recordable layers after the  
25 recording of information on the layers is determined, followed by a second preparatory step in which the sequence of recording of the first and the second optically recordable layer is determined.. If the changes of the effective transmission properties of the optically recordable layers are known a priori they can be communicated to the method, for example by a user or a recording apparatus. The sequence in which the optically recordable layers are inscribed can  
30 be determined in an optimum manner, for example so as to minimize the laser beam intensity required for inscribing these layers. This results inter alia in the heat generation during recording onto the optically recordable information carrier not being unduly large and in the possibility of using a comparatively simple and cheap laser light source.

A variant of the method in accordance with the invention is characterized in that the first preparatory step comprises the reading of information about the changes of the effective transmission properties of the optically recordable layers from an area on the optically recordable information carrier, which area contains information about the physical properties of the optically recordable information carrier. If the optically recordable information carrier has an area which contains information about the physical properties of the optically recordable information carrier, such as for example a lead-in area, the method can automatically read this information and derive from this information the changes of the effective transmission properties of the optically recordable layers. The area containing information about the physical properties of the optically recordable information carrier may be provided during the manufacture of the optically recordable information carrier.

A special variant of the method in accordance with the invention is characterized in that the first preparatory step comprises a first measurement step in which the effective transmission properties of the optically recordable layers before the recording of information on the layers is measured, followed by a second measurement step in which the effective transmission properties of the optically recordable layers after the recording of information on the layers is measured, followed by a comparison step in which the measured effective transmission properties of the optically recordable layers before the recording of information on the layers is compared with measured effective transmission properties of the optically recordable layers after the recording of information on the layers. If no information is available about the change of the effective transmission properties of the optically recordable layers during recording onto these layers, this change can be measured in a plurality of measurement steps. For the write operations necessary to carry out these measurement steps it is possible to reserve for example a portion of the optically recordable information carrier.

A variant of the method in accordance with the invention is characterized in that the first and the second optically recordable layer are inscribed successively, starting with the optically recordable layer situated farther from the laser light source and ending with the optically recordable layer situated nearer the laser light source if the effective transmission properties of the optically recordable layers after the recording of information on the layers have decreased with respect to the effective transmission properties of the optically recordable layers before the recording of information on the layers. An advantage of writing onto the optically recordable layers in the sequence as defined for the present variant of the method is that the maximum laser beam intensity that is required corresponds to the intensity required for inscribing the optically recordable layer which is farthest from the laser light source while

the intermediate layers have not been inscribed and are consequently comparatively transparent. During the recording onto the optically recordable layers the laser beam intensity necessary for inscribing these layers will decrease according as successive layers are written.

Another variant of the method in accordance with the invention is characterized in that the first and the second optically recordable layer are inscribed successively, starting with the optically recordable layer situated nearer the laser light source and ending with the optically recordable layer situated farther from the laser light source if the effective transmission properties of the optically recordable layers after the recording of information on the layers have increased with respect to the effective transmission properties of the optically recordable layers before the recording of information on the layers. An advantage of inscribing the optically recordable layers in the sequence as defined for the present variant of the method is that the laser beam intensity necessary for inscribing the successive layers will increase to a minimal extent as the successive layers are written.

The recording apparatus in accordance with the invention is characterized in that the recording apparatus is adapted to determine the changes of the effective transmission properties of the optically recordable layers before the recording of information on the layers with respect to the effective transmission properties of the optically recordable layers after the recording of information on the layers, and the recording apparatus is adapted to determine the sequence of recording of the first and the second optically recordable layer.

These and other aspects of the invention will now be described in more detail with reference to the drawings. In the drawings

Figure 1 is a diagrammatic cross-sectional view of a multi-layer optically recordable information carrier of which one layer is being inscribed by a focused laser beam received from a laser light source,

Figure 2 is a partial plan view of an inscribed intermediate layer exposed to a laser beam,

Figure 3 shows flow charts of the method in accordance with the invention, and

Figure 4 shows a block diagram of the device in accordance with the invention in the recording apparatus for recording information onto a multi-layer optically recordable information carrier.

Figure 1 shows a cross-sectional view of a part of multi-layer optically recordable information carrier 1. A plurality of optically recordable layers 41 through 43 are

shown. A laser beam 2 from a laser light source 3 is focused onto the optically recordable layer 41 to be inscribed. An example of a laser light source 3 is a solid-state laser which emits light having a wavelength in the visible part of the spectrum or light having a wavelength in the non-visible part of the spectrum, such as for example infrared (IR) light and ultraviolet (UV) light. At the location of the focal spot 5 the intensity of the laser beam is such that a mark can be formed in the optically recordable layer 41 to be inscribed. At the location where the laser beam 2 traverses the intermediate layers 42 the diameter of the laser beam is comparatively large, as a result of which the intensity of the laser beam is inadequate to produce a mark in these intermediate layers.

Figure 2 is a partial plan view of an intermediate layer 42 in a multi-layer optically recordable information carrier 1 taken on the line II-II in Figure 1. This intermediate layer 42 has already been inscribed, as a result of which marks 6 are situated on the layer. The intermediate layer 42 is illuminated by the laser beam 2. The portion 21 of the intermediate layer 42 exposed to the laser beam 2 includes both an area with marks 6 and an area without these marks. The transmission coefficient of the intermediate layer 42 at the location of the marks 6 will generally differ from the transmission coefficient of the intermediate layer in an area without these marks. As a result of this, the intermediate layer 42 cannot be characterized by a fixed transmission coefficient. However, the intermediate layer 42 can be characterized by an effective transmission coefficient which is a combination of the transmission coefficient of the intermediate layer at the location of the marks 6 and the transmission coefficient of the intermediate layer in the area without these marks. The value of this effective transmission coefficient depends inter alia on the density of the spatial distribution of the marks 6. If the intermediate layer 42 has not yet been inscribed and, consequently, there are not yet any marks 6 on the layer, the effective transmission coefficient will correspond to the transmission coefficient of the intermediate layer in an area without marks.

The marks 6 in the optically recordable layers 41 through 43 may reflect the laser beam 2 to a greater extent or to a smaller extent than an area without any marks. If the laser beam 2 is reflected to a greater extent by the marks 6 this is referred to inter alia as white writing layers, in which the effective transmission properties generally decrease after the layers have been inscribed. If the laser beam 2 is reflected to a smaller extent by the marks 6 this is referred to as black writing layers, in which the effective transmission properties generally increase after the layers have been inscribed.

Figure 3A is a flow chart of an example of a variant of the method in accordance with the invention. The variant comprises three steps 31 through 33. Step 33, in

which information is written onto the optically recordable layers 41 through 43, is preceded by a first preparatory step 31 and a second preparatory step 32. In the first preparatory step 31 the changes of the effective transmission properties of the optically recordable layers 41 through 43 before the recording of information on layers with respect to the effective transmission properties of the optically recordable layers after the recording of information on the layers ( $\Delta\text{Eff. Trans.}$ ) are determined. Said determining can be effected inter alia in that information about the changes of the effective transmission properties is entered by a user or by the recording apparatus, is read from the multi-layer optically recordable information carrier 1 itself, or is determined by a measurement. Subsequently, in a second preparatory step, the information about the changes of the effective transmission properties is used for determining the sequence in which the optically recordable layers 41 through 43 are to be inscribed in the step 33.

By way of example the second preparatory step 32 is represented diagrammatically in greater detail in Figure 3B. In a sub-step 320 a subsequent sub-step 321 or a sub-step 322 is chosen depending on the change of the effective transmission properties. If the effective transmission properties of the optically recordable layers 41 through 42 after information has been written onto the layers have decreased (6) with respect to the effective transmission properties of the optically recordable layers before information is written onto the layers, the sequence in which the optically recordable layers 41 through 43 are to be inscribed will be determined in the sub-step 321 in such a manner that the layers will be inscribed consecutively starting with the optically recordable layer farthest from the laser light source 3 and ending with the optically recordable layer nearest the laser light source. Conversely, if the effective transmission properties of the optically recordable layers 41 through 42 after information has been written onto the layers have increased (5) with respect to the effective transmission properties of the optically recordable layers before information is written onto the layers, the sequence in which the optically recordable layers 41 through 43 are to be inscribed will be determined in the sub-step 322 in such a manner that the layers will be inscribed consecutively starting with the optically recordable layer nearest the laser light source 3 and ending with the optically recordable layer farthest from the laser light source. It will be obvious to the expert that there are other alternatives for the step 32. The alternative for the step 32 then depends on the desired result.

Figure 4 shows a block diagram of a device 50 for recording information on a multi-layer optically recordable information carrier 1. A laser beam 2 from a laser light source 3 is focused onto one of the optically recordable layers 41 through 43. For positioning the



focal spot of the laser beam 2 on the optically recordable layer 41 to be inscribed a unit which comprises a positioning logic 52 applies a control signal 60 to the laser light source 3. When information is recorded onto the optically recordable information carrier 1 an information stream 612 is applied from an information processing unit 51 to the laser light source 3. When  
5 information is read from the optically recordable information carrier 1 an information stream 611 is applied from an optical system 31 to the information processing unit 51. The device includes an analysis logic 55 for detecting the changes of the effective transmission properties of the optically recordable layers 41 through 43 before the recording of information on the layers with respect to the effective transmission properties of the optically recordable layers  
10 after the recording of information on the layers. Information about these changes 711 is applied to a decision unit 56. In this decision unit 56 the sequence of recording of optically recordable layers 41 through 43 is determined. Information about the sequence 712 thus determined is applied to the unit comprising the decision logic 52. The analysis logic 55 can receive external information 70 received from a user or from another device in the recording  
15 apparatus, or information 621 which is received from the optically recordable information carrier 1 via the information processing unit 51. While measurements are being carried out the analysis logic 55 can apply measurement signals 622 to the optically recordable information carrier 1 via the information processing unit 51.

## CLAIMS:

1. A method of recording information onto an optically recordable information carrier having at least two superposed optically recordable layers, comprising

a first step in which information is recorded on a first one of the optically recordable layers by means of laser light to which the information carrier is exposed from a first side, followed by

a second step in which information is recorded on a second one of the optically recordable layers, which second layer differs from the first layer, by means of laser light to which the information carrier is also exposed from the first side, characterized in that the method comprises

a first preparatory step in which the changes of the effective transmission properties of the optically recordable layers before the recording of information on the layers with respect to the effective transmission properties of the optically recordable layers after the recording of information on the layers is determined, followed by

a second preparatory step in which the sequence of recording of the first and the second optically recordable layer is determined.

2. A method as claimed in Claim 1, characterized in that the first preparatory step comprises the reading of information about the changes of the effective transmission properties of the optically recordable layers from an area on the optically recordable information carrier, which area contains information about the physical properties of the optically recordable information carrier.

3. A method as claimed in Claim 1, characterized in that the first preparatory step comprises

a first measurement step in which the effective transmission properties of the optically recordable layers before the recording of information on the layers is measured, followed by

a second measurement step in which the effective transmission properties of the optically recordable layers after the recording of information on the layers is measured, followed by

a comparison step in which the measured effective transmission properties of the optically recordable layers before the recording of information on the layers is compared with measured effective transmission properties of the optically recordable layers after the recording of information on the layers.

4. A method as claimed in Claim 1, 2 or 3, characterized in that the first and the second optically recordable layer are inscribed successively, starting with the optically recordable layer situated farther from the laser light source and ending with the optically recordable layer situated nearer the laser light source if the effective transmission properties of the optically recordable layers after the recording of information on the layers have decreased with respect to the effective transmission properties of the optically recordable layers before the recording of information on the layers.

5. A method as claimed in Claim 1, 2 or 3, characterized in that the first and the second optically recordable layer are inscribed successively, starting with the optically recordable layer situated nearer the laser light source and ending with the optically recordable layer situated farther from the laser light source if the effective transmission properties of the optically recordable layers after the recording of information on the layers have increased with respect to the effective transmission properties of the optically recordable layers before the recording of information on the layers.

6. A recording apparatus for the recording of information on an optically recordable information carrier having at least two superposed optically recordable layers, comprising a device adapted to record information on a first one of the optically recordable layers by means of laser light to which the information carrier is exposed from a first side, and to record information on a second one of the optically recordable layers, which second layer differs from the first layer, by means of laser light to which the information carrier is also exposed from the first side, characterized in that

the recording apparatus is adapted to determine the changes of the effective transmission properties of the optically recordable layers before the recording of information

on the layers with respect to the effective transmission properties of the optically recordable layers after the recording of information on the layers, and

the recording apparatus is adapted to determine the sequence of recording of the first and the second optically recordable layer.

1/3

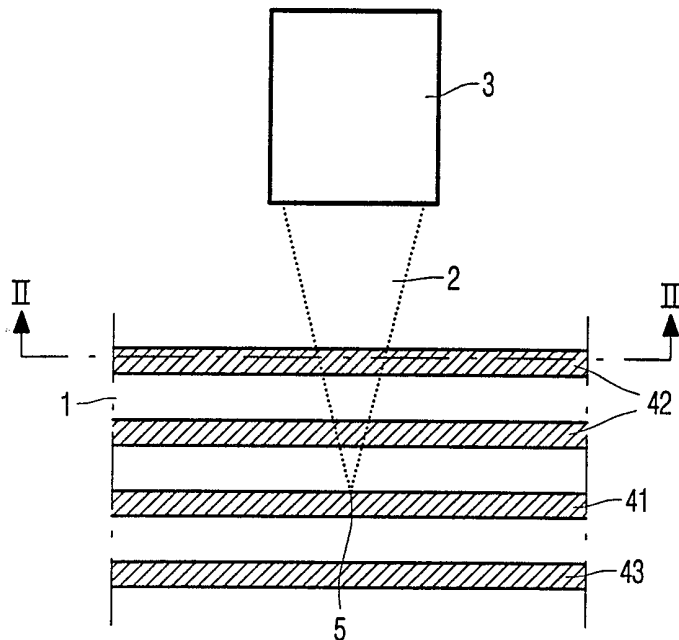


FIG. 1

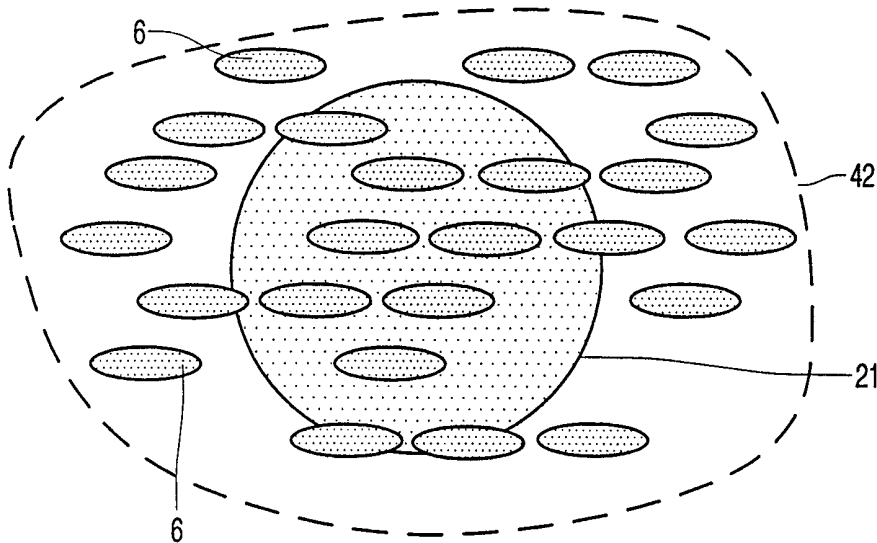


FIG. 2

2/3

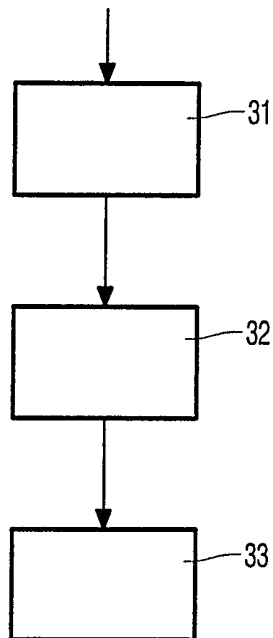


FIG. 3A

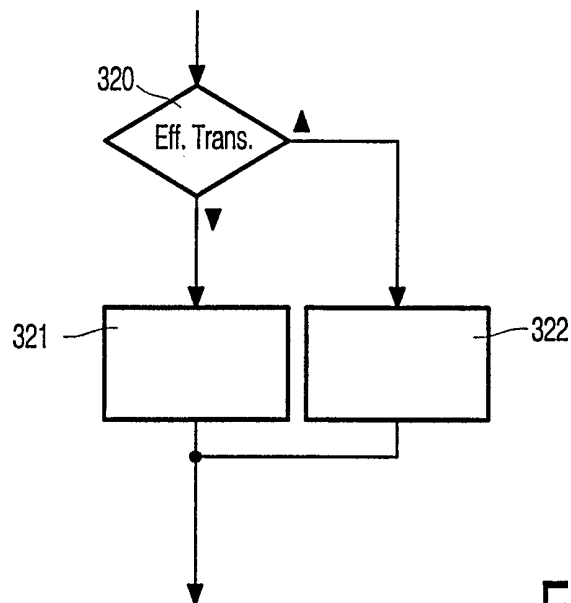


FIG. 3B



## INTERNATIONAL SEARCH REPORT

Int. l. Application No

PCT/EP 99/08330

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G11B7/00 G11B19/04

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G11B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 414 451 A (SUGIYAMA HISATAKA ET AL) 9 May 1995 (1995-05-09) column 20, line 21 -column 21, line 34 column 24, line 60 -column 26, line 28; figure 5	1-6

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&amp;" document member of the same patent family

Date of the actual completion of the international search

28 January 2000

Date of mailing of the international search report

18/02/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Annibal, P



# INTERNATIONAL SEARCH REPORT

Information on patent family members

Int. .tional Application No

PCT/EP 99/08330

Patent document  
cited in search report

Publication  
date

Patent family  
member(s)

Publication  
date

US 5414451 A

09-05-1995

JP 5101398 A

23-04-1993

US 5614938 A

25-03-1997