

CORRECTED VERSION

(19) World Intellectual Property
Organization
International Bureau



(10) International Publication Number
WO 2013/049899 A8

(43) International Publication Date
11 April 2013 (11.04.2013)

(51) International Patent Classification:

E05B 63/22 (2006.01) *E05C 3/08* (2006.01)

E05B 65/10 (2006.01) *E05C 3/12* (2006.01)

(21) International Application Number:

PCT/BE2012/000040

(22) International Filing Date:

8 August 2012 (08.08.2012)

(25) Filing Language:

Dutch

(26) Publication Language:

English

(30) Priority Data:

2011/0582 5 October 2011 (05.10.2011) BE

(72) Inventor; and

(71) Applicant : VANDERICK, Frans J.R. [BE/BE]; Hage-
landstraat 5, B-3545 Halen (BE).

(74) Agent: D'HALLEWEYN, Nele Veerle Trees Gertrudis;
Arnold & Siedsma, Meir 24, B-2000 Antwerpen (BE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,

HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(48) Date of publication of this corrected version:

15 May 2014

(15) Information about Correction:

see Notice of 15 May 2014

(54) Title: DEVICE FOR UNLOCKING A DOOR

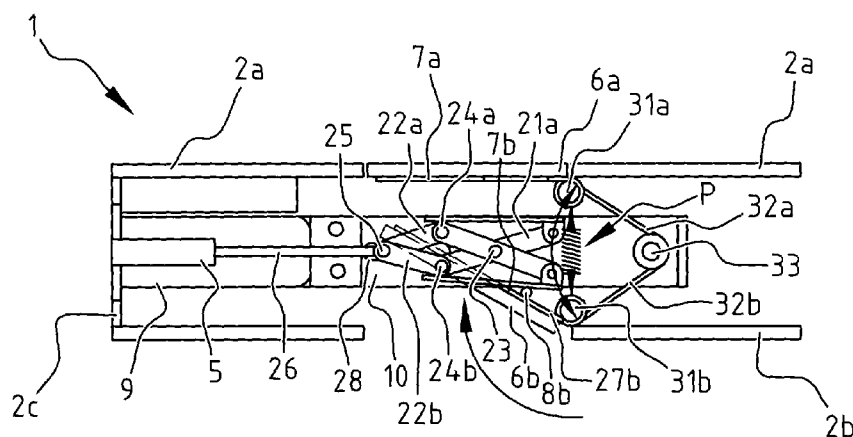


FIG. 2A

(57) Abstract: Device for unlocking a door, comprising at least one operating element; a bolt; a coupling which can be placed in the door and which is coupled between the bolt and the operating element, wherein the coupling comprises a pair of scissor arms mounted rotatably around a fixed shaft, and a pair of pivot arms, wherein each pivot arm is connected at a first end for pivoting around a first shaft to a scissor arm and connected at a second end for pivoting around a second shaft to a push part intended to engage against the bolt, such that a tilting of the operating element brings about a movement of the push part, and thus of the bolt.