

(12) STANDARD PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. **AU 2006230100 B2**

(54) Title
Titanium compounds and complexes as additives in lubricants

(51) International Patent Classification(s)
C10M 163/00 (2006.01) **C10M 159/12** (2006.01)

(21) Application No: **2006230100** (22) Date of Filing: **2006.03.27**

(87) WIPO No: **WO06/105022**

(30) Priority Data

(31) Number (32) Date (33) Country
60/665,715 **2005.03.28** **US**

(43) Publication Date: **2006.10.05**
(44) Accepted Journal Date: **2011.07.07**

(71) Applicant(s)
The Lubrizol Corporation

(72) Inventor(s)
Adams, Paul E.;Lange, Richard M.;Vilardo, Jonathan S.;Abraham, William D.;Mosier, Patrick E.;Brown, Jason R.;Carrick, Virginia A.;Dohner, Brent R.

(74) Agent / Attorney
Houlihan2, Level 1 70 Doncaster Road, Balwyn North, VIC, 3104

(56) Related Art
US 7543445
WO 87/04454
EP 0352067
US 4533480
US 4137183

2006230100 13 Sep 2007

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
5 October 2006 (05.10.2006)

PCT

(10) International Publication Number
WO 2006/105022 A1

(51) International Patent Classification:
C10M 163/00 (2006.01) *C10M 159/12* (2006.01)

(74) Agents: **SHOLD, David M.** et al.; The Lubrizol Corporation, 29400 Lakeland Boulevard, Wickliffe, OH 44092 (US).

(21) International Application Number:
PCT/US2006/011116

(22) International Filing Date: 27 March 2006 (27.03.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/665,715 28 March 2005 (28.03.2005) US

(71) Applicant (for all designated States except US): **THE LUBRIZOL CORPORATION** [US/US]; 29400 Lakeland Boulevard, Wickliffe, OH 44092 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PI, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BROWN, Jason R.** [US/US]; 29400 Lakeland Boulevard, Wickliffe, OH 44092 (US). **ADAMS, Paul E.** [US/US]; 29400 Lakeland Boulevard, Wickliffe, OH 44092 (US). **CARRICK, Virginia A.** [US/US]; 29400 Lakeland Boulevard, Wickliffe, OH 44092 (US). **DOHNER, Brent R.** [US/US]; 29400 Lakeland Boulevard, Wickliffe, OH 44092 (US). **ABRAHAM, William D.** [US/US]; 29400 Lakeland Boulevard, Wickliffe, OH 44092 (US). **VILARDO, Jonathan S.** [US/US]; 29400 Lakeland Boulevard, Wickliffe, OH 44092 (US). **LANGE, Richard M.** [US/US]; 155 East 207th Street, Euclid, OH 44092 (US). **MOSIER, Patrick E.** [US/US]; 29400 Lakeland Boulevard, Wickliffe, OH 44092 (US).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: TITANIUM COMPOUNDS AND COMPLEXES AS ADDITIVES IN LUBRICANTS

(57) Abstract: A lubricating composition comprising an oil of lubricating viscosity, 1 to 1000 parts per million by weight of titanium in the form of an oil-soluble titanium-containing material, and at least one additional lubricant additive provides beneficial effects on properties such as deposit control, oxidation, and filterability in engine oils.

WO 2006/105022 A1

2006230100 13 Sep 2007

TITLE

Titanium Compounds and Complexes as Additives in Lubricants

CROSS-REFERENCE TO RELATED APPLICATIONS

- 5 [0001] This application claims benefit of priority from U.S. Provisional Application 60,665,715, filed March 28, 2005

BACKGROUND OF THE INVENTION

- 10 [0002] The present invention relates to lubricant compositions containing a soluble titanium-containing material, having beneficial effects on properties such as deposit control, oxidation, and filterability in, for instance, engine oils.

- 15 [0003] Current and proposed specifications for crankcase lubricants, such as GF-4 for passenger car motor oils, and PC-10 for heavy duty diesel engines specify increasingly stringent standards to meet government specifications. Of particular concern are sulfur and phosphorus limits. It is widely believed that lowering these limits may have a serious impact on engine performance, engine wear, and oxidation of engine oils. This is because historically a major contributor to phosphorus content in engine oils has been zinc dialkyldithiophosphate (ZDP), and ZDP has long been used to impart antiwear and antioxidancy performance to engine oils. Thus, as reduced amounts of ZDP are anticipated in engine oils, there is a need for alternatives to impart protection against deterioration in one or more of the properties of engine performance, engine wear, and oxidation of engine oils. Such improved protection is desirable whether or not ZDP and related materials are included in the lubricant. Desirable lubricants may be low in one or more of phosphorus, sulfur, and ash, that is, sulfated ash according to ASTM D-874 (a measure of the metal content of the sample).

- 25 [0004] U.S. Patent 6,624,187, Schwind et al., November 4, 2003, discloses lubricating compositions, concentrates, and greases containing the combination of an organic polysulfide and an overbased composition or a phosphorus or boron compound. Metals which can be used in the basic metal compound include (among others) titanium.

- 30 [0005] U.S. Patent 5,968,880, Mathur et al., October 19, 1999, discloses lubricating composition, functional fluids and greases containing certain thio-phosphorus esters. Boron antiwear or extreme pressure agents can be present, which can be a borated overbased metal salt. Examples of the metals of the basic metal compound include (among others) titanium.
- 35

2006230100 20 Jun 2011

[0006] U.S. Patent 5,811,378, Lange, September 22, 1998, discloses metal containing dispersant viscosity improvers for lubricating oils, comprising the reaction product of a hydrocarbon polymer grafted with an α,β -unsaturated carboxylic acid and a nitrogen and metal containing derivative of a hydrocarbon substituted polycarboxylic acid. The metal can be selected from (among others) titanium.

[0007] U.S. Patent 5,614,480, Salomon et al., March 25, 1997, discloses lubricating compositions and concentrates including an oil of lubricating viscosity, a carboxylic derivative, and an alkali metal overbased salt. Also disclosed are antioxidants which can be an oil-soluble transition metal-containing composition. The transition metal can be selected from (among others) titanium.

[0008] Titanium in the form of surface-modified TiO_2 particles has also been disclosed as an additive in liquid paraffin for imparting friction and wear properties. See, for instance, Q. Xue et al., *Wear* 213, 29-32, 1997.

[0009] It has now been discovered that the presence of titanium, supplied, for instance, in the form of certain titanium compounds, provides a beneficial effect on one or more of the above properties. In particular, the titanium compounds impart a beneficial effect in one or more of the Komatsu Hot Tube Deposits screen test (KHT), the KES Filterability test, the Dispersant Panel Coker test (a test used to evaluate the deposit-forming tendency of an engine oil), the Cat 1M-PC test and the Oxidation Induction Time test (OIT).

SUMMARY OF THE INVENTION

[0010] The present invention provides a lubricating composition comprising:

(a) an oil of lubricating viscosity;

(b) 1 to 1000 parts per million by weight of titanium in the form of an oil-soluble titanium-containing material selected from the group consisting of titanium alkoxides other than titanium methoxide, titanium ethoxide, titanium propoxide, titanium isopropoxide and titanium butoxide, having a number average molecular weight of less than 20,000; and

(c) at least one additive selected from the group consisting of non-phosphorus-containing anti-wear agents selected from borated esters.

[0011] The invention further provides a method for preparing a lubricating composition comprising combining the foregoing elements..

[0012] The invention further provides a method for lubricating an internal combustion engine, preferably a heavy-duty diesel engine, comprising supplying to said engine a lubricating composition comprising:

2006230100 20 Jun 2011

(a) an oil of lubricating viscosity;

(b) 1 to 1000 parts per million by weight of titanium in the form of an oil-soluble titanium-containing material selected from the group consisting of titanium alkoxides other than titanium methoxide, titanium ethoxide, titanium propoxide, titanium isopropoxide and titanium butoxide, having a number average molecular weight of less than 20,000;

(c) an antioxidant other than a Ti-containing antioxidant, and

(d) a metal containing detergent other than a Ti-containing detergent.

DETAILED DESCRIPTION OF THE INVENTION

[0013] Various preferred features and embodiments will be described below by way of non-limiting illustration.

[0014] One element of the present invention is an oil of lubricating viscosity, also referred to as a base oil. The base oil used in the inventive lubricating oil composition may be selected from any of the base oils in Groups I-V as specified in the American Petroleum Institute (API) Base Oil Interchangeability Guidelines. The five base oil groups are as follows:

| | Base Oil | | | | Viscosity |
|----|-----------|----------------------------------------------------|--------------|-----|-----------|
| 20 | Category | Sulfur (%) | Saturates(%) | | Index |
| | Group I | >0.03 | and/or | <90 | 80 to 120 |
| | Group II | <0.03 | and | >90 | 80 to 120 |
| | Group III | <0.03 | and | >90 | >120 |
| 25 | Group IV | All polyalphaolefins (PAOs) | | | |
| | Group V | All others not included in Groups I, II, III or IV | | | |

Groups I, II and III are mineral oil base stocks. The oil of lubricating viscosity, then, can include natural or synthetic lubricating oils and mixtures thereof.

Mixture of mineral oil and synthetic oils, particularly polyalphaolefin oils and polyester oils, are often used.

[0015] Natural oils include animal oils and vegetable oils (e.g. castor oil, lard oil and other vegetable acid esters) as well as mineral lubricating oils such as liquid petroleum oils and solvent-treated or acid treated mineral lubricating oils of the paraffinic, naphthenic or mixed paraffinic-naphthenic types. Hydrotreated or hydrocracked oils are included within the scope of useful oils of lubricating viscosity.

2006230100 20 Jun 2011

[0016] Oils of lubricating viscosity derived from coal or shale are also useful. Synthetic lubricating oils include hydrocarbon oils and halosubstituted hydrocarbon oils such as polymerized and interpolymerized olefins and mixtures thereof, alkylbenzenes, polyphenyl, (e.g., biphenyls, terphenyls, and alkylated polyphenyls), alkylated diphenyl ethers and alkylated diphenyl sulfides and their derivatives, analogs and homologues thereof.

[0017] Alkylene oxide polymers and interpolymers and derivatives thereof, and those where terminal hydroxyl groups have been modified by, for example, esterification or etherification, constitute other classes of known synthetic lubricating oils that can be used.

[0018] Another suitable class of synthetic lubricating oils that can be used comprises the esters of dicarboxylic acids and those made from C5 to C12 monocarboxylic acids and polyols or polyol ethers. Other synthetic lubricating oils include liquid esters of phosphorus-containing acids, polymeric tetrahydrofurans, silicon-based oils such as the poly-alkyl-, polyaryl-, polyalkoxy-, or polyaryloxy-siloxane oils, and silicate oils.

[0019] Hydrotreated naphthenic oils are also known and can be used, as well as oils prepared by a Fischer-Tropsch gas-to-liquid synthetic procedure followed by hydroisomerization.

[0020] Unrefined, refined and rerefined oils, either natural or synthetic (as well as mixtures of two or more of any of these) of the type disclosed hereinabove can be used in the compositions of the present invention. Unrefined oils are those obtained directly from a natural or synthetic source without further purification treatment. Refined oils are similar to the unrefined oils except they have been further treated in one or more purification steps to improve one or more properties. Rerefined oils are obtained by processes similar to those used to obtain refined oils applied to refined oils which have been already used in service. Such rerefined oils often are additionally processed by techniques directed to removal of spent additives and oil breakdown products.

[0021] The present invention also comprises titanium in the form of an oil-soluble titanium-containing material or, more generally, a hydrocarbon-soluble material. By "oil-soluble" or "hydrocarbon soluble" is meant a material which will dissolve or disperse on a macroscopic or gross scale in an oil or hydrocarbon, as the case may be, typically a mineral oil, such that a practical solution or dispersion can be prepared. In order to prepare a useful lubricant formulation, the titanium material should not precipitate or settle out over a course of several days or weeks. Such materials may exhibit true solubility on a molecular scale or may

2006230100 20 Jun 2011

exist in the form of agglomerations of varying size or scale, provided however that they have dissolved or dispersed on a gross scale.

[0022] The oil-soluble titanium-containing material can be titanium alkoxides other than titanium methoxide, titanium ethoxide, titanium propoxide, titanium isopropoxide and titanium butoxide. Titanium (IV) 2-ethylhexoxide and titanium (IV) (triethanolaminate)isopropoxide are preferred alkoxides..

[0023] In another embodiment, the titanium can be supplied as a Ti-modified dispersant, such as a succinimide dispersant. Such materials may be prepared by forming a titanium mixed anhydride between the titanium alkoxide and a hydrocarbyl-substituted succinic anhydride, such as an alkenyl- (or alkyl) succinic anhydride. The resulting titanate-succinate intermediate may be used directly or it may be reacted with any of a number of materials, such as (a) a polyamine-based succinimide/amide dispersant having free, condensable -NH functionality; (b) the components of a polyamine-based succinimide/amide dispersant, i.e., an alkenyl- (or alkyl-)succinic anhydride and a polyamine, (c) a hydroxy-containing polyester dispersant prepared by the reaction of a substituted succinic anhydride with a polyol, aminoalcohol, polyamine, or mixtures thereof. Alternatively, the titanate-succinate intermediate may be reacted with other agents such as alcohols, aminoalcohols, ether alcohols, polyether alcohols or polyols, or fatty acids, and the product thereof either used directly to impart Ti to a lubricant, or else further reacted with the succinic dispersants as described above. As an example, 1 part (by mole) of tetraisopropyl titanate may be reacted with 2 parts (by mole) of polyisobutene-substituted succinic anhydride at 140-150 °C for 5 to 6 hours to provide a titanium modified dispersant or intermediate. The resulting material (30 g) may be further reacted with a succinimide dispersant from polyisobutene-substituted succinic anhydride and a polyethylenepolyamine mixture (127 g ÷ diluent oil) at 150 °C for 1.5 hours, to produce a titanium-modified succinimide dispersant.

[0024] In one embodiment, the titanium is not a part of or affixed to a long-chain polymer, that is, a high molecular weight polymer. Thus, the titanium species may, in these circumstances, have a number average molecular weight of less than 150,000 or less than 100,000 or 30,000 or 20,000 or 10,000 or 5000, or 3000 or 2000, e.g., about 1000 or less than 1000. Non-polymeric species providing the titanium as disclosed above will typically be below the molecular weight range of such polymers. A titanium-modified dispersant, as described above, may include a hydrocarbyl substituent with a number average molecular weight of 3000 or less or 2000 or less, e.g., about 1000.

2006230100 20 Jun 2011

[0025] The amount of titanium present in the lubricant may typically be 1 to 1000 parts per million by weight (ppm), alternatively 10 to 500 ppm or 10 to 150 ppm or 20 to 500 ppm or 20 to 300 ppm or 30 to 100 ppm or, again, alternatively, 50 to 500 ppm. It is believed that the cleanliness /anti-fouling /antioxidation benefits observed in the present invention may be obtained at relatively low concentrations of titanium, e.g., 5 – 100 or 8 – 50 or 8 – 45 or 10 – 45 or 15 – 30 or 10 – 25 parts per million of titanium or 1 to less than 50 parts per million, or 8 to less than 50 parts per million by weight Ti, regardless of the anionic portion of the compound. It is believed that amounts in excess of 50 or 70 or 100 parts per million will still be effective, although progressively less benefit may be obtained in exchange for the cost of supplying the excess level of titanium. Amounts much below 8 or 10 ppm may not provide particularly useful improvement in performance, and amounts more than 1000 ppm may not provide sufficient additional benefit to justify the additional expense.

[0026] These limits may vary with the particular system investigated and may be influenced to some extent by the anion or complexing agent associated with the titanium. Also, the amount of the particular titanium compound to be employed will depend on the relative weight of the anionic or complexing groups associated with the titanium.

[0027] Different performance advantages may be obtained by using different specific titanium compounds, that is, with different anionic portions or complexing portions of the compound. For example, surface-modified TiO_2 particles may impart friction and wear properties. Similarly, tolyltriazole oligomers salted with and/or chelated to titanium may impart antiwear properties. In a like manner, titanium compounds containing relatively long chain anionic portions or anionic portion containing phosphorus or other anti-wear elements may impart anti-wear performance by virtue of the anti-wear properties of the anion. Examples would include titanium neodecanoate; titanium 2-ethylhexoxide; titanium (IV) 2-propanolato, tris-isooctadecanato-O; titanium (IV) 2,2(bis-2-prepenolatomethyl)butanolato, tris-neodecanato-O; titanium (IV) 2-propanolato, tris(dioctyl)phosphato-O; and titanium (IV) 2-propanolato, tris(dodecyl)benzenesulfonato-O. When any such anti-wear-imparting materials are used, they may be used in an amount suitable to impart – and should in fact impart – a reduction in surface wear greater than surface of a lubricant composition devoid of such compound.

[0028] The titanium compound can be imparted to the lubricant composition in any convenient manner, such as by adding to the otherwise finished lubricant

2006230100 20 Jun 2011

(top-treating) or by pre-blending the titanium compound in the form of a concentrate in an oil or other suitable solvent, optionally along with one or more additional components such as an antioxidant, a friction modifier such as glycerol monooleate, a dispersant such as a succinimide dispersant, or a detergent such as an overbased sulfurized phenate detergent. Such additional components, typically along with diluent oil, may typically be included in an additive package, sometimes referred to as a DI (detergent-inhibitor) package.

[0029] Additional conventional components may be used in preparing a lubricant according to the present invention, for instance, those additives typically employed in a crankcase lubricant. Crankcase lubricants may typically contain any or all of the following components hereinafter described. One such additive is an antiwear agent.

[0030] Examples of anti-wear agents include phosphorus-containing anti-wear/extreme pressure agents such as metal thiophosphates, phosphoric acid esters and salts thereof, phosphorus-containing carboxylic acids, esters, ethers, and amides; and phosphites. The phosphorus acids include phosphoric, phosphonic, phosphinic, and thiophosphoric acids including dithiophosphoric acid as well as monothiophosphoric acids, thiophosphinic acids, and thiophosphonic acids. Non-phosphorus-containing anti-wear agents include borated esters, molybdenum-containing compounds, and sulfurized olefins.

[0031] Phosphorus acid esters can be prepared by reacting one or more phosphorus acids or anhydrides with an alcohol containing, for instance, 1 to 30 or 2 to 24 or to 12 carbon atoms, including monools and diols and polyols of various types. Such alcohols, including commercial alcohol mixtures, are well known. Examples of these phosphorus acid esters include triphenylphosphate and tricresylphosphate.

[0032] In one embodiment, the phosphorus antiwear/extreme pressure agent can be a dithiophosphoric acid or phosphorodithioic acid. The dithiophosphoric acid may be represented by the formula $(RO)_2PSSH$ wherein each R is independently a hydrocarbyl group containing, e.g., 3 to 30 carbon atoms, or up to 18, or 12, or 8 carbon atoms.

[0033] Metal salts of the phosphorus acid esters are prepared by the reaction of a metal base with a phosphorus acid ester. The metal base may be any metal compound capable of forming a metal salt. Examples of metal bases include metal oxides, hydroxides, carbonates, sulfates, borates, or the like. The metals of the metal base include Group IA, IIA, IB through VIIB, and VIII metals (CAS version of the Periodic Table of the Elements). These metals include the

2006230100 20 Jun 2011

alkali metals, alkaline earth metals and transition metals. In one embodiment, the metal is a Group IIA metal, such as calcium or magnesium, Group IIB metal, such as zinc, or a Group VIIB metal, such as manganese. In one embodiment, the metal is magnesium, calcium, manganese or zinc. The metal may also be titanium, although in certain embodiments the metal salt is other than a Ti salt.

[0034] In one embodiment, phosphorus containing antiwear/extreme pressure agent is a metal thiophosphate, or a metal dithiophosphate. The metal thiophosphate is prepared by means known to those in the art. Examples of metal dithiophosphates include zinc isopropyl methylamyl dithiophosphate, zinc isopropyl isooctyl dithiophosphate, zinc di(cyclohexyl) dithiophosphate, zinc isobutyl 2-ethylhexyl dithiophosphate, zinc isopropyl 2-ethylhexyl dithiophosphate, zinc isobutyl isoamyl dithiophosphate, zinc isopropyl n-butyl dithiophosphate, calcium di(hexyl) dithiophosphate, and barium di(nonyl) dithiophosphate.

[0035] In one embodiment, the phosphorus containing antiwear agent is a phosphorus containing amide. The phosphorus containing amides may be, for instance prepared by the reaction of a thiophosphoric or dithiophosphoric acid ester with an unsaturated amide. Examples of unsaturated amides include acrylamide, N,N-methylene bis(acrylamide), methacrylamide, crotonamide, and the like. The reaction product of the phosphorus acid and the unsaturated amide may be further reacted with a linking or a coupling compound, such as formaldehyde or paraformaldehyde. The phosphorus containing amides are known in the art and are disclosed in U.S. Pat. Nos. 4,670,169, 4,770,807, and 4,876,374.

[0036] In one embodiment, the phosphorus antiwear/extreme pressure agent is a phosphorus containing carboxylic ester contain at least one phosphite. The phosphite may be a di- or trihydrocarbyl phosphite. In one embodiment, each hydrocarbyl group independently contains 1 to 24 carbon atoms, or 1 to 18 or 2 to 8 carbon atoms. Phosphites and their preparation are known and many phosphites are available commercially. Particularly useful phosphites are dibutyl hydrogen phosphite, dioleyl hydrogen phosphite, di(C₁₄₋₁₈) hydrogen phosphite, and triphenyl phosphite.

[0037] Other phosphorus-containing antiwear agents include triphenylthiophosphate, and dithiophosphoric acid ester such as mixed O,O-(2-methylpropyl, amyl)-S-carbomethoxy-ethylphosphorodithioates and O,O-diisooctyl-S-carbomethoxyethyl-phosphorodithioate.


[0038] Such phosphorus-containing antiwear agents are described in greater detail in U.S. Published Application 2003/0092585.

2006230100 20 Jun 2011

between the two moieties is possible beside the simple imide structure shown above, including a variety of amides and quaternary ammonium salts. Succinimide dispersants are more fully described in U.S. Patents 4,234,435 and 3,172,892.

5 [0042] Another class of ashless dispersant is high molecular weight esters. These materials are similar to the above-described succinimides except that they may be seen as having been prepared by reaction of a hydrocarbyl acylating agent and a polyhydric aliphatic alcohol such as glycerol, pentaerythritol, or sorbitol. Such materials are described in more detail in U.S. Patent 3,381,022.

10 [0043] Another class of ashless dispersant is Mannich bases. These are materials which are formed by the condensation of a higher molecular weight, alkyl substituted phenol, an alkylene polyamine, and an aldehyde such as formaldehyde. Such materials may have the general structure

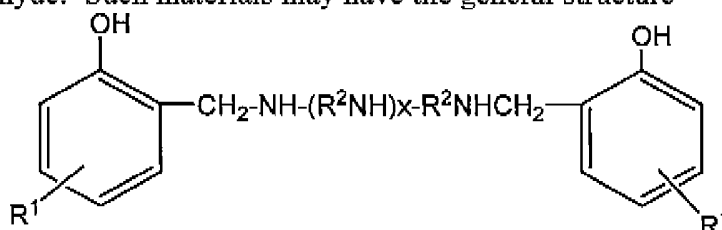

15 (including a variety of isomers and the like) and are described in more detail in U.S. Patent 3,634,515.

[0044] Other dispersants include polymeric dispersant additives, which are generally hydrocarbon-based polymers which contain polar functionality to impart dispersancy characteristics to the polymer.

20 [0045] Dispersants can also be post-treated by reaction with any of a variety of agents. Among these are urea, thiourea, dimercapthiadiazoles, carbon disulfide, aldehydes, ketones, carboxylic acids, hydrocarbon-substituted succinic anhydrides, nitriles, epoxides, boron compounds, and phosphorus compounds. References detailing such treatment are listed in U.S. Patent 4,654,403.


25 [0046] The amount of dispersant in the present composition can typically be 1 to 10 weight percent, or 1.5 to 9.0 percent, or 2.0 to 8.0 percent, all expressed on an oil-free basis.

30 [0047] Another component is an antioxidant. While certain antioxidants may contain titanium, in certain embodiments the antioxidant which may be present is other than a titanium-containing antioxidant. That is, although a Ti-containing antioxidant may or may not be present in the lubricant, in certain

2006230100 20 Jun 2011


embodiments a different, or additional antioxidant may be present which does not contain titanium.

[0048] Antioxidants encompass phenolic antioxidants, which may be of the general the formula




5

wherein R^4 is an alkyl group containing 1 to 24, or 4 to 18, carbon atoms and a is an integer of 1 to 5 or 1 to 3, or 2. The phenol may be a butyl substituted phenol containing 2 or 3 t-butyl groups, such as



- 10 The para position may also be occupied by a hydrocarbyl group or a group bridging two aromatic rings. In certain embodiments the para position is occupied by an ester-containing group, such as, for example, an antioxidant of the formula

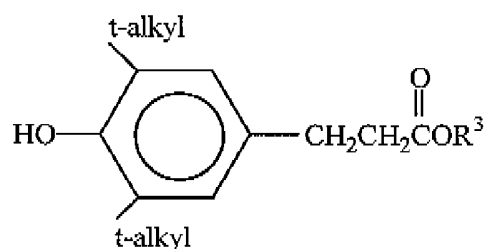


15

wherein R^3 is a hydrocarbyl group such as an alkyl group containing, e.g., 1 to 18 or 2 to 12 or 2 to 8 or 2 to 6 carbon atoms; and t-alkyl can be t-butyl. Such antioxidants are described in greater detail in U.S. Patent 6,559,105.


[0049] Antioxidants also include aromatic amines, such as those of the formula

20



2006230100 20 Jun 2011

wherein R^5 can be an aromatic group such as a phenyl group, a naphthyl group, or a phenyl group substituted by R^7 , and R^6 and R^7 can be independently a hydrogen or an alkyl group containing 1 to 24 or 4 to 20 or 6 to 12 carbon atoms. In one embodiment, an aromatic amine antioxidant can comprise an alkylated diphenylamine such as nonylated diphenylamine of the formula



or a mixture of a di-nonylated amine and a mono-nonylated amine.

[0050] Antioxidants also include sulfurized olefins such as mono-, or disulfides or mixtures thereof. These materials generally have sulfide linkages having 1 to 10 sulfur atoms, for instance, 1 to 4, or 1 or 2. Materials which can be sulfurized to form the sulfurized organic compositions of the present invention include oils, fatty acids and esters, olefins and polyolefins made thereof, terpenes, or Diels-Alder adducts. Details of methods of preparing some such sulfurized materials can be found in U.S. Pat. Nos. 3,471,404 and 4,191,659.

[0051] Molybdenum compounds can also serve as antioxidants, and these materials can also serve in various other functions, such as antiwear agents. The use of molybdenum and sulfur containing compositions in lubricating oil compositions as antiwear agents and antioxidants is known. U.S. Pat. No. 4,285,822, for instance, discloses lubricating oil compositions containing a molybdenum and sulfur containing composition prepared by (1) combining a polar solvent, an acidic molybdenum compound and an oil-soluble basic nitrogen compound to form a molybdenum-containing complex and (2) contacting the complex with carbon disulfide to form the molybdenum and sulfur containing composition. A molybdenum based antioxidant may be present or may be absent. In certain embodiments, the lubricant formulation contains little or no molybdenum, for instance, less than 500, or less than 300 or less than 150 or less than 100 or less than 50 or less than 20 or less than 10 or less than 5 or less than 1 parts per million Mo by weight.

[0052] Typical amounts of antioxidants will, of course, depend on the specific antioxidant and its individual effectiveness, but illustrative total amounts can be 0.01 to 5 percent by weight or 0.15 to 4.5 percent or 0.2 to 4

2006230100 20 Jun 2011

percent. Additionally, more than one antioxidant may be present, and certain combinations of these can be synergistic in their combined overall effect.


[0053] Detergents are typically overbased materials. Overbased materials, otherwise referred to as overbased or superbased salts, are generally single phase, homogeneous Newtonian systems characterized by a metal content in excess of that which would be present for neutralization according to the stoichiometry of the metal and the particular acidic organic compound reacted with the metal. The overbased materials are prepared by reacting an acidic material (typically an inorganic acid or lower carboxylic acid, preferably carbon dioxide) with a mixture comprising an acidic organic compound, a reaction medium comprising at least one inert, organic solvent (e.g., mineral oil, naphtha, toluene, xylene) for said acidic organic material, a stoichiometric excess of a metal base (such as a Ca, Mg, Ba, Na, or K compound, among other metals), and a promoter such as a phenol or alcohol. The acidic organic material will normally have a sufficient number of carbon atoms to provide a degree of solubility in oil. The amount of excess metal is commonly expressed in terms of metal ratio. The term "metal ratio" is the ratio of the total equivalents of the metal to the equivalents of the acidic organic compound. A neutral metal salt has a metal ratio of one. A salt having 4.5 times as much metal as present in a normal salt will have metal excess of 3.5 equivalents, or a ratio of 4.5.

[0054] Such overbased materials are well known to those skilled in the art. Patents describing techniques for making basic salts of sulfonic acids such as long chain alkylbenzenesulfonic acids, carboxylic acids, phenols, including overbased phenol sulfides (sulfur-bridged phenols), phosphonic acids, and mixtures of any two or more of these include U.S. Patents 2,501,731; 2,616,905; 2,616,911; 2,616,925; 2,777,874; 3,256,186; 3,384,585; 3,365,396; 3,320,162; 3,318,809; 3,488,284; and 3,629,109.

[0055] Detergents based on other, or more specific, acidic substrates include salicylates, salixarates, and saligenins. Typical salicylate detergents are metal overbased salicylates having a sufficiently long hydrocarbon substituent to promote oil solubility. Hydrocarbyl-substituted salicylic acids can be prepared by the reaction of the corresponding phenol by reaction of an alkali metal salt thereof with carbon dioxide. The hydrocarbon substituent can be as described for the carboxylate or phenate detergents. Overbased salicylic acid detergents and their preparation are described in greater detail in U.S. Pat. No. 3,372,116.


2006230100 20 Jun 2011

[0056] Salixarate and saligenin derivative detergents are described in greater detail in US Published Application 2004/0102335. Saligenin detergents can be represented by the formula:

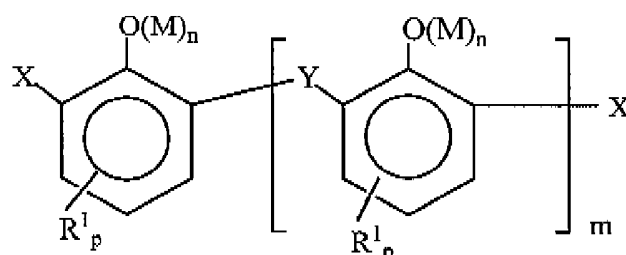


5 wherein X comprises -CHO or -CH₂OH, Y comprises -CH₂- or -CH₂OCH₂-, and wherein, in typical embodiments, such -CHO groups comprise at least 10 mole percent of the X and Y groups; and M is a valence of a metal ion, typically mono- or di- valent. Each n is independently 0 or 1. R¹ is a hydrocarbyl group typically containing 1 to 60 carbon atoms, m is 0 to 10, and when m > 0, one of the X groups can be H; each p is independently 0, 1, 2 or 3, preferably 1; and that the total number of carbon atoms in all R¹ groups is typically at least 7. When n is 0, M is replaced by H to form an unneutralized phenolic -OH group. Preferred metal ions M are monovalent metals ion such as lithium, sodium, potassium, as well as divalent ions such as calcium or magnesium. Saligenin derivatives and methods of their preparation are described in greater detail in U.S. patent number 6,310,009.



[0057] Salixarate detergents can be represented by a substantially linear compound comprising at least one unit of formula (I) or formula (II):

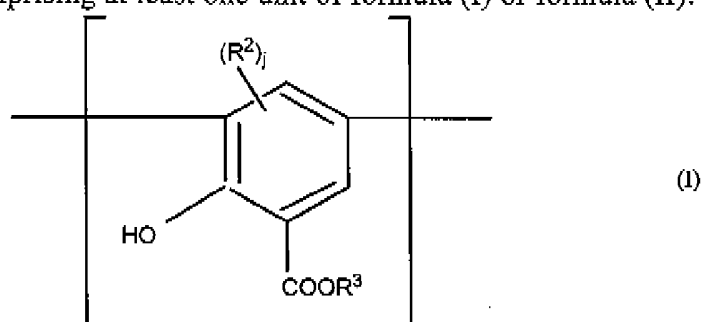

2006230100 20 Jun 2011

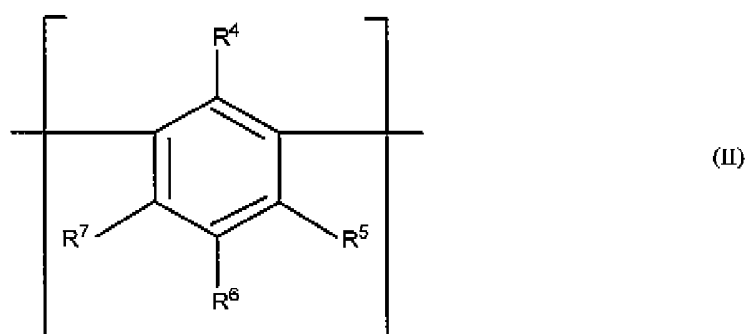

each end of the compound having a terminal group of formula (III) or formula (IV):



- 5 such groups being linked by divalent bridging groups A, which may be the same or different for each linkage. In the above formulas (I)-(IV) R³ is hydrogen or a hydrocarbyl group; R² is hydroxyl or a hydrocarbyl group, and j is 0, 1, or 2; R⁶ is hydrogen, a hydrocarbyl group, or a hetero-substituted hydrocarbyl group; and either R⁴ is hydroxyl and R⁵ and R⁷ are independently either hydrogen, a hydrocarbyl group, or hetero-substituted hydrocarbyl group, or else R⁵ and R⁷ are both hydroxyl and R⁴ is hydrogen, a hydrocarbyl group, or a hetero-substituted hydrocarbyl group; provided that at least one of R⁴, R⁵, R⁶ and R⁷ is hydrocarbyl containing at least 8 carbon atoms; and wherein the molecules on average contain at least one of unit (I) or (III) and at least one of unit (II) or (IV) and the ratio of the total number of units (I) and (III) to the total number of units of (II) and (IV) in the composition is 0.1:1 to 2:1. The divalent bridging group "A," which may be the same or different in each occurrence, includes -CH₂- (methylene bridge) and -CH₂OCH₂- (ether bridge), either of which may be derived from formaldehyde or a formaldehyde equivalent (e.g., paraform, formalin). Salixarate derivatives and methods of their preparation are described in greater detail in U.S. patent number 6,200,936 and PCT Publication WO 01/56968. It is believed that the salixarate derivatives have a predominant-

2006230100 20 Jun 2011

ly linear, rather than macrocyclic, structure, although both structures are intended to be encompassed by the term "salixarate."

[0058] The amount of the detergent can typically be 0.1 to 5.0 percent by weight on an oil free basis. Since many detergents contain 30-50 percent diluent oil, this would correspond to, for instance, about 0.2 to 12 percent by weight of the commercially available, oil-diluted detergents. In other embodiments, the amount of detergent can be 0.2 to 4.0 percent by weight or 0.3-3.0 percent by weight (oil-free).

[0059] It will be evident that the detergent may be based on any of the aforementioned metals as well as other metals generally. Thus, titanium based detergents are also possible. Thus, while certain detergents may contain titanium, in certain embodiments the detergent which may be present is other than a titanium-containing detergent. That is, although a Ti-containing detergent may or may not be present in the lubricant, in certain embodiments a different, or additional detergent may be present which does not contain titanium. Of course, it is recognized that the metal ions within a lubricant may migrate from one detergent to another, so that if a detergent other than a titanium detergent is initially added, after a period of time some of the molecules thereof may become associated with a Ti ion. The presence of a detergent other than a Ti-containing detergent is to be interpreted as not to be negated by the presence of such incidental, transferred Ti ions in such detergent.

[0060] Viscosity improvers (also sometimes referred to as viscosity index improvers or viscosity modifiers) may be included in the compositions of this invention. Viscosity improvers are usually polymers, including polyisobutenes, polymethacrylic acid esters, diene polymers, polyalkyl styrenes, esterified styrene-maleic anhydride copolymers, alkenylarene-conjugated diene copolymers and polyolefins. Multifunctional viscosity improvers, other than those of the present invention, which also have dispersant and/or antioxidancy properties are known and may optionally be used in addition to the products of this invention.

[0061] Other additives that may optionally be used in the lubricating oils of this invention include pour point depressing agents, extreme pressure agents, anti-wear agents, color stabilizers and anti-foam agents.

[0062] Extreme pressure agents and corrosion and oxidation inhibiting agents which may be included in the compositions of the invention are exemplified by chlorinated aliphatic hydrocarbons, organic sulfides and polysulfides, phosphorus esters including dihydrocarbon and trihydrocarbon phosphites, and molybdenum compounds.

2006230100 20 Jun 2011

[0063] The various additives described herein can be added directly to the lubricant. In one embodiment, however, they can be diluted with a concentrate-forming amount of a substantially inert, normally liquid organic diluent such as mineral oil or a synthetic oil such as a polyalphaolefin to form an additive concentrate. These concentrates usually comprise 0.1 to 80% by weight of the compositions of this invention and may contain, in addition, one or more other additives known in the art or described hereinabove. Concentrations such as 15%, 20%, 30% or 50% of the additives or higher may be employed. By a "concentrate forming amount" is generally mean an amount of oil or other solvent less than the amount present in a fully formulated lubricant, e.g., less than 85% or 80% or 70% or 60%. Additive concentrates can be prepared by mixing together the desired components, often at elevated temperatures, usually up to 150° C or 130° C or 115° C.

[0064] The lubricating compositions of the present invention may thus impart protection against deterioration in one or more of the properties of engine performance, engine wear, engine cleanliness, deposit control, filterability, and oxidation of engine oils, when they are used to lubricate a surface of a mechanical device such as an engine drive train, for instance, the moving parts of a drive train in a vehicle including an internal surface a component of an internal combustion engine. Such a surface may then be said to contain a coating of the lubricant composition.

[0065] The internal combustion engines to be lubricated may include gasoline fueled engines, spark ignited engines, diesel engines, compression ignited engines, two-stroke cycle engines, four-stroke cycle engines, sump-lubricated engines, fuel-lubricated engines, natural gas-fueled engines, marine diesel engines, and stationary engines. The vehicles in which such engines may be employed include automobiles, trucks, off-road vehicles, marine vehicles, motorcycles, all-terrain vehicles, and snowmobiles. In one embodiment, the lubricated engine is a heavy duty diesel engine, which may include sump-lubricated, two- or four-stroke cycle engines, which are well known to those skilled in the art. Such engines may have an engine displacement of greater than 3, greater than 5, or greater than 7 L.

[0066] As used herein, the term "hydrocarbyl substituent" or "hydrocarbyl group" is used in its ordinary sense, which is well-known to those skilled in the art. Specifically, it refers to a group having a carbon atom directly attached to the remainder of the molecule and having predominantly hydrocarbon character. Examples of hydrocarbyl groups include:

2006230100 20 Jun 2011

hydrocarbon substituents, that is, aliphatic (e.g., alkyl or alkenyl), alicyclic (e.g., cycloalkyl, cycloalkenyl) substituents, and aromatic-, aliphatic-, and alicyclic-substituted aromatic substituents, as well as cyclic substituents wherein the ring is completed through another portion of the molecule (e.g., two substituents together form a ring);

substituted hydrocarbon substituents, that is, substituents containing non-hydrocarbon groups which, in the context of this invention, do not alter the predominantly hydrocarbon nature of the substituent (e.g., halo (especially chloro and fluoro), hydroxy, alkoxy, mercapto, alkylmercapto, nitro, nitroso, and sulfoxy);

hetero substituents, that is, substituents which, while having a predominantly hydrocarbon character, in the context of this invention, contain other than carbon in a ring or chain otherwise composed of carbon atoms. Heteroatoms include sulfur, oxygen, nitrogen, and encompass substituents as pyridyl, furyl, thienyl and imidazolyl. In general, no more than two, preferably no more than one, non-hydrocarbon substituent will be present for every ten carbon atoms in the hydrocarbyl group; typically, there will be no non-hydrocarbon substituents in the hydrocarbyl group.

[0067] It is known that some of the materials described above may interact in the final formulation, so that the components of the final formulation may be different from those that are initially added. For instance, metal ions (of, e.g., a detergent) can migrate to other acidic or anionic sites of other molecules. The products formed thereby, including the products formed upon employing the composition of the present invention in its intended use, may not be susceptible of easy description. Nevertheless, all such modifications and reaction products are included within the scope of the present invention; the present invention encompasses the composition prepared by admixing the components described above.

EXAMPLES

[0068] Lubricant formulation D. A lubricant formulation is prepared containing the following components, given as percent by weight:

2.19% Overbased calcium sulfonate and phenate detergents (including about 40% diluent oil)

1.1% Zinc dialkyldithiophosphate (including 9% oil)

4.0% Succinimide dispersant (from ethylene polyamine) (including 50% oil)

1.5% Dispersant viscosity modifier, containing a nitrogen compound component (including 66.5% diluent oil)

2006230100 20 Jun 2011

0.5% Hindered phenolic ester antioxidant

0.3% Aromatic amine antioxidant

0.1% Hydrocarbyl-substituted succinic anhydride

Lesser amounts of corrosion inhibitor(s) and antifoam agent(s)

- 5 Base oil of lubricating viscosity – Group II base oil in an amount to = 100%

[0069] Lubricant formulation D is tested, separately, without and with added 0.12% tetra(2-ethylhexyl)titanate. Each sample of the lubricant formulation is subjected to an Oxidation Induction Time test by ACEA E-5 Pressurized Differential Scanning Calorimetry. In this test, a sample of lubricant is heated in a
10 pressure cell capable of pressurization to 700 kPa (100 psi), supplied with compressed air. Following equilibration at 50 °C, the temperature is increased to 210°C at 40°C per minute and maintained at 210°C until an oxidation event is detected by heat flow. The oxidation induction time is the time, starting when 100°C is reached, until the onset of the oxidation event. Results are reported in
15 minutes to oxidation onset. Longer times indicate greater stability.

| Formulation | Titanium component | Ti, ppm | OIT (min) |
|-------------|------------------------------------|---------|-----------|
| D (no Ti) | -- none -- | 0 | 90 |
| D (with Ti) | Tetra(2-ethylhexyl)titanate, 0.12% | 100 | 127 |

[0070] Lubricant formulation E. A lubricant formulation is prepared containing the following components, given as percent by weight:

- 20 2.19% Overbased calcium sulfonate and phenate detergents (including about 40% diluent oil)
- 1.1% Zinc dialkyldithiophosphate (including 9% oil)
- 7.0% Succinimide dispersant (from ethylene polyamine) (including 50% oil)
- 1.5% Dispersant viscosity modifier, containing a nitrogen compound component
25 (including 66.5% diluent oil)
- 0.5% Hindered phenolic ester antioxidant
- 0.3% Aromatic amine antioxidant
- 0.1% Hydrocarbyl-substituted succinic anhydride
- Lesser amounts of corrosion inhibitor(s) and antifoam agent(s)
- 30 Base oil of lubricating viscosity – Group II base oil in an amount to = 100%
- [0071] Lubricant formulation E is tested as above, separately, without and with added 0.12% tetra(2-ethylhexyl)titanate. Results in terms of oxidation induction time are shown below:

2006230100 20 Jun 2011

| Formulation | Titanium component | Ti, ppm | OIT (min) |
|-------------|------------------------------------|---------|-----------|
| E (no Ti) | - none - | 0 | 82 |
| E (with Ti) | Tetra(2-ethylhexyl)titanate, 0.12% | 100 | 122 |

[0072] The results show that, in both Formulation D and Formulation E, addition of tetra(2-ethylhexyl)titanate leads to improved oxidative stability.

[0073] Each of the documents referred to above is incorporated herein by reference. Except in the Examples, or where otherwise explicitly indicated, all numerical quantities in this description specifying amounts of materials, reaction conditions, molecular weights, number of carbon atoms, and the like, are to be understood as modified by the word "about." Unless otherwise indicated, each chemical or composition referred to herein should be interpreted as being a commercial grade material which may contain the isomers, by-products, derivatives, and other such materials which are normally understood to be present in the commercial grade. However, the amount of each chemical component is presented exclusive of any solvent or diluent oil, which may be customarily present in the commercial material, unless otherwise indicated. It is to be understood that the upper and lower amount, range, and ratio limits set forth herein may be independently combined. Similarly, the ranges and amounts for each element of the invention can be used together with ranges or amounts for any of the other elements. As used herein, the expression "consisting essentially of" permits the inclusion of substances that do not materially affect the basic and novel characteristics of the composition under consideration.

Where the terms "comprise", "comprises", "comprised" or "comprising" are used in this specification, they are to be interpreted as specifying the presence of the stated features, integers, steps or components referred to, but not to preclude the presence or addition of one or more other feature, integer, step, component or group thereof.

Further, any prior art reference or statement provided in the specification is not to be taken as an admission that such art constitutes, or is to be understood as constituting, part of the common general knowledge in Australia.

2006230100 20 Jun 2011

The Claims defining the invention are as follows:

1. A method for lubricating an internal combustion engine, comprising supplying to said engine a lubricating composition comprising:

(a) an oil of lubricating viscosity;

5 (b) 1 to 1000 parts per million by weight of titanium in the form of an oil-soluble titanium-containing material selected from the group consisting of titanium alkoxides other than titanium methoxide, titanium ethoxide, titanium propoxide, titanium isopropoxide and titanium butoxide, having a number average molecular weight of less than 20,000;

10 (c) an antioxidant other than a Ti-containing antioxidant, and

(d) a metal containing detergent other than a Ti-containing detergent.

2. The method of claim 1, wherein said lubricating composition further comprises (e) a non-phosphorus-containing anti-wear agent selected from borated esters.

15 3. The method of claim 1 or 2, wherein said metal-containing detergent of (d) comprises a salicylate detergent.

4. The method of any one of claims 1 to 3, wherein the oil-soluble titanium-containing material comprises a titanium-modified succinimide dispersant which is the reaction product of the titanium alkoxide and a hydrocarbyl-substituted succinimide dispersant.

20 5. The method of any one of claims 1 to 4, wherein the amount of titanium is 1 to less than 50 parts per million by weight.

6. The method of any one of claims 1 to 5, wherein an amount of molybdenum in the composition is less than 150 parts per million by weight and wherein the composition contains less than 1200 parts per million by weight of phosphorus.

7. The method of any one of claims 1 to 6, wherein the internal combustion engine is a heavy-duty diesel internal combustion engine.

8. A lubricating composition comprising:

30 (a) an oil of lubricating viscosity;

(b) 1 to 1000 parts per million by weight of titanium in the form of an oil-soluble titanium-containing material selected from the group consisting of titanium alkoxides other than titanium methoxide, titanium ethoxide, titanium

2006230100 20 Jun 2011

propoxide, titanium isopropoxide and titanium butoxide, having a number average molecular weight of less than 20,000; and

(c) at least one additive selected from the group consisting of non-phosphorus-containing anti-wear agents selected from borated esters.

5 9. The composition of claim 8 further comprising (d) a metal containing detergent other than a Ti-containing detergent, comprising a salicylate detergent.

10 10. A method for preparing a lubricating composition comprising combining the components set forth in claim 8 or 9.

11. A composition prepared by combining the components of any one of claims 1 to 6.