



(86) Date de dépôt PCT/PCT Filing Date: 2001/09/28  
(87) Date publication PCT/PCT Publication Date: 2002/04/04  
(45) Date de délivrance/Issue Date: 2011/02/08  
(85) Entrée phase nationale/National Entry: 2003/03/28  
(86) N° demande PCT/PCT Application No.: NZ 2001/000201  
(87) N° publication PCT/PCT Publication No.: 2002/026086  
(30) Priorité/Priority: 2000/09/28 (NZ507215)

(51) Cl.Int./Int.Cl. *A47F 3/00* (2006.01),  
*A47B 47/00* (2006.01), *E04B 1/684* (2006.01),  
*E04B 1/686* (2006.01), *E04B 2/00* (2006.01),  
*E04B 2/72* (2006.01), *F16B 12/02* (2006.01),  
*F16B 12/20* (2006.01), *F16B 12/46* (2006.01),  
*F16B 12/50* (2006.01), *E04B 1/61* (2006.01)


(72) Inventeur/Inventor:  
FRANK, MANFRED JOHANNES, NZ

(73) Propriétaire/Owner:  
ASC SYSTEMS LIMITED, NZ

(74) Agent: MARKS & CLERK


(54) Titre : JOINT POUR STRUCTURE DEMONTABLE

(54) Title: A JOINT ARRANGEMENT FOR DEMOUNTABLE STRUCTURE

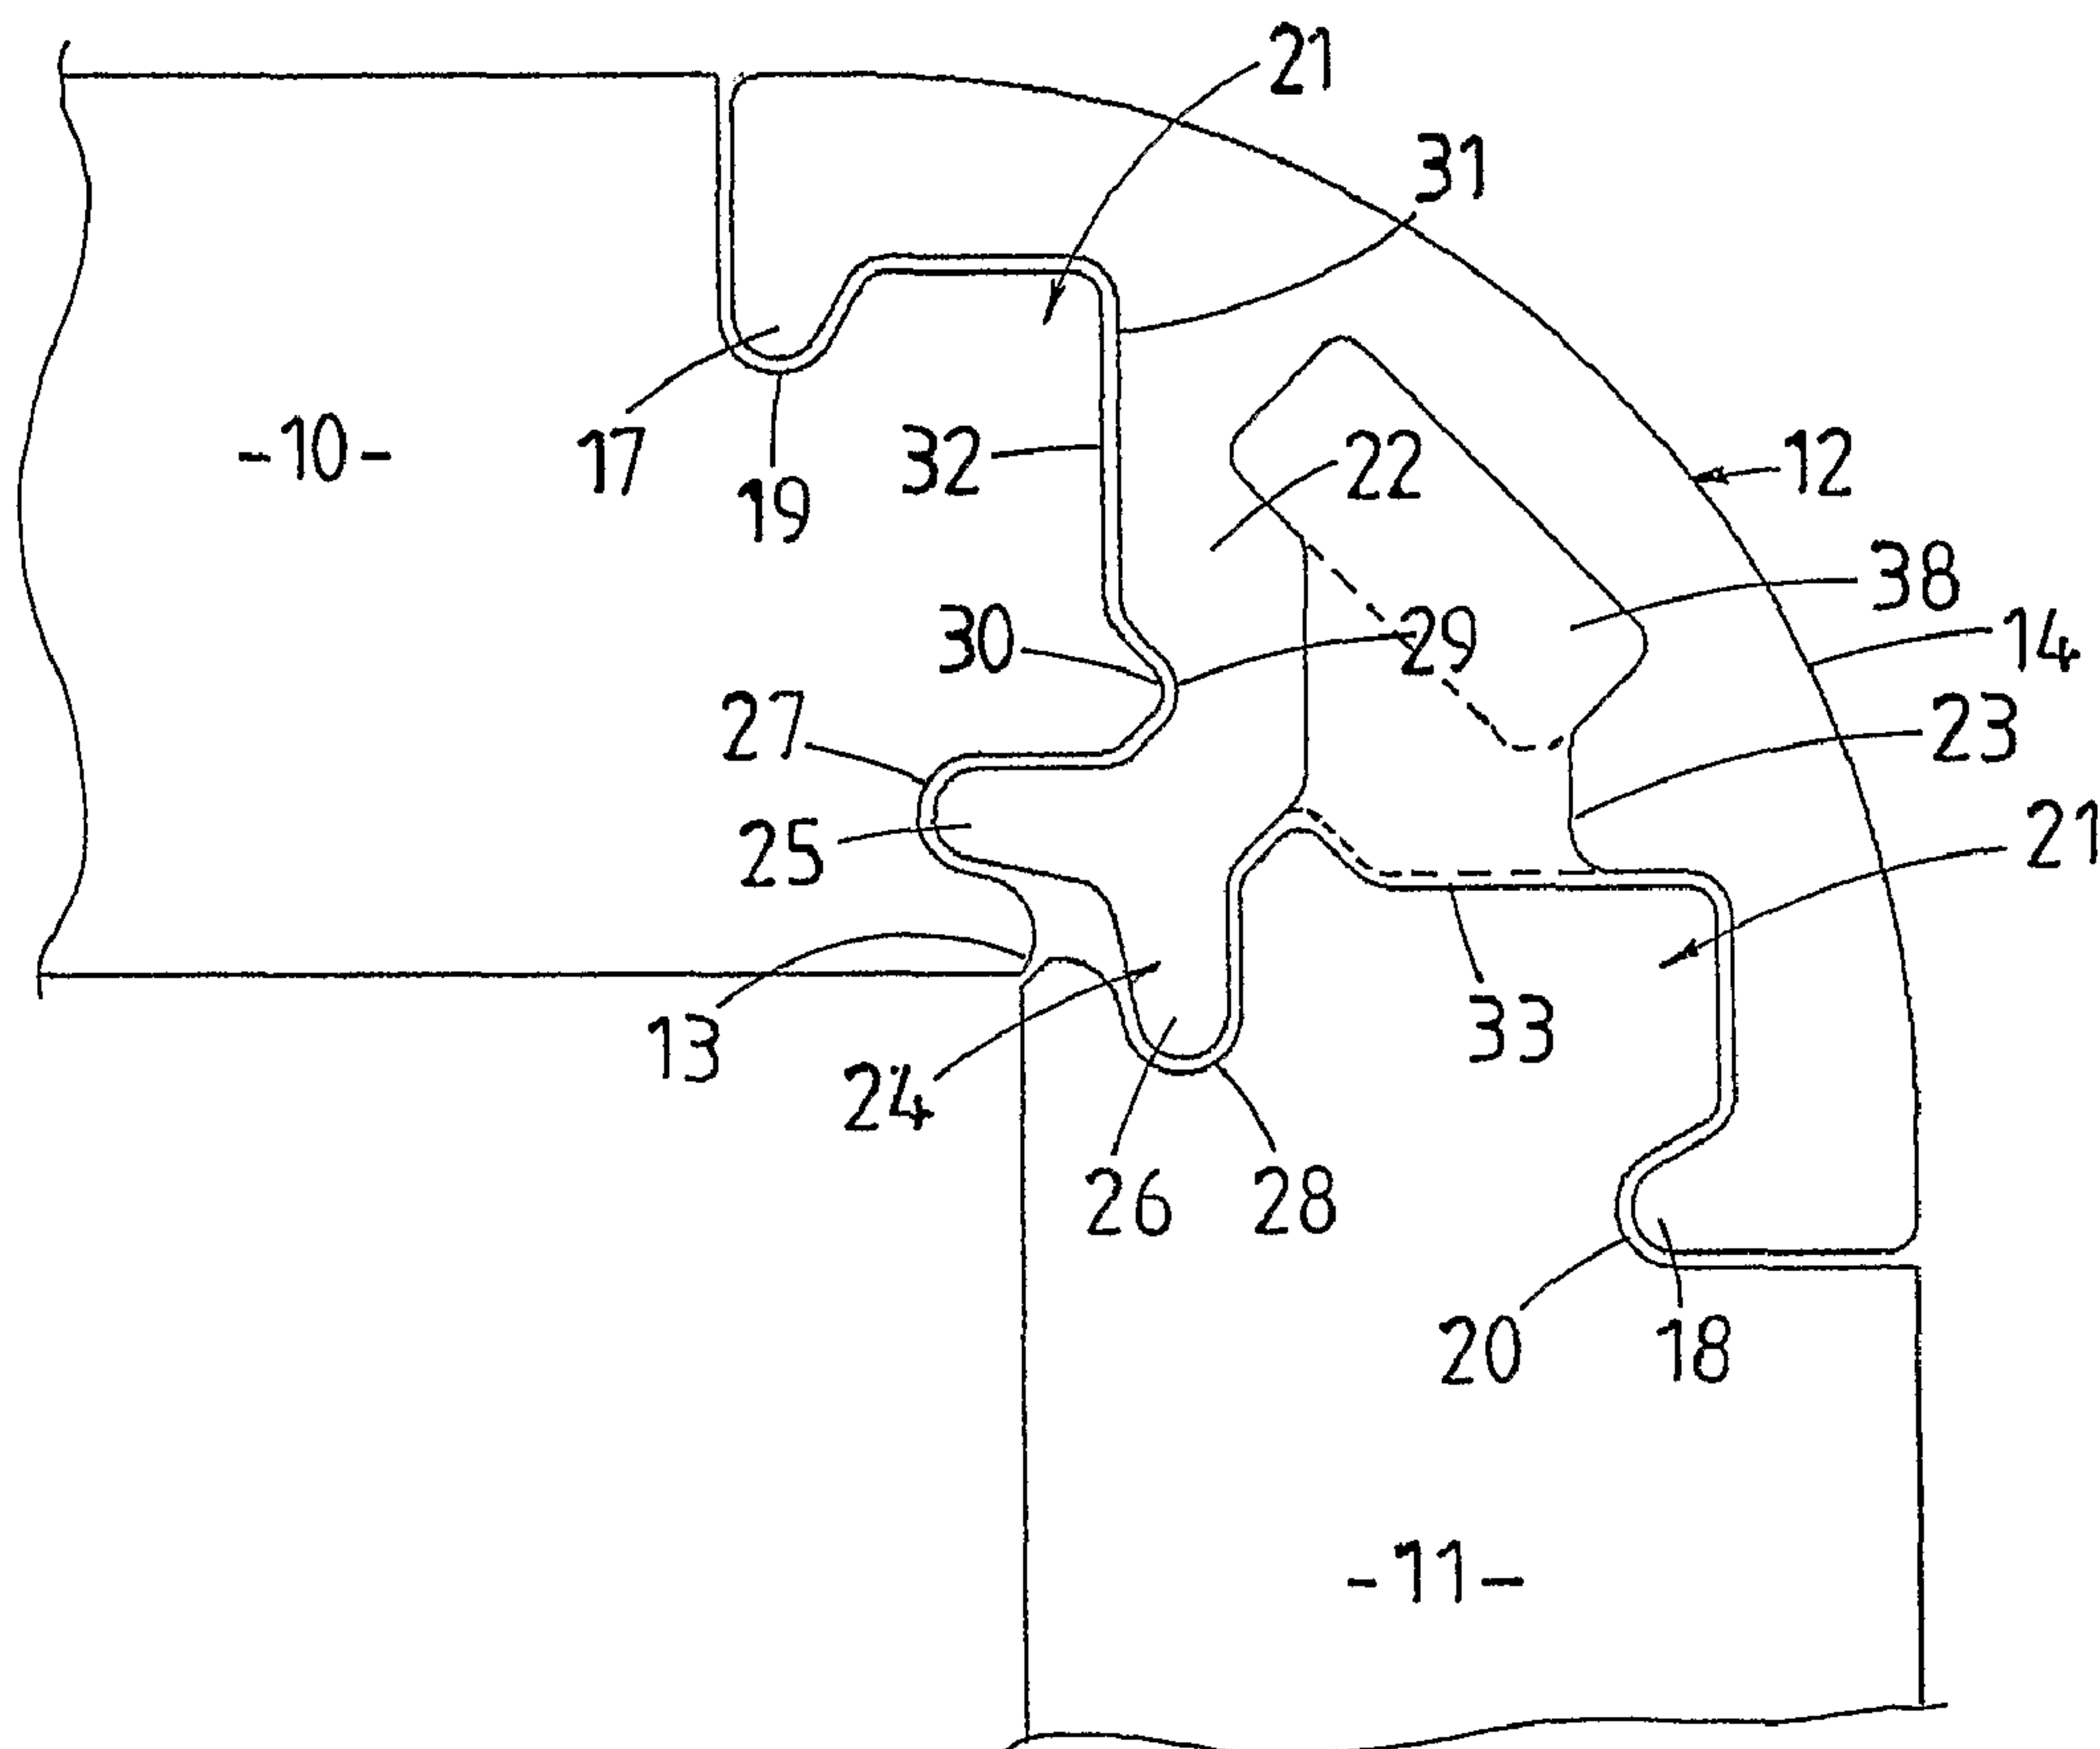

(57) Abrégé/Abstract:

A joint arrangement joining adjacent edges of two structural elements (10, 11). The joint arrangement includes a joiner element (12) which has projections (17, 18), each of which is slidingly engageable in a groove (19, 20) of the respective structural elements

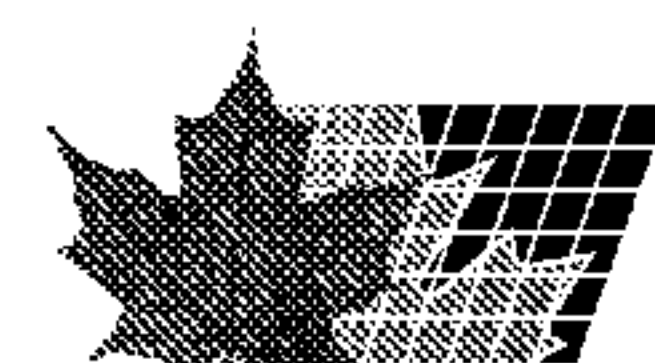

(57) **Abrégé(suite)/Abstract(continued):**

(10, 11). The joiner element (12) has a spine means (22) which in the assembled joint engages between profiled edge portions of the structural elements (10, 11). The distal end (24) of the spine (22) has two oppositely disposed lateral projections (25, 26) each of which engage in a groove (27, 28) formed in the profile edge of the adjacent structural element (10, 11).

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
4 April 2002 (04.04.2002)

PCT

(10) International Publication Number  
**WO 02/26086 A1**

(51) International Patent Classification<sup>7</sup>: **A47F 3/00**,  
A47B 47/00, F16B 12/20, 12/50, 12/46, E04B 2/00, 2/72,  
1/684, 1/686

**Johannes** [DE/NZ]; Unit 4A, 157 Stoddard Road, Mt.  
Roskill, Auckland 1004 (NZ).

(21) International Application Number: PCT/NZ01/00201

(74) Agent: **HOPKINS, Donald, Leslie**; C/- Don Hopkins  
& Associates, Unit 2, Northcote Office Park, 145 Queen  
Street, Palmerston North (NZ).

(22) International Filing Date:  
28 September 2001 (28.09.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
507215 28 September 2000 (28.09.2000) NZ

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI,  
SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU,  
ZA, ZW.

(71) Applicant (*for all designated States except US*): **MAN-  
FRED FRANK PATENT HOLDINGS LIMITED**  
[NZ/NZ]; Unit 4A, 157 Stoddard Road, Mt. Roskill,  
Auckland 1004 (NZ).


(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian  
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European  
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,  
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,  
CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD,  
TG).

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **FRANK, Manfred**,

[Continued on next page]

(54) Title: A JOINT ARRANGEMENT FOR DEMOUNTABLE STRUCTURE

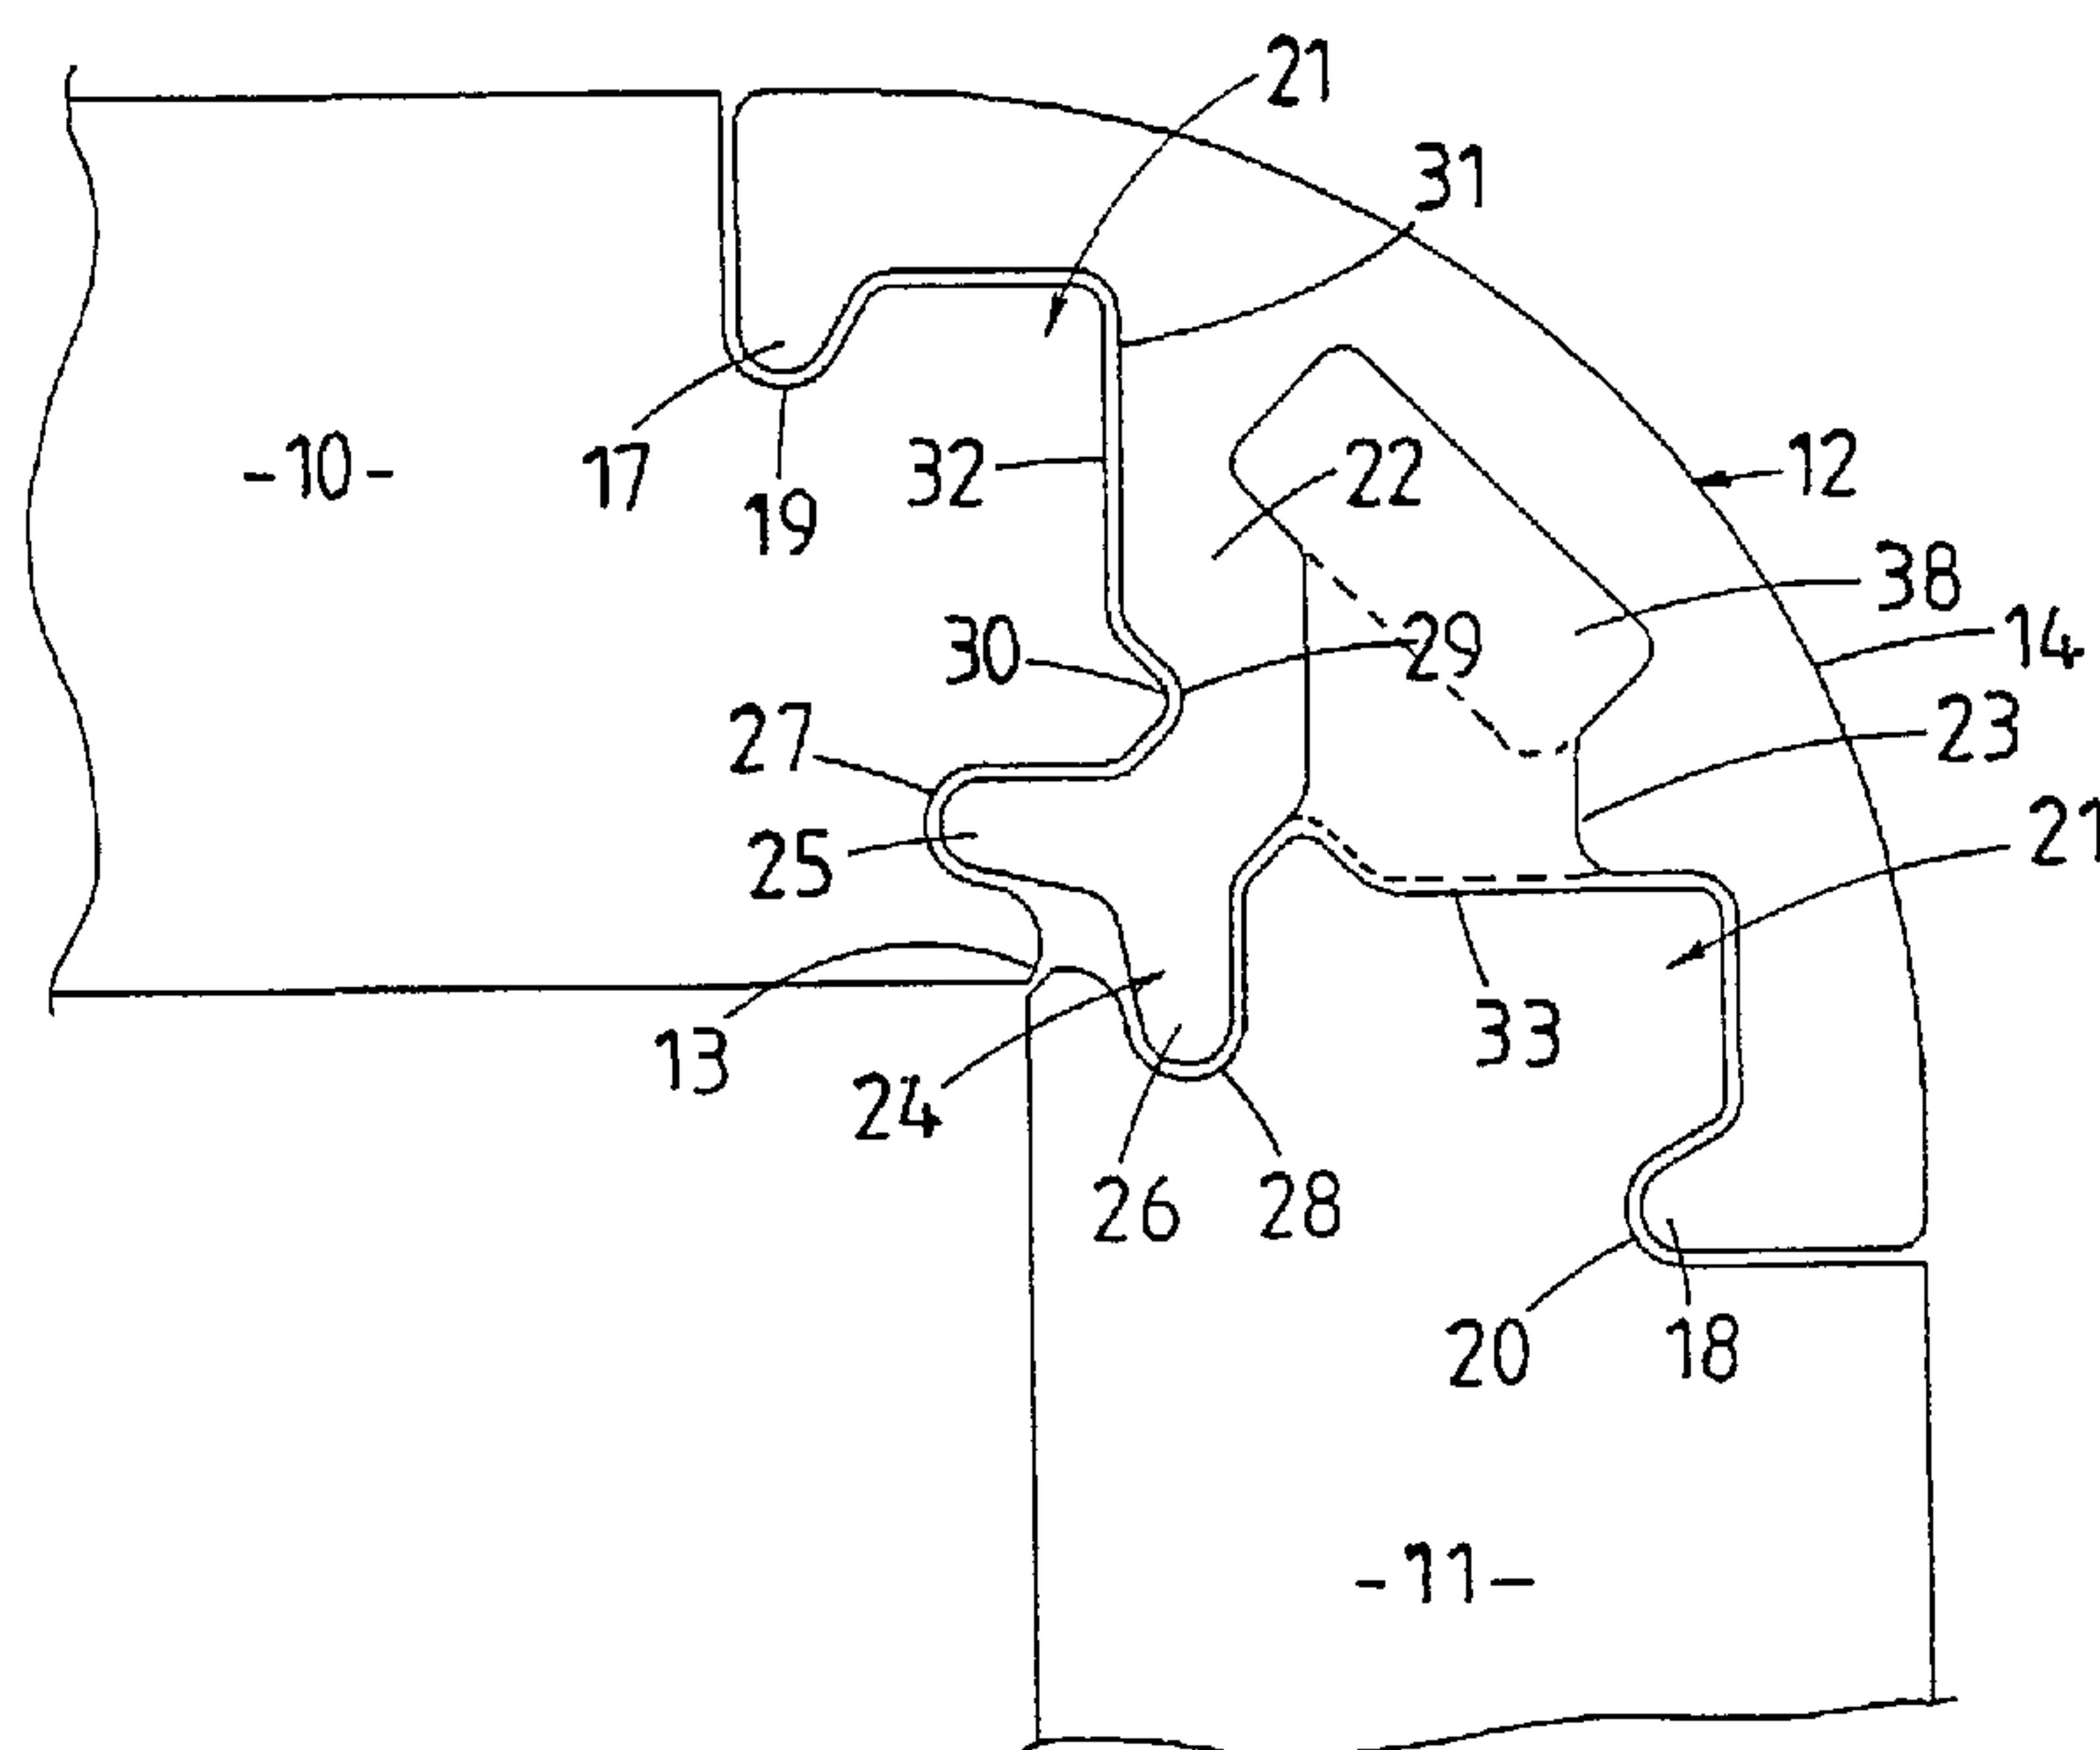

(57) Abstract: A joint arrangement joining adjacent edges of two structural elements (10, 11). The joint arrangement includes a joiner element (12) which has projections (17, 18), each of which is slidably engageable in a groove (19, 20) of the respective structural elements (10, 11). The joiner element (12) has a spine means (22) which in the assembled joint engages between profiled edge portions of the structural elements (10, 11). The distal end (24) of the spine (22) has two oppositely disposed lateral projections (25, 26) each of which engage in a groove (27, 28) formed in the profile edge of the adjacent structural element (10, 11).



WO 02/26086 A1

A JOINT ARRANGEMENT FOR DEMOUNTABLE STRUCTUREBACKGROUND TO THE INVENTION

5

This invention relates to improvements in demountable structures such as cabinets which can be used for display purposes and to a joint arrangement for use in demountable structures.

10

In our international patent specification WO 99/08575 there is disclosed a cabinet which is demountable. The cabinet has walls which are joined edge to edge by joiner elements. At the apex of each intersection of the walls there is a  
15 retainer. The retainers prevent the joiner elements from being removed. One of the retainers which is the last to be installed when the cabinet is assembled is lockable. This lockable retainer needs to be unlocked and removed before any of the other joiner elements and retainer elements can be  
20 removed so as to disassemble or demount the cabinet.

The cabinet according to WO 99/08575 has been extremely successful especially in the museum environment. One of the

attributes of the cabinet is that it can be assembled around the object or objects to be displayed. This is particularly useful where the object is large and would otherwise be difficult to engage an assembled cabinet over the object(s).

5 Thus the object can be placed on one side of the cabinet and then the remainder of the cabinet assembled around the object by progressively positioning the sides and top panels edge to edge, insertion of the joiner elements and the retainers.

10 The cabinet of WO 99/08575 also exhibits good strength characteristics when assembled. This is despite the fact that the walls are joined edge to edge by a joiner element of overall small cross sectional dimensions.

15 According to the invention of WO 99/08575 the edges of the walls are profiled and the joiner element has a cross sectional profile which is slid on to the adjacent profiled wall edges (the panels being located at right angles to one another). As a result the joiner element couples the  
20 profiled edges together to provide a sound and secure manner. This has worked successfully, however, we have now developed further the joiner element and the profiles of the edges such that assembly of the joint between panels is further

3

facilitated by making it easier to slide the joiner element on to the profiled edges of the adjacent wall panels. Also a stronger join is achieved.

5

#### SUMMARY OF THE INVENTION

Broadly in one aspect of the invention there is provided a joint arrangement between adjacent edges of two structural elements the joint arrangement including a joiner element  
10 which has projections, each engageable in a recess, groove or the like in a respective of each of the structural elements, the joiner element further having a spine means which in an assembled join between the structural elements engages between edge portions of the structural elements.

15

According to a second broad aspect of the invention provides a joint arrangement between adjacent profiled edges of two structural elements, the joint arrangement including an elongate joiner element slidably engaged with each of said  
20 profiled edges, the joiner element having a pair of longitudinally extending projections, each engaged in a longitudinal groove which extends inwardly from a face surface of a respective of the structural elements, the

joiner element further including a spine which locates  
between opposing parts of the profiled edges of the  
structural elements, said spine having a distal end with a  
pair of lateral projections each engaged in a groove in a  
5 respective of the profiled edges.

In one aspect, the invention provides a joint  
construction comprising:

first and second structural elements with adjacent edges of  
10 the first and second structural elements being joined by an  
elongate joiner element, each structural element includes an  
outer surface, an inner surface and an edge extending  
laterally between the outer and inner surfaces, each edge  
being profiled to form a shoulder spaced from both the outer  
15 and inner surfaces, the joint construction including a groove  
in the outer surface of each structural element said groove  
being spaced from and extends parallel to the profiled edge,

the elongate joiner element includes first and second  
projections, the first projection being engaged in the groove  
20 in the first structural element and the second projection  
engaged in the groove of the second structural element, the  
elongate joiner element further including a spine which is  
located within an area between the profiled edges of the first  
and second structural elements, a lateral projection

4a

projecting from the spine and engaged behind the shoulder relative to the outer surface of the first structural element.

In one aspect, the invention provides a kit set of parts  
5 for assembling a demountable structure, the kit set comprising:

a first structural element, a second structural element, each of said first and second structural elements including an outer surface, an inner surface and an edge extending  
10 laterally between the outer and inner surfaces, each outer surface having a groove which is spaced from and extends parallel to the profiled edge,

a shoulder is formed in the profiled edge of the first structural element adjacent the inner surface and extends  
15 longitudinally along the profiled edge, and

an elongate joiner element which has first and second projections, a spine and a lateral projection projecting from the spine, the elongate joiner element being slidably engageable with the first and second structural elements when  
20 the profiled edges thereof are placed adjacent one another such that the first and second projections engage within the respective grooves of the first and second structural elements and the lateral projection engages behind (relative to the outer surface) of the shoulder.

4b

In one aspect, the invention provides a joint construction comprising:

two structural elements with adjacent profiled edges being  
5 joined by a joiner element, each structural element having an outer surface and an inner surface, the profiled edge extending laterally to the outer and inner surfaces,

a groove formed in the outer surface of each structural element, said groove being spaced from and parallel to the  
10 profiled edge, the joint construction including:

the joiner element which has projections, each engaged in said groove in the outer surface of a respective one of the structural elements, the joiner element further having a spine which is located between the profiled edges of the structural  
15 elements and the spine includes at least one lateral projection which is engaged in a groove formed in a profiled edge.

#### BRIEF DESCRIPTION OF THE DRAWINGS

20 Figure 1 is a cross sectional view of a pair of panel elements joined together by a joiner element,

Figure 2 is a similar view but of an alternative embodiment where a more angular joiner element is used,

4c

Figure 3 is a perspective view of a retainer suitable for use with the arrangement shown in Figure 2,

Figures 4-7 are further views of the retainer as shown in  
5 Figure 3,

Figure 8 is a view similar to Figures 1 and 2 but showing yet a further form of the invention, and

Figure 9 is a view similar to Figure 2 but showing how panels or elements of different cross-sectional thickness can be joined together by a joiner element.

5

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

The following describes and illustrates particular embodiments to the present invention. It will be appreciated by those skilled in the art that other variations and combinations in shape and configuration may be possible without departing from the scope of the invention.

In its simplest form a demountable structure to which the joint arrangement of the present invention applies will be described as a cabinet. The cabinet can comprise a plurality of side walls, a bottom or base wall and a top wall as is disclosed in WO 99/08575. The panel members are joined edge to edge at their peripheral edges by elongate joiner elements, there being one joiner element for each pair of adjacent edges as is described in WO 99/08575. The present

6

invention thus relates specifically to the form and construction of the edges of the panel members and the joiner element. For this reason the drawings accompanying the present specification relate to these aspects of construction.

Figure 1 shows in cross section a part length of each of panels 10 and 11. The panels are in the illustrated arrangement located in planes which are right angles to one another. The panels 10 and 11 in the preferred form are manufactured from acrylic sheet with the side edges profiled to have an edge profile of the form illustrated.

In the drawings panels 10 and 11 are shown as physically contacting each other at interface 13. This interface is for the purposes of illustration, thus it is shown somewhat exaggerated in its length. The interface may be extremely small or may not even exist i.e. the opposing surfaces which form the interface 13 may actually be spaced apart so that no physical contact occurs.

In the arrangement shown in Figure 1 the outer surface 14 of the joiner element 12 is curved so as to provide a curved

transition from the outer surface of panel 10 to the outer surface of panel 11. However, with the arrangement shown in Figure 2 the joiner element 12 is of a more angular cross section at its outer surface where a first surface 15 extends  
5 parallel to the outer surface of panel 10 and a second surface 16 extends parallel to the outer surface of panel 11. The actual physical external appearance of the joiner element 12 could take on other appearances such as a plurality of facets or a more complex curved shape.

10

Projecting inwardly (relative to outer surfaces 14 or 15 and 16 as the case may be) are a pair of ribs 17 and 18 which engage in corresponding recesses, grooves, channels or the like 19 and 20 formed in the profiled edge 21 of each panel.

15 In contrast to the grooves used in the edge profiling of WO 99/08575 these grooves are shallow and therefore do not provide a profiling where damage, breakage etc. to the profile edge is a possibility.

20 Projecting inwardly from the inside surface of the joiner element 12 is a major spine 22 and a minor spine 23. This arrangement of two separate spines has been adopted so that a tube die for extrusion of the joiner element 12 is not

8

required. However, as shown in dotted detail in Figure 1 the major and secondary spines 22/23 can be connected if the joiner element is extruded by using a tube die. With such an arrangement there will effectively be a single spine.

5

The major spine 22 extends to an enlarged distal end 24 which provides a pair of outwardly disposed ribs 25 and 26. These ribs 25 and 26 engage in correspondingly shaped grooves 27 and 28 formed in the respective profiled edges of panels 10 and 11.

10

The major spine 22 is also provided with an indent 29 into which engages a projection 30 formed in the profiled edge of panel 10. A like projection 31 of panel 11 fits into a shaped portion of the major spine 22 but would if the major and minor spines 22 and 23 were coupled, similarly fit into a recess.

15

As can be seen in Figure 1 the major spine 22 has a flat surface 31 which engages against a flat surface 32 of the edge of the panel 10. Similarly minor spine 23 engages against flat surface 33 of the edge of panel 10.

20

The joiner element 12 therefore keys onto the profiled edges of panels 10 and 11 as shown in Figure 1. Thus according to the present invention there is no requirement for face to face contact of the respective edges of panels 10 and 11 in order to obtain a secure a robust joint. Because there is no requirement for deep grooves to accept projections from the joiner element the profiled edges of the acrylic panels are not prone to damage or failure. Furthermore, the high degree of accuracy required to ensure the interface between the edges of the panels as required in WO 99/08575 is no longer a requirement.

Because the panels 10 and 11 of the present invention do not need to fit face to face as an interface (e.g. such as interface 13) the panels 10 and 11 can, with suitable adjustment of the profiling and the configuration of the joiner element be located at angles other than 90° as illustrated. Also as shown in Figure 9 panels of unequal thickness can also be joined. This illustrates how the front to back dimension of the panel is not critical to achieving a successful joint.

It is also possible with the present invention to key the joiner element 12 onto one panel and then slide the other panel onto the joiner element. This results in the possibility of being able to slide one of the panels relative to the remainder of the cabinet after a pair of the retainers are removed from opposed adjacent corners to provide a means of opening the cabinet. Generally one of the retainers would be the lockable retainer. Such an arrangement is shown in Figure 8 where the spines 22 and 32 are "fatter". As a result the edges of panels do not overlap thereby permitting the sliding action referred to above to occur.

In Figures 3-7 there is shown a retainer for use with the more angular joiner element shown in Figure 2. As with the joiner elements disclosed in WO 99/08575 this retainer element has a main body 35 which is configured to fit at the corner of the cabinet and provide a smooth transition to the abutting end of a joiner element. A shaft 36 is shaped to fit into openings formed at each corner and a tongue 37 to engage into the space 38 of joiner element 12 in the same manner as disclosed in WO 99/08575. The shaft 36 includes a chamfered surface 39 to facilitate the insertion of the shaft

into the opening as a consequence of the outwardly projecting radial projection 40 which as disclosed in WO 99/08575.

The joining arrangement according to the present invention  
5 thus provides a strong joint and obviates the need for edge  
profiling of the panels in a manner which can either lead to  
weakness of the joint or be prone to damage. Also a greater  
degree of accuracy is achieved as face to face engagement of  
adjacent panels is not required. Furthermore the manner of  
10 keying the joiner element onto the profile edges of the  
panels does facilitate easier fitment of the joiner element  
to the panels. Also panels of unequal thickness can be  
joined together.

The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:

1. A joint construction comprising:

first and second structural elements with adjacent edges of the first and second structural elements being joined by an elongate joiner element, each structural element includes an outer surface, an inner surface and an edge extending laterally between the outer and inner surfaces, each edge being profiled to form a shoulder spaced from both the outer and inner surfaces, the joint construction including a groove in the outer surface of each structural element said groove being spaced from and extends parallel to the profiled edge,

the elongate joiner element includes first and second projections, the first projection being engaged in the groove in the first structural element and the second projection engaged in the groove of the second structural element, the elongate joiner element further including a spine which is located within an area between the profiled edges of the first and second structural elements, a lateral projection projecting from the spine and engaged behind the shoulder relative to the outer surface of the first structural element.

2. The joint construction as claimed in claim 1, wherein the profiled edge of each of the first and second structural elements has an engagement surface and the joiner element has first and second abutments which are respectively engaged with said engagement surface of the first and second structural elements.

3. The joint construction as claimed in claim 2, wherein the lateral projection is at a distal end of the spine.

4. The joint construction as claimed in claim 3, wherein the spine has a second lateral projection which is engaged with the second structural element.

5. The joint construction of claim 4, wherein the joiner elements being retained against sliding movement by a retainer element located in each corner of a demountable case including panels, the panels being joined edge to edge by the joint construction at which the ends of at least two joiner elements are located.

6. The joint construction of claim 5, wherein at least one of the retainer elements is lockable in the corner in which it is located.

7. The joint construction of claim 5 or 6, wherein each joiner element includes a space and each of the retainer elements has a tongue which is engaged in said space of one of the joiner elements.

8. The joint construction of claim 7, wherein each retainer element includes a main body configured to fit at said corner and form a smooth transition with the ends of joiner elements to which the retainer element abuts.

9. The joint construction of claim 8, wherein the retainer element further includes a shaft which is engaged in an opening formed in said corner.

10. The joint construction of claim 9, wherein the shaft includes a chamfered surface at a distal end thereof.

11. The joint construction of claim 10, wherein the shaft includes a projection which extends outwardly from a side of the shaft.

12. The joint construction as claimed in claim 4, wherein the second lateral projection is engaged behind, relative to the outer surface of the second structural element, the shoulder formed in the profiled edge of the second structural element.

13. The joint construction as claimed in any one of claims 4 to 12, wherein the second lateral projection is located at the distal end of the spine.

14. The joint construction as claimed in any one of claims 1 to 13, wherein the spine includes a distal end with at least one said lateral projection thereat.

15. The joint construction as claimed in claim 14, wherein the distal end has two oppositely disposed lateral projections.

16. The joint construction as claimed in any one of claims 1 to 13, wherein said spine includes an indented portion in which is engaged a projecting portion of an adjacent profiled edge of the first structural element.

17. The joint construction as claimed in claim 16, wherein said indented portion is located adjacent said lateral projection.

18. The joint construction as claimed in claim 17, wherein a surface of the spine adjacent said indented portion engages with a surface of the profiled edge of the first structural element.

19. The joint construction as claimed in any one of claims 1 to 18, wherein the elongate joiner element further includes:

an abutment surface which is engaged with a surface of the profiled edge of the second structural element adjacent the outer surface of the other of the structural elements.

20. The joint construction as claimed in any one of claims 1 to 19, wherein during assembly of the joint arrangement the joiner element is slidably engageable with the profiled edges, grooves and shoulder of the first and second structural elements.

21. The joint construction as claimed in any one of claims 1 to 20, wherein the first and second structural elements are each in the form of a panel.

22. The joint construction as claimed in claim 21, wherein each structural panel is formed from a plastic material and the joiner element is of extruded construction.

23. The joint construction as claimed in any one of claims 1 to 22, wherein the joiner element includes an outer surface which forms a transition between face surfaces of the first and second structural elements.

24. The joint construction as claimed in claim 23, wherein the outer surface is curved or angular.

25. A kit set of parts for assembling a demountable structure, the kit set comprising:

a first structural element, a second structural element, each of said first and second structural elements including an outer surface, an inner surface and an edge extending laterally between the outer and inner surfaces, each outer surface having a groove which is spaced from and extends parallel to the profiled edge,

a shoulder is formed in the profiled edge of the first structural element adjacent the inner surface and extends longitudinally along the profiled edge, and

an elongate joiner element which has first and second projections, a spine and a lateral projection projecting from the spine, the elongate joiner element being slidably engageable with the first and second structural elements when the profiled edges thereof are placed adjacent one another such that the first and second projections engage within the respective grooves of the first and second structural elements and the lateral projection engages behind (relative to the outer surface) of the shoulder.

26. The kit set of parts as claimed in claim 25, wherein the elongate joiner element has first and second abutments which engage in the demountable structure with surfaces of respective profiled edges of the first and second structural elements.

27. The kit set of parts as claimed in claim 26, wherein the spine has a second lateral projection which is

engageable behind a shoulder in the profiled edge of the second structural element.

28. The kit set of parts as claimed in claim 27, wherein each of the first and second structural elements is a panel.

29. The kit set of parts as claimed in claim 28, wherein the panel is made of plastic material.

30. A joint construction comprising:

two structural elements with adjacent profiled edges being joined by a joiner element, each structural element having an outer surface and an inner surface, the profiled edge extending laterally to the outer and inner surfaces, a groove formed in the outer surface of each structural element, said groove being spaced from and parallel to the profiled edge, the joint construction including:



the joiner element which has projections, each engaged in said groove in the outer surface of a respective one of the structural elements, the joiner element further having a spine which is located between the profiled edges of the structural elements and the spine includes at least one lateral projection which is engaged in a groove formed in a profiled edge.



31. The joint construction as claimed in claim 30, wherein the spine includes a distal end with at least one said lateral projection thereat.




32. The joint construction as claimed in claim 31, wherein the distal end has two oppositely disposed lateral

projections each engaged in a respective one of the profiled edges of the structural elements.

1/4

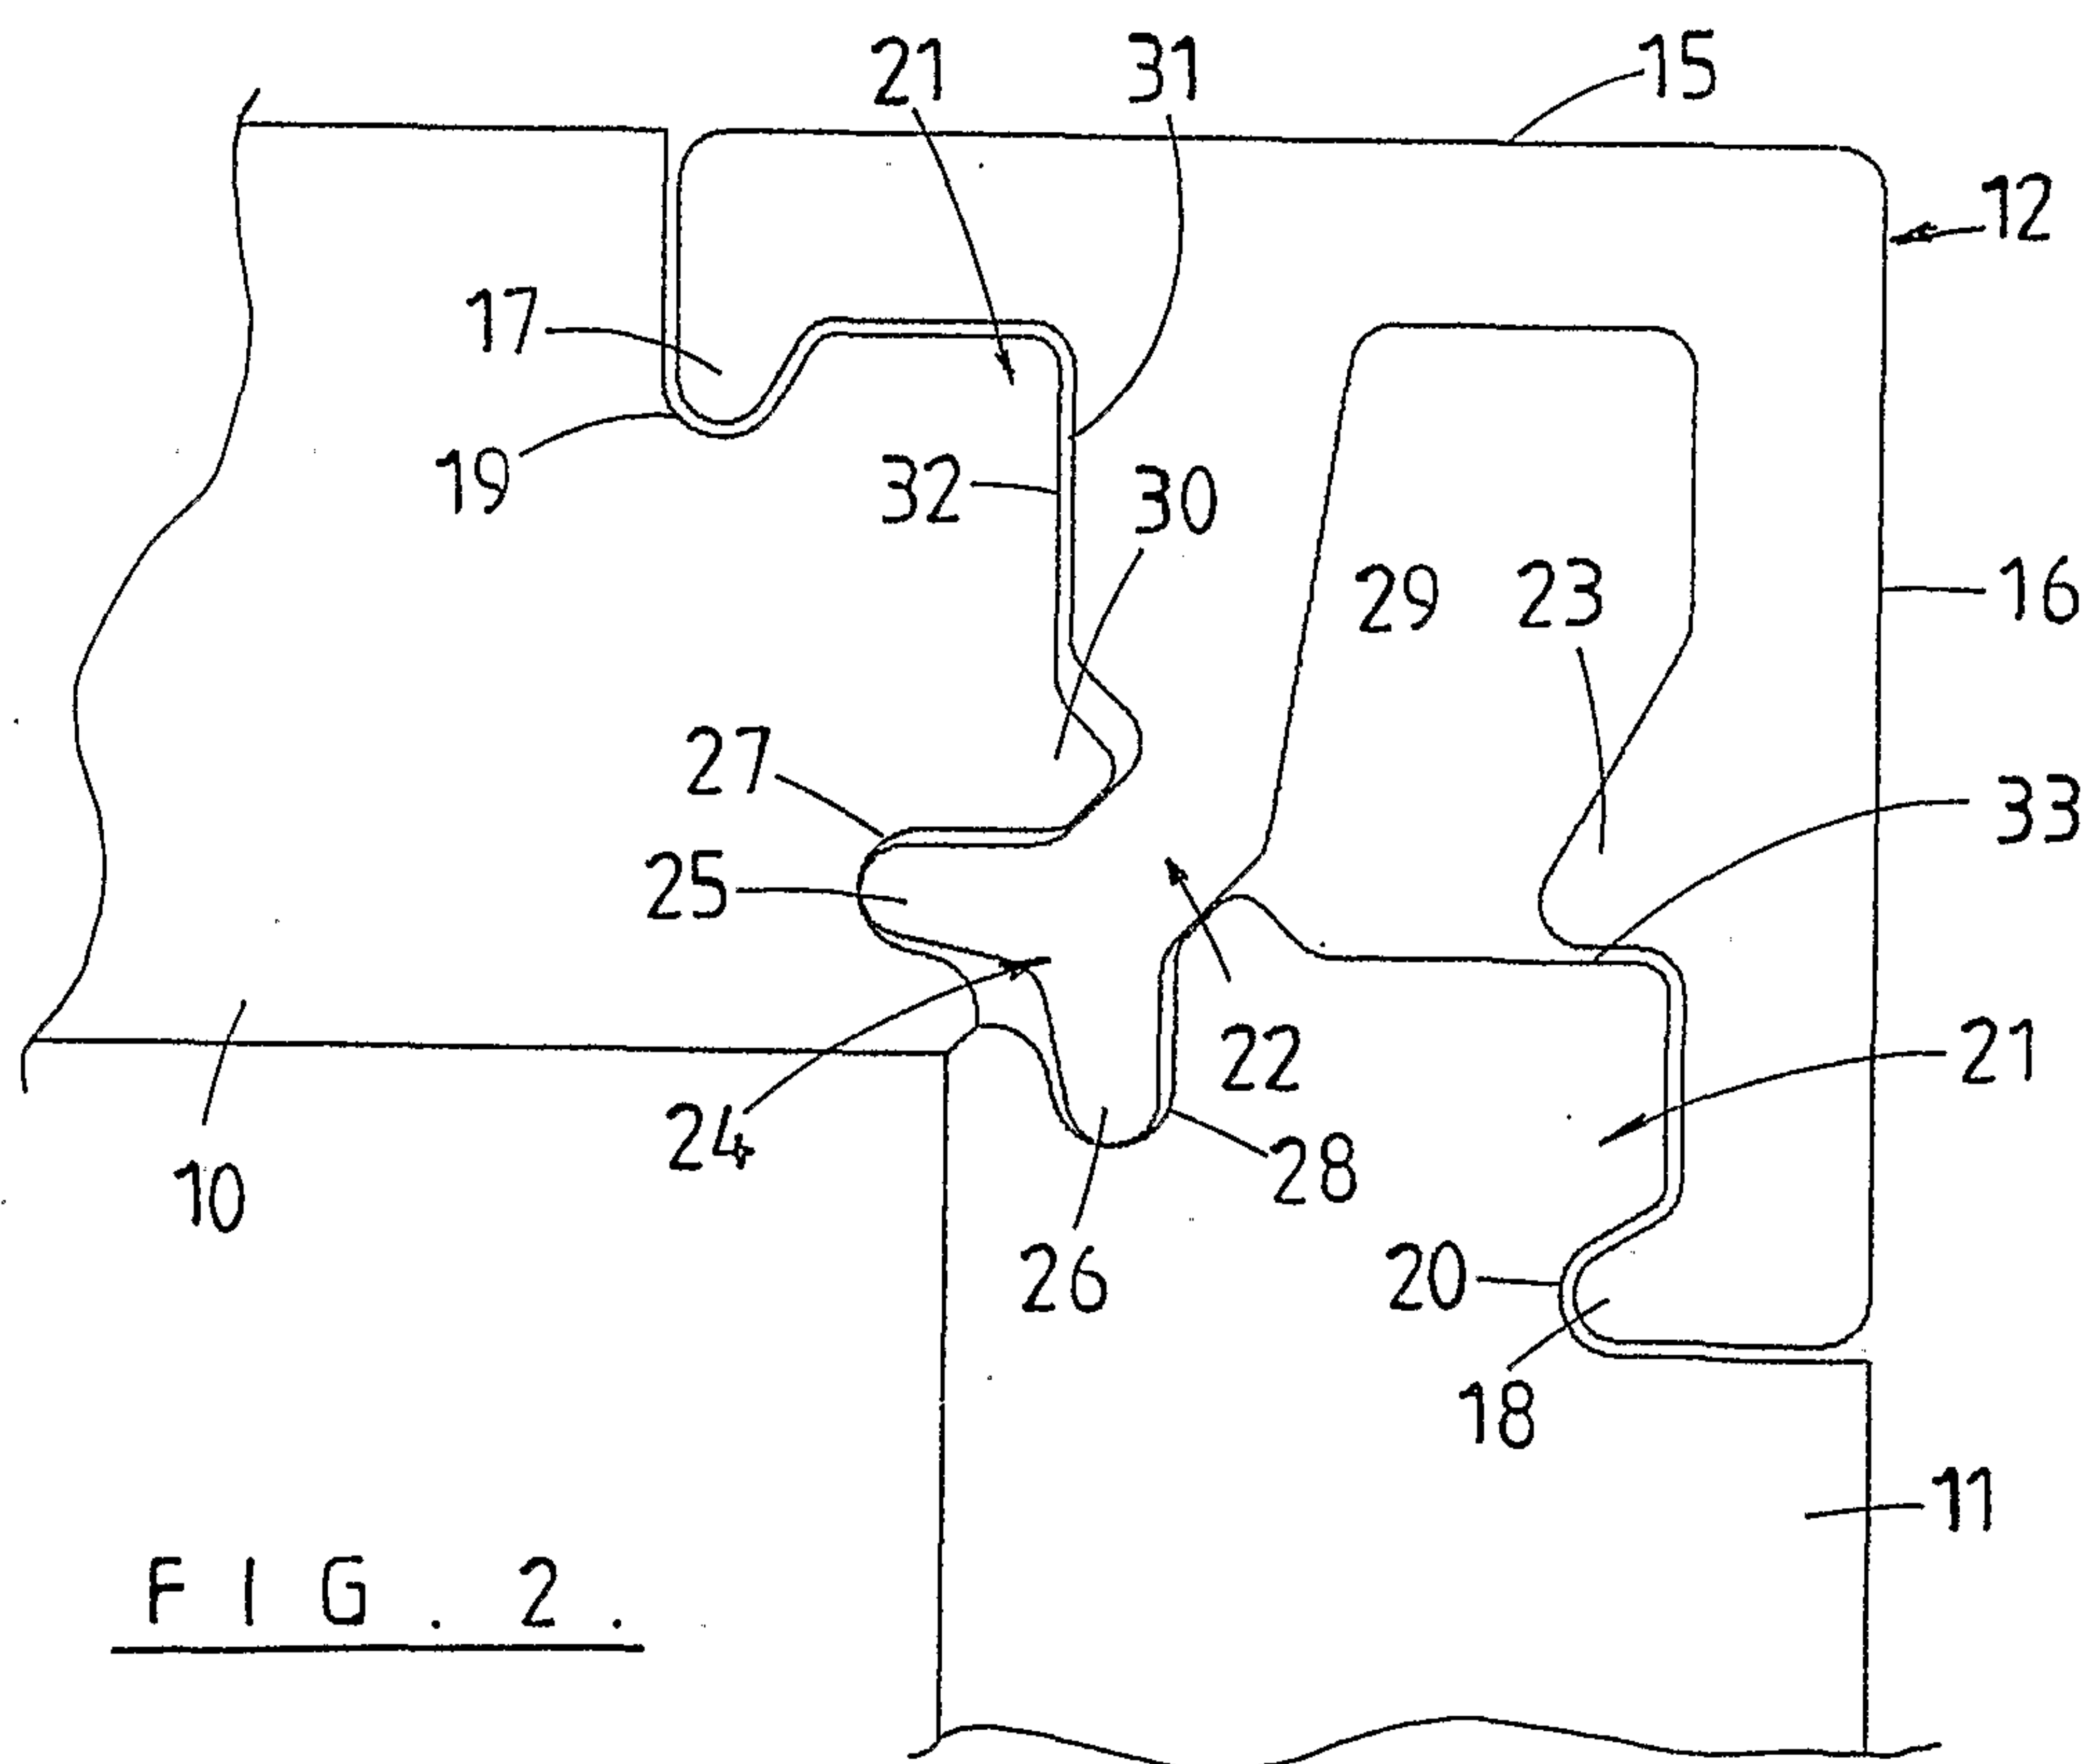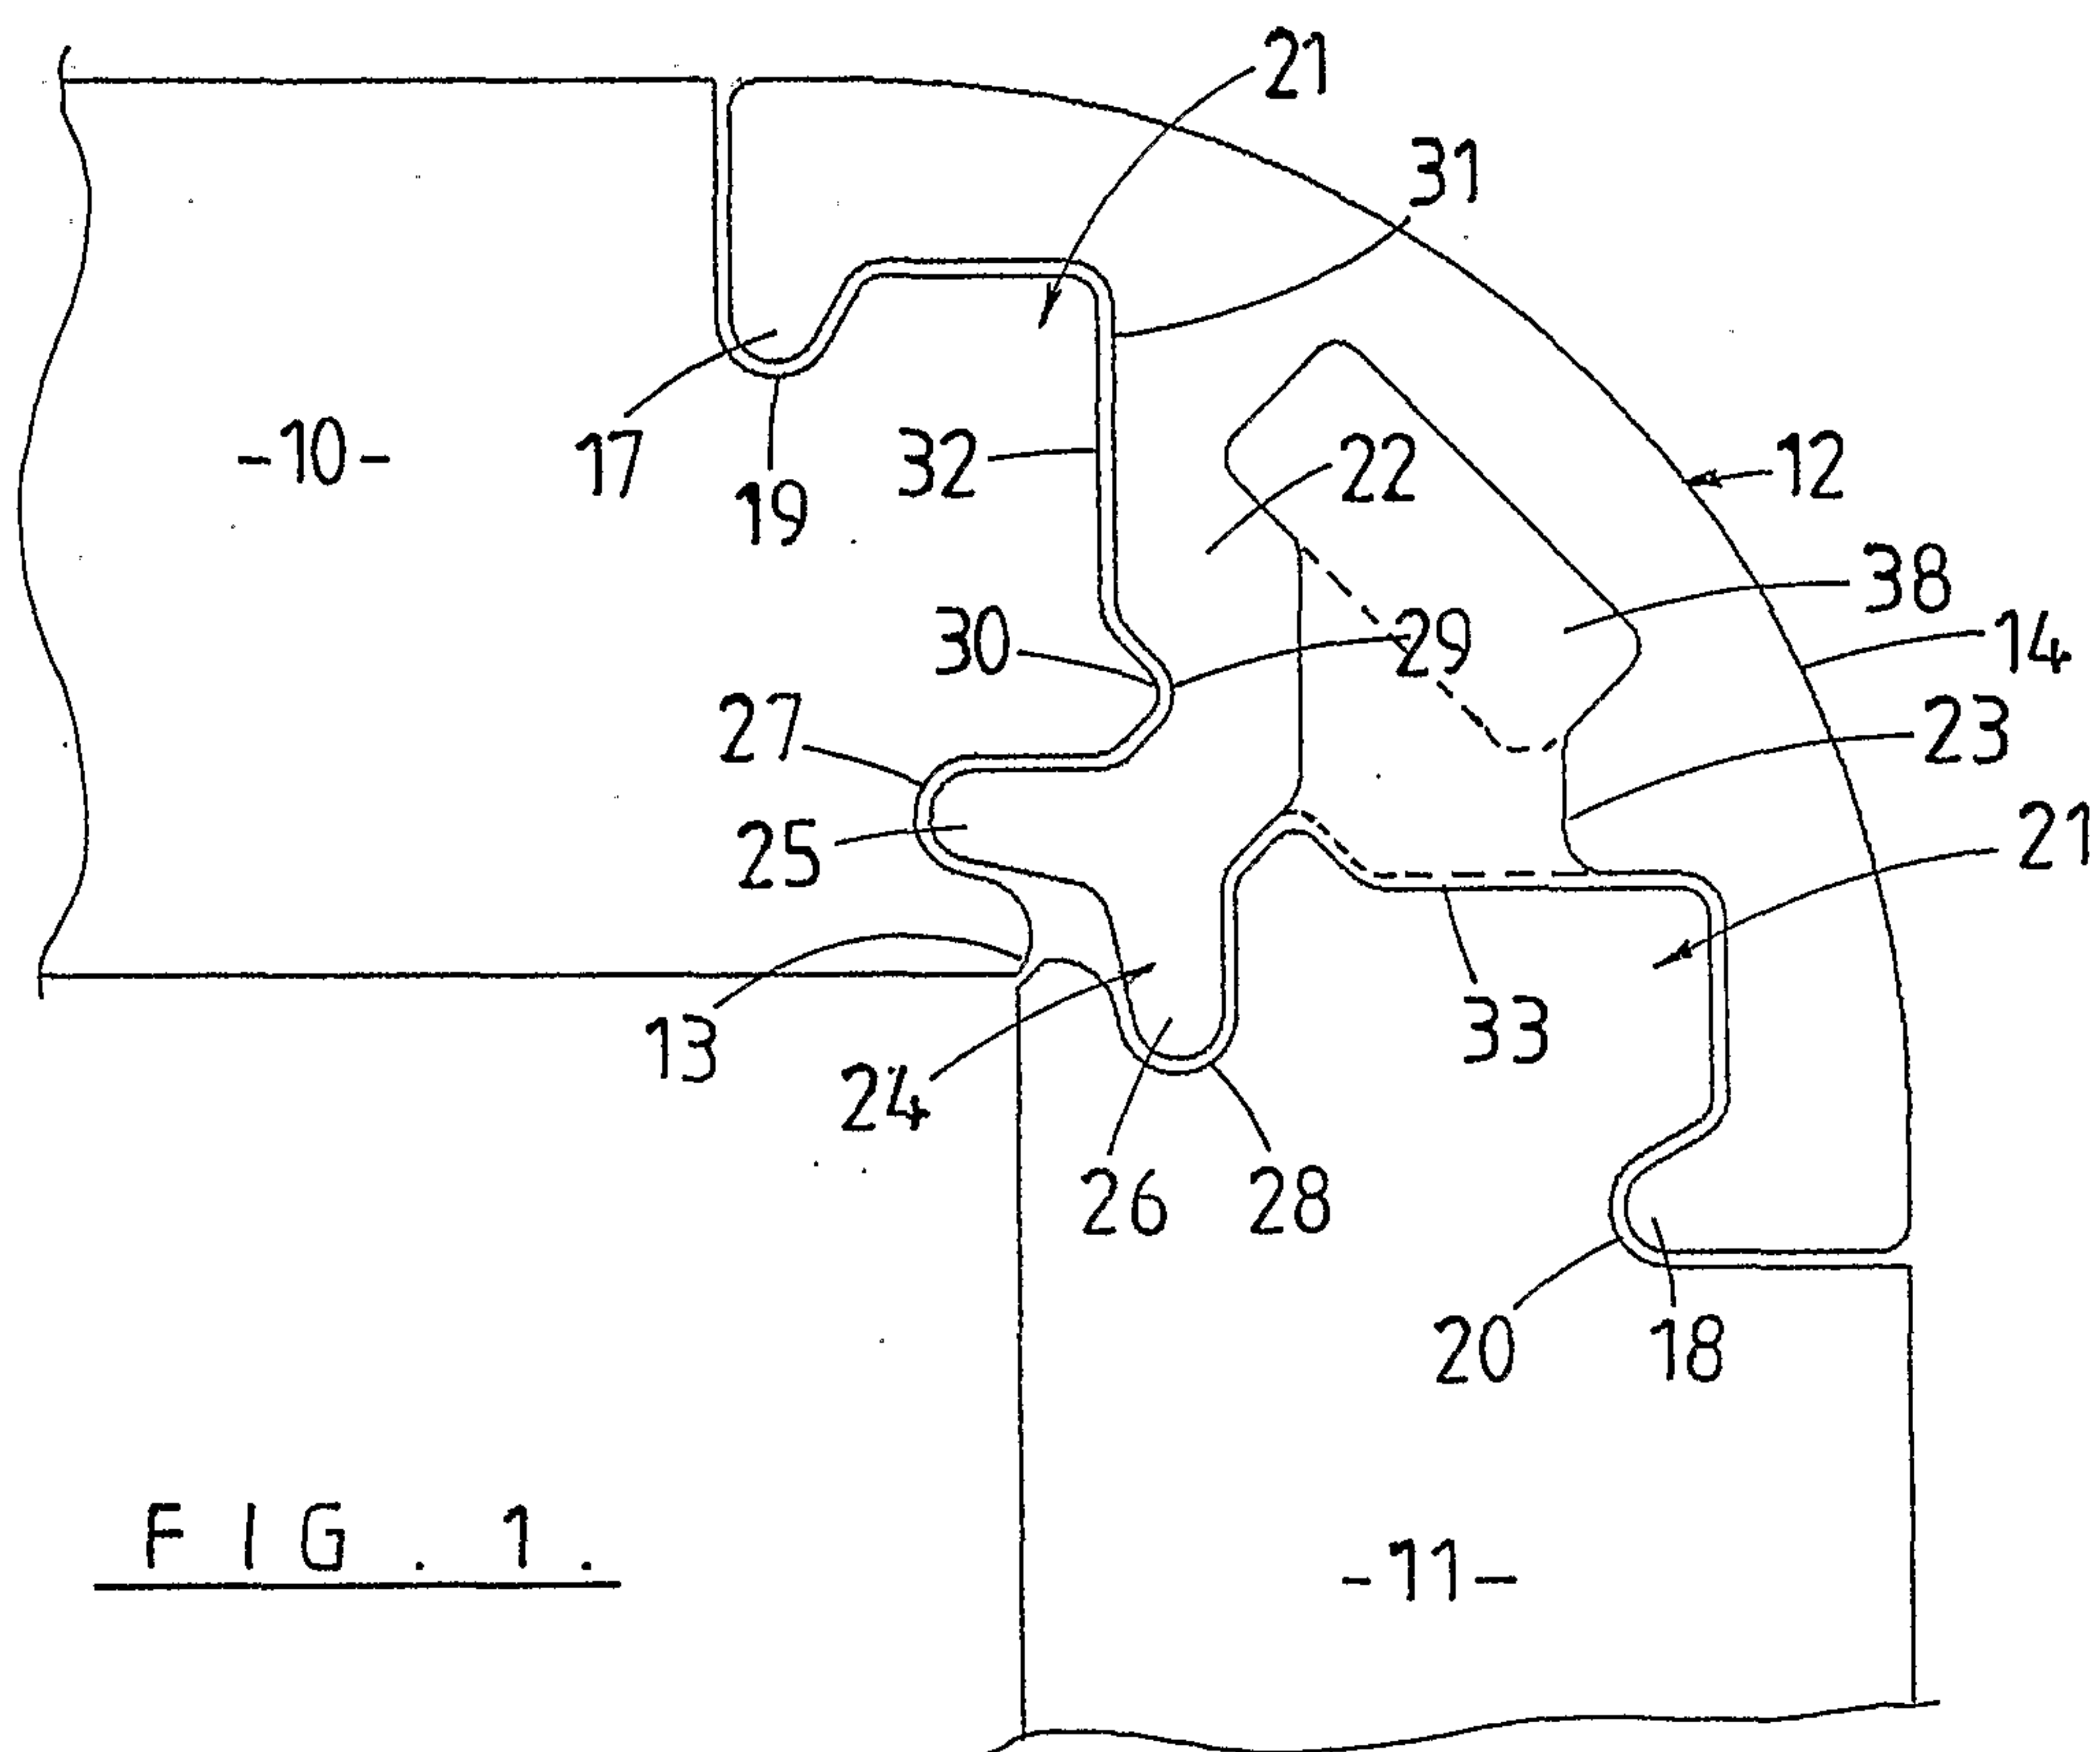

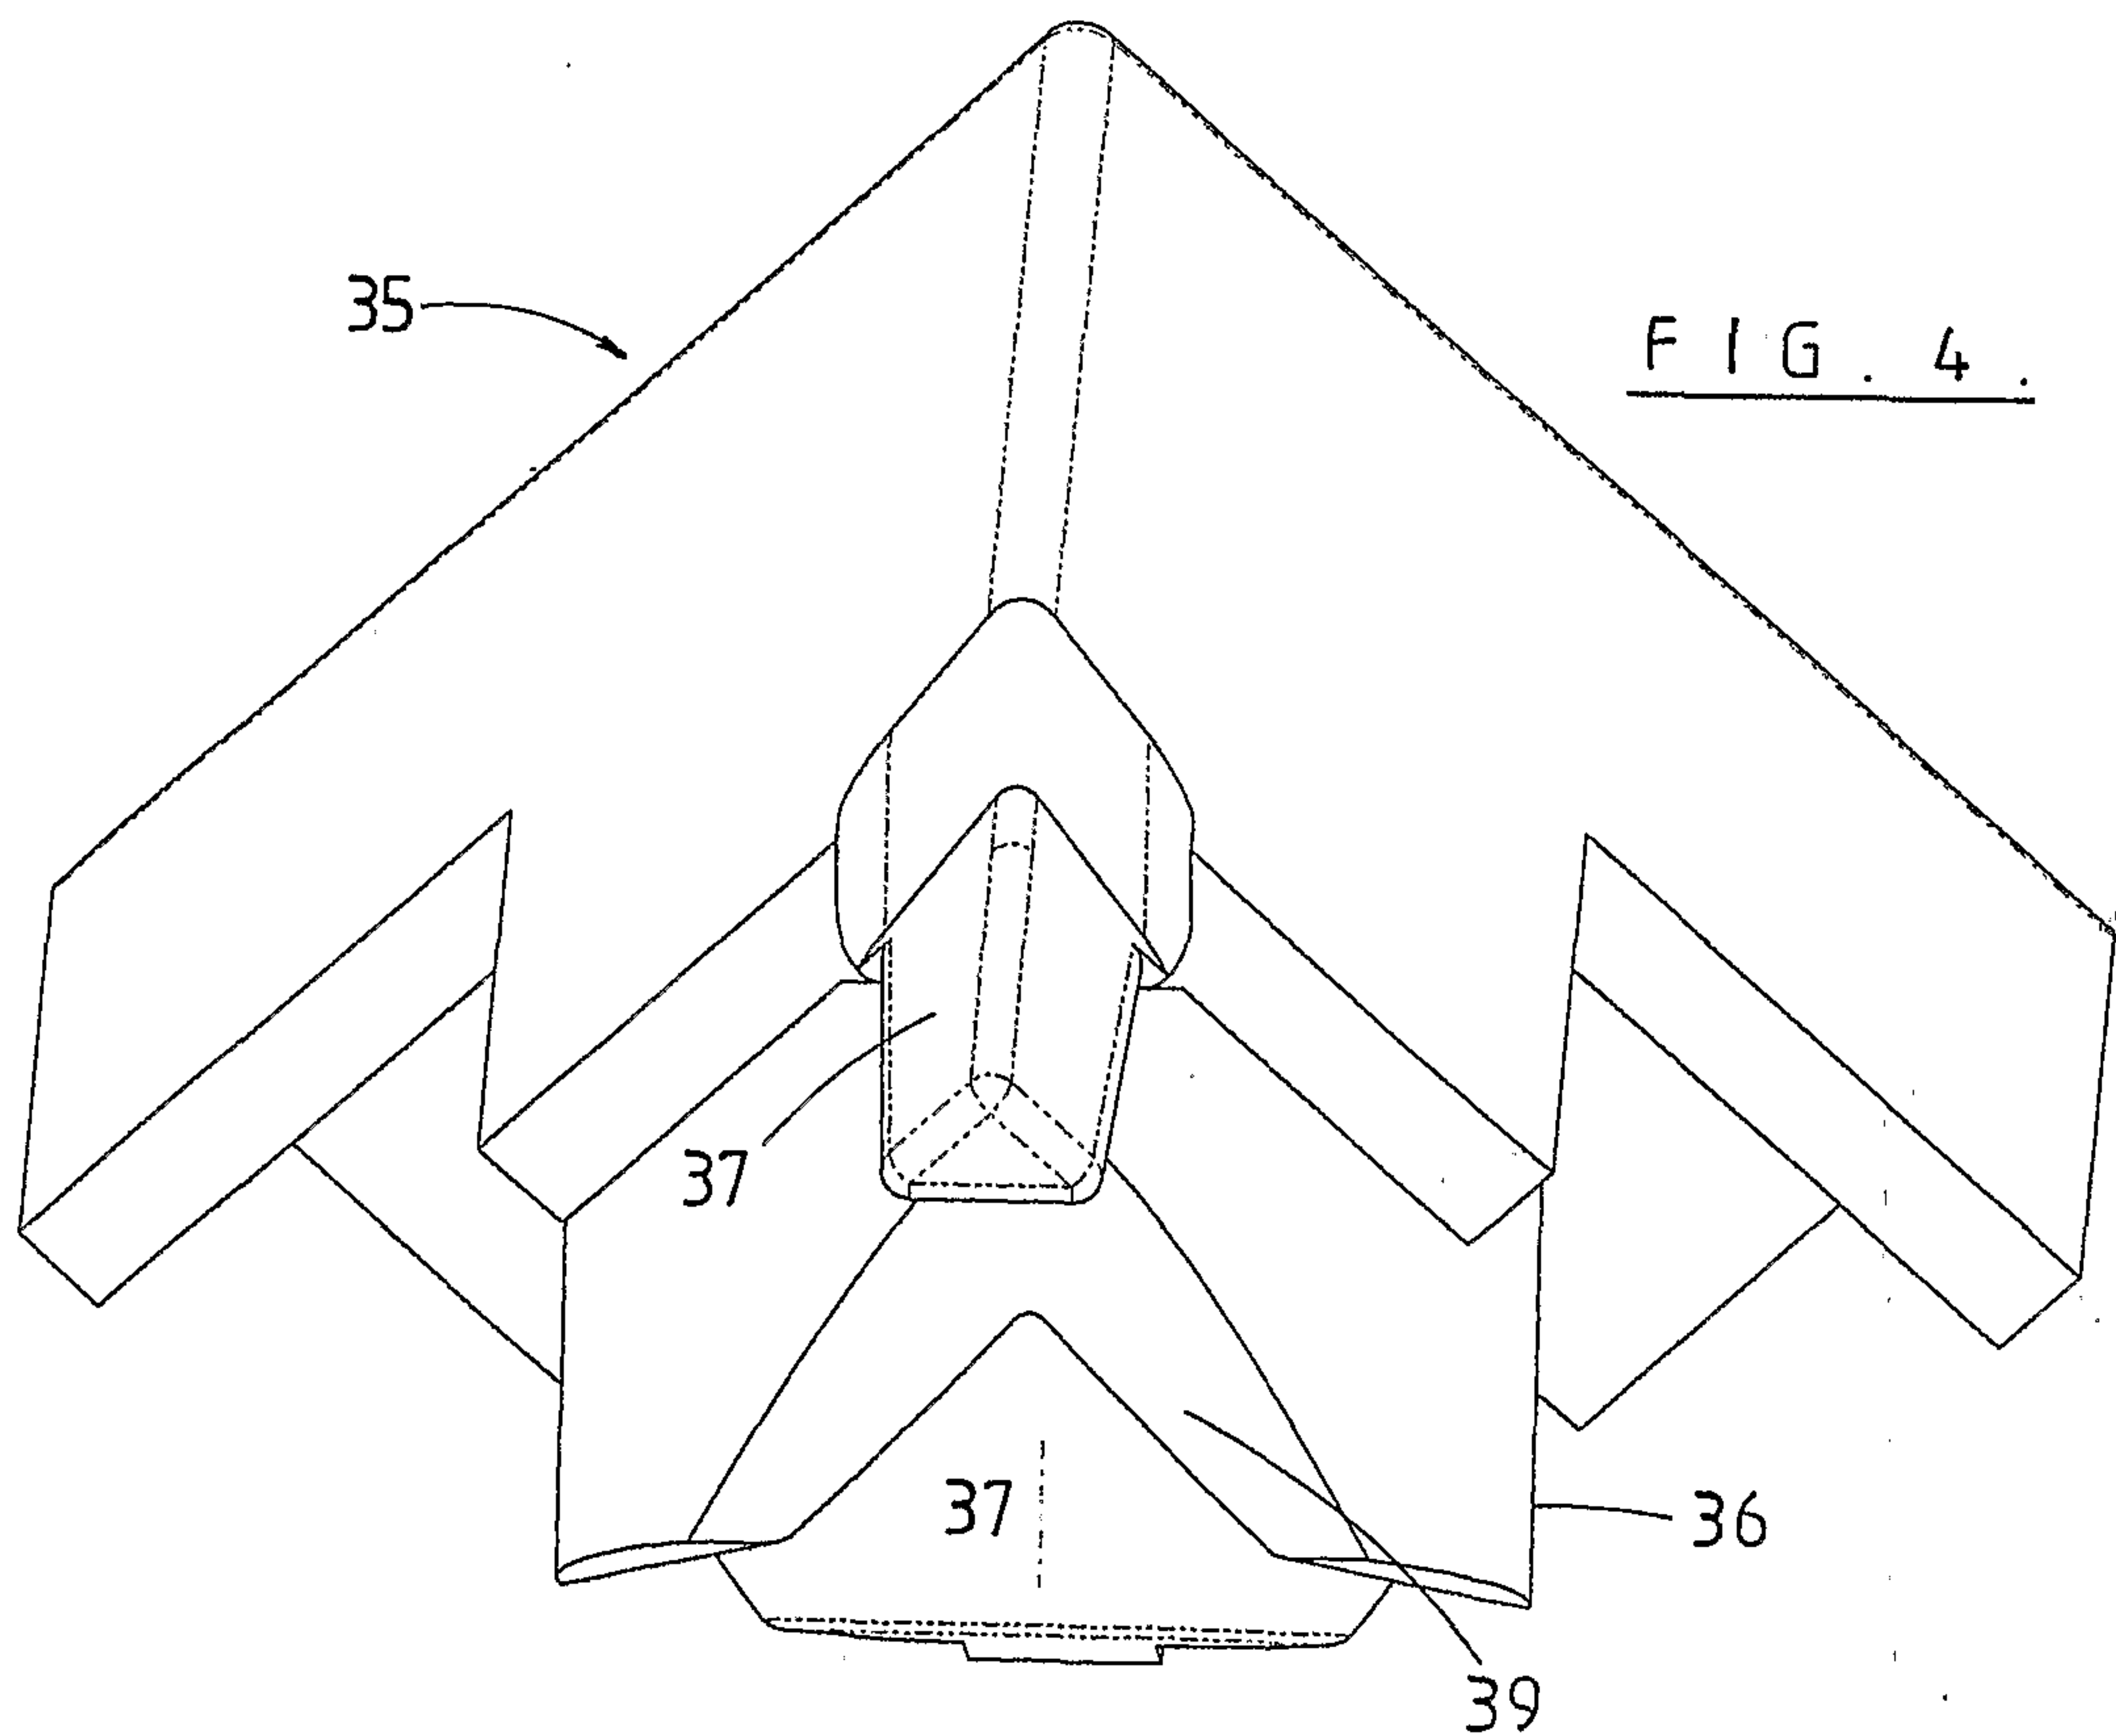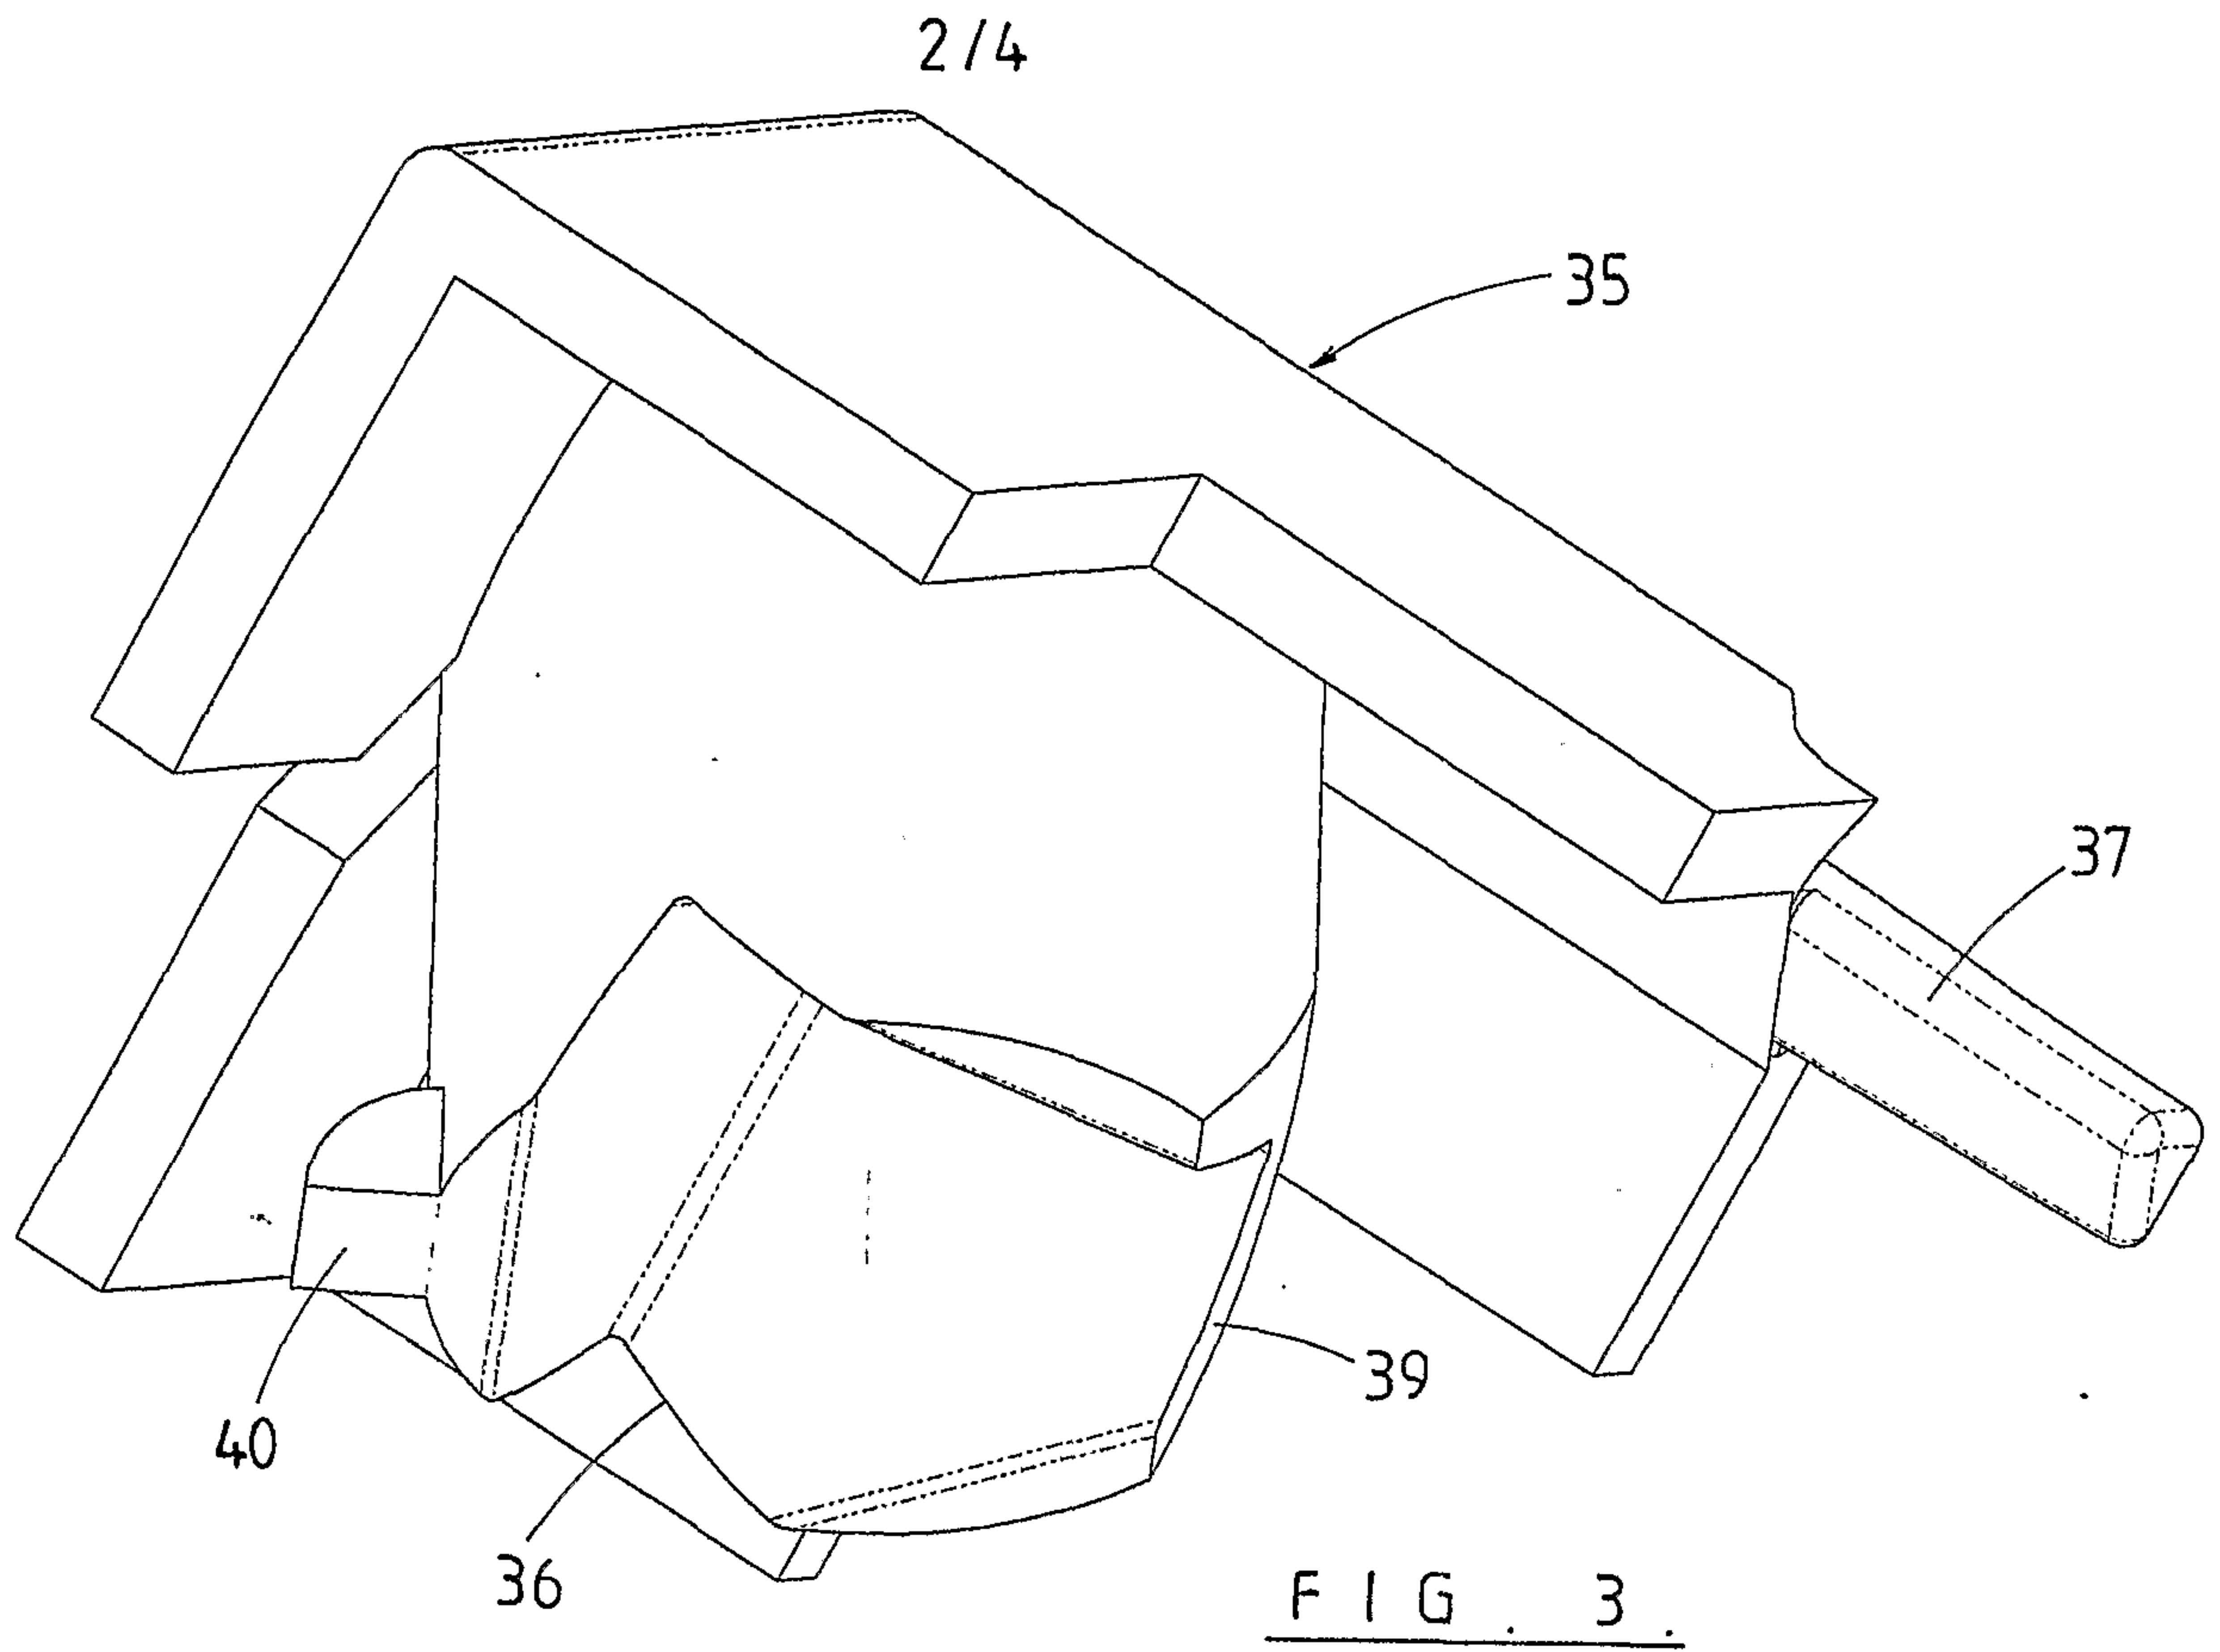

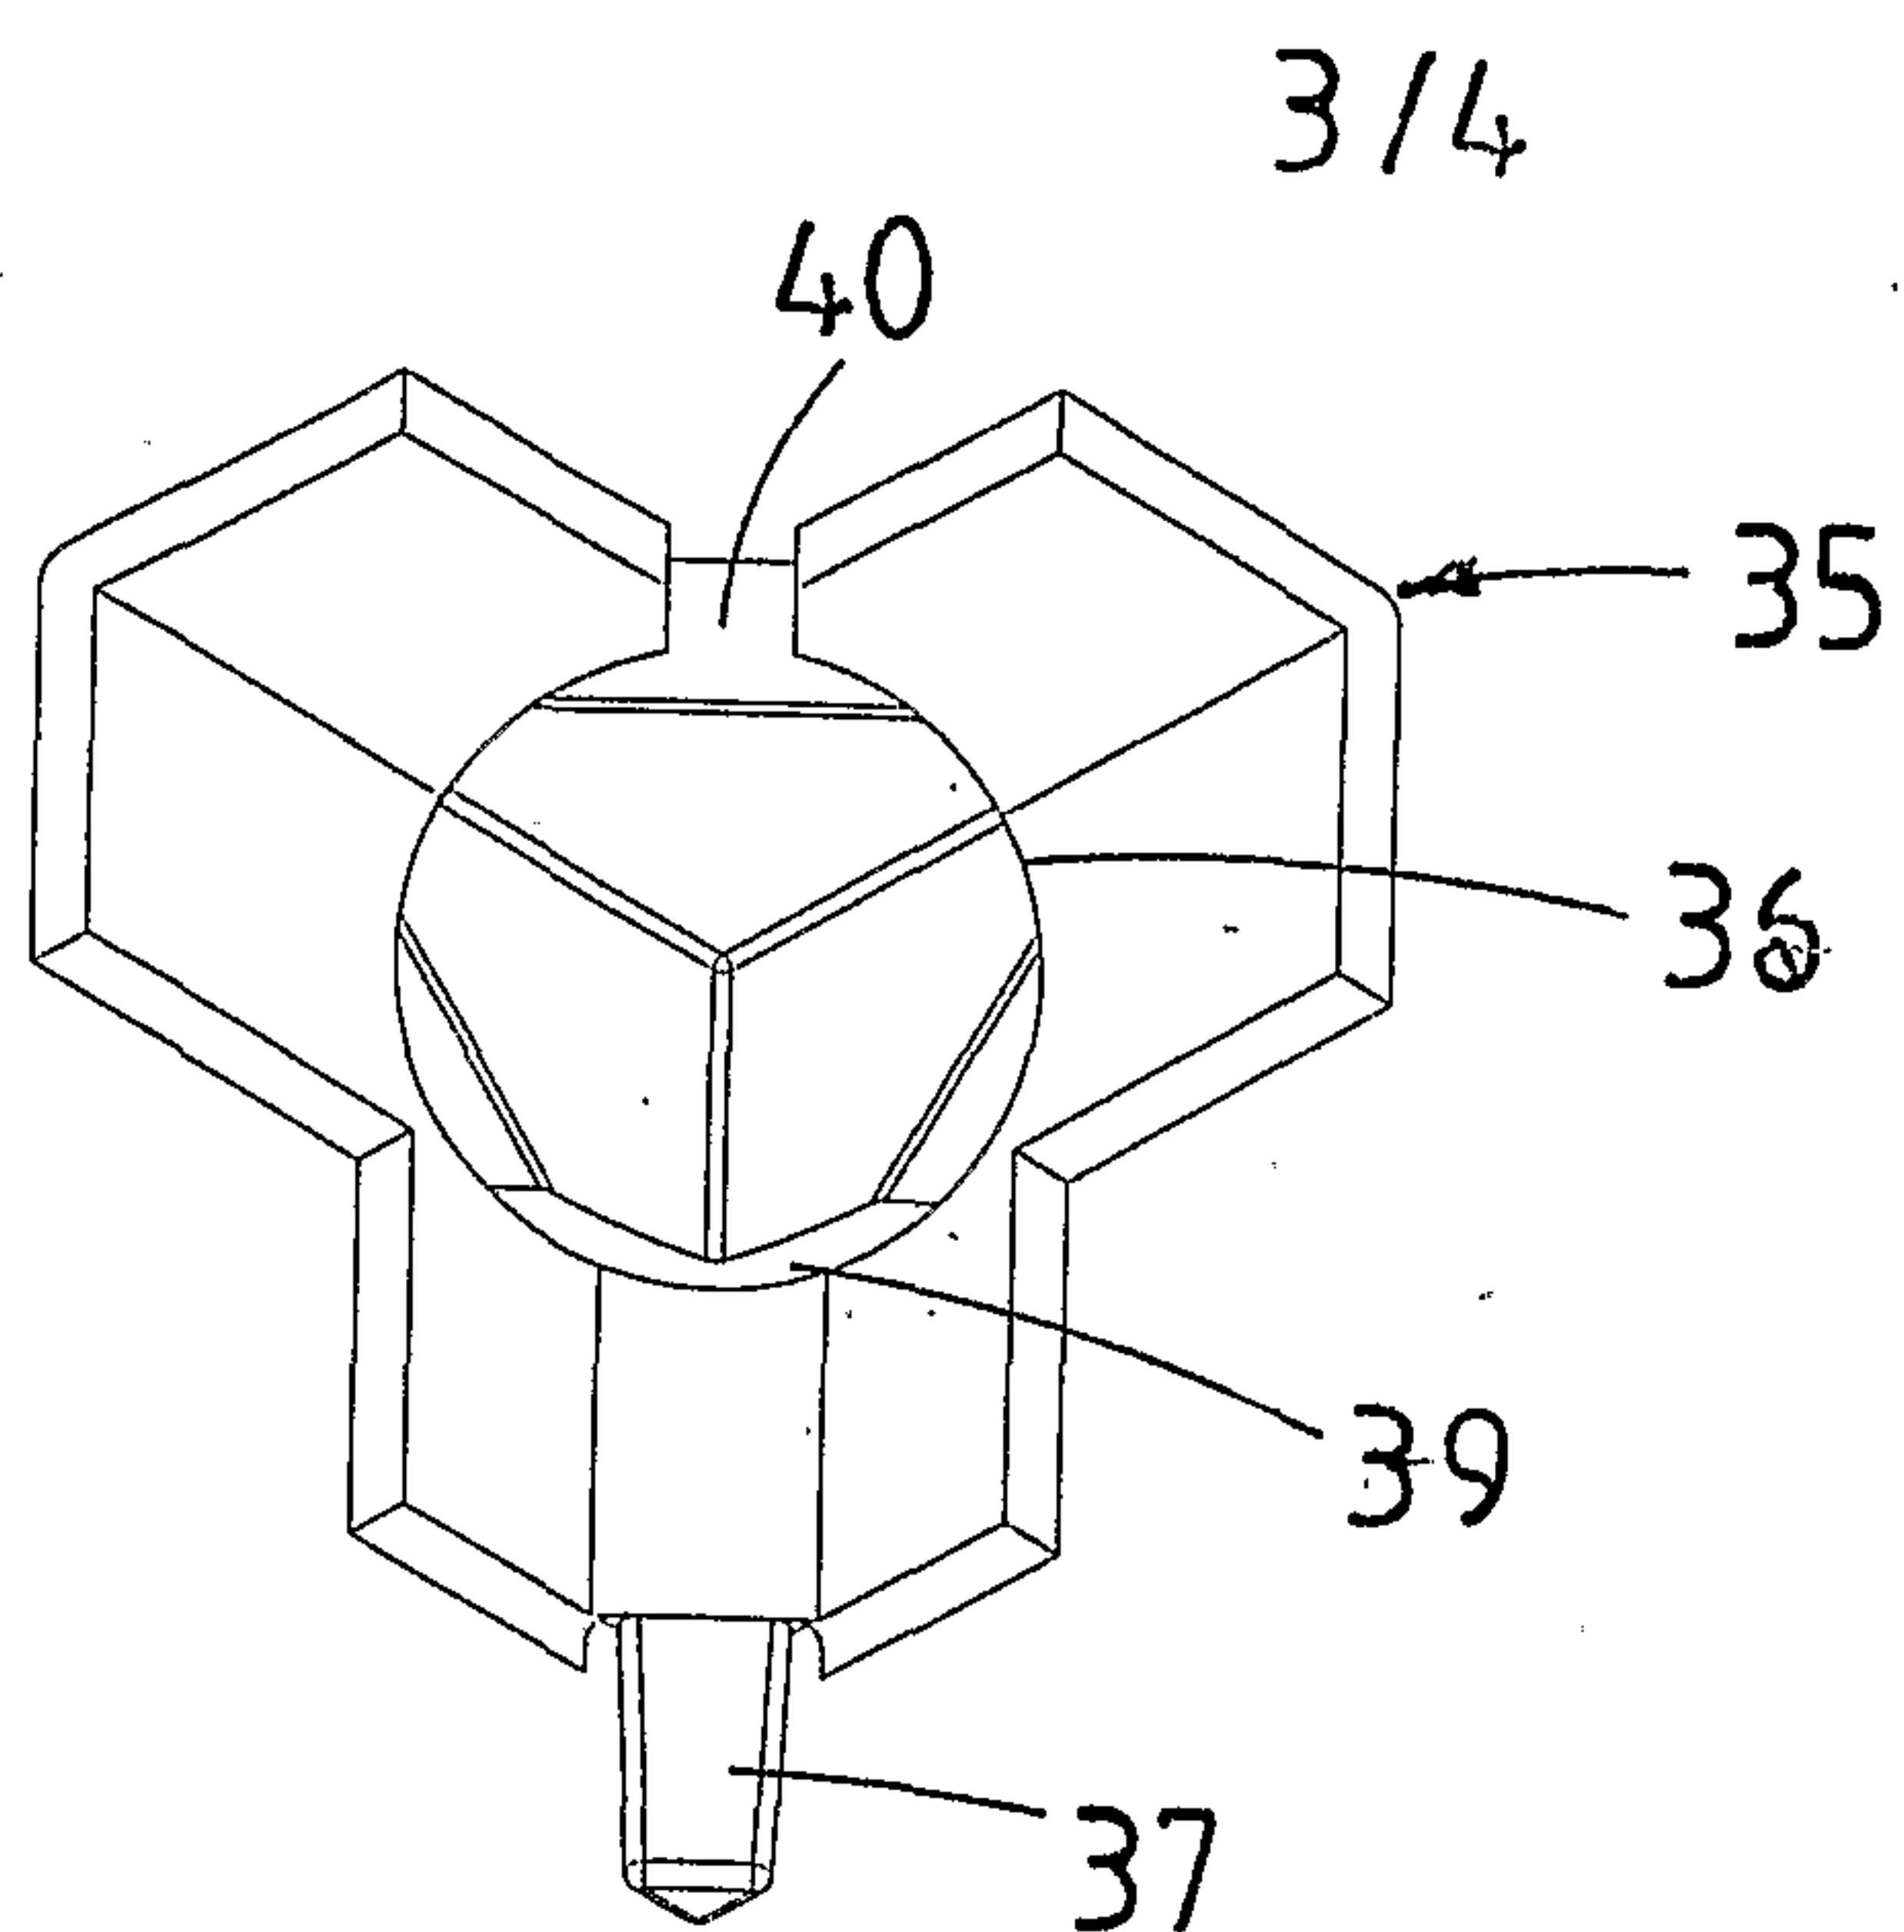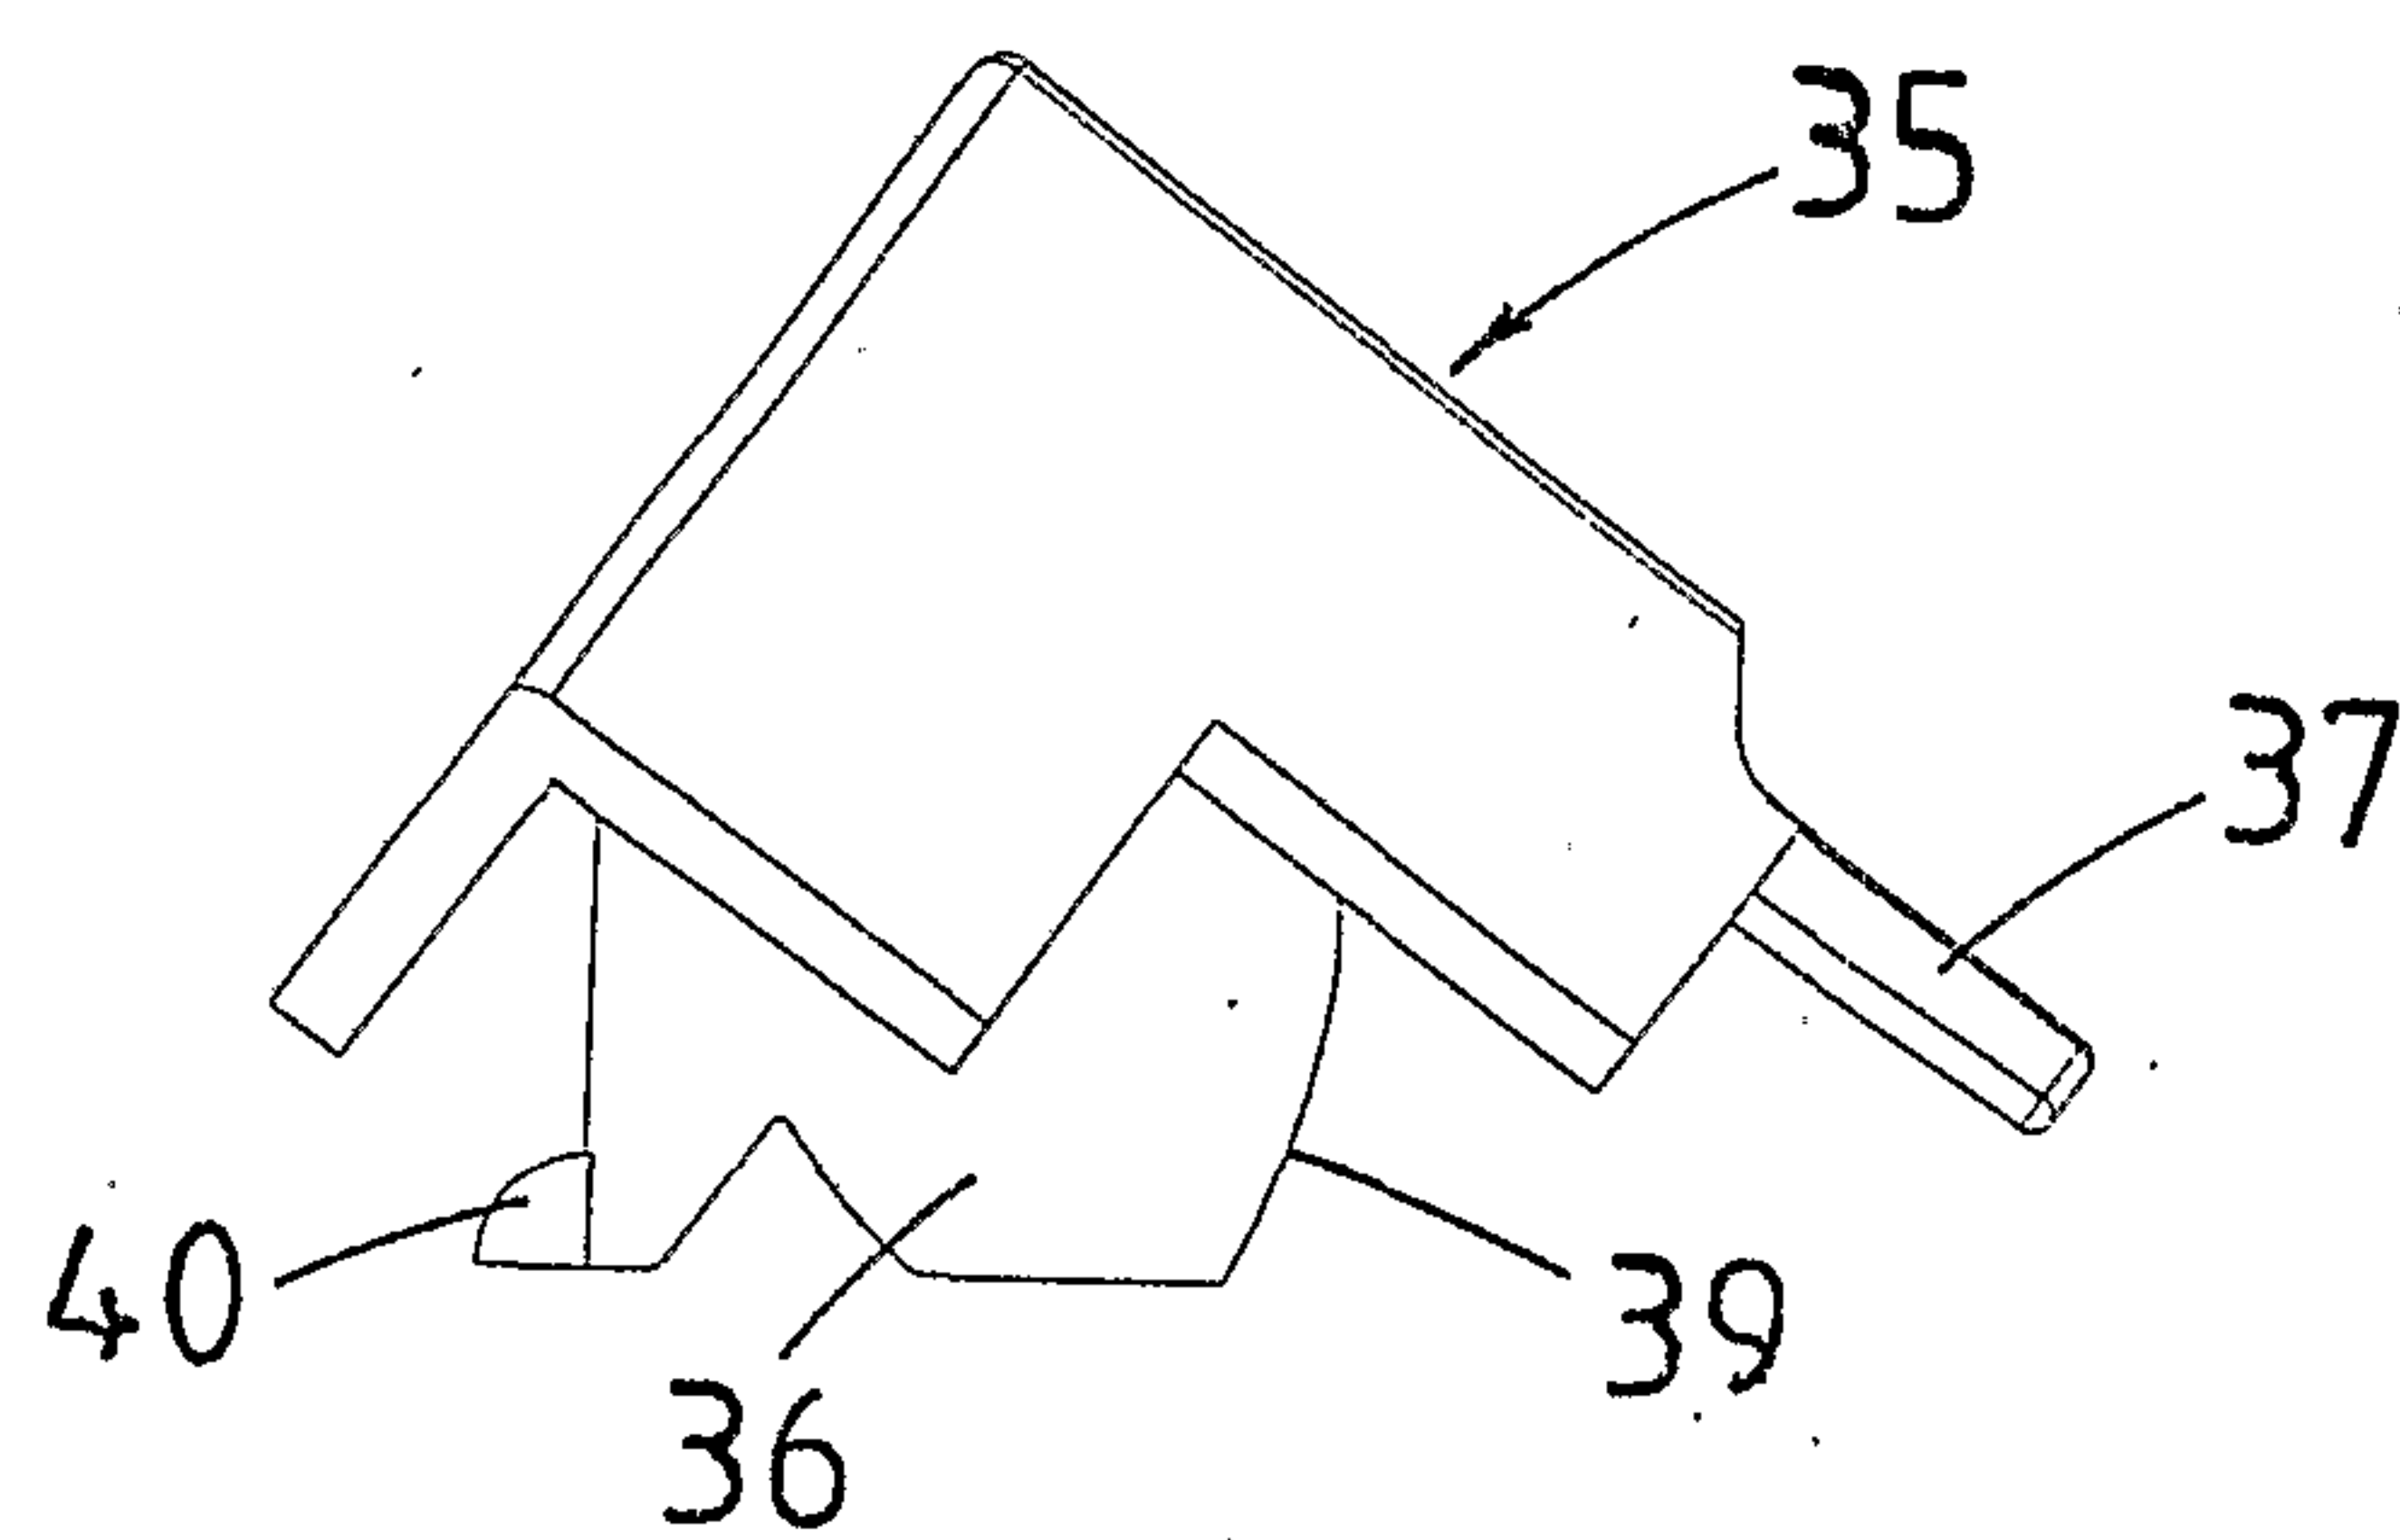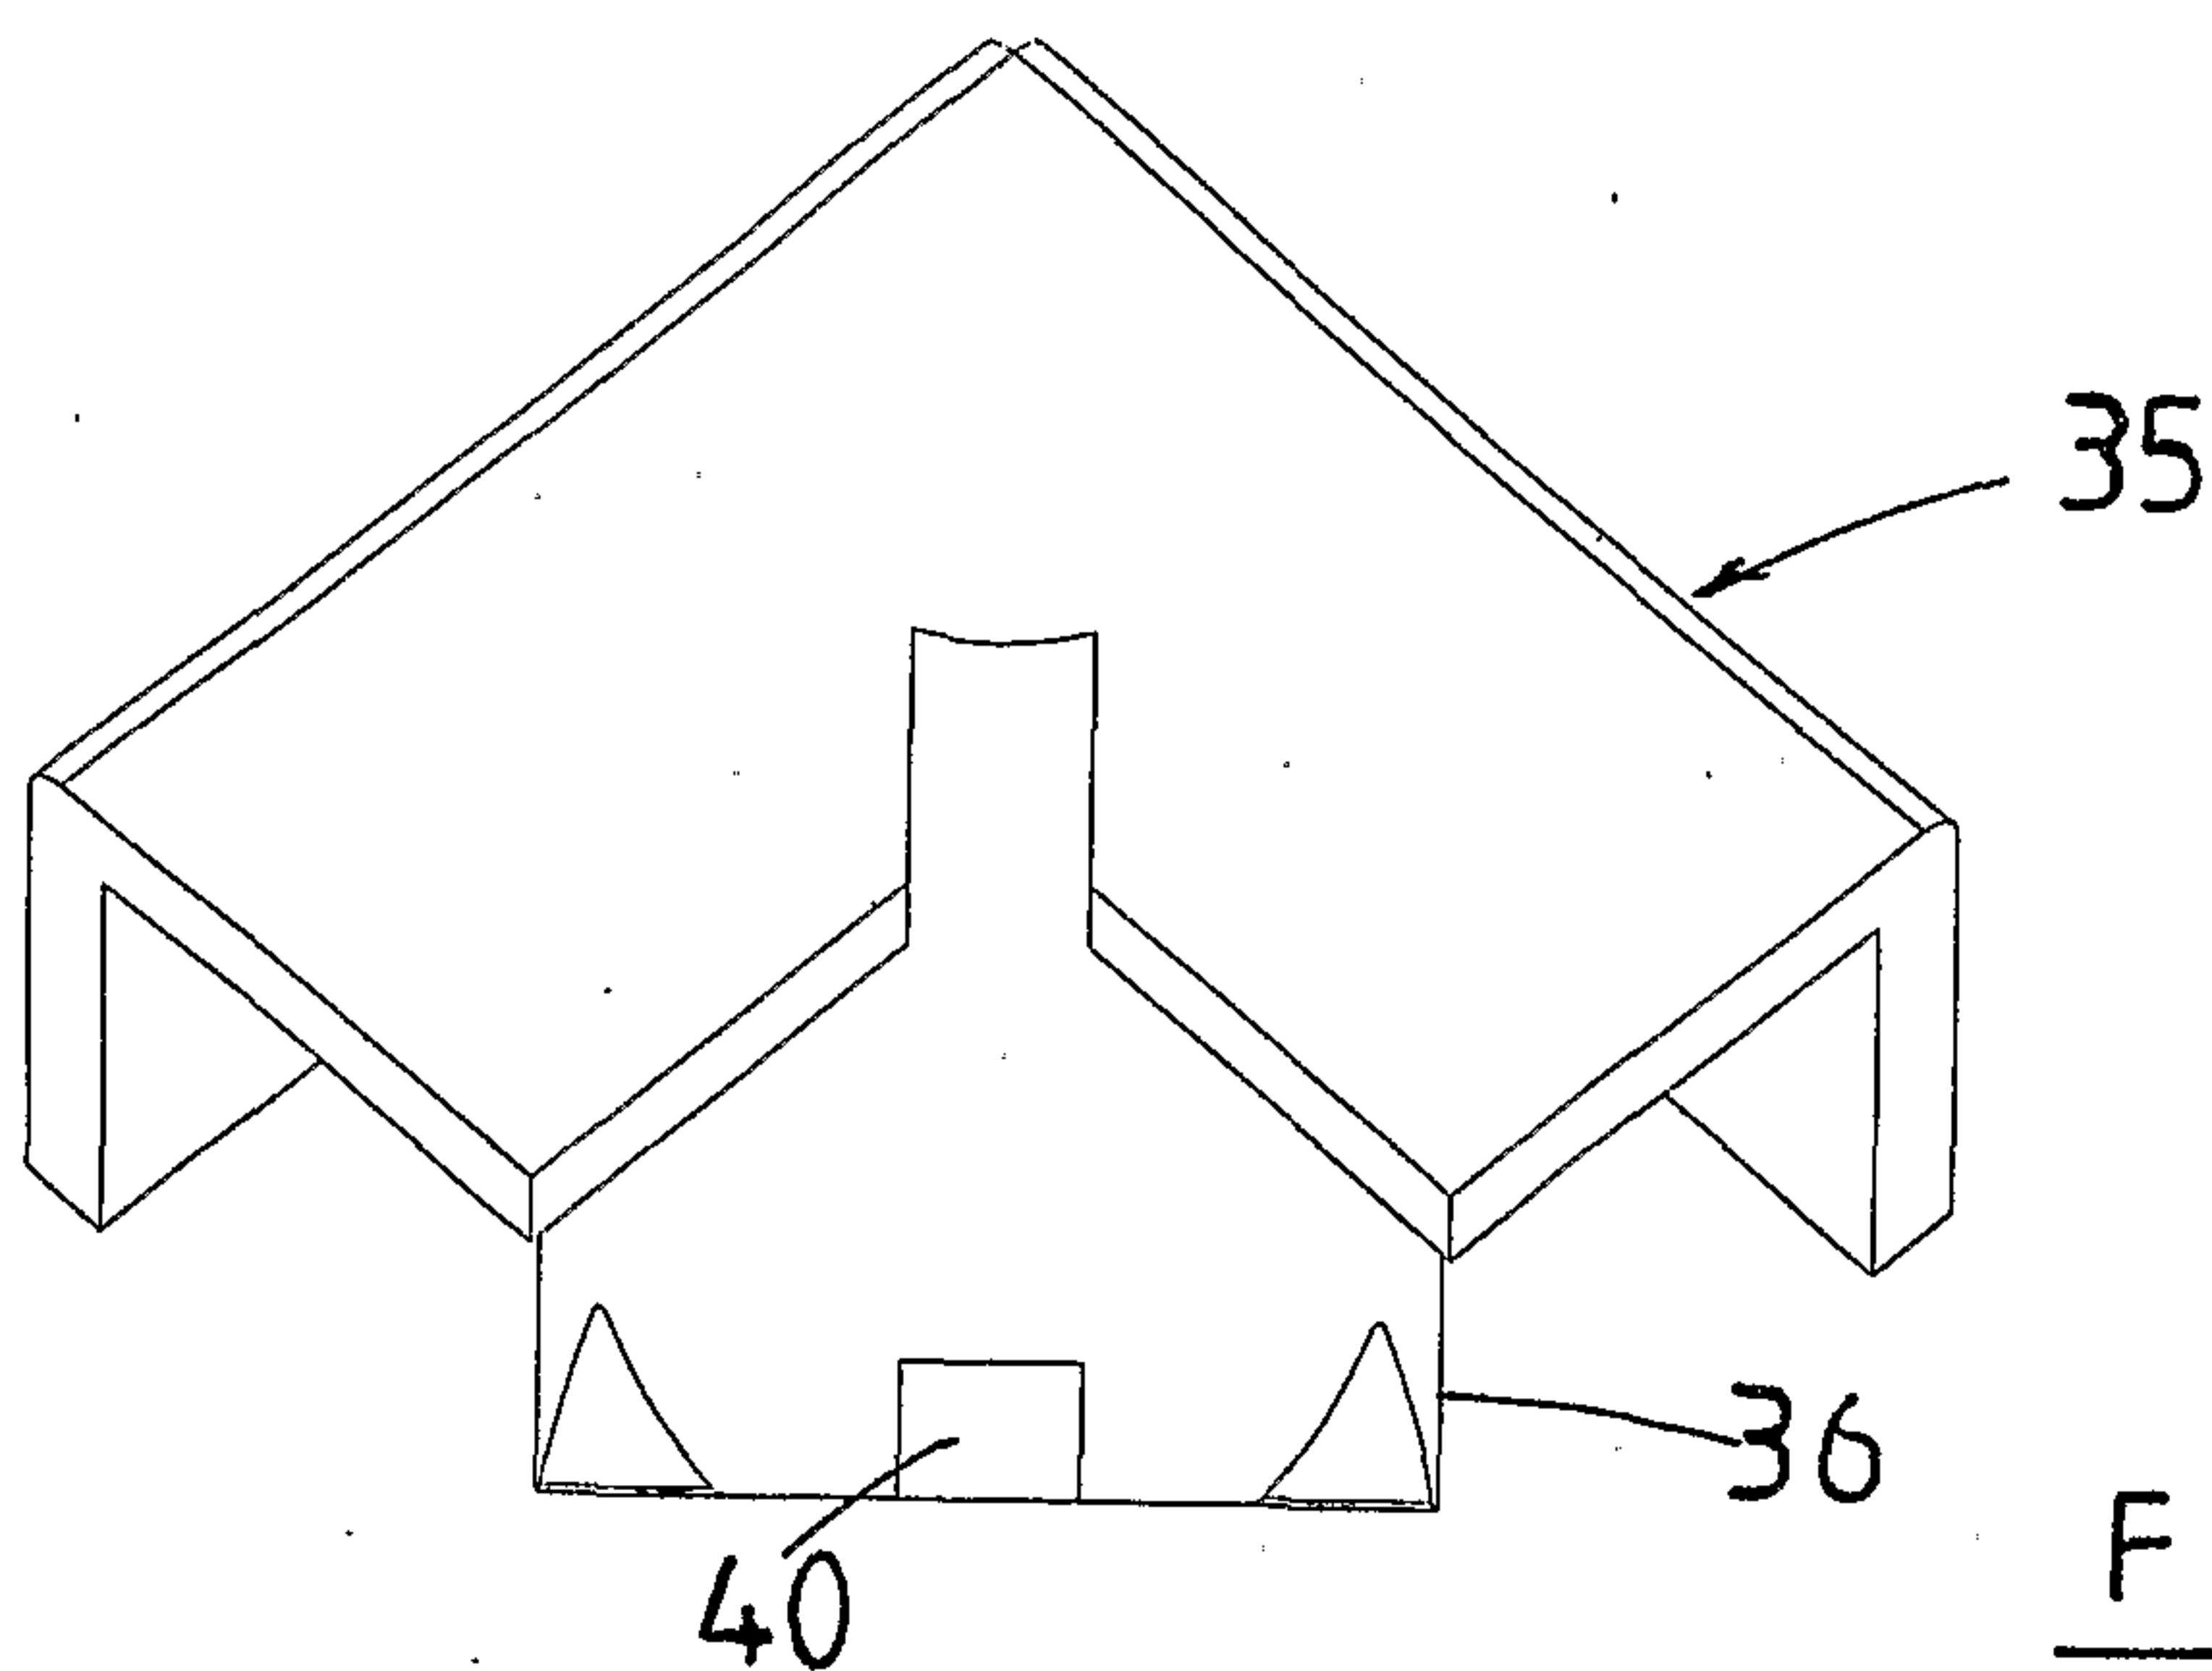FIG. 5.FIG. 6.FIG. 7.

4/4

