



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 3 669 726 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:

18.09.2024 Bulletin 2024/38

(51) International Patent Classification (IPC):
A47K 10/36 (2006.01)

(21) Application number: **20154118.2**

(52) Cooperative Patent Classification (CPC):
A47K 10/3612; A47K 10/3618; A47K 10/3625;
A47K 10/3643; A47K 10/3656; A47K 2010/365;
A47K 2010/3668; A47K 2010/3872;
A47K 2010/3881

(22) Date of filing: **17.06.2016**

(54) **DISPENSER FOR ROLLED SHEET MATERIALS WITH CUTTING SYSTEM**

SPENDER FÜR AUFGEROLLTE BLATTMATERIALIEN MIT SCHNEIDSYSTEM

DISTRIBUTEUR DE MATÉRIAUX EN FEUILLE LAMINÉE À SYSTÈME DE COUPE

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(73) Proprietor: **Kimberly-Clark Worldwide, Inc.
Neenah, Wisconsin 54956 (US)**

(30) Priority: **18.06.2015 US 201562181457 P**

24.02.2016 US 201662299256 P

30.03.2016 US 201662315318 P

06.06.2016 US 201615173970

(72) Inventor: **OSBORNE JR., Charles Agnew
Cumming, Georgia 30040 (US)**

(43) Date of publication of application:

24.06.2020 Bulletin 2020/26

(74) Representative: **Dehns
St. Bride's House
10 Salisbury Square
London EC4Y 8JD (GB)**

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:

16812545.8 / 3 310 232

(56) References cited:
FR-A1- 2 583 729 US-A- 3 893 636
US-A1- 2007 079 684 US-A1- 2009 140 001
US-A1- 2009 256 022 US-B1- 6 196 102

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Technical Field

[0001] This disclosure generally relates to dispensers and, more particularly, to electronic dispensers for flexible sheet material such as paper products.

Background

[0002] A number of different types of dispensing devices for controlling quantities of paper products dispensed such as for restroom and other environments have been developed in recent years. Some such dispensers have included mechanical paper feeding mechanisms, actuated by the user physically touching the dispenser equipment to deliver a fixed length of paper. This bodily contact can, however, raise concerns over hygiene when such dispensers are located in public restroom facilities. More recently, the use of electronic dispensers has become more prevalent especially in public restroom facilities. Similar to manually operated dispensers, electronic dispensers dispense a measured length of sheet material, but their operation generally is initiated by a sensor detecting the presence of a user. Thus, in such "hands free" operations, the user does not have to manually activate or otherwise contact the dispenser in order to initiate a dispense cycle. While electronic dispensers are generally more hygienic and can enable enhanced control of the amount of paper fed, resulting in paper savings, such dispensers can be subject to other problems. For example, conventional electronic dispensers can generally include motors, gears and/or other drive systems that can be expensive and require closer tolerances to manufacture. In addition, such dispensers accumulate static electricity such as due to the movement of the sheet material over rollers, interactions between rollers, etc., and if this static charge is not dissipated, the user may receive a static shock if he touches the dispenser during use, and the electronic control and sensor circuitry in the dispenser further can be affected. Still further, the operation of these dispensers often is loud, generating substantial noise during their operation. US patent applications 2007/079684 and 2009/140001 disclose electronic dispensers with cutting mechanisms.

[0003] Accordingly, it can be seen that a need exists for a dispenser that provides for a consistent controlled dispensing or feeding of desired amounts of a sheet material, and which addresses the foregoing and other related and unrelated problems in the art.

Summary

[0004] In one aspect, the present invention provides a dispenser for dispensing a flexible, rolled sheet material as claimed in claim 1.

[0005] In another aspect, the present invention provides a method for dispensing a flexible, rolled material

from a dispenser as claimed in claim 8.

[0006] In an embodiment, an electronic dispenser is provided with a feed roll assembly including a motorized or driven feed roll assembly for dispensing flexible sheet material. In one aspect, the motorized or driven feed roll assembly of the dispenser can include a motorized drive or feed roller for unrolling the paper from a paper holder in response to a signal from an electronic sensor; and one or more pressing rollers, the pressing rollers at least partially engaging the driving roller as sheet material is being dispensed along a feed path between the pressing and driving rollers to a discharge chute. The motorized drive or feed roller can have a body with an internal chamber or recess defined therein, and a drive mechanism or system including a motor can be at least partially received within the internal chamber or recess of the feed roller body so as to be at least partially or substantially integrated therein, and can be operable in response to the signal from the electronic sensor to rotate the feed roll as needed to feed a measured or desired amount of paper from the roll. The drive system also can include a gear reducer assembly and one or more bearings that rotatably support the motor within the feed roller body as the feed roller is driven/rotated thereabout. The motor further may be coupled to the feed roller by a gear assembly, such as an involute spline gear assembly configured to selectively transfer torque from a driveshaft of the motor to the feed roller for the dispensing of the sheet material. However, the driven feed roll assembly may include a gear reducer assembly, which can comprise one or more planetary gear arrangements or other suitable gear reducer assembly arrangements linking the motor to the body of the feed roller. The gear assembly further may comprise or act as a hybrid or one-way clutch allowing the motor to engage and drive the feed roller, while also allowing the feed roller to be rotated independently without resistance, for example, when a selected amount of sheet material is being manually dispensed, e.g., pulled by a user.

[0007] In another embodiment, the drive system including a motor may be separate from the driven feed roller. For example, the drive system can be mounted to the housing such that the drive system is position in a spaced relationship with respect to the feed roller. The drive system and feed roller may be operatively connected by one or more gears or a belt drive assembly to transfer power or torque therebetween. The drive system further may include a drive belt arrangement that can drive one or more pressing rolls in conjunction with the operation of the feed roller. For example, a drive motor, which can include a DC motor, an AC motor, stepper motor, servo motor or other similar motor or actuator (powered by a battery pack or other power source) can drive a belt gear that in turn can be coupled to and drive the feed roller. The belt gear can engage and drive the feed roll by interaction with a gear or spindle mounted to a roller shaft of the feed roller, and can further drive one or more pressing rolls by driving a belt that engages a spindle or

shaft of one or both pressing rolls. The belt gear can be driven by the drive motor directly or indirectly, such as by a gear transmission assembly wherein the drive motor drives a series of gears to in turn drive the belt gear; or by a further drive belt linking the belt gear to the drive motor for driving the belt gear by operation of the motor. [0008] In an another embodiment, the dispenser also can include a pivotally mounted pawl member located proximate to the tear bar such that movement of sheet material into the tear bar for severance pivots the pawl member from a first position to a second position. A sensor or signal device cooperative with the pawl member also can be located such that movement of the pawl member to the second position causes the signal device to send a signal to notify the control circuit that the sheet material has been removed. The dispenser thus can be operative in a first mode to be responsive to a signal from the proximity sensor to dispense a sheet of material, and is operative in a second mode to dispense a next sheet in response to the signal means being activated by movement of the pawl member to the second position.

[0009] In a further embodiment, the dispenser can include an adjustable proximity or other sensor for initiating operation of a dispensing mechanism, and a tear bar is mounted within the housing for severance of the sheet material by the user. A pivotally mounted pawl member further can be located proximate to the tear bar such that movement of sheet material into the tear bar for severance pivots the pawl member from a first position to a second position. A detector, sensor, switch or similar signal means or actuator that senses or is otherwise responsive to movement of the pawl member can send a signal to notify the control circuit that the sheet material may have been removed from the discharge chute upon movement of the pawl member to the second position. A paper detection sensor further can be activated by the control circuit to verify that the sheet material has been removed from the discharge chute. The dispenser thus can be operative in one mode to be responsive to a signal from the proximity sensor to dispense a sheet of material, and can further be operative in another mode to dispense a next sheet in response to a signal from the paper detection sensor that the sheet material has been removed from the dispenser.

[0010] In a still further embodiment, the dispenser also may operate in a number of modes, including a proximity detection mode in which a proximity sensor detects the presence of a user's hand when placed into proximity with the dispenser, and a butler mode in which the dispenser can automatically dispenses another measured amount of sheet material. Additionally, the electronic dispenser can include a dispenser housing having a support for holding at least one roll of sheet material, a base for mounting to a surface, a removable cover mounted to the base, and a discharge for discharging the sheet material from the dispenser. A tear bar also can be mounted within the housing for severance of the dispensed amount of sheet material by the user. The dispenser fur-

ther can include a control system or circuit that controls the operation of the motorized spindle or feed roller for dispensing the sheet material, and can include an adjustable proximity or other sensor.

5 [0011] These and other advantages and aspects of the embodiments of the disclosure will become apparent and more readily appreciated from the following detailed description of the embodiments and the claims, taken in conjunction with the accompanying drawings. Moreover, 10 it is to be understood that both the foregoing summary of the disclosure and the following detailed description are exemplary and intended to provide further explanation without limiting the scope of the invention as claimed.

15 **Brief Description of the Drawings**

[0012] The accompanying drawings, which are included to provide a further understanding of the embodiments of the present disclosure, are incorporated in and constitute a part of this specification, illustrate embodiments of the invention, and together with the detailed description, serve to explain the principles of the embodiments discussed herein. No attempt is made to show structural details of this disclosure in more detail than may be necessary for a fundamental understanding of the exemplary embodiments discussed herein and the various ways in which they may be practiced.

30 Fig. 1 shows a partial cutaway, perspective view of an example dispenser according to principles of the present disclosure.

35 Figs. 2A-2D show cross-sectional, partial cutaway views of example dispensers according to principles of this disclosure.

40 Fig. 3 shows an exploded view of the various components of the dispenser according to principles of this disclosure.

45 Fig. 4A schematically illustrates a cross-sectional view of a feed roller drive assembly for a dispenser such as shown in Fig. 3.

50 Fig. 4B provides a partial cutaway view of a feed roller drive assembly housed within the feed roller body of the dispenser according to Fig. 3.

55 Fig. 5A illustrates example driving elements of a feed roller drive assembly according to principles of this disclosure.

Fig. 5B is an exploded view of an example gear arrangement for the drive assembly of the feed roller drive assembly shown in Fig. 5A.

Figs. 6A-6C illustrate one example construction of a driven feed roller assembly according to principles

of this disclosure.

Figs. 7A-7B show an example of a feed roller according to the principles of the present disclosure.

Figs. 8A-8B illustrate perspective views of an example arrangement a feed and pressing rollers according to principles of this disclosure.

Figs. 9A - 9B show example drive mechanisms/arrangements for driving the pressing rollers according to principles of this disclosure.

Figs. 10A-10B show an example clutch assembly for the feed roller drive assembly according to principles of this disclosure.

Fig. 11 provides a cross-sectional view of the feed roller drive assembly according to principles of this disclosure.

Fig. 12A shows an additional example integrated feed roller drive assembly according to one aspect of the present disclosure.

Fig. 12B shows a drive system housing for the integrated feed roller drive assembly shown in Fig. 12A.

Fig. 13 shows a cross-sectional, partial cutaway view of a cutting mechanism for use with a dispenser according to principles of this disclosure.

Fig. 14 illustrates a cutaway view of the drive assembly housed within the feed roller illustrated in Fig. 3.

Fig. 15 provides a cross-sectional view of the cutting mechanism according to Fig. 13.

Figs. 16A-16B provide examples of a tear bar and pivotable pawl member according to principles of this disclosure.

Fig. 17 shows a block diagram of an example of a control system in communication with the dispenser according to principles of the present disclosure.

Detailed Description

[0013] The following description is provided as an enabling teaching of embodiments of this disclosure. Those skilled in the relevant art will recognize that many changes can be made to the embodiments described, while still obtaining the beneficial results. It will also be apparent that some of the desired benefits of the embodiments described can be obtained by selecting some of the features of the embodiments without utilizing other features. Accordingly, those who work in the art will recognize that many modifications and adaptations to the embodiments

described are possible and may even be desirable in certain circumstances. Thus, the following description is provided as illustrative of the principles of the embodiments of the invention and not in limitation thereof, since the scope of the invention is defined by the claims.

[0014] As generally illustrated in Figs. 1-3, 11, the present disclosure is directed to a dispenser 10 for feeding or dispensing a flexible sheet material 12, including a motorized or driven feed roll drive assembly 14 mounted/disposed within a dispenser housing 16. Upon activating the dispenser 10, the feed roller drive assembly 14 can be engaged, causing rotation of a motorized feed roller or drive spindle 18, thereby resulting in conveyance of a measured or selected amount or length L of sheet material 12 along a conveying or feed path P (Figs. 2A-2D) from a roll or supply 20 of the sheet material 12 through the feed roller drive assembly 14 and out of a dispensing throat or discharge chute 22 or other suitable aperture or opening provided/defined in the housing 16, as generally indicated in Figs. 1 and 2A-2D. It further should be appreciated that the electronic dispenser 10 described herein should not be considered to be limited to any particular style, configuration, or intended type of sheet material. For example, the dispenser 10 may be operable to dispense paper towels, toilet tissue, or other similar paper or sheet materials, including dispensing or feeding non-perforated and/or perforated sheet materials.

[0015] Figs. 2A-2D show examples of dispensers including the motorized or driven feed roller assembly 14 for actively feeding or driving the sheet material 12 from a supply 20 and through a discharge chute or opening 22 of the housing 16, for example, upon receiving a signal from a control system 25, which includes a controller or processor 24, as generally indicated in Figs. 2A and 17. The controller 24 for the dispenser 10 can receive a plurality of signals from a sensor or an array or series of sensors, such as generally indicated at 26, to control dispensing of the sheet material 12. These one or more sensors 26 can include various type sensors or detectors, for example, including an adjustable proximity sensor that can be configured/adjusted to detect the presence of a user's hand at a desired range/location and dispense measured/selected amounts of sheet material 12, as well as a photoelectric, infrared (IR) or similar sensing systems/detectors, used to detect the presence of a user's hands placed below the bottom portion of the dispenser housing, and/or the feeding of a selected amount of sheet material 12.

[0016] As indicated in Figs. 1-2B, the dispenser housing 16 also will generally include a roll support mechanism 21, for holding at least one roll 23 of the supply 20 of sheet material 12. For example, as generally indicated in Fig. 2A, the roll support mechanism 21 can include slots or grooves 21A defined in the housing 16 configured to receive the first and/or second ends 23A/23B of the roll 23 of the sheet material 12 such that at least a portion of the supply 20 of sheet material 12 is supported by,

and/or rests on or engages the feed roller 18. The slots or grooves 21A of the roll support mechanism further can include one or more angled or sloped sides or portions 21B having a variable slope to increase/decrease the amount of force the supply 20 of sheet material exerts on the roller 18. For example, a slope can be selected such that as the supply 20 of sheet material is fed (e.g., the amount of sheet material 12 left on the roll decreases), the slope or position of the supply roll can change so as to keep a downward force exerted on the feed roller 18 by the supply roll substantially constant as the supply of sheet material, and likewise the weight thereof, is diminished as selected portions of the sheet material 12 are dispensed (Fig. 2B). Alternatively, as shown in Fig. 2B, the roll 23 can be supported by a pair of arms 25 coupled to the dispenser housing 16. These arms 25 may be fixedly arranged to hold the supply 20 of sheet material in a spaced relationship with the feed roller 18 or, in the alternative, the arms 25 may be biased or urged, such as by a spring, other pre-stressed member or suitable biasing mechanisms, toward the feed roller 18 to urge or direct the supply 20 of sheet material downwardly toward or against the roller 18.

[0017] Figs. 1-6C illustrate an example motorized drive or feed roller 18 of the embodiment of the feed roller drive assembly 14 of the electronic dispenser 10, which incorporates or comprises an integrated feed roller drive mechanism or system 58 therein. As indicated in Figs. 3-5A and 6A-6C, the drive or feed roller 18 generally will include an elongated body 28, which can be made of a molded plastic, synthetic or other composite material, though other types of low or reduced static materials, such as wood and/or metal materials, which can include an insulating material thereabout, also can be employed.

[0018] In addition, as further shown in Figs. 3 and 6A-C, the feed roller body 28 may include first and second ends 28A/28B and a generally cylindrical outer side wall 30 and an inner side wall 31 defining an open ended passage, recess, or at least partially hollow cavity 32 defined within/along the feed roller body 28, and the feed roller body 28 may also include one or more driving bands or sections 34 disposed on, or adhered to, an outer surface 30A of the side wall 30, such as a series of driving bands 34 disposed on the outer surface 30A in a spaced arrangement or configuration (Fig. 3). The driving bands 34 may at least partially include or be comprised of rubber, plastic, resin or other similar materials suitable to increase grip of the feed roller 18 and/or friction between the feed roller 18 and the sheet material 12 to thereby assist in the feeding or driving of the sheet material 12. In addition, the outer surface 30A of the feed roller body 28 also may include a series of recessed or gap sections 35 defined therein. It further will be understood that although the exemplary embodiments illustrated in Fig. 3 shows four substantially equally sized driving bands 34 disposed in a spaced relationship about the outer surface 30A of the feed roller body 28, any number, size, arrangement and/or configuration of driving bands may be used

in accordance with embodiments of the present disclosure.

[0019] Alternatively, as generally shown in Figs. 7A-7B, the feed roller body 28 can be made up of various sections or portions including a first section/portion 29 having, for example, a cylindrical sidewall 29A defining an open ended passage or at least a partially hollow cavity 31 therealong, and a second, or other additional, section or portion 33 connected to and/or adjacent the first section 29 and which can be formed with a series of cut-outs, pockets, or cavities 37 therein. Such a configuration may provide increased stiffness of the feed roller body 28, while also reducing the amount of material required for production, and thus potentially can help decrease manufacturing costs. The second portion/section 33 also may have a series of contact portions or flanges 41 disposed/arranged therealong, each with a contact surface 41A for engaging/driving the sheet material 12 as the feed roller body 28 is driven/rotated to feed the sheet material 12.

[0020] Fig. 2D additionally shows that the feed roller body 228 can be made up of multiple sections that can be removably coupled or connected to one another so as to provide increased access to the components housed within the feed roller body 228 and/or to allow for more efficient assembly/manufacture of the feed roller body 228 and the components housed therein. For example, the feed roller body 228 can include a pair of hemispherical, modular portions or sections 270 and 272 that can be removably secured into place/together by one or more connecting portions 274, such as a snap fit configuration or other suitable connection or locking mechanism.

[0021] As shown in Fig. 3, the feed roller body 28 can be movably or rotatably mounted/attached to one or more walls or other portions of the dispenser housing 16, such as side walls 38/39. The first 28A and/or second 28B ends of the feed roller body 28 can be connected, mounted or otherwise coupled to the side walls 38/39 by one or more bearing assemblies 40, and/or including other suitable support mechanisms that support and allow for rotation of the feed roller body 28 in relation to the dispenser housing 16. The bearings 40 may include roller or ball bearings that can be contained, housed or otherwise disposed between bands or rings defining a bearing assembly or body 45. Embodiments of this disclosure are not, however, limited to roller/ball bearings, however, and may include plain, fluid, or magnetic bearings or any other suitable mechanisms for rotatably fixing the feed roller body 28 to or within the dispenser housing 16.

[0022] The first 28A and/or second 28B ends of the feed roller body 28 also may be rotatably mounted to the sides of the housing 16 by the bearing assemblies 40. For example, the first and/or second ends 28 A/B of the feed roller body 28 can be received through and engage the bearing assemblies 40 so as to be movable therein to enable the feed roller body 28 to rotate with respect to the dispenser housing 16. Though Fig. 3 shows the

feed roller body 28 attached to the dispenser housing 16 at both the first and second ends 28 A/B, embodiments of the present disclosure are not limited to this arrangement and the feed roller body 28 can be attached to the dispenser housing 16 in any suitable manner. For example, an axle or shaft 27 may be engaged or otherwise affixed to or integrated with one, or both, of the ends 28A/B (e.g. the second end 28B) of the feed roller body 28, and further can be rotatably mounted to one of the sidewalls 38/39 of the housing 16, such as by a hub and/or bearing assembly or other suitable connection (Figs. 6A -C).

[0023] Referring to Fig. 3, the bearing assemblies 40 also can be at least partially received or housed within apertures or openings 46 defined in the side walls 38 A/B of the dispenser housing 16, and each can include a flange or support portions 50 for connecting the bearing assemblies to an outer surface 38A/39A of the sidewalls 38/39 of the dispenser housing 16. In one example, the flange portions 50 may have a series of openings or apertures 52 defined or formed therein, which openings 52 are disposed/arranged to be substantially aligned with corresponding openings or apertures 106 and 54 defined or formed in the flanges 100 of the motor bracket or housing 96 and in side walls 38/39 of the dispenser housing 16. These openings can be further configured to receive fasteners, such as screws or bolts 56, to fixedly connect the flange portion 50 of the bearings 40 to the side walls 38/39 of the dispenser housing 16, and further mount the motor housing 96 thereover and to the housing as shown in Fig. 5. Other fasteners, including rivets, snaps, etc., also can be used. The flanges 50 of the bearings further may alternatively be fixed/secured to the sidewall 38/39 of the dispenser housing 16 using an adhesive or, alternatively, may be integrally formed with the dispenser housing 16.

[0024] As illustrated in Figs. 1-3 and 8A-8B, the dispenser 10 further includes one or more pressing rollers 36 that can be biased toward engagement with the feed roller 18, so as to engage and force or press the sheet material 12 against the feed roller 18. The pressing roller(s) 36 can be movably mounted within the dispenser housing 16, such as with the ends thereof held within holders or brackets 36A/36B that can be biased toward engagement with the driven feed roller 18 such as by springs, biased cylinders or other suitable biasing mechanisms. The pressing rollers or a single roller where used, also can be biased independently toward the feed roller. The pressing roller(s) 36 further can include bands of a gripping material, such as a rubber or synthetic material, to assist in pulling the sheet material therebetween without causing damage to the sheet material as it passes between the feed roller and pressing roller(s). Additional pressing or guide rollers also can be arranged along the feed roller 18 to assist in guiding the sheet material, which additional rollers 36B (Fig. 2B) may be fixed or biased against the feed roller body 30, such as by springs, biased cylinders or other suitable biasing mechanisms (Fig. 2B).

[0025] For example, a series of pressing rollers 236, 238 can be biased toward engagement with the feed roller 18, as indicated in Figs. 8A-B, to engage the sheet material against the feed roller 18. The pressing rollers 236, 238 can be movably mounted within a housing 240, such as with the ends thereof (236A-B, 238A-B) held within holders or brackets 242, 244 that can be biased toward engagement with the feed roller 18 by springs, cylinders or other suitable biasing mechanisms. The engagement of the pressing rollers 236, 238 and feed roller 18 will define nip points 239A/B, as indicated in Fig. 2C, at upstream and downstream points along the feed path P of the sheet material 12 as the sheet material 12 is engaged and fed between the feed roller 18 and the pressing rollers 236, 238 of the motorized or driven feed roll assembly 14. The pressing rollers 236, 238 further can include bands of a gripping material, such as a rubber or synthetic material, to assist in pulling the sheet material therebetween without causing damage to the sheet material as it passes between the feed roller and pressing rollers.

[0026] In addition, the pressing rollers 236, 238 may be driven by the motor 60 of the feed roller 18 so as to facilitate feeding of the sheet material 12. For example, as shown in Figs. 9A-9B, the pressing rollers 236, 238 may be connected to a drive belt assembly 246 that is operatively connected to the motor 60 to transfer torque/power between the motor 60 and the pressing rollers 236, 238. The drive belt mechanism 246 can include a drive belt 248 that engages a belt gear, sleeve or pulley 250 fixed or otherwise connected or coupled to the feed roller 18 (so as to be driven thereby) and a series of belt gears, sleeves, or pulleys 252 fixed or otherwise connected to the pressing rollers 236, 238, e.g., at one or more ends 236A-B or 238A-B of the pressing rollers (Fig. 9A). In addition, the drive belt mechanism 246 further can include tensioning or idler pulleys, sheaves, gears, etc. 254/256 arranged/positioned adjacent the belt gear 250 fixed to the feed roller 18 and engaging the drive belt 248 (Fig. 9B). The pulleys 254/256 may be biased or urged in a predetermined direction (e.g., away from the pressing rollers as indicated by arrows 258) by a biasing member, such as one or more springs, to provide a substantially constant biasing force against, or to otherwise substantially maintain tension along, the drive belt 248. The magnitude of this biasing force or degree to which the drive belt 248 is tensioned may be selected such that the pressing rollers 236, 238 are urged toward and substantially maintained against and in contact with the feed roller 18, and/or so that the drive belt 248 is sufficiently tensioned to help prevent slippage between the drive belt 248 and the belt gear or belt pulleys of the pressing rollers 236, 238.

[0027] Embodiments of the present disclosure described herein can also utilize concepts disclosed in commonly-owned patents US 7,213,782 entitled "Intelligent Dispensing System" and US 7,370,824 entitled "Intelligent Electronic Paper Dispenser.". The embodiments al-

so utilize concepts disclosed in published patent applications US 2008/010098241 entitled "System and Method for Dissipating Static Electricity in an Electronic Sheet Material Dispenser," "Electronic Dispenser for Flexible Rolled Sheet Material," and US 2014/026381241, entitled "Electronic Residential Tissue Dispenser,".

[0028] The driven feed roller assembly 14 will include a feed roller drive assembly/system 58, which can be at least partially received or housed within the open ended cavity or recess 32 of the feed roller body so as to be substantially integrated with the feed roller 18 as generally illustrated in Figs. 4A-4B and 5A-6C. The drive assembly 58 will include a driving mechanism, such as motor 60, and can include a gear arrangement/assembly 62 for transferring power generated by the motor 60 to the rotatable feed roller 18. The motor 60 can include a brushless servo or stepper motor or other, similar type of adjustable, variable speed electric motor, and can have connectors, such as a plug-in type connector including a pair of spaced prongs 64 (Figs. 4A-4B) or other, similar connection through which the motor 60 can communicate with the control system of the dispenser and through which the motor 60 can receive instructions and power for driving the feed roller 18 so as to feed a selected or desired amount or length of sheet material through the discharge opening of the dispenser. The motor 60 can additionally provide feedback to the controller 24 (Fig. 17) of the dispenser control system 25, for example, to indicate a jam or misfeed and/or to further enable the controller 24 to monitor movement of the feed roller and thus control feeding of the sheet material. The motor also can include additional connecting leads or members to operatively connect the motor 60 to a power source, including, for example, one or more batteries 61 (Fig. 2B) or an electrical outlet.

[0029] As shown in Fig. 5A, the motor 60 can have a drive shaft 66 that connects directly to an interior partition or other portion 32A of the feed roller 18 so as to directly drive the rotation of the feed roller. The motor further can be mounted within the cavity 32 of the feed roller or bearing mounts 265 which enable the motor 60 to remain substantially stationary as the feed roller 18 is driven and rotates thereabout. In addition, the drive assembly 58 also can include a gear arrangement/assembly 62 coupled to, or otherwise in communication with, the motor 60 to transfer and/or regulate or control power/torque from the motor 60 to the feed roller 18. This could include a gear reducer or other driving assembly to vary torque/driving force output from the motor and communicated to the feed roller.

[0030] In one example, the gear arrangement/assembly 62 may include an involute spline gear arrangement or configuration 62 (Figs. 3 and 4A-4B). For example, as shown in Fig. 4A, the motor 60 generally may include a driveshaft 66 with a drive gear 68 of the gear arrangement/assembly 62 (Figs. 4A-4B, 5B and 6A-6C) connected thereto, which drive gear 68 can include a drive gear body 70 with front 74, rear 76 and circumferential 72 sides

or surfaces, and a series of gear teeth 78 disposed about/defined in the circumferential side/surface 78. The drive gear 68 can be receivable within a roller or spline gear 82, with the gear teeth 78 of the drive gear 68 generally configured to be matable with and engage a series of gear teeth 80 of a roller gear 82 coupled to, or otherwise communication with, the feed roller 18. The roller gear 82 generally will have a gear body 83 with front 84, rear 86 and outer/inner circumferential 88A/B surfaces or sides, and with an internal recess, cavity or opening 90 defined in the front surface 84 of the gear body 83, which recess 90 may be sized, dimensioned and/or configured to at least partially receive/house the drive gear 68 coupled to the driveshaft 66. The recess 90 generally may be defined by a substantially flat inner surface/side 92 and the substantially circular inner circumferential surface/side 88B, with the gear teeth 80 of the roller gear 82 defined/formed therealong.

[0031] Accordingly, as indicated in Figs. 11 and 14, the drive gear 68 can be at least partially received within the recess 90 of the roller or spline gear 82 (Figs. 4A-4B) so that the rear surface 74 of the drive gear body 70 is substantially adjacent and opposes the inner surface 92 of the roller gear 80 such that the teeth 78 of the drive gear 68 generally are mated or engaged with the teeth 80 of the roller gear 82, so that as the motor 60 drives/turns the drive gear 68, the teeth 78 of the drive gear 68 engage the teeth 80 of the roller gear 82 to transfer torque/power from the motor 60 to the roller gear 82 to drive the roller 18. The gear ratio between the arrangement/configuration of the teeth 78 of the drive gear 68 and the teeth 80 of the roller gear 82 may be set as needed to provide a desired driving force. For example, in some embodiments, the gear ratio can be approximately one-to-one (1: 1) so as not to change the transmission of power or torque from the motor 60. However, other gear ratios can be utilized without departing from the present disclosure, such as gear ratios greater than, or less than, one to one (1:1) as needed to increase and/or decrease the power or torque transmitted from the motor 60 so as to allow for the use of, for example, smaller less powerful motors. Such an involute spline gear arrangement further can assist in the manufacturing of the dispenser 10 as relatively higher deviations may be permitted in the tolerances between the drive and roller gears 68/82, and such that the manufacturing thereof does not require substantially close, tight/restrictive tolerances that often come with other driving arrangements. It also will be understood that other gear drive arrangements, such as, by way of example, a planetary gear drive arrangement (Fig. 5B), can be provided as needed to adjust, reduce or increase the driving force provided by the motor for driving the feed roller.

[0032] The gear arrangement/assembly 62 (Figs. 13-14) further can be constructed or configured to act as a hybrid or one-way clutch assembly to allow for selective transfer of torque/power between the motor 60 and the roller 18 and/or allow for the roller 18 to freely rotate ab-

sent resistance of the motor 60. For example, when the motor 60 is powered on, the clutch assembly may lock/engage so to initiate communication between or operatively connect the drive gear 68 and roller gear 82 and provide transfer of power/torque between the drive gear 68 and the roller gear 82 thereby allowing rotation or driving of the roller 18 under the power of the motor 60. When the motor 60 is powered off, such as by being manually turned off or due to experiencing a loss of power or a low power condition, the clutch assembly may unlock or disengage such that there is no communication or operative connection between the drive gear 68 and the roller gear 82 to thereby allow for rotation of the roller 18 without resistance caused by rotation of the motor 60 so as to allow for manual dispensing of the sheet material, when a user applies a relatively small force thereto. The clutch assembly also may selectively disconnect/disengage the motor 60 if the sheet material is pulled as the motor 60 is driving the roller 18 so as to prevent damage to the motor, prevent jamming of the dispenser, and/or allow faster dispensing of sheet material.

[0033] In addition, the drive gear 68 or, alternatively, the roller gear 82 may include one or more tracks/races, such as inner and outer races 83A/B, that may rotate together or independently of one another (Figs. 10A-B). The outer race 83B may include a series of biased rollers or bearings 85, such as by a series of springs 87, that engage/disengage with the corresponding notches or other engagement portions 89 of the outer race 83B to stop or prevent rotation of the rollers 85. As such, when the inner race 83A is rotated in the drive direction D, such as by operation of the motor 60, the rollers 85 are engaged thereby and urged into the notches 89 so as to prevent rotation of the rollers 85 and allow the inner race 83A to drive, and thus rotate, the outer race 83B to drive the feed roller 18. When the outer race 83B is rotated separately, such as by manual dispensing of the sheet material, the rollers 85 can be held in place by the springs 87 so as to rotate or spin freely, allowing the outer race 83B to turn substantially independently of the inner race 83A, and thus enable the feed roller 18 to rotate absent resistance caused by forced rotation of the motor 60.

[0034] Other gear or drive arrangements also can be used. For example, as indicated in Fig. 5B, a planetary gear arrangement or a gear reducer assembly 63 can be provided, wherein the drive motor 60, which can include a brushless servo motor, a stepper motor or other, similar type of adjustable, variable speed motor sized, configured to fit within the open end of the feed roller body, with driveshaft 66, further can be coupled to or include a drive gear 65 mounted thereon. This drive gear in turn can engage a corresponding planetary or other drive gear arrangement 67 of a gear reduction assembly 63. For example, the drive gear 65 of the driveshaft of the motor can engage a first planetary gear assembly 67, with the drive gear of the motor driveshaft being received between and engaged by a series of three-four planetary gears 67A-C which in turn can drive a forwardly extending gear

67D adapted to engage a second planetary gear assembly 69, the rotation of which in turn drives a fixed or stub shaft 71 as illustrated in Fig. 5B. The gear reducer arrangement also can be received within a gear reduction assembly housing 73 as a unit, with the stub shaft or planetary gear driveshaft 71 of the gear reduction assembly 63 being attached or mounted at its distal end 71A to a partition or otherwise engaging the inner side wall of the feed roller body. It also will be understood that fewer or more, or still other gear drive arrangements also can be provided as needed to adjust or reduce the driving force provided by the motor for driving the feed rollers.

[0035] The drive assembly 58 typically can be mounted substantially adjacent to the first or second end 28A/28B of the feed roller body 28, for example, in a substantially fixed position at one end, such as the first end 28A, of the feed roller body 28, with the drive assembly 58 being at least partially positioned, disposed or arranged within the interior cavity 32 so as to be integrated with the feed roller body 28. As schematically indicated in Figs. 3 and 4A-B, the drive assembly 58 may include a motor housing 96 mated to the dispenser housing 16 for supporting or holding the motor 60 within the interior cavity 31/32 of the feed roller body 28/29. The motor housing 96 will generally include a body 98 with a base or flange portion 100 and a substantially cylindrical portion 102 extending or protruding from the base 100, which cylindrical portion 102 defines a cavity or chamber 104 extending the length sized, configured and dimensioned for receiving or housing the motor 60. The motor 60 may be secured or fixed within the motor housing 60, such as by press fitting the motor 60 within the chamber 104, and there may further be one or more seals or other suitable elastic portion formed from a cushioning or dampening material and arranged or positioned between the housing 60 and the motor 60 sufficient to dampen or reduce vibrations caused by operation of the motor 60.

[0036] The flange portion 100 of the motor housing 96 also can have a series of holes or apertures 106 formed/defined therein so as to align with the holes 54 defined in the housing sidewall 38/39 and the apertures 51 of one of the bearings 40 so that the motor housing 96 can be fixed in place within the dispenser housing 16 by the fasteners 56, and further can extend into and be supported within the recess or cavity 32 of the roller body 18 provided an integrated driven roller assembly (Fig. 4A). The body 98 of the motor housing further may include a stepped portion 99 with a surface 99A, which stepped portion 99 may be configured, sized and dimensioned to be fitted and received within one or more protruding portions or ridges 57 of the bearings 40 such that an inner surface 57A of each of the ridges 57 can contact or engage a surface 99A of the motor housing, so as to facilitate construction of the dispenser by, for example, ensuring proper alignment of the motor housing with respect to the sidewalls 38/39 and the feed roller body 28 thereby increasing the tolerances or the allowable deviation of the dimensions of the motor housing and reduc-

ing potential errors during manufacturing.

[0037] As illustrated in Figs. 5A and 6B-C, the motor 60 also can be rotatably mounted and supported within the body of the feed roller, such as by one or more spaced motor/roller bearing assemblies 265. As indicated in Fig. 5A, the motor bearing assemblies 265 can include a series of ball or roller bearings 266 contained between bands or sections housing 267, which bearings 266 can be fixed to or integrally formed with an outer surface 60A of the motor 60. As a result, as the feed roller 18 is rotated, the motor can remain stationary with the feed roller body 30 being driven by operation of the motor 60 and rotating thereabout. Also, though two bearing assemblies are shown in the present embodiment, one bearing assembly or multiple bearing assemblies can be used without departing from the present disclosure.

[0038] With the motor 60 at least partially disposed within the roller body 28, the noise generated/heard from operation of the motor 60 can be substantially reduced. A relatively large diameter roller also may be employed/selected to provide a housing or cavity for containing a desired size motor 60 within the roller body 28, as needed. For example, the roller body 28 may have a diameter in the range of approximately 20 mm to approximately 40 mm, such as about 24 mm or about 36 mm, and increasing the diameter of the roller body 28 can generally allow for the use of a bigger motor, which may increase efficiency and/or the power supplied to the feed roller 18 so as to allow for dispensing of heavier sheet materials. It further should be understood that additional drive system or assemblies also can be provided, e.g., on both sides or ends of the feed roller, as needed, such as for feeding heavier sheet materials.

[0039] Figs. 3 and 4A further show a sealing member or cover 108 that can be placed over the drive assembly 58 and bearings 40 to substantially seal off the components of the drive assembly 58 received within the roller body 28 and the bearings 40 attached to the dispenser housing 16 so as to prevent particulates or other particles from impacting performance of the motor 60, operation of the other components of the drive assembly 58, and/or rotation of the bearings 40 or feed roller 18. The sealing cover 108 can include a body 110 with a cavity or chamber 112 defined therein and having an inner rear wall 114 and inner sidewalls 116. The chamber 112 can be sized, dimensioned and configured to cover the flange 100 of the motor housing body 98 and/or the flange 50 of the bearings 40. The sealing cover 108 may be releasably or detachably connected or coupled to the flanges 50/100 to allow for replacement and/or maintenance of the various components of the dispenser 10. However, the sealing cover 108 may be more permanently connected to the dispenser housing 16 and/or flanges 50/100, such as by an adhesive or other suitable means, so to, by way of example, prevent tampering with the components housed therein.

[0040] Figs. 12A-B further show a driven feed roller assembly 14 with a drive system 350 that is substantially

received or located within a chamber or cavity 354 defined/enclosed by a body 28 of a feed roller 18. The feed roller drive system 350 can be mounted near or adjacent one of the ends 28A/B of the feed roller body 28, and generally can include a motor housing 356 that at least partially houses or supports a drive motor 360 for driving rotation of the feed roller 18 to feed a selected or desired amount or length of sheet material. The motor 360 may include a servo or stepper motor or other, similar type of adjustable, variable speed electric motor, and can have a series of leads or connectors, such as a plug-in type connector or other similar connection mechanisms, through which the motor 360 can communicate with, and to receive instructions and power from, the control system 25 and a power supply or source of the dispenser.

[0041] As indicated in Fig. 12A, the motor housing 356 generally includes a body 358 that can have an eccentric or offset configuration and which includes or at least partially encloses a cavity or chamber 362 sized, dimensioned, or otherwise configured to receive the motor 360 (Fig. 12B). The motor housing 356 also can have a movable cover or removable portion or section 364 along an outer surface 358A of body 358 of the motor housing 356, so that the motor 360 can be removed/replaced, or otherwise accessed within the chamber 362 of the motor housing 356 (Fig. 12B). The cover removable portion 364 also can be closed and secured or locked into place, such as by a connector or other locking mechanism 368 arranged along the outer surface 358A of the body 358 of the motor housing 356 to encase or enclose the motor 360 therein and prevent the motor 360 from exposure to moisture, dust, or other particulates. This connector/locking mechanism 368 may include, for example, a snap fit connection, hook and groove locking mechanism, or other suitable connection or locking structure/configuration.

[0042] In one embodiment, the motor housing 356 additionally can include an elongated support portion 370 arranged/extending along an outer surface 358A of the motor housing body 358. The support portion 370 may include supports or arms 370A/B with a series of flanges 370C disposed thereabout, which supports 370A/B and/or flanges can be integrally formed with, or otherwise coupled to, the motor housing body 358 so as to support the motor housing 356, with the motor 360 received therein, within the body 28 of the feed roller 18 such as illustrated in Fig. 12A. This support portion 370 can further extend or protrude from and be connected to/supported by a base or bearing portion 372 that is coupled to the interior of the sidewall of the dispenser housing 302, such as by fasteners 374, e.g., bolts, screws, rivets, or other suitable fasteners. The base/bearing portion 372 alternatively can be integrally formed with one of the sidewalls 304/306, or other portion, of the dispenser housing 302. The support portion 370 for the motor housing also can include a bushing or bearing 376, arranged adjacent or near one of the ends 358A (or 358B) of the body 358 of the motor housing 356. The bushing or bearing 376 can rotatably support the feed roller 18 at one of its ends,

e.g., 28A, such that the feed roller 18 can be rotated/driven under the power of the motor 360 so as to dispense the selected amount or length of sheet material 12, as well as actuate the cutting blade 322 to at least partially cut or perforate the sheet material 12 as it is dispensed.

[0043] The body 358 of the motor housing 356 can additionally include an aperture or opening 378 defined therein, through which a driveshaft 380 of the motor 360 can protrude or extend (Figs. 12A). As further shown in Fig. 12A, the motor housing 356 can be positioned/arranged within the feed roller body 28 such that the driveshaft 380 of the motor 360 is offset or in a spaced relationship with respect to a longitudinal central axis A1 of the feed roller body 28. The driveshaft 380 further can be operatively connected to a gear assembly 382 to drive or transfer torque or power between the motor 360 and the feed roller 18. For example, the gear assembly 382 can include a ring or orbital-type gear assembly with a drive gear 384, such as a spur or similar type gear, connected to the driveshaft 380 of the motor 360 and is configured to engage a ring or hoop gear 386 connected to or integrally formed with, the feed roller body 28 for transfer of torque/power between the motor 360 and the feed roller 18 and cause rotation thereof. The offset of the driveshaft 380 and gear assembly 382 can allow for additional changes in the diameter of the feed roller, reducing or otherwise varying the size of the motor, and/or increased flexibility in the operation/driving of the feed roller for dispensing or feeding a variety of different type and/or weight sheet materials. In addition, the engagement of drive gear 384 and hoop gear 382 may be configured so as to act as a hybrid clutch assembly that enables the feed roller 18 to be selectively driven by the motor 360, and also allows the feed roller 18 to rotate independently of the motor 360, for example, when a user pulls the sheet material, such as for manual dispensing thereof, and/or if the motor 360 is experiencing a low power condition or is powered off. In addition, the an involute spline gear assembly, such as shown in Figs. 4A-B, or a planetary gear arrangement, such as shown in Figs. 5A-B, also may be used with the feed roller 18 without departing from this disclosure.

[0044] As indicated in Figs. 2C, 11, 13 and 15-16, the dispenser additionally may include one or more cutting mechanisms 120/320 to allow for at least partially cutting, perforating, or otherwise creating a line of separation, at or along a selected portion of the sheet material 12 after a desired or prescribed length of the sheet material has been dispensed or fed. For example, as generally shown in Figs. 13 and 15-16, one example cutting mechanism 120/320 can include an actuating or movable cutting blade 122/322 having a series of teeth 124/324 may be at least partially received within the feed roller body 28/328 and can be selectively movable to cut or make a series of perforations in the sheet material 12 to enable/facilitate tearing or removal thereof.

[0045] In one embodiment, as illustrated in Figs. 13 and 15, the cutting blade may be at least partially sup-

ported by a support portion or body 126 that can be substantially fixedly connected within the feed roller body 28 so that the cutting blade 122 is rotatable therewith. As shown in Fig. 15, the cutting blade 122 may further be

5 actuated between a series of positions, including a first position retracted within the feed roller, and a second or further additional positions extending or projecting out of the roller body 28 at a selected point during rotation of the feed path of the sheet material, under the control of one or 10 more piston-like actuation mechanisms 128. Upon such extension, the cutting blade can cut or perforate the sheet material after the feeding/dispensing of a desired or prescribed amount or length of material has been drawn 15 from the supply to dispense a measured (i.e. a 12", 10" or other length) sheet.. In some embodiments, each actuation mechanism 128 generally can include a movable body 130 supporting the cutting blade 122, an elastic body, such as a spring 132, that biases the cutting blade 20 122 toward its retracted position and is compressible between the movable body 130 and one or more flanges 134 of the support body 126 for controlling the movement of the movable body 130 and cutting blade 122 coupled thereto. The movable body 130 may further be operatively 25 connected to a roller or cam follower (or followers) 136 that move about a guide surface 138 of the motor housing 96 and can engage with a cam surface 140 (Figs. 13-15) arranged therealong so as to move the movable body 130 and the cutting blade to its extended cutting 30 position.

[0046] For example, shown schematically in Fig. 15, as the feed roller 18 is driven by its motor, or is manually rotated, the rollers 136 may roll along the guide surface 138 of the motor housing 96, with the cutting blade 122 held in a retracted position by the springs 132. As the roller 136 contacts or engages the cam surface 140 to compress the springs 132 and thereby cause the cutting blade 122 to move to an extended position with the teeth 124 of the cutting blade extending/projecting out of slots 35 or series of openings 142 defined in the feed roller body 28 so as to at least partially cut or perforate the sheet material 12 to enable or facilitate its removal. The cam 140 may be positioned on or arranged along the body 98 of motor housing 96 (Fig. 14) so that the cutting blade 40 122 (Figs. 13 and 15) is in the extended position and thereby cuts or perforates the sheet material at, adjacent to, or substantially near a pressing roller, such as at a pinch point between the feed roller and a pressing roller, though the sheet material 12 can be alternatively cut or 45 perforated at any suitable position. After the roller 136 (Fig. 15) moves away from engagement with the cam surface 140, and moves along/engages the guide surface 138, the cutting blade 122 may return to a retracted position. Further, there may be corresponding guide and 50 cam surfaces 144/146 along a side of the feed roller 18 opposite the motor housing so as to enable/facilitate substantially consistent extension of the cutting blade 122 along the feed roller 18.

[0047] Additionally, or alternatively, the dispenser housing 16 may include one or more tear bars or other suitable cutting members 150 disposed adjacent or along the discharge throat or chute of the dispenser housing so that a user can separate a sheet or measured amount of the material by grasping and pulling the sheet across the tear bar 150 (Figs. 2C and 16-16B). In addition, a pivotally mounted pawl member 152 can be located proximate to the stationary tear bar 150 such that movement of sheet material 12 into the tear bar 150 for severance pivots the pawl member 152 between multiple positions, e.g. a first 152 A and second 152 B positions. A signal device such as a proximity sensor switch or the like, co-operative with the pawl member 152, can also be arranged such that movement of the pawl member 152 between various positions causes the signal means to send a signal to notify the control circuit that the sheet material has been removed. By way of example, as shown in Fig. 2C, such signal means responsive or co-operative with the pawl member 152 can include an infrared emitter 151 and detector 153 that detects movement of the pawl member 152 between the first and second positions 152A/B, though any suitable sensor can be employed such as a proximity sensor or other detector, a magnetic switch, or a mechanical switch. After receiving a signal that sheet material 12 may have been removed, the control circuit can activate a paper detection sensor to verify that the sheet material has been removed from the discharge chute.

[0048] The feed roller 318 also can be manually driven if needed, e.g., when a user pulls on a portion of the sheet material 12 for dispensing thereof, or can be automatically/electrically driven by a driven feed roller assembly (Figs. 12A-B). For example, for a manually driven feed roller, the feed roller assembly further can include a series of biased members, e.g., springs, that can cause rotation or movement of the feed roller 318, such as by a desired or set amount of rotation thereof, after a user manually dispenses the sheet material 12 so as to reset the cutting blade 322. For example, when a user pulls on the sheet material 12 or otherwise rotates the feed roller 318 for dispensing the sheet material, the cutting blade 322 can be moved out of the opening 330 and into the operative position for at least partially cutting or perforating a portion of the sheet material 12 to facilitate removal thereof, and after the portion of sheet material 12 is removed and the user no longer acts to rotate or move the feed roller 318, the biasing members, e.g., springs, can be arranged and connected to the feed roller 318 to cause the feed roller 318 to continue to rotate to a position in which the cutting blade 322 is returned to its initial position within the body 328 of the feed roller.

[0049] Fig. 17 illustrates a block diagram of an electronic control system or circuit 25 for operating the dispenser 10 in an exemplary embodiment. The dispenser or operative components of the dispenser may be powered by a power supply 154 such as one or more batteries 61 contained in a battery compartment, though any suit-

able battery storage device may be used for this purpose. Alternatively, or in addition to battery power, the dispenser may also be powered by a building's alternating current (AC) distribution system as indicated at 156. For this purpose, a plug-in modular transformer/adapter could be provided with the dispenser, which connects to a terminal or power jack port located, for example, in the bottom edge of the circuit housing for delivering power to the control circuitry and associated components. The control circuit also may include a mechanical or electrical switch that can isolate the battery circuit upon connecting the AC adapter in order to protect and preserve the batteries.

[0050] In one example embodiment of an electronic dispenser, the sensor 26, such as a proximity detector or other sensor, may be configured to detect an object placed in a detection zone external to the dispenser to initiate operation of the dispenser. This sensor may be a passive sensor that detects changes in ambient conditions, such as ambient light, capacitance changes caused by an object in a detection zone, and so forth. In an alternate embodiment, the sensor 26 may be an active device and include an active transmitter and associated receiver, such as one or more infrared (IR) transmitters and an IR receiver. The transmitter transmits an active signal in a transmission cone corresponding to the detection zone, and the receiver detects a threshold amount of the active signal reflected from an object placed into the detection zone. The control system circuitry generally will be configured to be responsive to the sensor for initiating a dispense cycle upon a valid detection signal from the receiver. For example, as indicated in Figs. 2A-2B, the proximity sensor 26 or other detector can be used to detect both the presence of a user's hand below. The dispenser can additionally include a paper detector sensor 158, such as one or more infrared emitters and infrared detectors with one infrared emitter/detector pair aligned to detect a user's hand below the dispenser 10 and the second infrared emitter/detector pair aligned to detect a sheet hanging below the outermost front edge of the discharge chute 22.

[0051] The dispenser control system or circuitry 24 can control activation of the dispensing mechanism upon valid detection of a user's hand for dispensing a measured length of the sheet material 12. In one embodiment, the control circuit can track the running time of the drive motor 60 of the motorized feed roller, and/or receive feedback information directly therefrom indicative of a number of revolutions of the feed roller and correspondingly, an amount of the sheet material feed thereby. In addition, or as a further alternative, sensors and associated circuitry may be provided for this purpose. Various types of sensors can include IR, radio frequency (RF), capacitive or other suitable sensors, and any one or a combination of such sensing systems can be used. The control system 24 also can control the length of sheet material dispensed. Any number of optical or mechanical devices may be used in this regard, such as, for example, an optical encoder may be used to count the revolutions of

the drive or feed roller, with this count being used by the control circuitry to meter the desired length of the sheet material to be dispensed.

[0052] As also shown in Fig. 17, the processing logic for operation of the electronic dispenser in, for example, the hand sensor and butler modes, can be part of the control software stored in the memory of the microprocessor in the control system 24. One or more binary flags are also stored in memory and represent an operational state of the dispenser (e.g., "paper cut" set or cleared). An operational mode switch in dispenser sets the mode of operation. In the hand sensor mode, the proximity (hand) sensor detects the presence of a user's hand below the dispenser and in response, the motor 60 is operated to dispense a measured amount of sheet material 12. The control circuit can then monitor when the sheet of material is removed. For example, actuation of the pawl member 152 or triggering/activation of a paper detection sensor 158 can determine the removal of paper and reset the hand sensor. The hand sensor 22 also can be controlled to not allow additional sheet material to be dispensed until the hand sensor is reset. If the hand sensor 22 detects the presence of a user's hand but does not dispense sheet material, the control circuit can check for sheet material using the paper detection sensor 158. If sheet material 12 has not been dispensed (i.e., no sheet material is hanging from the dispenser), the motor 60 will be activated to dispense a next sheet.

[0053] A multi-position switch 160 also can be provided to switch the dispenser operation between a first or standard operation mode and a second mode, such as a butler mode. In such butler mode, the hand sensor 22 for detecting the presence of a user's hand can be deactivated, and the controller 24 can automatically dispense sheet material when the cover is closed and the dispenser is put into operation. The paper detection sensor 158 further can determine if a sheet is hanging from the dispenser. If sheet material is hanging, the control circuit will then monitor when the sheet of material is removed. For example, a cutting mechanism movement detector 162, which may arranged and configured to detect actuation or movement of the cutting mechanism 120; the pawl member 152; and/or the paper detection sensor 158 can determine the removal of paper and reset the dispenser. The next sheet will be dispensed automatically. If the paper detection sensor 158 determines the absence of hanging sheet material, the motor 60 will be activated to dispense the next sheet. The control circuit will then determine if the sheet has been removed before dispensing another sheet.

[0054] In one embodiment, the dispenser 10 is operative in a first mode to be responsive to a signal from the proximity sensor to dispense a sheet of material. The dispensing mechanism is operative in a second mode to dispense a next sheet in response to the signal means being activated by movement of the cutting mechanism or tear bar to its extended position in response to dispensed sheet material 12 being removed from the dis-

penser. In another embodiment, the dispenser 10 can be operative in a second mode to dispense a next sheet in response to a signal means being activated by movement of the cutting mechanism 120, and a signal from a paper detection sensor 158 that the sheet material 10 has been removed from the dispenser. Such a sensor can be affixed to an external surface of the discharge chute 22 rather than inside the discharge chute.

[0055] The dispenser 10 generally can dispense a measured length of the sheet material, which may be accomplished by various means, such as a timing circuit that actuates and stops the operation of the motor driving the feed roller after a predetermined time. In one embodiment, the drive motor of the drive or feed roll can provide direct feedback as to the number of revolutions of the feed roller, indicative of an amount of the sheet material fed thereby. Alternatively, a motor revolution counter can be provided that measures the degree of rotation of the drive rollers and is interfaced with control circuitry to stop a drive roller motor after a defined number of revolutions of the feed rollers. This counter may be an optical encoder type of device, or a mechanical device. The control circuitry may include a device to allow maintenance personnel to adjust the sheet length by increasing or decreasing the revolution counter set point. The multi-position switch 160 can also be in operable communication with the control circuit to select one of a plurality of time periods as a delay between delivery of a first sheet and delivery of a next sheet.

Claims

1. A dispenser (10) for dispensing a flexible, rolled sheet material (12), comprising:

a dispenser housing (16); and
a supply (20) of the sheet material (12) supported within the dispenser housing (16) for feeding the sheet material (12) along a path (P) defined through the dispenser housing (16);
wherein the dispenser (10) is characterized by:

a feed roller (18, 318) rotatably mounted within the dispenser housing (16) and arranged along the path of travel (P) of the sheet material (12), the feed roller (18, 318) comprising a body (28, 328) that engages the sheet material (12) to pull the sheet material (12) from the supply (20) so as to dispense a selected amount of the sheet material therefrom;
one or more pressing rollers (36, 236, 238, 436, 428) positioned adjacent the feed roller (18, 318) and biased toward the body (28, 328) of the feed roller (18, 318) sufficient to engage the sheet material (12) between the one or more pressing rollers (36, 236, 238)

and the feed roller (18, 318); and a cutting mechanism (120, 320) arranged along the body (28, 328) of the feed roller (18, 318), the cutting mechanism (120, 320) comprising a cutting blade (122, 322) that is operatively connected to the body (28, 328) of the feed roller (18, 318) and is actuated with rotation thereof to at least partially cut or perforate a selected portion of the sheet material (12) as the sheet material (12) is dispensed; 5
 wherein the cutting blade (122, 322) is at least partially housed within a chamber (32, 32A) defined by the body (28, 328) of the feed roller (18, 318), and the cutting blade (122, 322) is moveable into and out from one or more openings (142, 330) defined along the body (28, 328) of the feed roller (18, 318) during rotation thereof; **characterised in that** 10
 the cutting blade (122, 322) is supported within the body (28, 328) of the feed roller (28, 328) by one or more supports (134) connected to one or more cam followers (136) movable along a cam track (138), wherein, as the feed roller is rotated to dispense the sheet material, the cam follower slides along or engages a surface of the cam track to move the cutting blade between extended and retracted positions into and out from the body of the feed roller, the cam track (138) being arranged along a body of a motor housing (96, 356) extending into the body (28, 328) of the feed roller (28, 328) and at least partially supporting a drive mechanism (58) including a motor (60, 460). 15
 20
 25
 30
 35

2. The dispenser (10) according to Claim 1 or 2, wherein in the drive mechanism (58) including the motor (60, 460) is linked to the feed roller (18, 318) so as to drive rotation of the feed roller (18, 318) to dispense the selected amount of the sheet material (12). 40

3. The dispenser (10) according to Claim 2, wherein the motor (60) is coupled to the feed roller (18, 318) by a gear assembly (62, 406) transferring power thereto. 45

4. The dispenser (10) according to Claim 3, wherein the drive mechanism (58) and the gear assembly (62) coupled thereto are substantially integrated within the body (28, 328) of the feed roller (18, 318). 50

5. The dispenser (10) according to Claim 4, wherein the motor (60) includes a driveshaft (66) having a drive gear (68) mounted thereto and is located within the body (28, 328) of the feed roller (18, 318) such 55
 that the driveshaft (66) of the motor (60) is substantially offset with respect to a longitudinal axis of the body (28, 328) of the feed roller (18, 318), wherein the gear assembly (62, 406) comprises a ring-type gear arrangement having a ring-type gear (82) coupled to an interior surface of the body (28, 328) of the feed roller (18, 318), and wherein the drive gear (68) engages the ring-type gear (82) for driving rotation of the feed roller (18, 318) upon operation of the motor (60). 60

6. The dispenser (10) according to any preceding Claim, wherein the drive mechanism further comprises a belt drive mechanism (246) arranged to drive the one or more pressing rollers (236, 238) in conjunction with the operation of the feed roller (18). 65

7. The dispenser (10) according to Claim 6, wherein the one or more pressing rollers (236, 238) are biased toward the feed roller (18) and are driven by a belt (248) of the belt drive mechanism (246). 70

8. A method for dispensing a flexible, rolled sheet material (12) from a dispenser (10), comprising: 75
 engaging the sheet material (12) between a feed roller (18, 318) and at least one pressing roller (36, 236, 238); and
 drawing the sheet material (12) from a supply (20) and along a path of travel (P) by rotation of the feed roller (18, 318) mounted within the dispenser (10);
 wherein the method is **characterized by**:
 driving rotation of the feed roller (18, 318) for a time or amount of rotation sufficient to feed a selected length of sheet material (12) through a discharge (22) of the dispenser (10); and
 moving a cutting blade (122, 322) from retracted position within the feed roller (18, 318) to extended position projecting from an opening (142, 330) in the feed roller (18, 318) so as to selectively cut or perforate of the sheet material (12) for releasing or dispensing the selected length of sheet material (12) from the dispenser (10);
 wherein the cutting blade (122, 322) is at least partially housed within a chamber (32, 32A) defined by the body (28, 328) of the feed roller (18, 318), and the cutting blade (122, 322) is moveable into and out from one or more openings (142, 330) defined along the body (28, 328) of the feed roller (18, 318) during rotation thereof; the cutting blade (122, 322) supported within the body (28, 328) of the feed roller (28, 328) by one or more supports (134) connected to one or more cam followers (136) movable along a cam track (138), wherein, as the feed roller is rotated to dispense the sheet material, the cam follower (136) slides along or engages a surface of the cam track (138). 80
 85
 90

cam track (138) to move the cutting blade between extended and retracted positions into and out from the body of the feed roller, the cam track (138) being arranged along a body of a motor housing (96, 356) extending into the body (28, 328) of the feed roller (28, 328) and at least partially supporting a drive mechanism (58) including a motor (60, 460). 5

9. The method of Claim 8, wherein driving rotation of the feed roller (18, 318) comprises actuating the motor (60), the motor being internally received within the feed roller (18, 318) and coupled to the feed roller (18, 318) for a selected time and rotating the feed roller (18, 318) around the motor (60). 10

10. The method of Claim 9, wherein the motor (60) is coupled to the feed roller (18, 318) by a clutch assembly (62), and further comprising selectively coupling the motor (60) to the feed roller (18, 318) so as to drive rotation of the feed roller (18, 318) upon actuation of the motor (60), and uncoupling the motor (60) and the feed roller (18, 318) for manual rotation of the feed roller (18, 318). 15

11. The method of Claim 8, 9 or 10, further comprising biasing the at least one pressing roller (236, 238) toward engagement with the feed roller (18) by engagement of a belt (248) extended about and connecting the feed roller (18) and the at least one pressing roller (236, 238). 20

12. The method of Claim 11, further comprising driving rotation of the at least one pressing roller (236, 238), wherein the rotation of the at least one pressing roller (236, 238) is driven with the rotation of the feed roller (18) by the belt (248) connecting the feed roller (18, 318) and the at least one pressing roller (236, 238). 25

40

Patentansprüche

1. Spender (10) zum Ausgeben eines flexiblen, gerollten Bahnmaterials (12), umfassend: 45

ein Spendergehäuse (16); und eine in dem Spendergehäuse (16) gelagerte Zuführvorrichtung (20) des Bahnmaterials (12) zum Zuführen des Bahnmaterials (12) entlang eines durch das Spendergehäuse (16) hindurch definierten Wegs (P); 50 wobei der Spender (10) **gekennzeichnet ist durch:**

eine Zuführwalze (18, 318), die drehbar innerhalb des Spendergehäuses (16) angebracht ist und entlang dem Laufweg (P) des Bahnmaterials (12) angeordnet ist, wobei 55

die Zuführwalze (18, 318) einen Körper (28, 328) umfasst, der das Bahnmaterial (12) in Eingriff nimmt, um das Bahnmaterial (12) von der Zuführvorrichtung (20) zu ziehen, um eine ausgewählte Menge des Bahnmaterials davon auszugeben; eine oder mehrere Andruckwalzen (36, 236, 238, 436, 428), die benachbart zu der Zuführwalze (18, 318) positioniert und hin zu dem Körper (28, 328) der Zuführwalze (18, 318) ausreichend vorgespannt sind, um das Bahnmaterial (12) zwischen der einen oder den mehreren Andruckwalzen (36, 236, 238) und der Zuführwalze (18, 318) in Eingriff zu nehmen; und einen Schneidmechanismus (120, 320), der entlang des Körpers (28, 328) der Zuführwalze (18, 318) angeordnet ist, wobei der Schneidmechanismus (120, 320) eine Schneidklinge (122, 322) umfasst, die mit dem Körper (28, 328) der Zuführwalze (12, 318) in Wirkverbindung steht und **durch** deren Drehung betätigt wird, um einen ausgewählten Abschnitt des Bahnmaterials (12) zumindest teilweise zu schneiden oder zu perforieren, wenn das Bahnmaterial (12) ausgegeben wird; wobei die Schneidklinge (122, 322) zumindest teilweise innerhalb einer Kammer (32, 32A) untergebracht ist, die **durch** den Körper (28, 328) der Zuführwalze (18, 318) definiert ist, und die Schneidklinge (122, 322) in eine oder mehrere und aus einer oder mehreren Öffnungen (142, 330) bewegbar ist, die entlang des Körpers (28, 328) der Zuführwalze (18, 318) während der Drehung derselben definiert sind, **dadurch gekennzeichnet, dass** die Schneidklinge (122, 322) innerhalb des Körpers (28, 328) der Zuführwalze (28, 328) **durch** einen oder mehrere Träger (134) gelagert ist, die mit einem oder mehreren Nockenstößeln (136) verbunden sind, die entlang einer Nockenbahn (138) bewegbar sind, wobei, wenn die Zuführwalze gedreht wird, um das Bahnmaterial auszugeben, der Nockenstöbel entlang einer Fläche der Nockenbahn gleitet oder mit dieser in Eingriff kommt, um die Schneidklinge zwischen einer ausgefahrenen und einer eingefahrenen Position in und aus dem Körper der Zuführwalze zu bewegen, wobei die Nockenbahn (138) entlang eines Körpers eines Motorgehäuses (96, 356) angeordnet ist, das sich in den Körper (28, 328) der Zuführwalze (28, 328) erstreckt und zumindest teilweise einen Antriebsmechanismus (58) läuft, der einen Motor (60, 460) beinhaltet.

2. Spender (10) nach Anspruch 1 oder 2, wobei der Antriebsmechanismus (58), der den Motor (60, 460) beinhaltet, mit der Zuführwalze (18, 318) verbunden ist, um die Drehung der Zuführwalze (18, 318) anzutreiben, um die ausgewählte Menge des Bahnmaterials (12) auszugeben. 5

3. Spender (10) nach Anspruch 2, wobei der Motor (60) mit der Zuführwalze (18, 318) durch eine Zahnradanordnung (62, 406) gekoppelt ist, die dazwischen Energie überträgt. 10

4. Spender (10) nach Anspruch 3, wobei der Antriebsmechanismus (58) und die Zahnradanordnung (62), die damit gekoppelt ist, im Wesentlichen im Körper (28, 328) der Zuführwalze (18, 318) integriert sind. 15

5. Spender (10) nach Anspruch 4, wobei der Motor (60) eine Antriebswelle (66) mit einem daran angebrachten Antriebszahnrad (68) beinhaltet und derart innerhalb des Körpers (28, 328) der Zuführwalze (18, 318) gelagert ist, dass die Antriebswelle (66) des Motors (60) in Bezug auf eine Längsachse des Körpers (28, 328) der Zuführwalze (18, 318) im Wesentlichen versetzt ist, wobei die Zahnradanordnung (62, 406) eine Hohlradanordnung umfasst, die ein Hohlrad (82) aufweist, das mit einer Innenfläche des Körpers (28, 328) der Zuführwalze (18, 318) gekoppelt ist, und wobei das Antriebszahnrad (68) mit dem Hohlrad (82) in Eingriff kommt, um die Drehung der Zuführwalze (18, 318) bei Betrieb des Motors (60) anzutreiben. 20 25

6. Spender (10) nach einem der vorhergehenden Ansprüche, wobei der Antriebsmechanismus ferner einen Riemenantriebsmechanismus (246) umfasst, der so angeordnet ist, dass er die eine oder die mehreren Andruckwalzen (236, 238) in Verbindung mit dem Betrieb der Zuführwalze (18) antreibt. 30 35 40

7. Spender (10) nach Anspruch 6, wobei die eine oder die mehreren Andruckwalzen (236, 238) hin zu der Zuführwalze (18) vorgespannt sind und von einem Riemen (248) des Riemenantriebsmechanismus (246) angetrieben werden. 45

8. Verfahren zum Ausgeben eines flexiblen, gerollten Bahnmaterials (12) aus einem Spender (10), umfassend: 50

Ineingriffnehmen des Bahnmaterials (12) zwischen einer Zuführwalze (18, 318) und mindestens einer Andruckwalze (36, 236, 238); und Ziehen des Bahnmaterials (12) von einer Zuführvorrichtung (20) und entlang eines Laufwegs (P) durch Drehung der innerhalb des Spenders (10) gelagerten Zuführwalze (18, 318); 55

wobei das Verfahren durch Folgendes gekennzeichnet ist:

Antreiben der Drehung der Zuführwalze (18, 318) für eine Zeit oder einen Drehungsbetrag, die bzw. der ausreichend ist, um eine ausgewählte Länge von Bahnmaterial (12) durch einen Austritt (22) des Spenders (10) hindurch zuzuführen; und Bewegen einer Schneidklinge (122, 322) von einer eingefahrenen Position innerhalb der Zuführwalze (18, 318) in eine ausgefahrene Position, in der sie aus einer Öffnung (142, 330) in der Zuführwalze (18, 318) herausragt, um das Bahnmaterial (12) zum Freigeben oder Ausgeben der ausgewählten Länge des Bahnmaterials (12) aus dem Spender (10) wahlweise zu schneiden oder zu perforieren; wobei die Schneidklinge (122, 322) zumindest teilweise innerhalb einer Kammer (32, 32A) untergebracht ist, die durch den Körper (28, 328) der Zuführwalze (18, 318) definiert ist, und die Schneidklinge (122, 322) in eine oder mehrere und aus einer oder mehreren Öffnungen (142, 330) bewegbar ist, die entlang des Körpers (28, 328) der Zuführwalze (18, 318) während der Drehung derselben definiert sind; wobei die Schneidklinge (122, 322) innerhalb des Körpers (28, 328) der Zuführwalze (28, 328) durch einen oder mehrere Träger (134) gelagert ist, die mit einem oder mehreren Nockenstößeln (136) verbunden sind, die entlang einer Nockenbahn (138) bewegbar sind, wobei, wenn die Zuführwalze gedreht wird, um das Bahnmaterial auszugeben, der Nockenstößel (136) entlang einer Fläche der Nockenbahn (138) gleitet oder mit dieser in Eingriff kommt, um die Schneidklinge zwischen einer ausgefahreneren und einer eingefahrenen Position in und aus dem Körper der Zuführwalze zu bewegen, wobei die Nockenbahn (138) entlang eines Körpers eines Motorgehäuses (96, 356) angeordnet ist, das sich in den Körper (28, 328) der Zuführwalze (28, 328) erstreckt und zumindest teilweise einen Antriebsmechanismus (58) lagert, der einen Motor (60, 460) beinhaltet.

9. Verfahren nach Anspruch 8, wobei das Antreiben der Drehung der Zuführwalze (18, 318) ein Betätigen des Motors (60), wobei der Motor im Inneren der Zuführwalze (18, 318) aufgenommen ist und mit der Zuführwalze (18, 318) für eine ausgewählte Zeit gekoppelt wird, und ein Drehen der Zuführwalze (18, 318) um den Motor (60) umfasst.

10. Verfahren nach Anspruch 9, wobei der Motor (60) durch eine Kupplungsanordnung (62) mit der Zuführwalze (18, 318) gekoppelt wird, und das ferner ein wahlweises Koppeln des Motors (60) mit der Zuführwalze (18, 318), um die Drehung der Zuführwalze (18, 318) bei Betätigung des Motors (60) anzutreiben, und ein Entkoppeln des Motors (60) und der Zuführwalze (18, 318) zur manuellen Drehung der Zuführwalze (18, 318) umfasst. 5

10

11. Verfahren nach Anspruch 8, 9 oder 10, das ferner ein Vorspannen der mindestens einen Andruckwalze (236, 238) hin zu einem Eingriff mit der Zuführwalze (18) durch Ineingriffbringen eines Riemens (248), der sich um die Zuführwalze (18) und die mindestens eine Andruckwalze (236, 238) erstreckt und diese verbindet, umfasst. 15

15

12. Verfahren nach Anspruch 11, das ferner ein Antreiben der Drehung der mindestens einen Andruckwalze (236, 238) umfasst, wobei die Drehung der mindestens einen Andruckwalze (236, 238) mit der Drehung der Zuführwalze (18) durch den Riemen (248), der die Zuführwalze (18, 318) und die mindestens eine Andruckwalze (236, 238) verbindet, angetrieben wird. 20

20

25

Revendications

30

1. Distributeur (10) pour la distribution d'un matériau de feuille enroulé (12), flexible, comprenant :
un boîtier de distributeur (16) ; et
une alimentation (20) du matériau de feuille (12) soutenu au sein du boîtier de distributeur (16) pour apporter le matériau de feuille (12) le long d'un trajet (P) défini à travers le boîtier de distributeur (16) ;
dans lequel le distributeur (10) est **caractérisé par** : 35

40

un rouleau d'apport (18, 318) monté de manière rotative au sein du boîtier de distributeur (16) et agencé le long du trajet de déplacement (P) du matériau de feuille (12), le rouleau d'apport (18, 318) comprenant un corps (28, 328) qui met en prise le matériau de feuille (12) pour tirer le matériau de feuille (12) depuis l'alimentation (20) afin de distribuer une quantité sélectionnée du matériau de feuille à partir de celle-ci ;
un ou plusieurs rouleaux de pression (36, 236, 238, 436, 428) positionnés adjacents au rouleau d'apport (18, 318) et poussés vers le corps (28, 328) du rouleau d'apport (18, 318) suffisamment pour mettre en prise le matériau de feuille (12) entre les un ou

plusieurs rouleaux de pression (36, 236, 238) et le rouleau d'apport (18, 318) ; et un mécanisme de coupe (120, 320) agencé le long du corps (28, 328) du rouleau d'apport (18, 318), le mécanisme de coupe (120, 320) comprenant une lame de coupe (122, 322) qui est connectée de manière fonctionnelle au corps (28, 328) du rouleau d'apport (12, 318) et est actionnée avec une rotation de celui-ci pour au moins partiellement découper ou perforen une portion sélectionnée du matériau de feuille (12) au fur et à mesure que le matériau de feuille (12) est distribué ; dans lequel la lame de coupe (122, 322) est au moins partiellement logée au sein d'une chambre (32, 32A) définie par le corps (28, 328) du rouleau d'apport (18, 318), et la lame de coupe (122, 322) est mobile dans et hors d'une ou plusieurs ouvertures (142, 330) définies le long du corps (28, 328) du rouleau d'apport (18, 318) pendant la rotation de celui-ci ; **caractérisé en ce que** la lame de coupe (122, 322) est supportée au sein du corps (28, 328) du rouleau d'apport (28, 328) par un ou plusieurs supports (134) connectés à un ou plusieurs suiveurs de came (136) mobiles le long d'une voie de came (138), dans lequel, lorsque le rouleau d'apport est mis en rotation pour distribuer le matériau de feuille, le suiveur de came coulisse le long d'une surface de la voie de came ou vient en prise avec celle-ci pour déplacer la lame de coupe entre des positions étendue et rétractée dans et hors du corps du rouleau d'apport, la voie de came (138) étant agencée le long d'un corps d'un boîtier de moteur (96, 356) s'étendant dans le corps (28, 328) du rouleau d'apport (28, 328) et supportant au moins partiellement un mécanisme d'entraînement (58) comportant un moteur (60, 460). 45

2. Distributeur (10) selon la revendication 1 ou 2, dans lequel le mécanisme d'entraînement (58) comportant le moteur (60, 460) est lié au rouleau d'apport (18, 318) de façon à entraîner une rotation du rouleau d'apport (18, 318) pour distribuer la quantité sélectionnée du matériau de feuille (12). 50

3. Distributeur (10) selon la revendication 2, dans lequel le moteur (60) est couplé au rouleau d'apport (18, 318) par un ensemble d'engrenages (62, 406) pour le transfert de puissance entre eux. 55

4. Distributeur (10) selon la revendication 3, dans lequel le mécanisme d'entraînement (58) et l'ensemble d'engrenages (62) qui y est couplé sont sensiblement intégrés au sein du corps (28, 328) du rou-

leau d'apport (18, 318).

5. Distributeur (10) selon la revendication 4, dans lequel le moteur (60) comprend un arbre d'entraînement (66) ayant un engrenage d'entraînement (68) monté sur celui-ci et est situé au sein du corps (28, 328) du rouleau d'apport (18, 318) de sorte que l'arbre d'entraînement (66) du moteur (60) est sensiblement décalé par rapport à un axe longitudinal du corps (28, 328) du rouleau d'apport (18, 318), dans lequel l'ensemble d'engrenages (62, 406) comprend un agencement d'engrenage de type annulaire ayant un engrenage de type annulaire (82) couplé à une surface intérieure du corps (28, 328) du rouleau d'apport (18, 318), et dans lequel l'engrenage d'entraînement (68) vient en prise avec l'engrenage de type annulaire (82) pour entraîner la rotation du rouleau d'apport (18, 318) lors du fonctionnement du moteur (60). 5

10

15

20

6. Distributeur (10) selon l'une quelconque des revendications précédentes, dans lequel le mécanisme d'entraînement comprend en outre un mécanisme d'entraînement à courroie (246) agencé pour entraîner les un ou plusieurs rouleaux de pression (236, 238) en conjonction avec le fonctionnement du rouleau d'apport (18). 25

25

7. Distributeur (10) selon la revendication 6, dans lequel les un ou plusieurs rouleaux de pression (236, 238) sont sollicités vers le rouleau d'apport (18) et sont entraînés par une courroie (248) du mécanisme d'entraînement à courroie (246). 30

30

8. Procédé pour la distribution d'un matériau de feuille (12) enroulé, flexible, à partir d'un distributeur (10), comprenant : 35

35

la mise en prise du matériau de feuille (12) entre un rouleau d'apport (18, 318) et au moins un rouleau de pression (36, 236, 238) ; et 40

l'étirage du matériau de feuille (12) à partir d'une alimentation (20) et le long d'un trajet de déplacement (P) par rotation du rouleau d'apport (18, 318) monté au sein du distributeur (10) ; dans lequel le procédé est **caractérisé par** ; 45

l'entraînement de la rotation du rouleau d'apport (18, 318) pour une durée ou une quantité de rotations suffisante pour apporter une longueur sélectionnée de matériau de feuille (12) à travers une décharge (22) du distributeur (10) ; et le déplacement d'une lame de coupe (122, 322) d'une position rétractée au sein du rouleau d'apport (18, 318) à la position étendue en projection à partir d'une ouverture (142, 330) dans le rouleau d'apport (18, 318) afin de couper ou de percer sélectivement le matériau de feuille (12) pour la libération ou la distribution de la longueur 50

50

55

9. Procédé selon la revendication 8, dans lequel l'entraînement de la rotation du rouleau d'apport (18, 318) comprend l'actionnement du moteur (60), le moteur étant reçu en interne au sein du rouleau d'apport (18, 318) et couplé au rouleau d'apport (18, 318) pendant une durée sélectionnée et la rotation du rouleau d'apport (18, 318) autour du moteur (60). 55

10. Procédé selon la revendication 9, dans lequel le moteur (60) est couplé au rouleau d'apport (18, 318) par un ensemble d'embrayage (62), et comprenant en outre le couplage sélectif du moteur (60) au rouleau d'apport (18, 318), de manière à entraîner la rotation du rouleau d'apport (18, 318) lors de l'actionnement du moteur (60), et le découplage du moteur (60) et du rouleau d'apport (18, 318) pour une rotation manuelle du rouleau d'apport (18, 318). 60

11. Procédé selon la revendication 8, 9 ou 10, comprenant en outre la sollicitation de l'au moins un rouleau de pression (236, 238) vers une mise en prise avec le rouleau d'apport (18) par mise en prise d'une courroie (248) tendue autour et la connexion du rouleau d'apport (18) et de l'au moins un rouleau de pression (236, 238). 65

12. Procédé selon la revendication 11, comprenant en outre l'entraînement de la rotation de l'au moins un rouleau de pression (236, 238), dans lequel la rota- 70

sélectionnée de matériau de feuille (12) à partir du distributeur (10) ; dans lequel la lame de coupe (122, 322) est au moins partiellement logée au sein d'une chambre (32, 32A) définie par le corps (28, 328) du rouleau d'apport (18, 318), et la lame de coupe (122, 322) est mobile dans et hors d'une ou plusieurs ouvertures (142, 330) définies le long du corps (28, 328) du rouleau d'apport (18, 318) pendant la rotation de celui-ci ; la lame de coupe (122, 322) supportée au sein du corps (28, 328) du rouleau d'apport (28, 328) par un ou plusieurs supports (134) connectés à un ou plusieurs suiveurs de came (136) mobiles le long d'une voie de came (138), dans lequel, lorsque le rouleau d'apport est mis en rotation pour distribuer le matériau de feuille, le suiveur de came (136) coulisse le long d'une surface de la voie de came (138) ou vient en prise avec celle-ci pour déplacer la lame de coupe entre des positions étendue et rétractée dans et hors du corps du rouleau d'apport, la voie de came (138) étant agencée le long d'un corps d'un boîtier de moteur (96, 356) s'étendant dans le corps (28, 328) du rouleau d'apport (28, 328) et supportant au moins partiellement un mécanisme d'entraînement (58) comportant un moteur (60, 460). 75

tion de l'au moins un rouleau de pression (236, 238) est entraînée avec la rotation du rouleau d'apport (18) par la courroie (248) connectant le rouleau d'apport (18, 318) et l'au moins un rouleau de pression (236, 238). 5

10

15

20

25

30

35

40

45

50

55

18

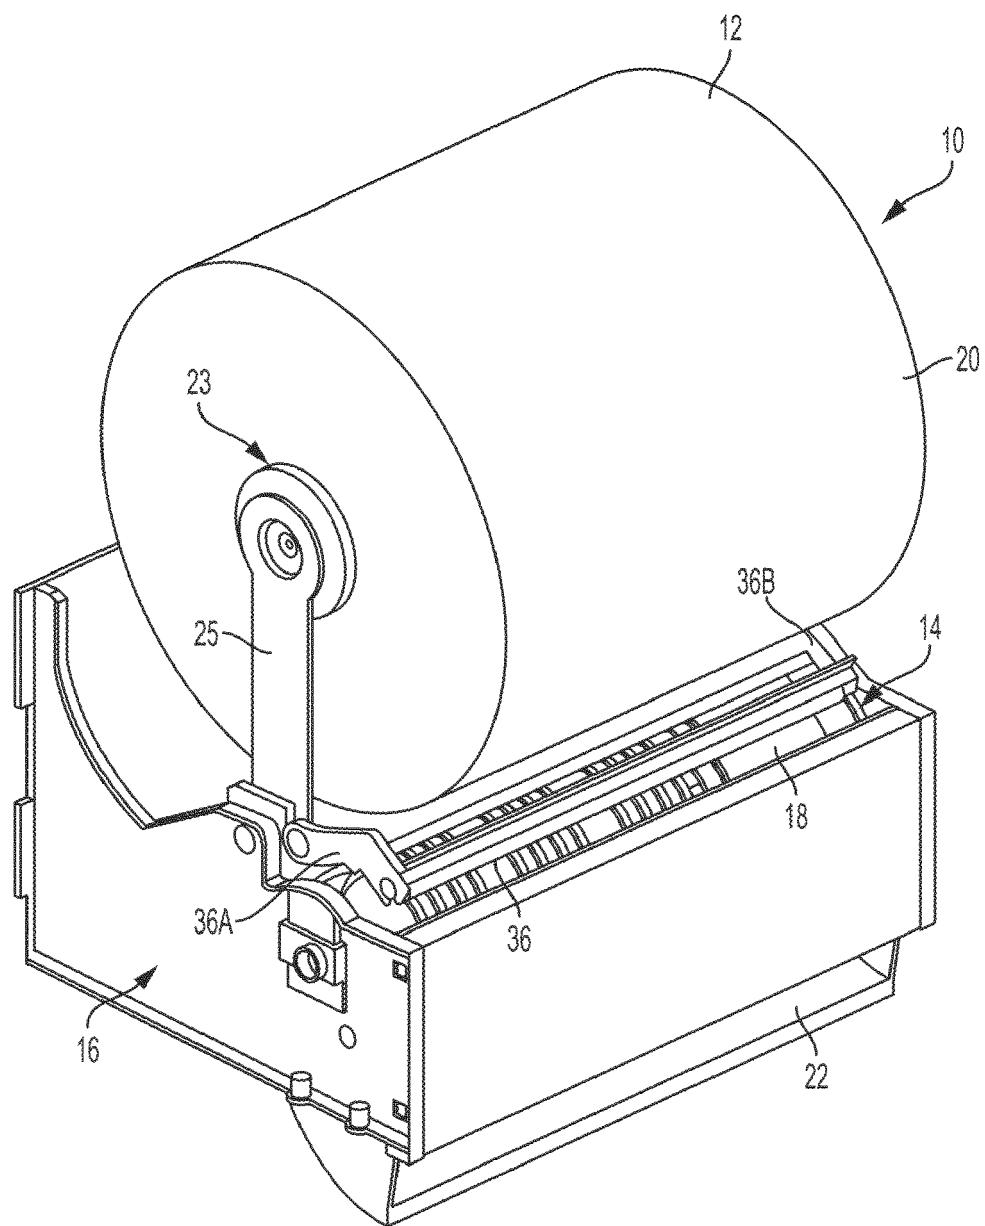


FIG. 1

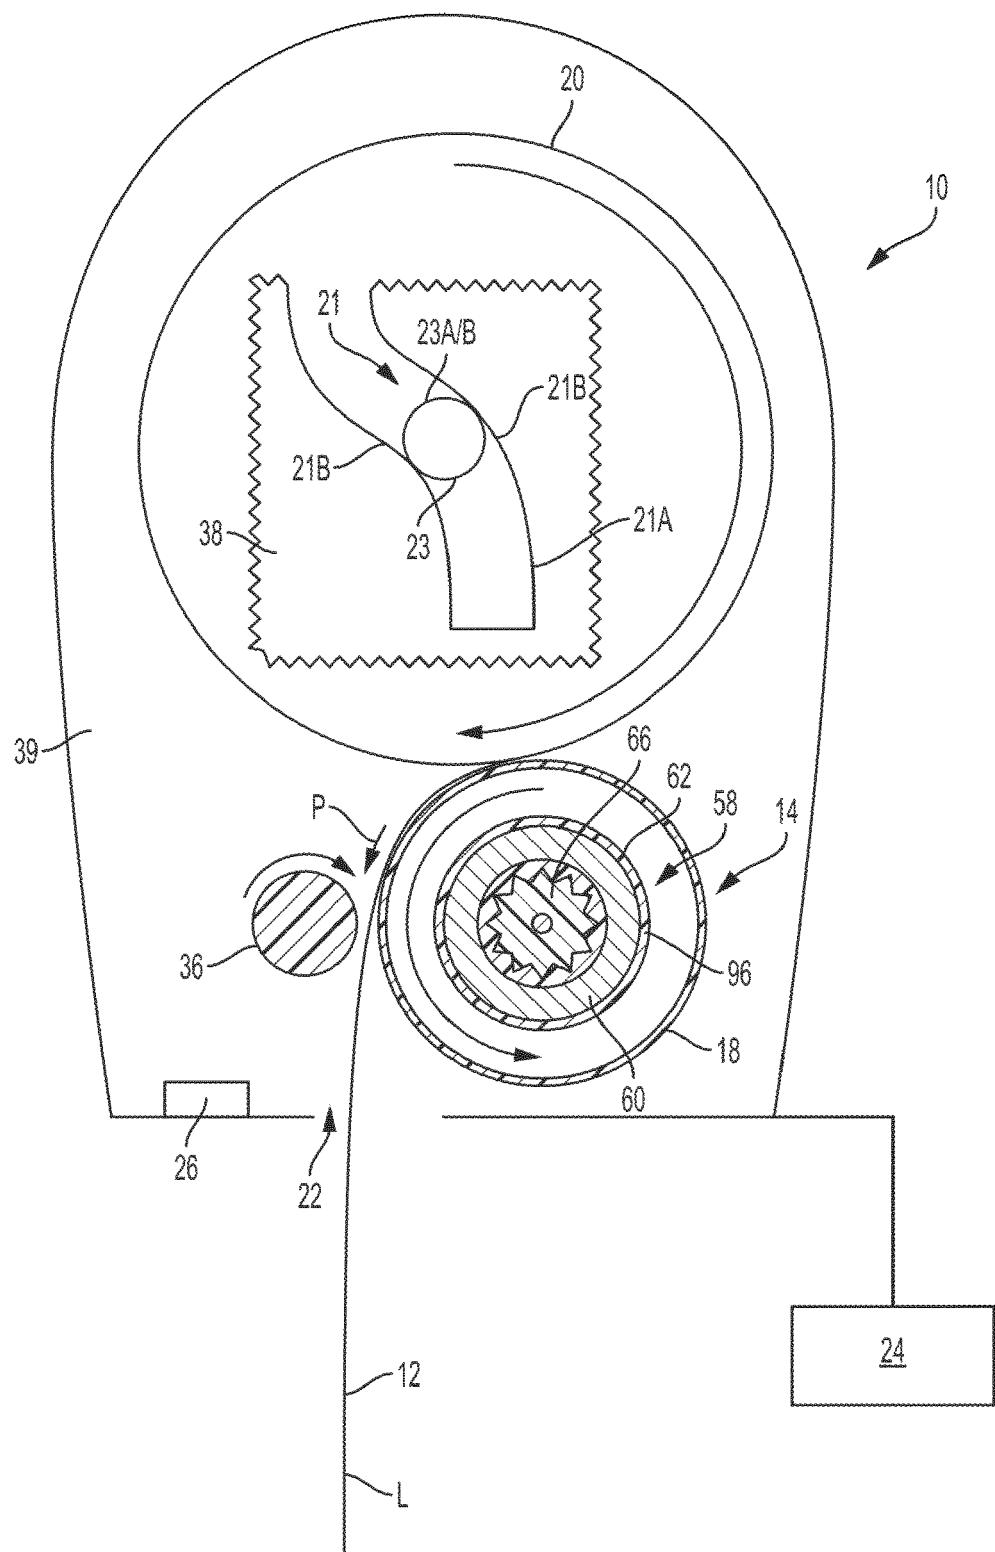


FIG. 2A

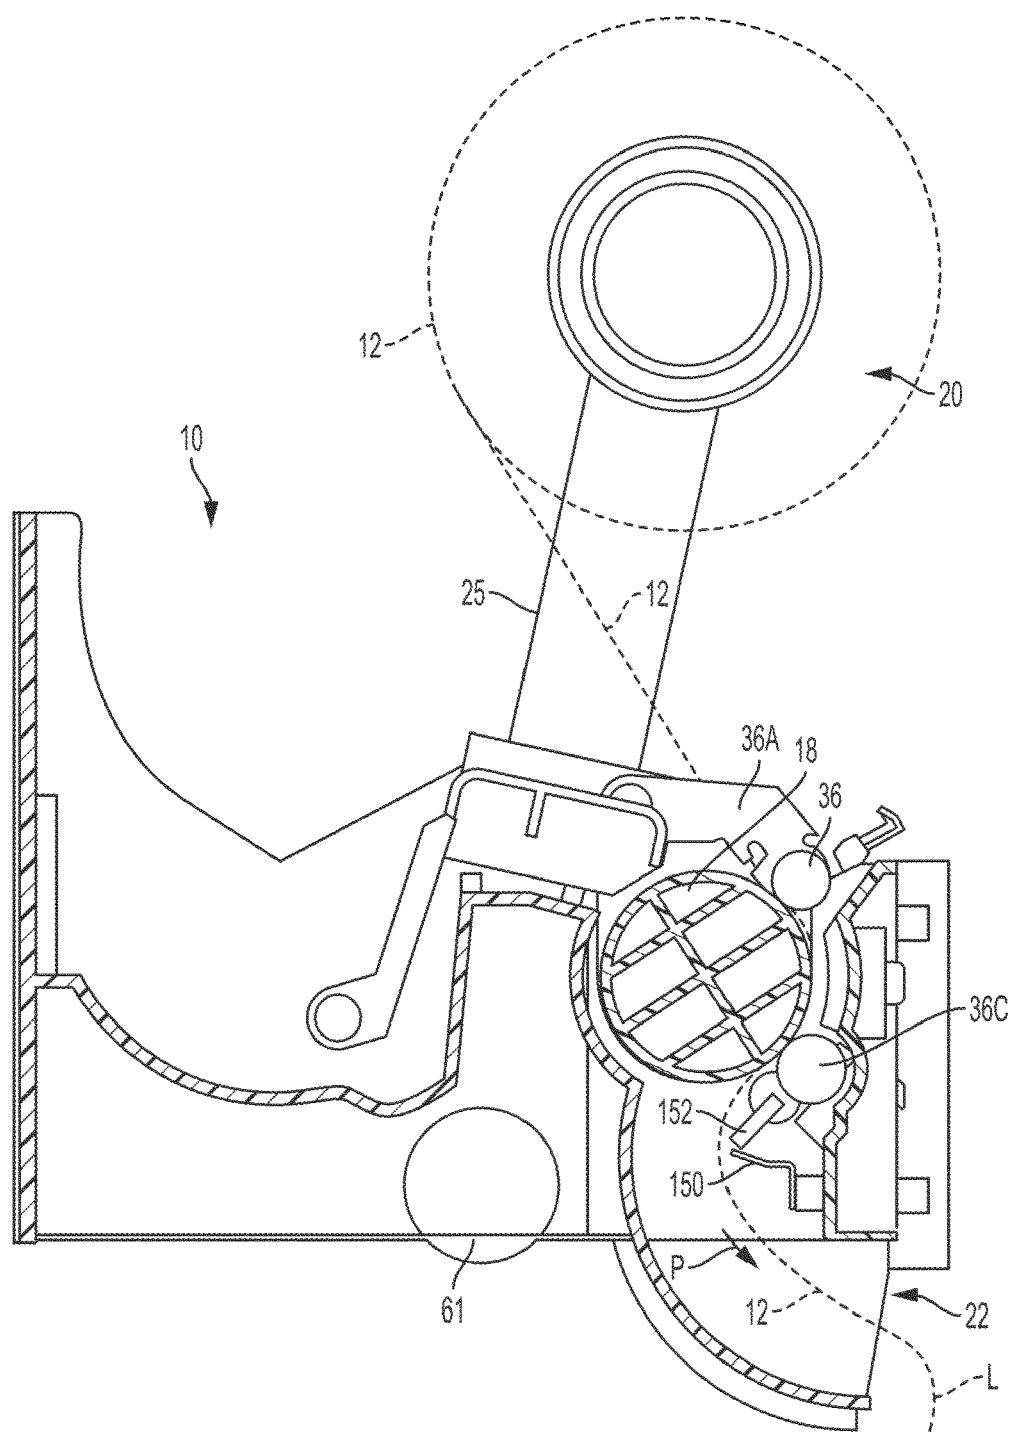


FIG. 2B

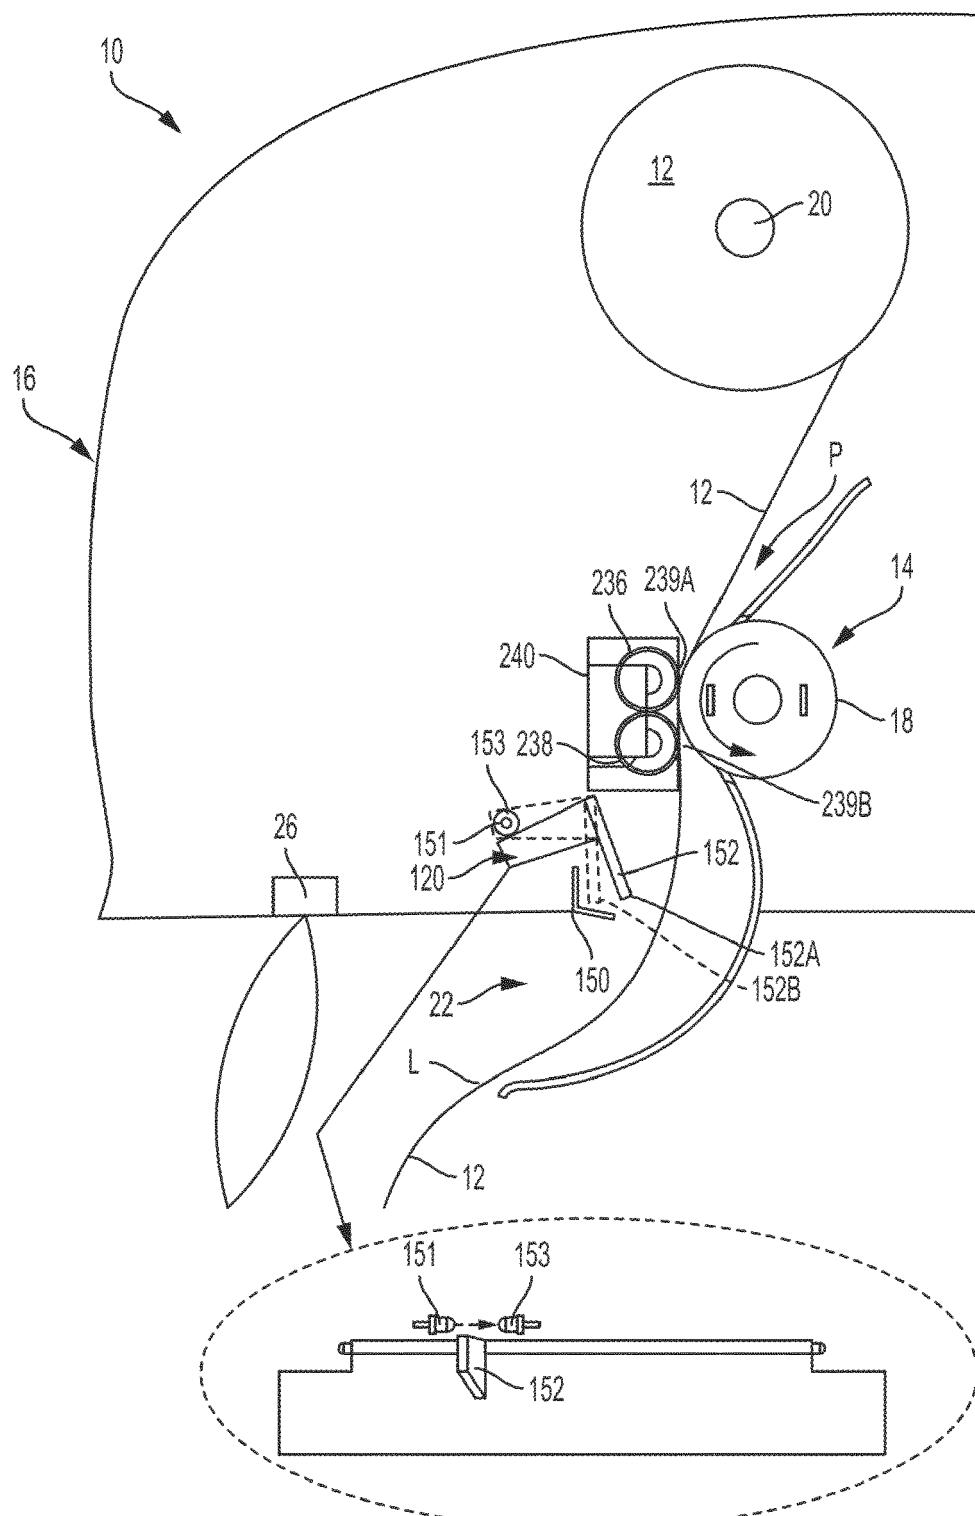


FIG. 2C

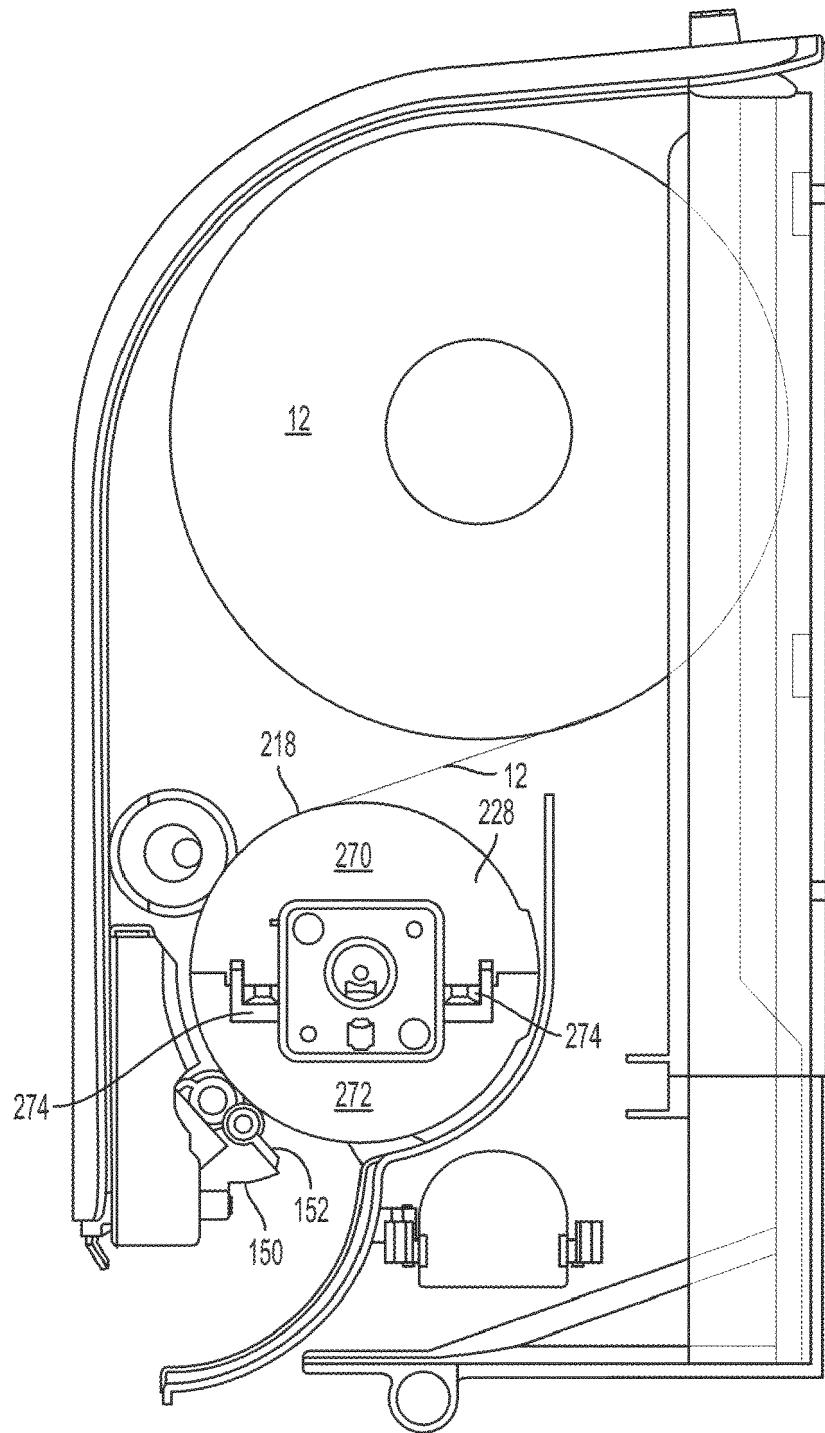


FIG. 2D

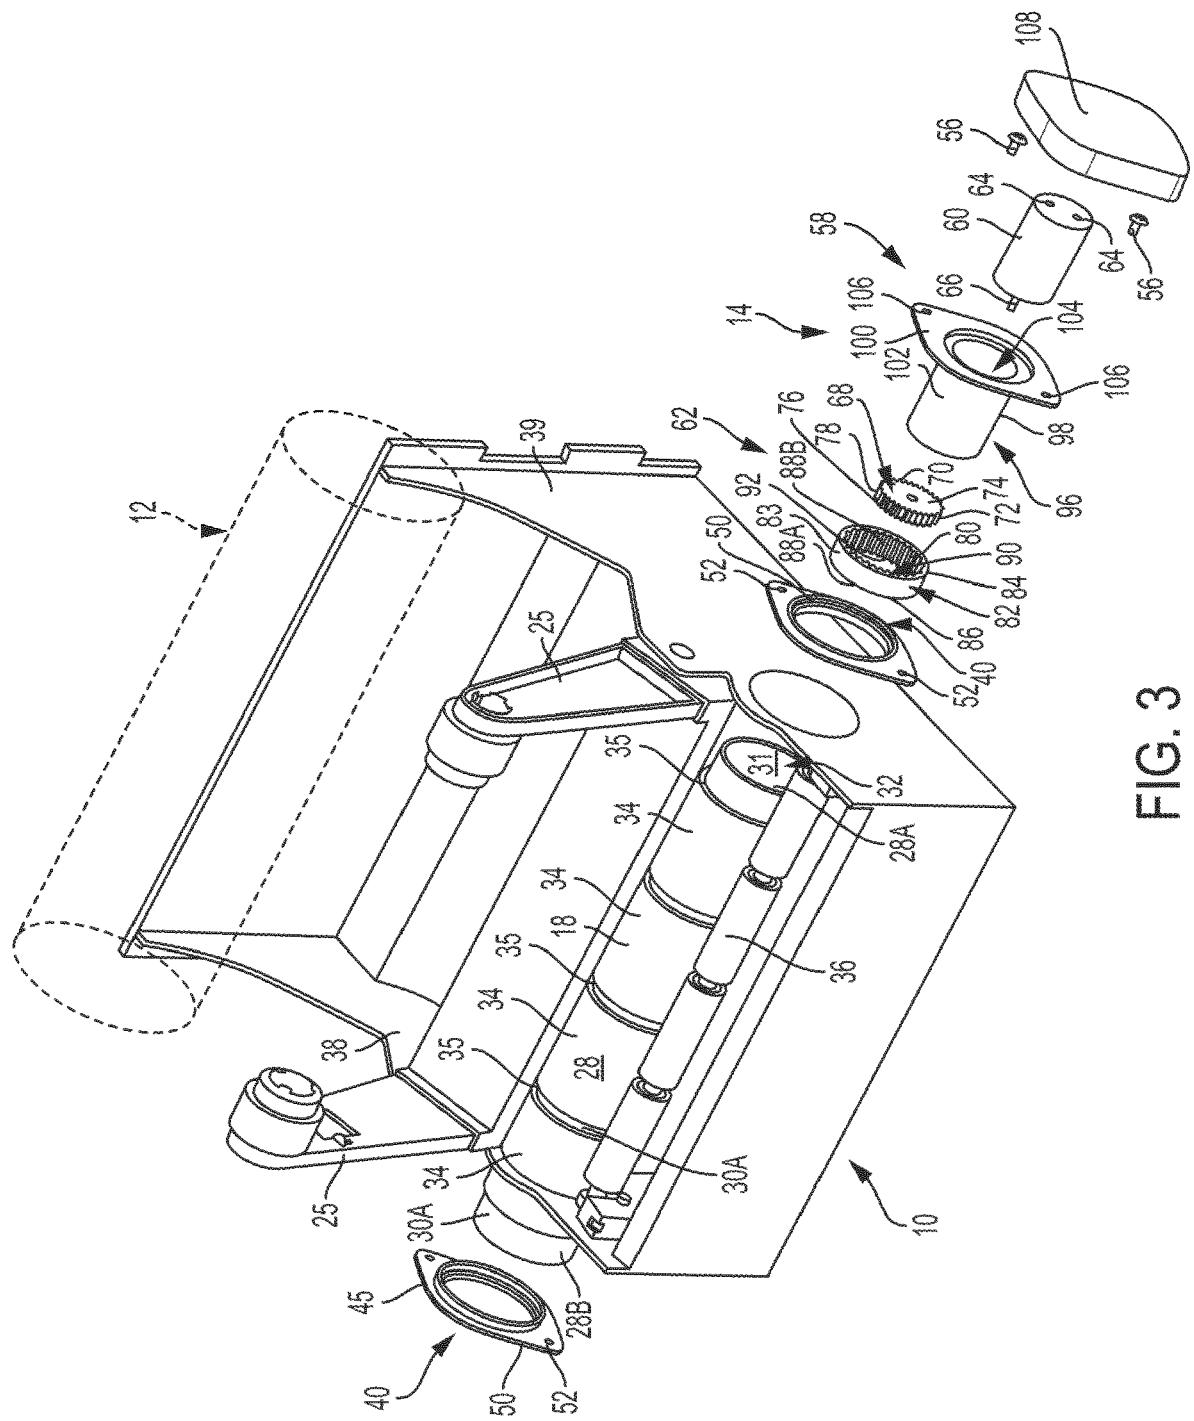


FIG. 3

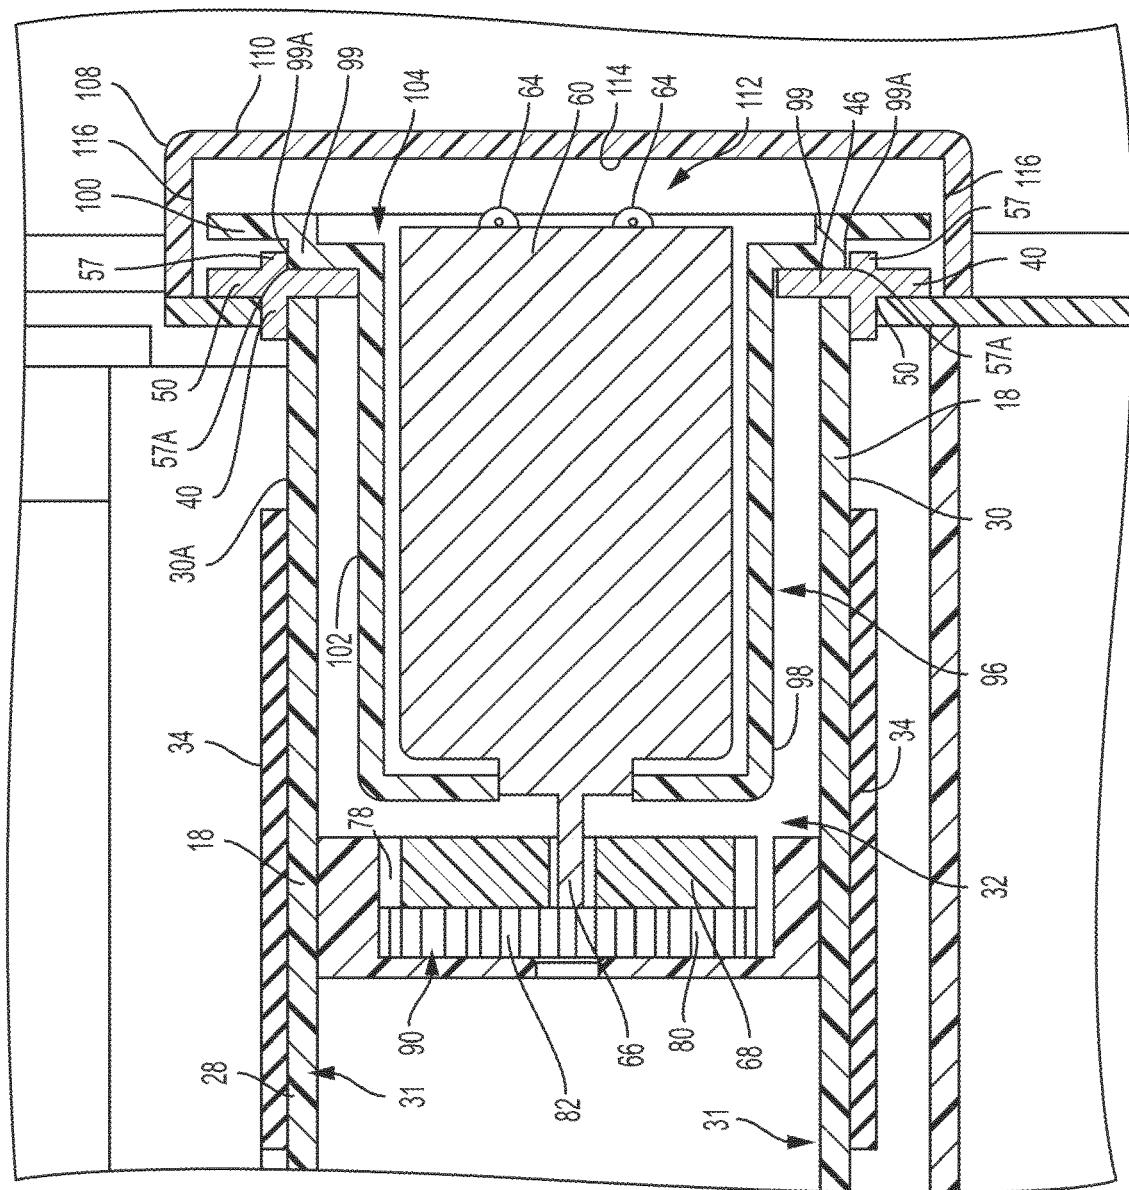


FIG. 4A

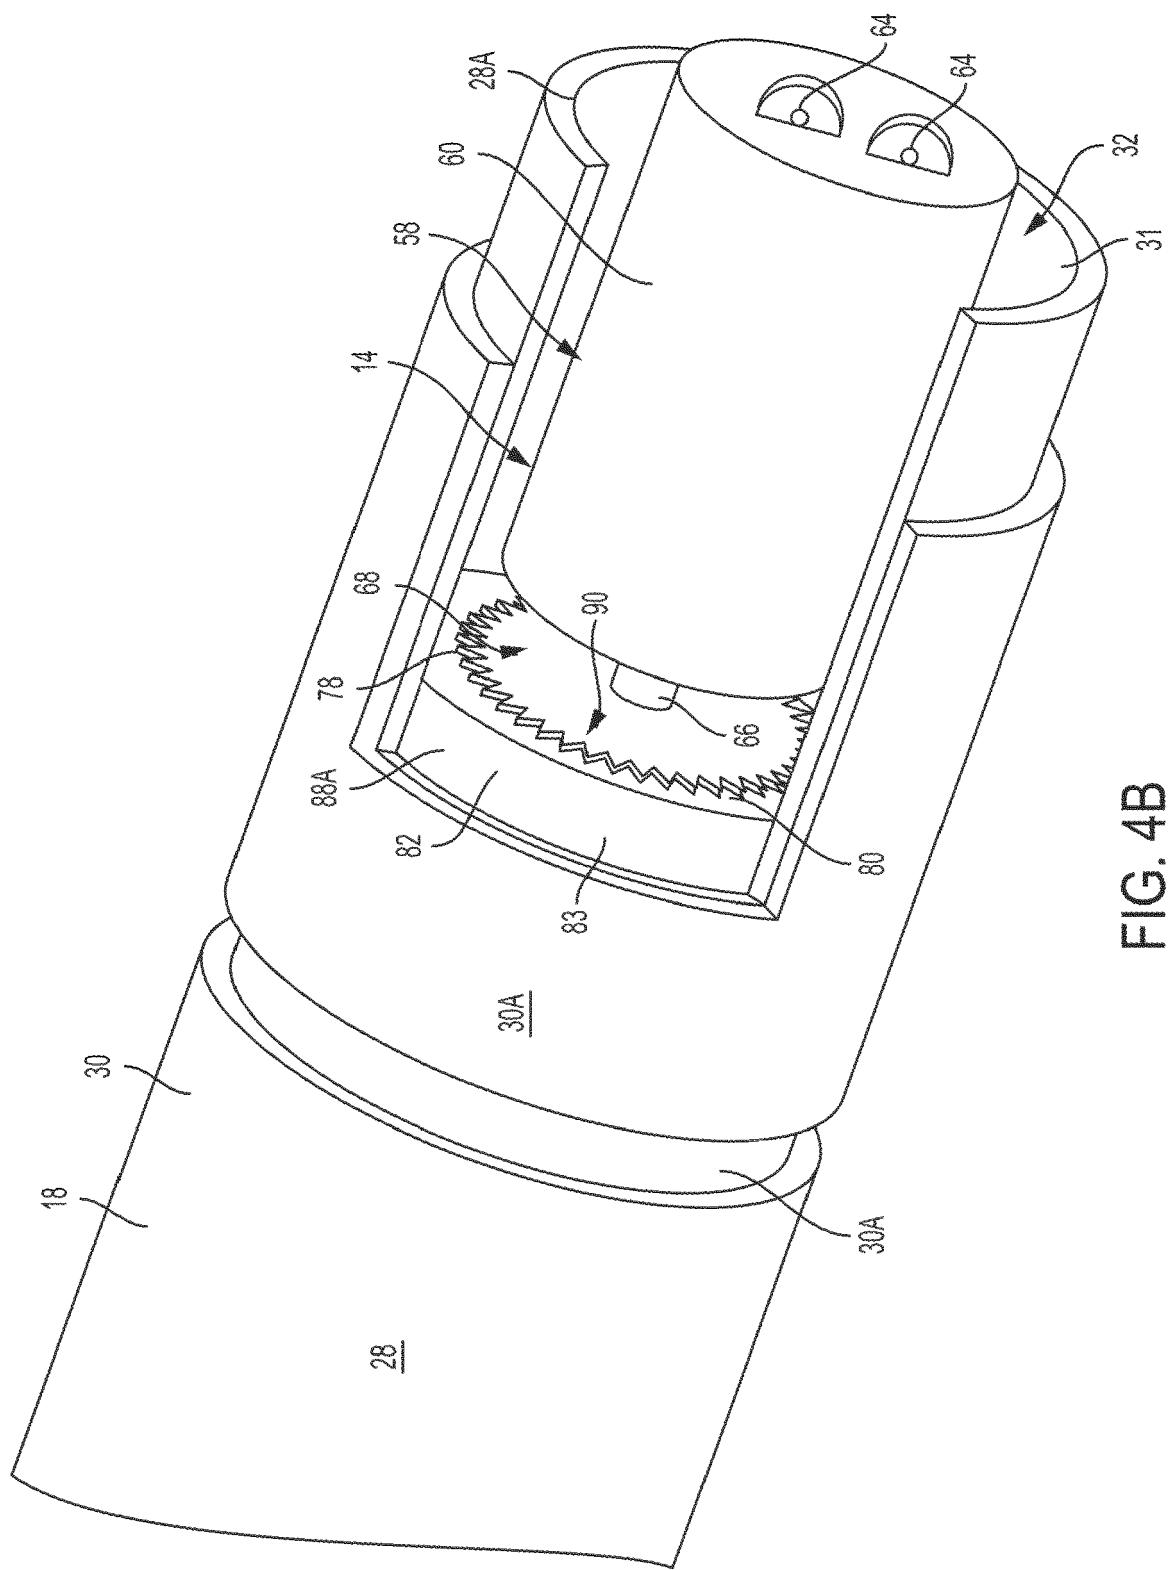


FIG. 4B

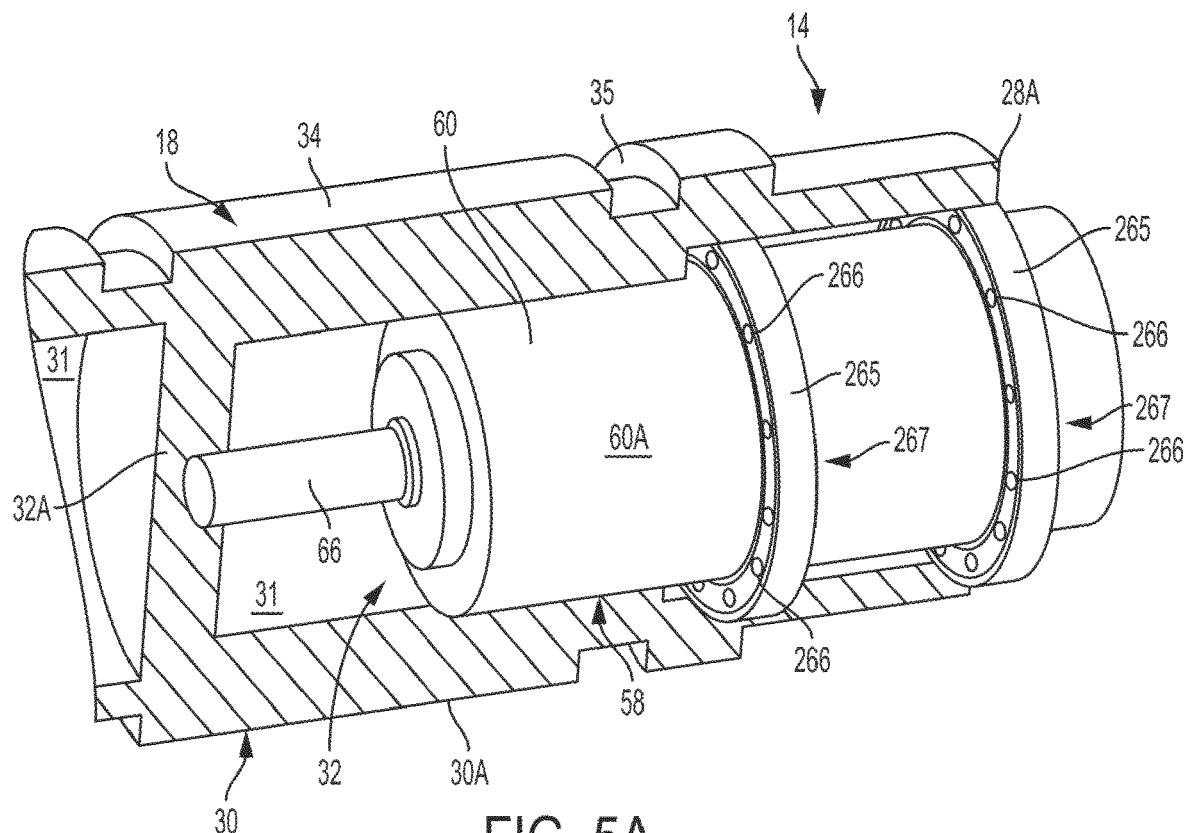


FIG. 5A

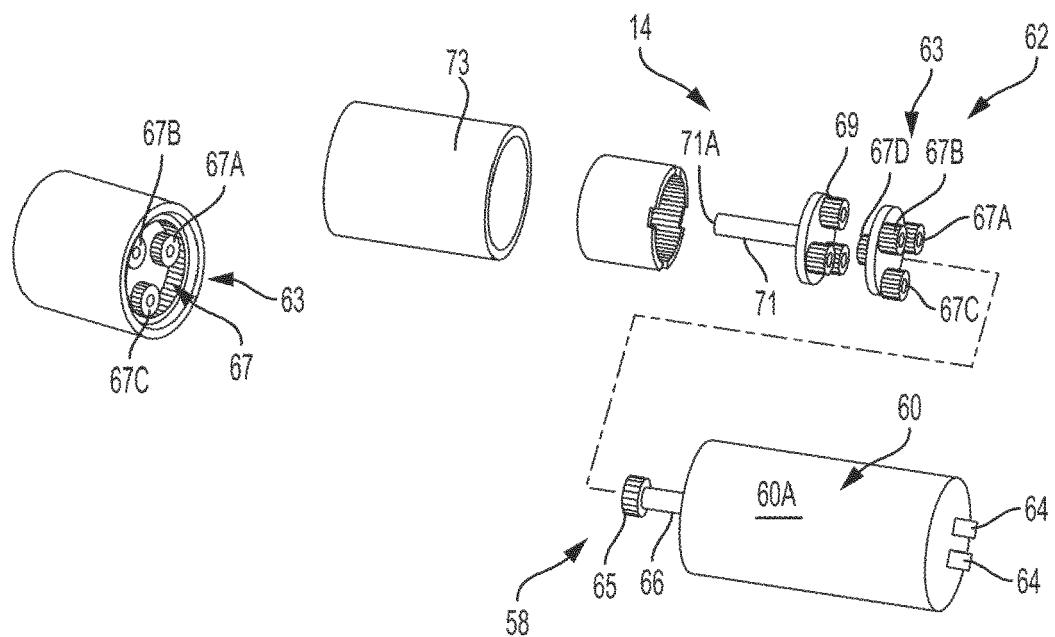


FIG. 5B

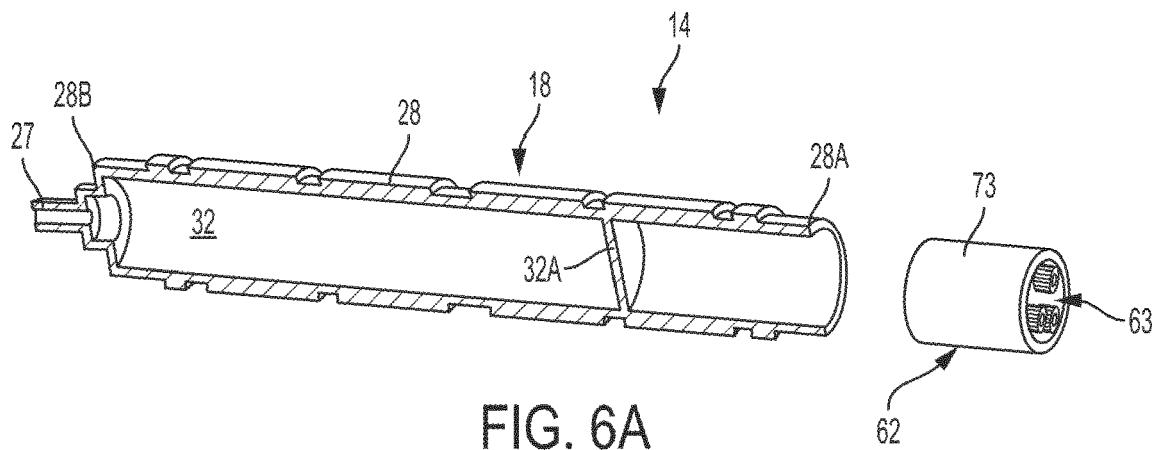


FIG. 6A

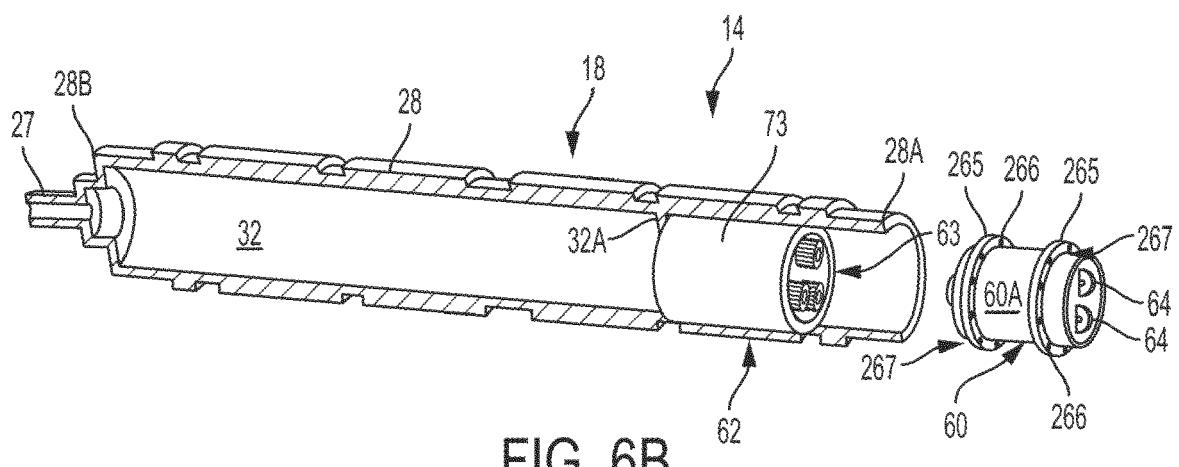


FIG. 6B

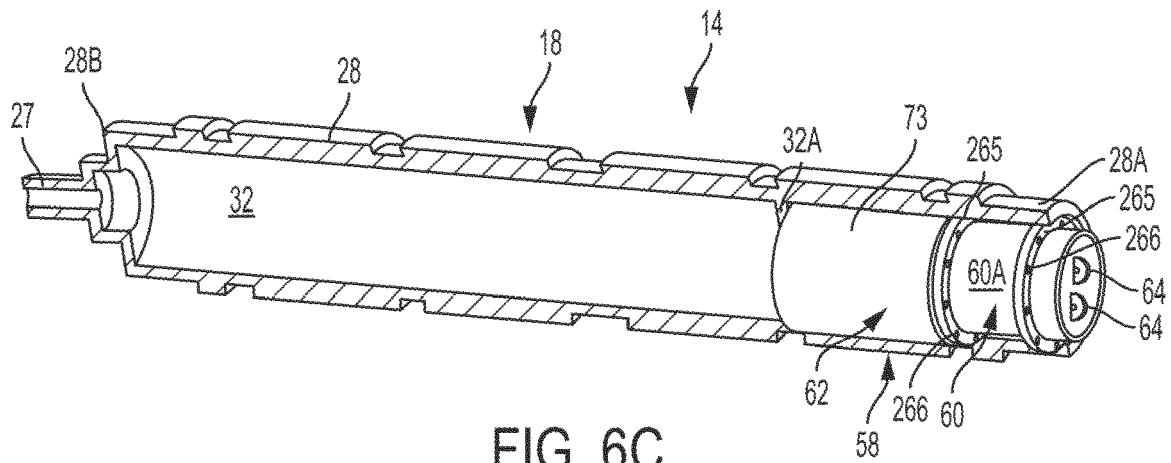


FIG. 6C

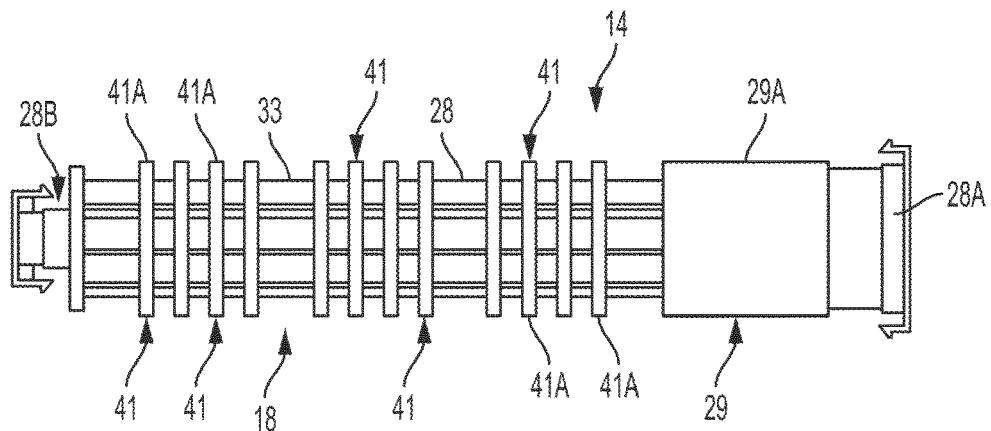


FIG. 7A

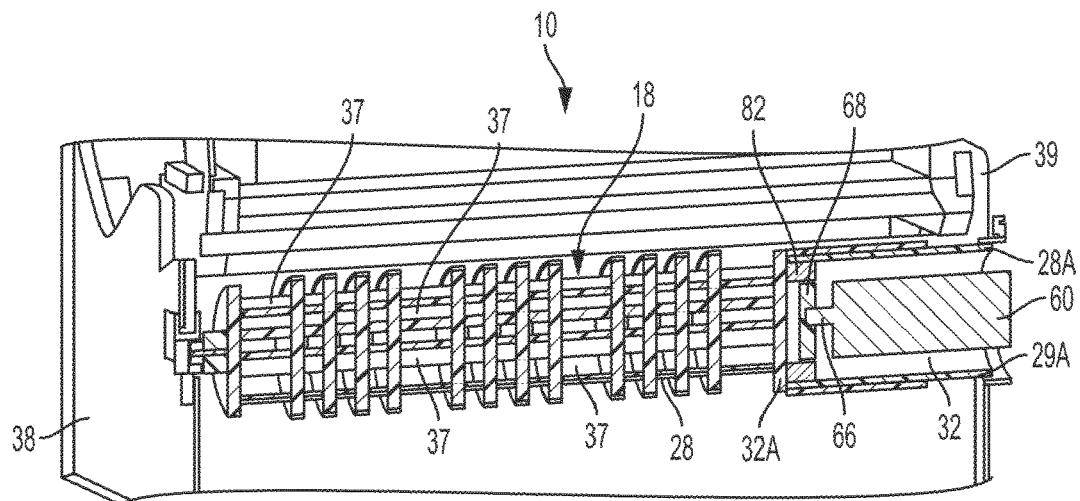


FIG. 7B

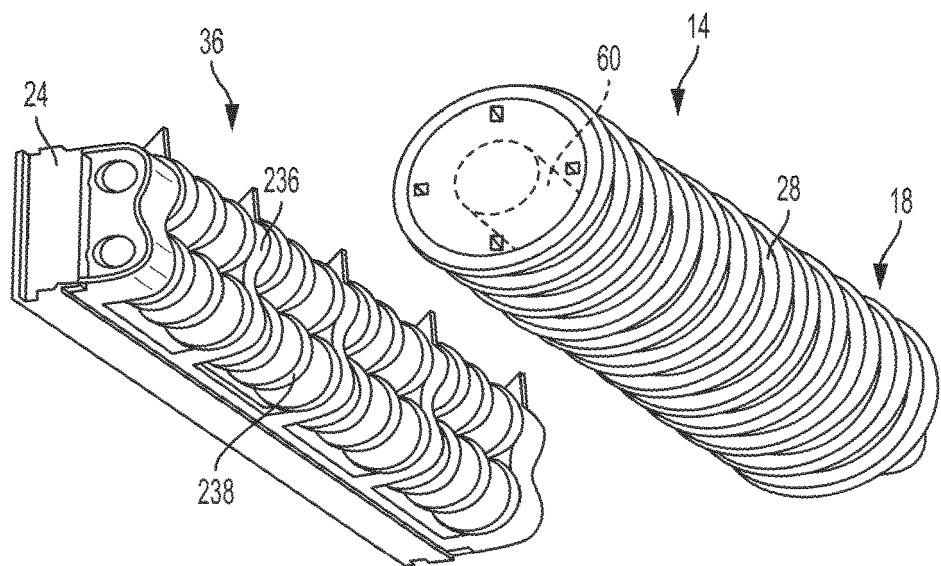


FIG. 8A

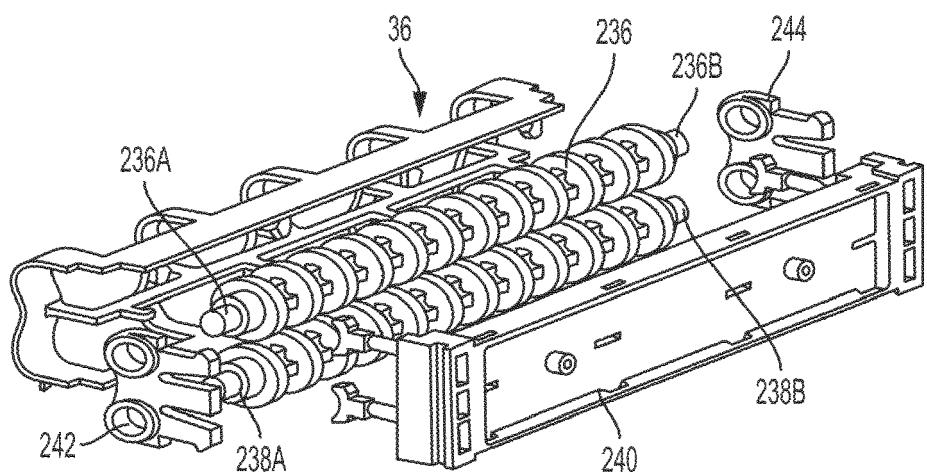


FIG. 8B

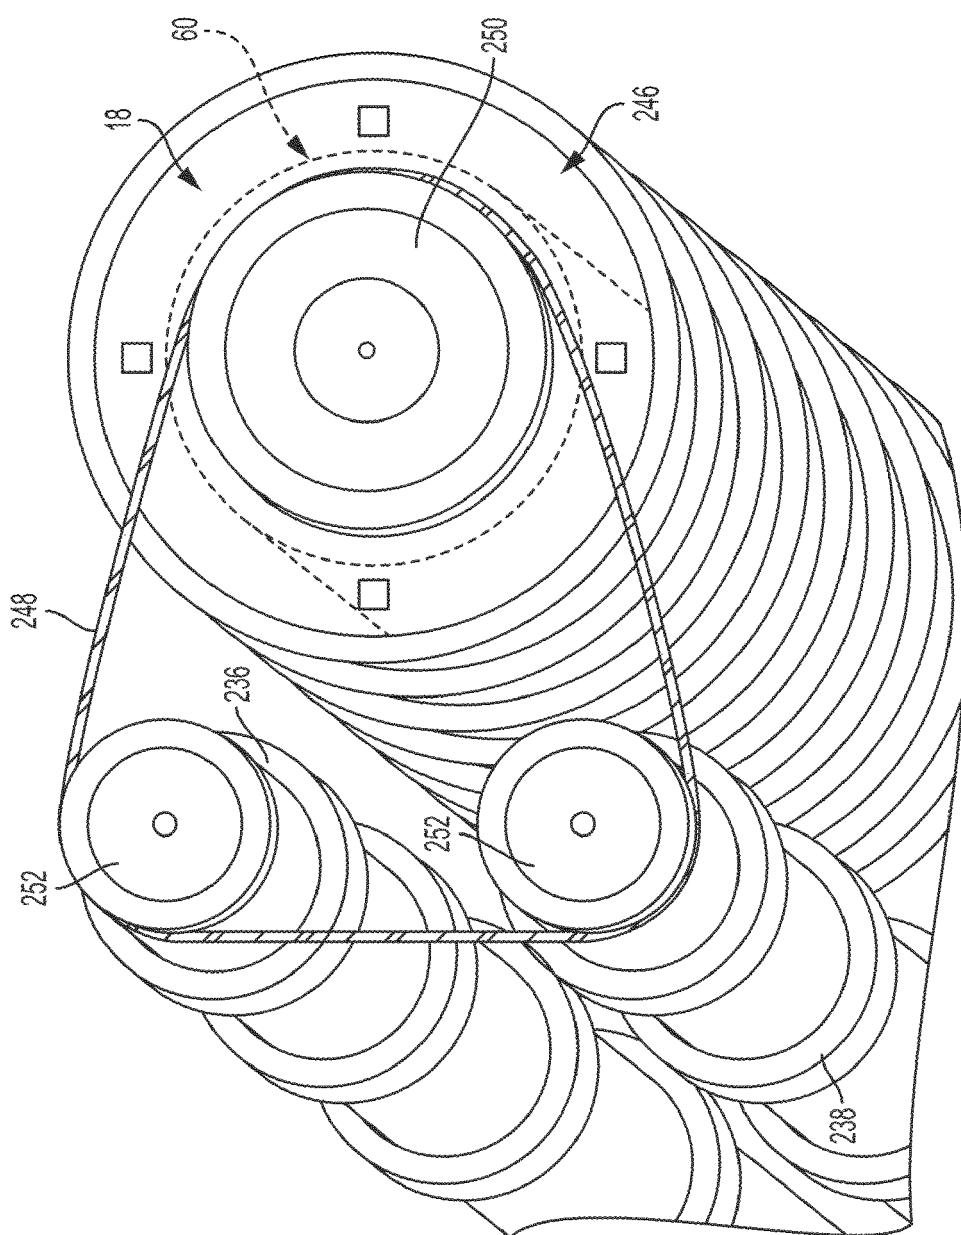


FIG. 9A

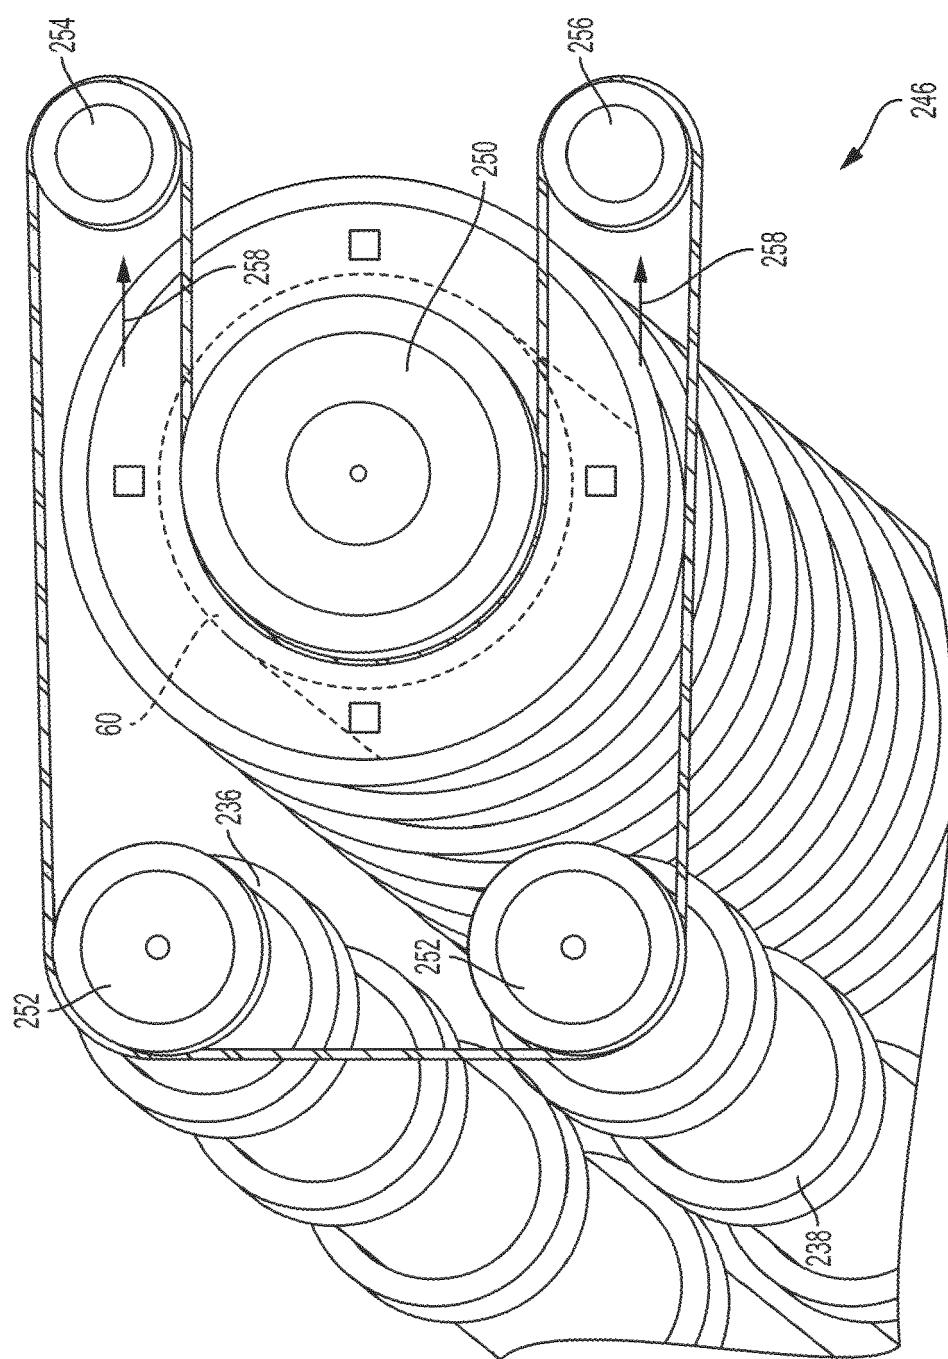


FIG. 9B

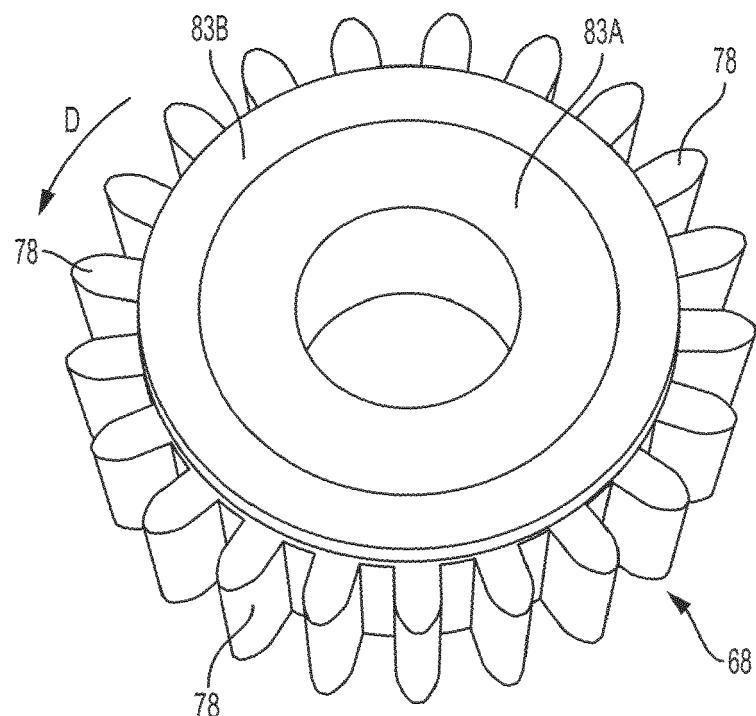


FIG. 10A

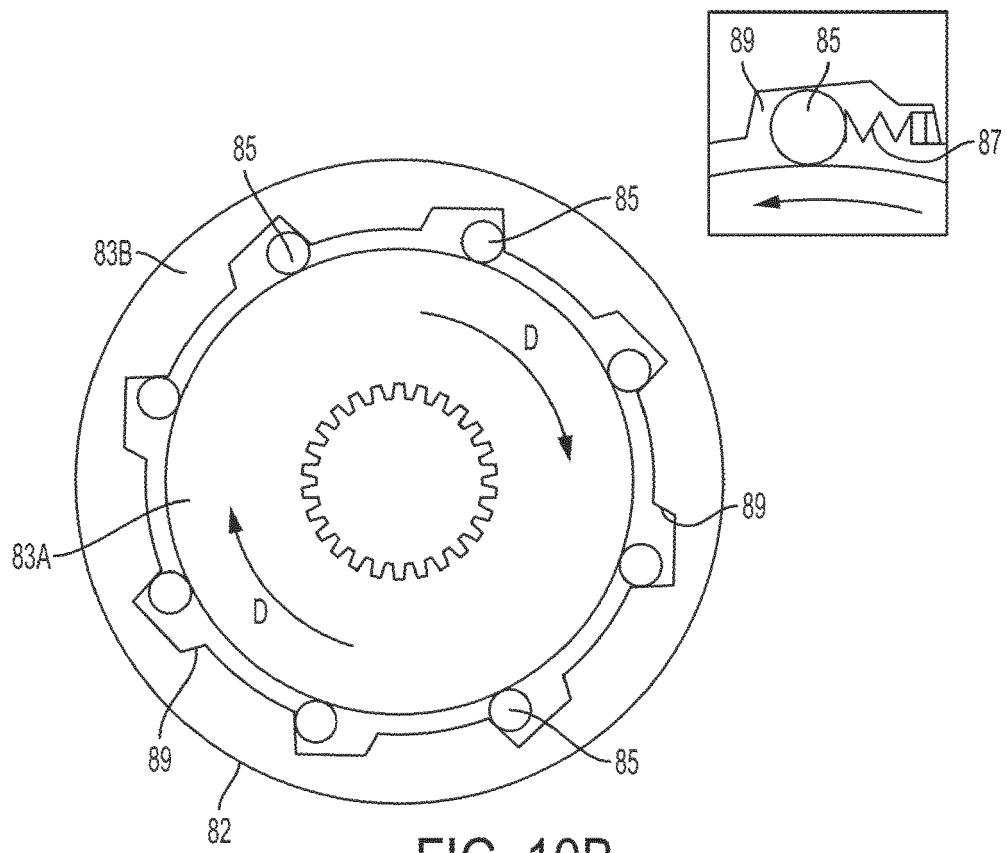


FIG. 10B

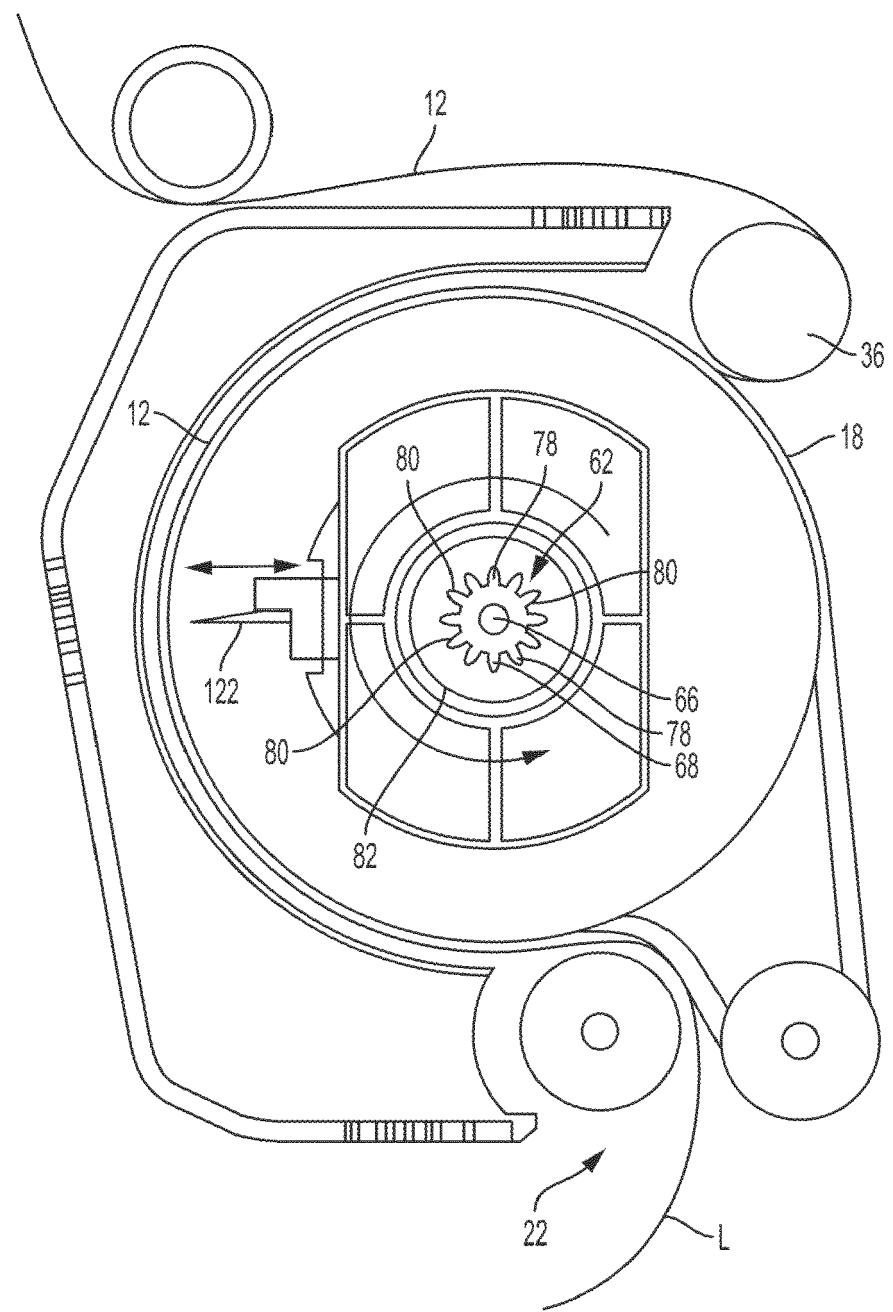


FIG. 11

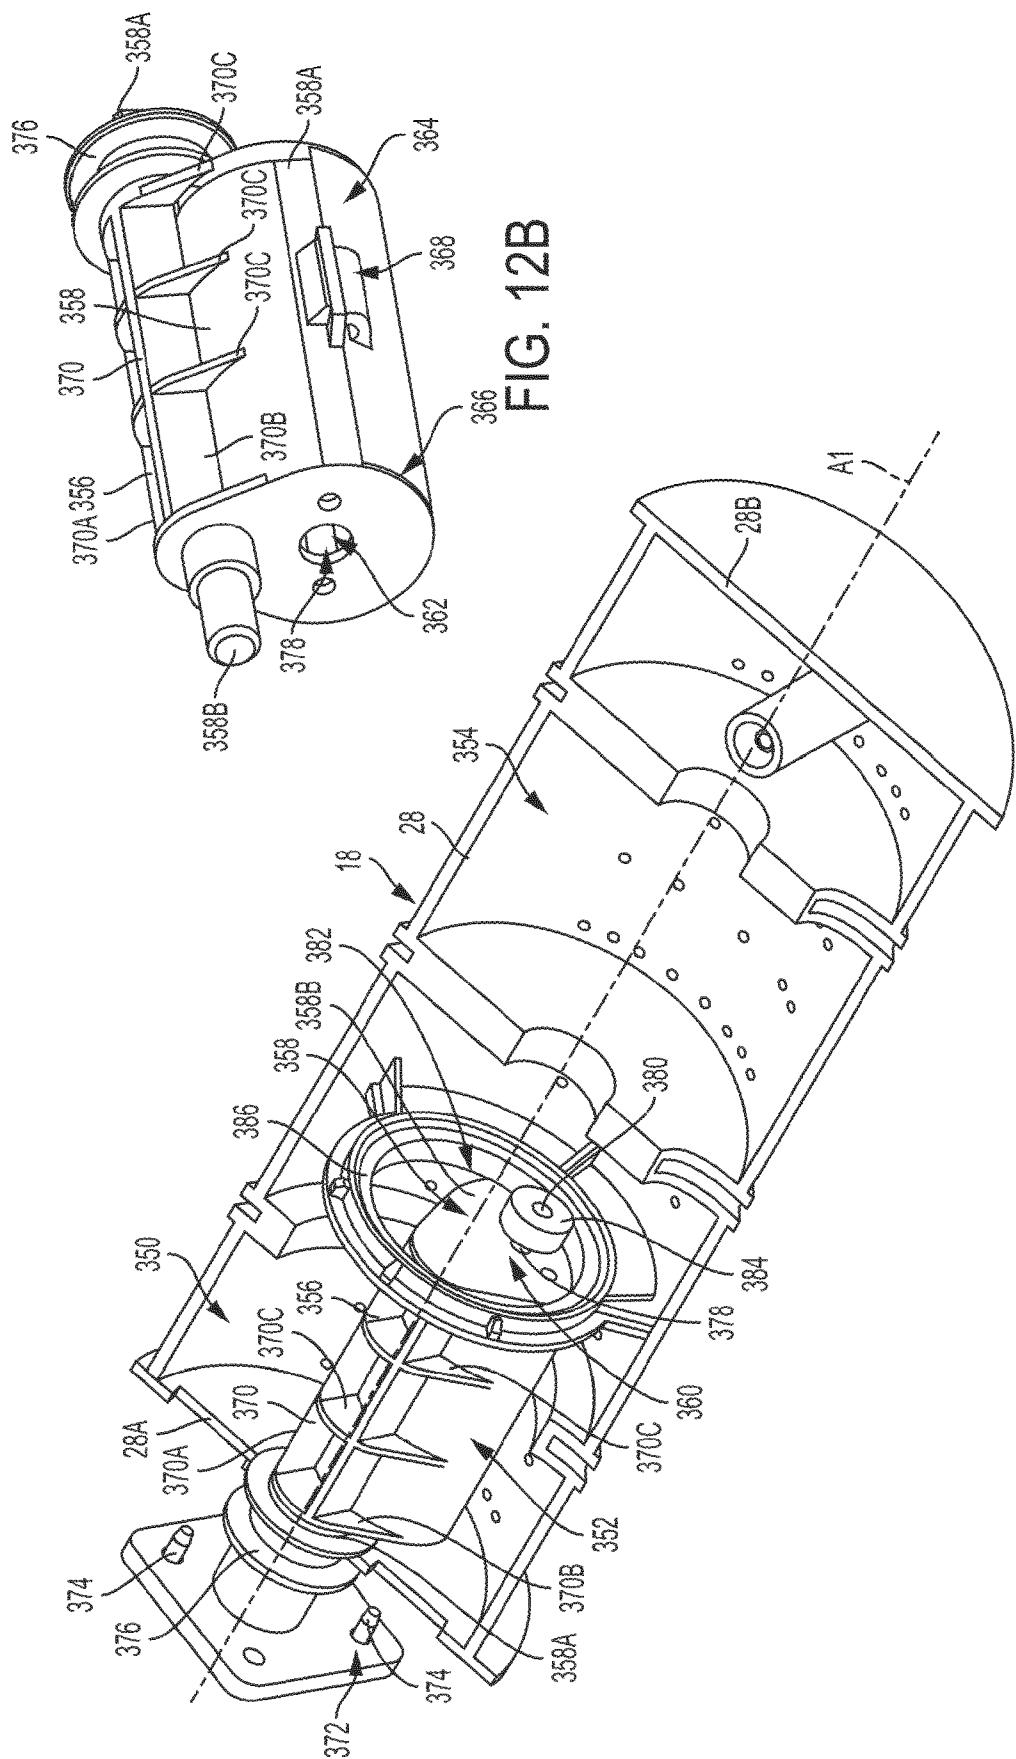


FIG. 12A

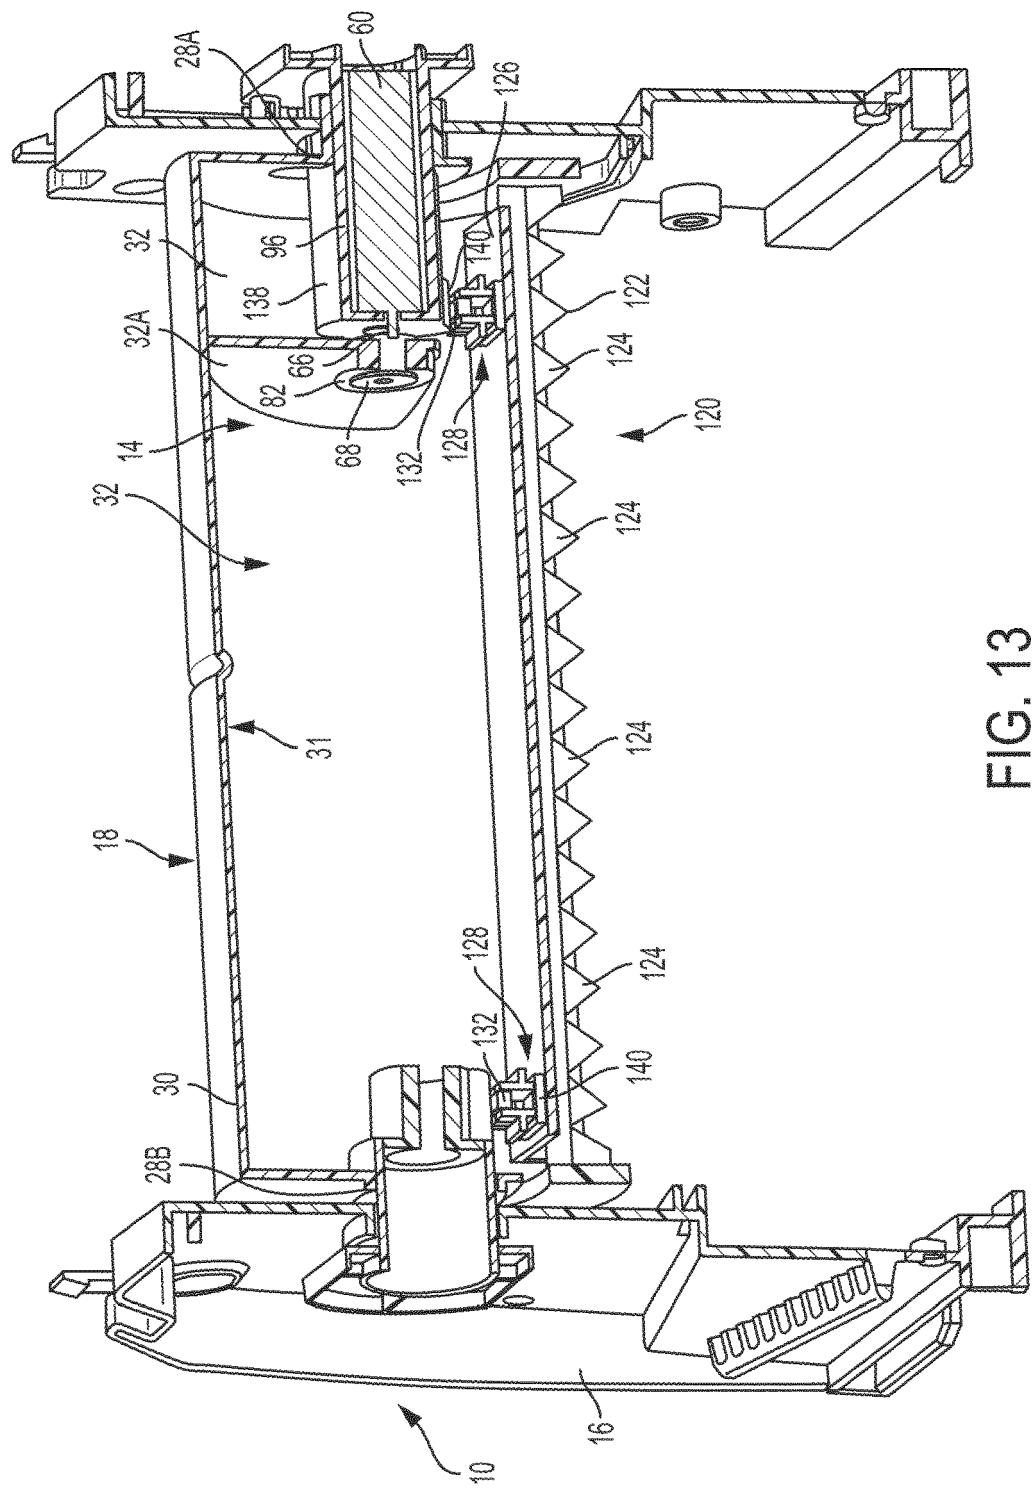


FIG. 13

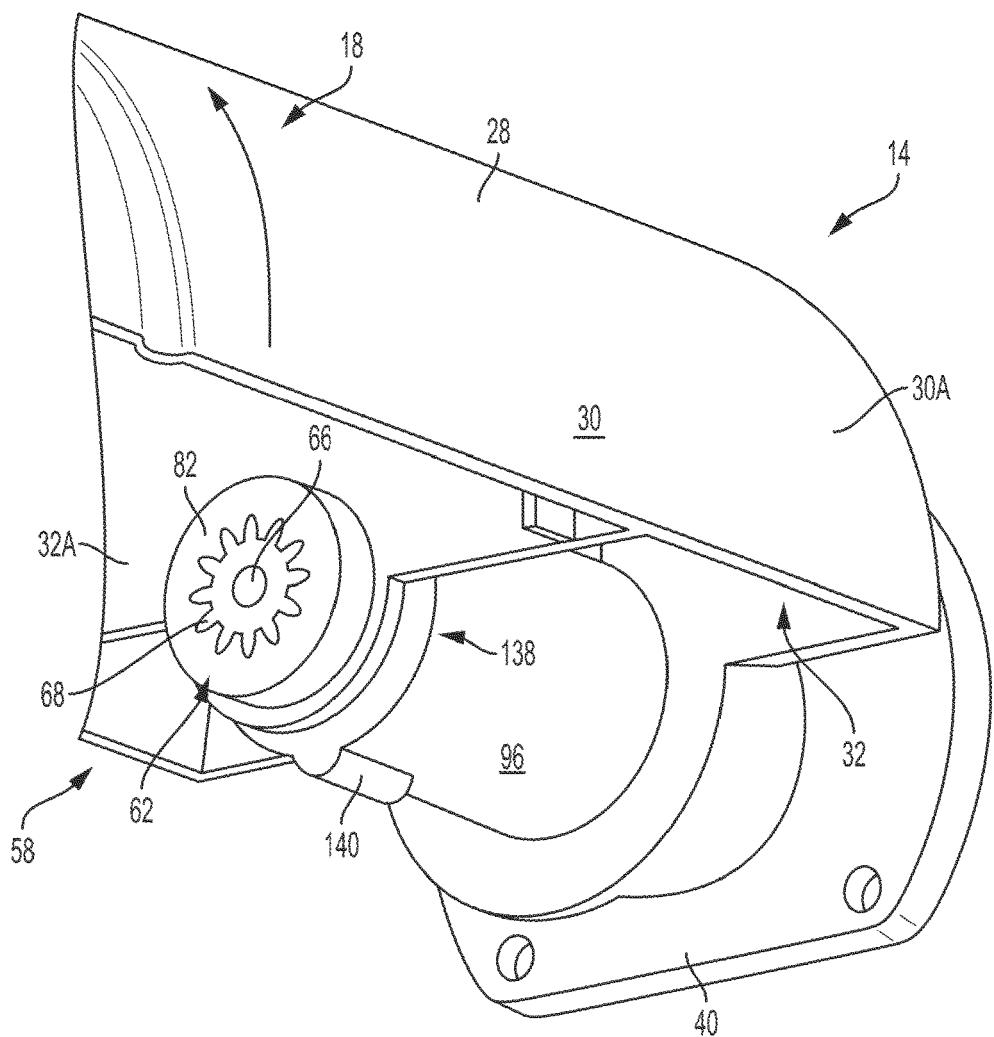


FIG. 14

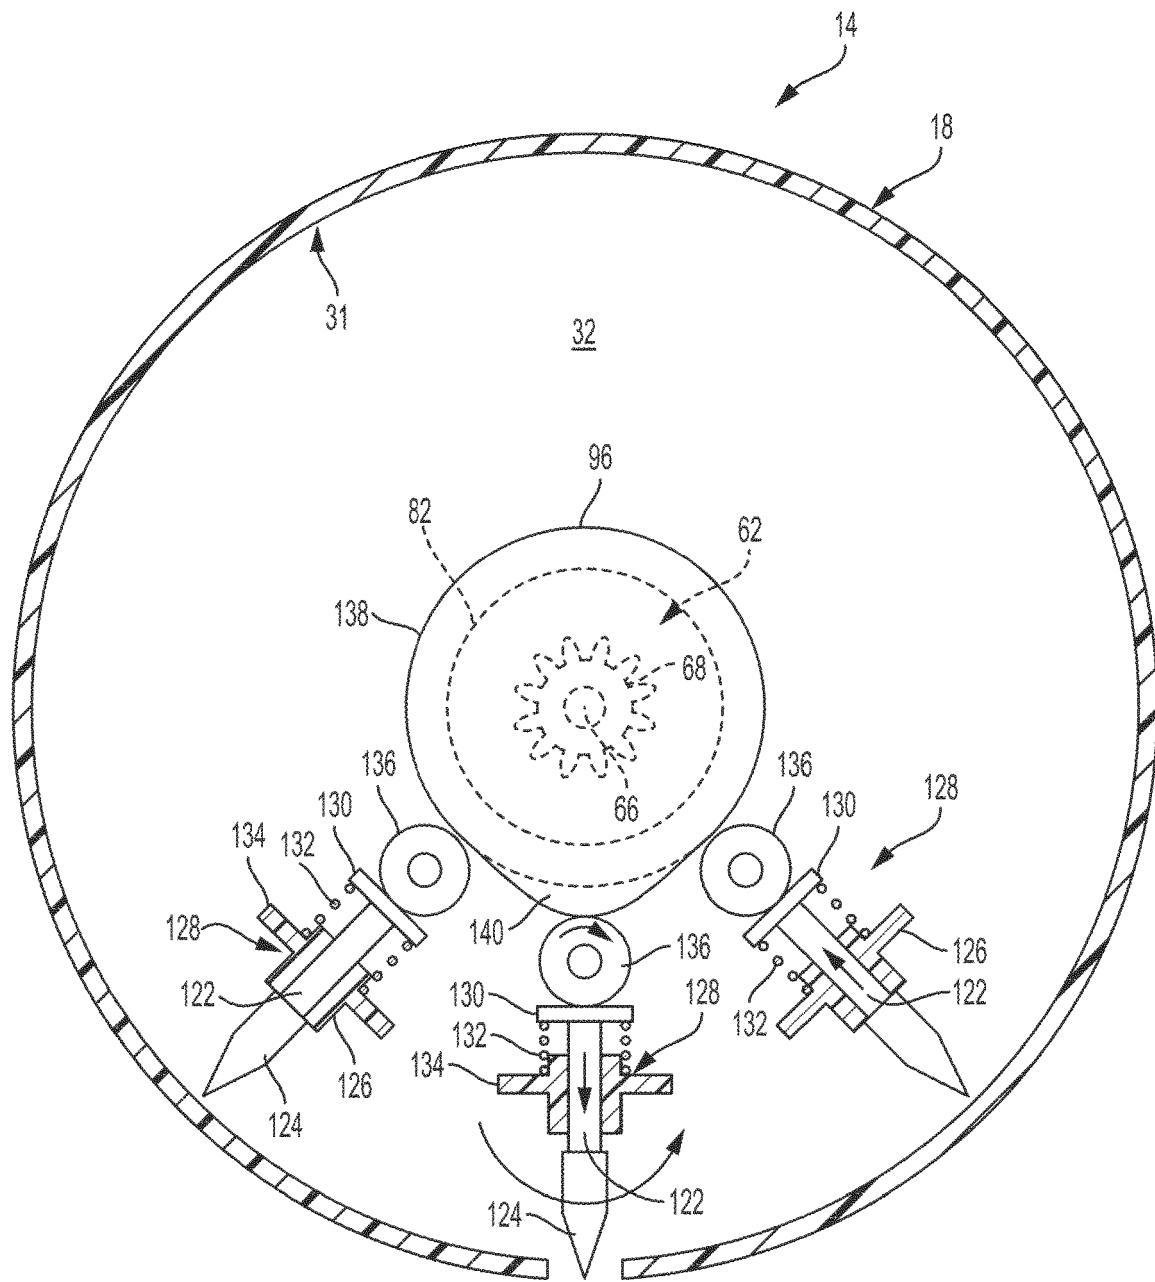


FIG. 15

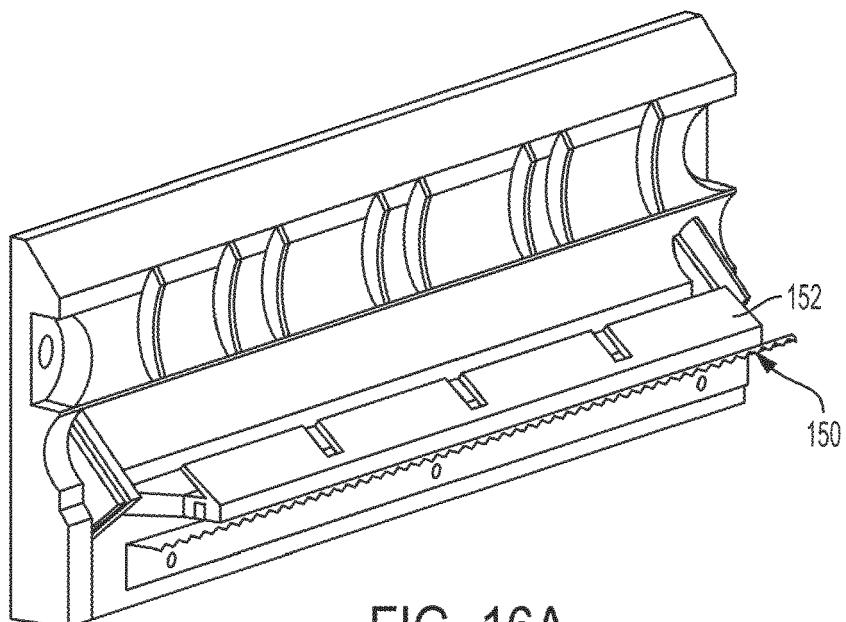


FIG. 16A

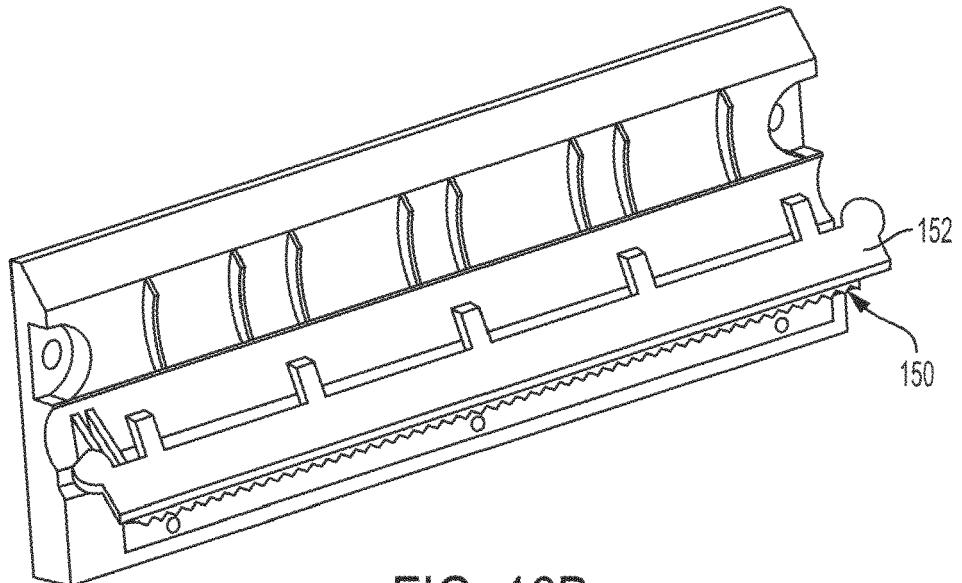


FIG. 16B

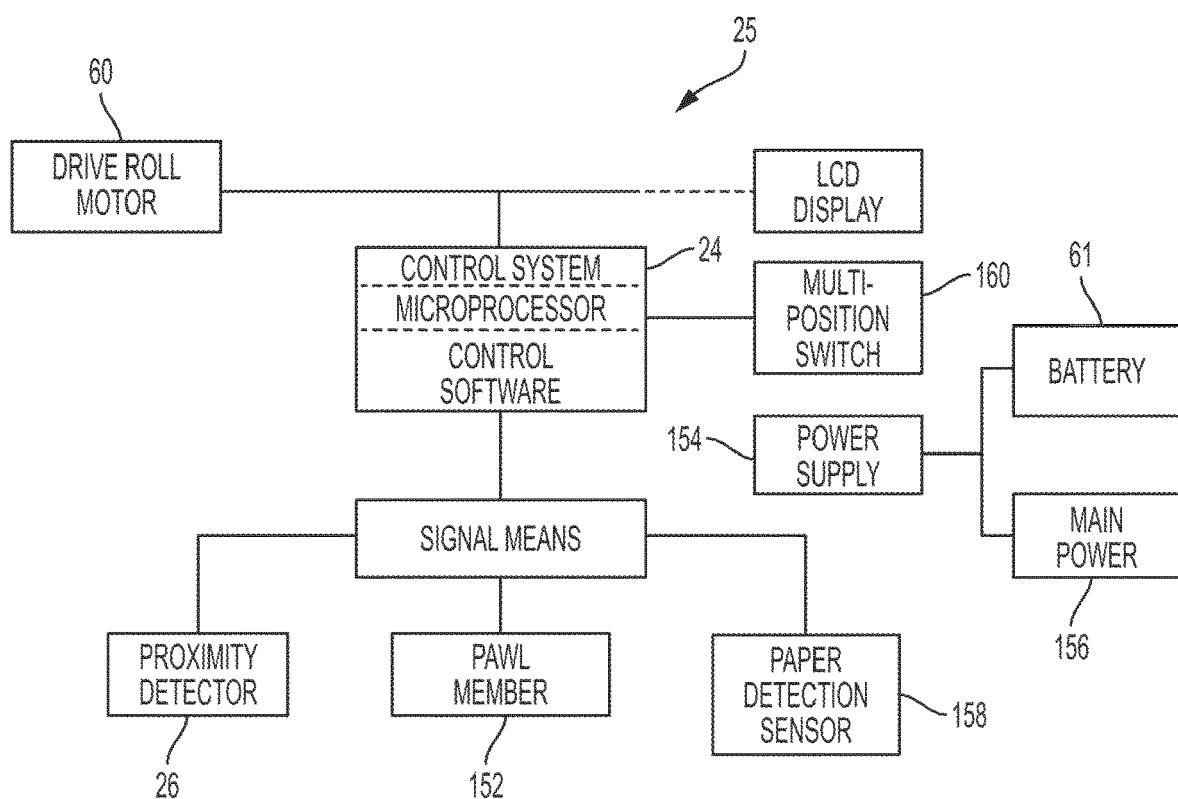


FIG. 17

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 2007079684 A [0002]
- US 2009140001 A [0002]
- US 7213782 B [0027]
- US 7370824 B [0027]
- US 2008010098241 A [0027]
- US 2014026381241 A [0027]