

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(10) International Publication Number

WO 2013/126377 A1

(43) International Publication Date

29 August 2013 (29.08.2013)

(51) International Patent Classification:

C09J 4/00 (2006.01) C09J 133/00 (2006.01)
C08K 3/00 (2006.01)

(21) International Application Number:

PCT/US2013/026814

(22) International Filing Date:

20 February 2013 (20.02.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/602,353 23 February 2012 (23.02.2012) US

(71) Applicant: 3M INNOVATIVE PROPERTIES COMPANY [US/US]; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).

(72) Inventors; and

(71) Applicants : KROPP, Michael A. [US/US]; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US). THOMPSON, Zachary J. [US/US]; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).

(74) Agents: EHRICH, Dena M., et al.; 3M Center Office of Intellectual Property Counsel Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- with international search report (Art. 21(3))



WO 2013/126377 A1

(54) Title: STRUCTURAL ACRYLIC ADHESIVE

(57) Abstract: There is provided an adhesive composition comprising: a) at least one acrylic functional monomer; b) a first toughening agent; c) a second toughening agent; d) an adhesion promoter; and e) a high aspect ratio filler selected from at least one of a high aspect ratio fibrillated filler and a halloycite clay filler.

STRUCTURAL ACRYLIC ADHESIVE

FIELD

[0001] This disclosure relates to two-part structural adhesive compositions. This disclosure also relates to 5 two-part structural acrylic adhesive compositions having high aspect ratio fillers and, optionally, in combination with treated fumed silica fillers to achieve higher adhesive performance.

BACKGROUND

[0002] Two-part structural acrylic adhesives are used in bonding a variety of substrates, including plastics, composites and metals. They can also bond minimally prepped surfaces.

10 [0003] There exists a need for acrylic adhesive compositions that provide higher strength, particularly at higher temperatures, as well as improved shelf life and better cure of fillets.

SUMMARY

[0004] The presently disclosed adhesive composition provides, among other things, higher strength, particularly at higher temperatures, as well as improved shelf life and better cure of fillets.

15 [0005] In some aspects, the present disclosure provides an adhesive composition comprising: a) at least one acrylic functional monomer; b) a first toughening agent; c) a second toughening agent; d) an adhesion promoter; and e) a high aspect ratio filler selected from at least one of a high aspect ratio fibrillated filler and a halloycite clay filler. In some embodiments, the high aspect ratio filler is surface treated to improve miscibility with resins.

20 [0006] In some embodiments, the adhesive composition further comprises fumed silica. In some embodiments, the first toughening agent is selected from at least one of a block copolymer, a core-shell particle, and combinations thereof. In some embodiments, the block copolymer is selected from a styrene-b-butadiene-b-polymethylmethacrylate block copolymer or a polymethyl methacrylate-b-poly n-butylacrylate-b-polymethylmethacrylate block copolymer. In some embodiments, the second toughening 25 agent is a methacrylate terminated liquid rubber.

[0007] In some embodiments, the adhesion promoter is an acidic adhesion promoter. In some embodiments, the high aspect ratio fibrillated filler is micro-fibrillated. In some embodiments, the composition has a peel value of greater than 3.5 kN/m. In some embodiments, the composition has a peel value of greater than 4.4 kN/m. In some embodiments, the composition exhibits substantially cohesive 30 failure.

[0008] In some embodiments, the adhesive composition further comprises a cure initiator system. In some embodiments, the cure initiator system comprises a barbituric acid derivative and a metal salt. In

some embodiments, the cure initiator system further comprises an organic peroxide, ammonium chloride salt, or a mixture thereof.

[0009] The above summary of the present disclosure is not intended to describe each embodiment of the present invention. The details of one or more embodiments of the invention are also set forth in the 5 description below. Other features, objects, and advantages of the invention will be apparent from the description and from the claims.

DETAILED DESCRIPTION

[0010] Before any embodiments of the invention are explained in detail, it is to be understood that the invention is not limited in its application to the details of construction and the arrangement of components 10 set forth in the following description. The invention is capable of other embodiments and of being practiced or of being carried out in various ways. Also, it is to be understood that the phraseology and terminology used herein is for the purpose of description and should not be regarded as limiting. The use of "including," "comprising," or "having" and variations thereof herein is meant to encompass the items listed thereafter and equivalents thereof as well as additional items. Any numerical range recited herein 15 includes all values from the lower value to the upper value. For example, if a concentration range is stated as 1% to 50%, it is intended that values such as 2% to 40%, 10% to 30%, or 1% to 3%, etc., are expressly enumerated. These are only examples of what is specifically intended, and all possible combinations of numerical values between and including the lowest value and the highest value enumerated are to be considered to be expressly stated in this application.

20 [0011] As used herein:

[0012] "fibrillated fiber" means fibers having a relatively high surface area and/or a branched structure, which in the case of branched structures can lead to a high degree of mechanical entanglement of the fibers;

25 [0013] "high aspect ratio" means a length to diameter ratio of an individual particle that is greater than 20, in some embodiments is between 20 and 60;

[0014] "cohesive failure" means adhesive bond failure within the adhesive layer, where substantially cohesive means 80% or more of the failure occurs within the adhesive layer.

[0015] "adhesive failure" means adhesive bond failure at the interface between the adhesive and the substrate;

30 [0016] "thin cohesive" means cohesive failure as described above, but where the majority of the adhesive is on one substrate

[0017] "mixed" failure means that the failure is not due totally to the type of failure reported and other failure modes are also present in the bondline.

[0018] The present disclosure generally relates to an adhesive composition that provides high overlap shear strength and adhesion to metals and plastics. Surprisingly, the presently disclosed adhesive compositions provide improvements in overlap shear and peel strengths, as well as a desirable cohesive failure mode, when high aspect ratio fibrillated fillers are used. It was also surprisingly discovered that even better results in overlap shear and peel performance, as well as desirable cohesive failure can be obtained when combining high aspect ratio fibrillated fillers with fumed silica in the presently disclosed adhesive compositions.


[0019] The present disclosure provides for an adhesive composition comprising: a) at least one acrylic functional monomer; b) a first toughening agent; c) a second toughening agent; d) an adhesion promoter; and e) a high aspect ratio fibrillated filler.

[0020] Acrylic functional monomers useful in the present disclosure include acrylate-based ester monomers. In some embodiments, the acrylic functional monomers comprise a methacrylate-based ester monomer. Such a methacrylate-based ester monomer can be selected from at least one of methyl methacrylate, ethyl methacrylate, butyl methacrylate, cyclohexyl methacrylate, 2-ethylhexyl methacrylate, and tetrahydrofurfuryl methacrylate. In some embodiments, the methacrylate-based ester monomer is selected from at least one of methyl methacrylate and ethyl methacrylate. In some embodiments, the methacrylate-based ester monomer is methyl methacrylate.


[0021] Toughening agents useful as the first toughening agent in the present disclosure include elastomeric materials. In some embodiments, these elastomeric materials are polymer substances that have rubber elasticity at room temperature. For example, an elastomeric material that can be dissolved or dispersed in the adhesive composition is useful. Such elastomeric material includes various synthetic rubbers such as a methyl methacrylate- butadiene-styrene copolymer (MBS), an acrylonitrile-styrene-butadiene copolymer, a linear polyurethane, acrylonitrile-butadiene rubber, a styrene-butadiene rubber, a chloroprene rubber and a butadiene rubber, and natural rubbers. Among them, an acrylonitrile-butadiene rubber is particularly useful because of its solubility in the presently disclosed acrylic functional monomers and its bonding properties. Such elastomeric materials may be used alone or in combination.

[0022] Toughening agents useful as the second toughening agent in the present disclosure include elastomeric materials such as those disclosed above with respect to the first toughening agent.

[0023] Adhesion promoters useful in the present disclosure include acid phosphate compounds of the following formula (I)

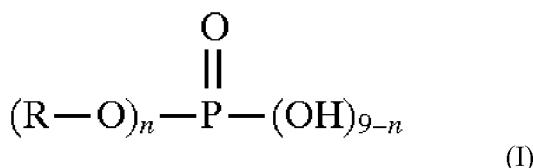

[0024] wherein R is $\text{CH}_2=\text{CR}_4\text{CO}(\text{OR}_5)_m$ -- (wherein R_4 is hydrogen or a methyl group, R_5 is -- C_2H_4 --, -- C_3H_6 --, -- $\text{CH}_2\text{CH}(\text{CH}_3)$ --, -- C_4H_8 --, -- C_6H_{12} -- or



[0025] and m is an integer of from 1 to 10), and n is 1 or 2.

[0026] The acid phosphate compound of the formula (I) may, for example, be phosphoxyethyl (meth)acrylate acid, phosphoxypropyl (meth)acrylate acid or bis(2-(meth)acryloyloxyethyl) phosphate.

[0027] High aspect ratio fibrillated fillers useful in the present disclosure include organic fibers. Organic fibers may include high-density polyethylene fibers such as those commercially available under the trade designations "SYLOTHIX 52(R)", "SYLOTHIX 53(R)" and "ARBOTHIX PE100" (from EP Minerals in Reno, Nev., USA), "SHORT STUFF(R) ESS2F", "SHORT STUFF(R) ESS50F" and "SHORT STUFF(R) ESS5F" (from MiniFIBERS, INC. in Johnson City, Tenn., USA), and "INHANCE(R) PEF" (from Inhance/Fluoro-Seal, Limited in Houston, Tex., USA). Organic fibers may also include high density aramid fibers such as those commercially available under the trade designation "INHANCE(R) KF" (from Inhance/Fluoro-Seal, Limited in Houston, Tex., USA)

[0028] The presently disclosed adhesive composition may also include fumed silica.

[0029] Curing systems useful in the present disclosure include redox initiator systems having (i) a barbituric acid derivative and/or a malonyl sulfamide and (ii) an organic peroxide, selected from the group of the mono- or multifunctional carboxylic acid peroxide esters. There can be used as barbituric acid derivatives, for example, 1,3,5-trimethylbarbituric acid, 1,3,5-triethylbarbituric acid, 1,3-dimethyl-5-ethylbarbituric acid, 1,5-dimethylbarbituric acid, 1-methyl-5-ethylbarbituric acid, 1-methyl-5-propylbarbituric acid, 5-ethylbarbituric acid, 5-propylbarbituric acid, 5-butylbarbituric acid, 1-benzyl-5-phenylbarbituric acid, 1-cyclohexyl-5-ethylbarbituric acid and the thiobarbituric acids mentioned in the German patent application DE-A-42 19 700.

[0030] The barbituric acids and barbituric acid derivatives described in German patent specification DE-C-14 95 520 as well as the malonyl sulfamides named in the European patent specification EP-B-0 059 451 are well suited. Preferred malonyl sulfamides are 2,6-dimethyl-4-isobutylmalonyl sulfamide, 2,6-diisobutyl-4-propylmalonyl sulfamide, 2,6-dibutyl-4-propylmalonyl sulfamide, 2,6-dimethyl-4-ethylmalonyl sulfamide or 2,6-dioctyl-4-isobutylmalonyl sulfamide.

[0031] The presently disclosed redox initiator system contains mono- or multifunctional carboxylic acid peroxyesters as organic peroxides. Carbonic peroxyesters are also included among the multifunctional carboxylic acid peroxyesters within the meaning of the present application. Suitable examples include

carbonic-diisopropyl-peroxydiester, neodecanoic acid-tertiary-butyl-peroxyester, neodecanoic acid-tertiaryamyl-peroxyester, maleic acid-tertiary-butyl-monoperoxyester, benzoic acid-tertiary-butyl-peroxyester, 2-ethylhexanoic acid-tertiary-butyl-peroxyester, 2-ethylhexanoic acid-tertiaryamyl-peroxyester, carbonic-monoisopropylester-monotertiary-butyl-peroxyester, carbonic-dicyclohexyl-peroxyester, carbonic dimyristyl-peroxyester, carbonic dicetyl peroxyester, carbonic-di(2-ethylhexyl)-peroxyester, carbonic-tertiary-butyl-peroxy-(2-ethylhexyl)ester or 3,5,5-trimethylhexanoic acid-tertiary-butyl-peroxyester, benzoic acid-tertiaryamyl-peroxyester, acetic acid-tertiary-butyl-peroxyester, carbonic-di(4-tertiary-butyl-cyclohexyl)-peroxyester, neodecanoic acid-cumene-peroxyester, pivalic acid-tertiary-amyl-peroxyester and pivalic acid tertiary-butyl-peroxyester.

10 [0032] [0055] In particular, carbonic-tertiary-butyl-peroxy-(2-ethylhexyl)ester or 3,5,5-trimethylhexanoic acid-tertiary-butyl-peroxyester can be used as organic peroxides according to the present disclosure.

15 [0033] We found that the addition of both high aspect ratio fillers and fumed silica improved overlap shear and peel strengths more than either alone, and provided improved properties compared to surface modified clay fillers.

[0034] For the present inventive adhesives, it is desirable to obtain overlap shear strengths of greater than 20 MPa and peel strengths of >2.5 kN/m, preferably >3.5 kN/m. In addition, the failure should occur within the adhesive (cohesive failure).

[0035] Some non-limiting exemplary embodiments and combinations of embodiments follow:

20 [0036] 1. An adhesive composition comprising: a) at least one acrylic functional monomer; b) a first toughening agent; c) a second toughening agent; d) an adhesion promoter; and e) a high aspect ratio filler selected from at least one of a high aspect ratio fibrillated filler and a halloysite clay filler.

[0037] 2. The adhesive composition of embodiment 1 wherein the high aspect ratio filler is surface treated to improve miscibility with resins.

25 [0038] 3. The adhesive composition of any of the preceding embodiments further comprising fumed silica.

[0039] 4. The adhesive composition of any of the preceding embodiments wherein the first toughening agent is selected from at least one of a block copolymer, a core-shell particle, and combinations thereof.

30 [0040] 5. The adhesive composition of embodiment 4 wherein the block copolymer is selected from a styrene-b-butadiene-b-polymethylmethacrylate block copolymer or a polymethyl methacrylate-b-poly n-butylacrylate-b-polymethylmethacrylate block copolymer.

[0041] 5.a. The adhesive composition of embodiment 4 wherein the block copolymer is selected from a polystyrene-b-butadiene-b-(methyl methacrylate) block copolymer or a poly(methyl methacrylate)-b-poly(n-butyl acrylate)-b-poly(methyl methacrylate) block copolymer.

5 [0042] 6. The adhesive composition of any of the preceding embodiments wherein the second toughening agent is a methacrylate terminated liquid rubber.

[0043] 7. The adhesive composition of any of the preceding embodiments wherein the adhesion promoter is an acidic adhesion promoter.

[0044] 8. The adhesive composition of any of the preceding embodiments wherein the high aspect ratio fibrillated filler is micro-fibrillated.

10 [0045] 9. The adhesive composition of embodiment 3 wherein the composition has a peel value of greater than 3.5 kN/m.

[0046] 10. The adhesive composition of any of embodiment 3 wherein the composition has a peel value of greater than 4.4 kN/m.

15 [0047] 11. The adhesive composition of any of the preceding embodiments having substantially cohesive failure.

[0048] 12. The adhesive composition of any of the preceding embodiments further comprising a cure initiator system.

[0049] 13. The adhesive composition of embodiment 12 wherein the cure initiator system comprises a barbituric acid derivative and a metal salt.

20 [0050] 14. The adhesive composition of embodiment 13 wherein the cure initiator system further comprises an organic peroxide, ammonium chloride salt, or a mixture thereof.

[0051] Various modifications and alterations of this invention will become apparent to those skilled in the art without departing from the scope and spirit of this invention.

Test Methods

25 [0052] Each adhesive composition was loaded into the 10 part side of a 10:1 dual syringe cartridge dispenser, using the accelerator described above in the 1 part side of the dispenser in each case. All bonds were prepared by dispensing the adhesive composition and accelerator through a static mixing tip.

[0053] The adhesives were used to prepare overlap shear and peel test samples on 2024 T3 AlClad aluminum substrates. For peel samples, the aluminum was chemically cleaned and etched as per ASTM D 2651. Overlap shear was measured according to ASTM D 1002. Bell peel was measured according to ASTM D 3167. Panels of thick metal, measuring 10.16 x 17.78 x .16 cm thick, and thin metal measuring 10.16 x 25.4 x .051 cm thick, were each coated with the test adhesive and .069 mm spacer beads were

sprinkled onto the bond line. Weights were placed on the panels for 24 hours at 25°C, , then the panels were cut to 2.54 cm width, after the adhesive has cured, yielding three 2.54 cm wide specimens per panel. These were tested in floating roller peel. Results are reported in pounds per inch width (piw) and are the average of 3 samples.

5 [0054] Overlap shear samples were 2.54 x 10.16 x .16 cm aluminum coupons using .076-.0127 mm spacer beads with a 1.27 cm overlap. The bond line was clamped with binder clips during cure and the clips were removed after 24 hours at 25°C. Testing was run on a 5000 lb load cell for overlap shear and 200 lb load cell for peel testing with pulling for both at 2.54 mm/min.

Materials

10 [0055] These examples are merely for illustrative purposes only and are not meant to be limiting on the scope of the appended claims. All parts, percentages, ratios, and the like in the examples are by weight, unless noted otherwise. Materials used were obtained from Sigma-Aldrich Chemical Company; Milwaukee, Wisconsin unless otherwise noted.

MMA	methyl methacrylate
NANOSTRENGTH M53	polymethyl methacrylate-b-poly-n-butylacrylate-b-polymethyl methacrylate (MAM) triblock copolymer (Arkema, Inc., King of Prussia, Pennsylvania)
NANOSTRENGTH E21	Styrene-b- butadiene-b-polymethylmethacrylate (SBM) triblock copolymer (Arkema)
PAM 200	methacrylated phosphate adhesion promoter (Rhodia, Cranberry, New Jersey)
CUNAP	copper naphthenate 8% in mineral spirits (Strem)
N+Cl-	Benzyl tributylammonium chloride (Sachem Americas, Austin, Texas)
SR 540 and SR 541	ethoxylated bisphenol A dimethacrylates with varying degrees of ethoxylation (Sartomer Technology USA, LLC, Wilmington, Delaware)
VTBN 33 and VTBN 43	vinyl terminated butadiene – acrylonitrile rubber (Emerald Materials, LLC, Cuyahoga Falls, Ohio)
ESS50F	micro fibrillated polyethylene, hydrophilic grade, aspect ratio 20:1 l:d (MiniFibers, Inc., Johnson City, Tennessee)
INHANCE PEF	oxidized, fibrillated polyethylene (Inhance/Fluoro-Seal, Ltd., Houston, Texas)
INHANCE HD 1800	oxidized fine high density polyethylene (HDPE) powder (Inhance)
POLYFIL WC	vinyl silane treated alumina silicate clay (KaMin Performance Minerals, Macon, Georgia)
CAB-O-SIL TS 720	silicone treated fumed silica (Cabot Corporation, Tuscola, Illinois)
AEROSIL R 7200	destructured methacrylate treated fumed silica (Evonik Degussa Corporation, Parsippany, New Jersey)
HEMA	hydroxyl ethyl methacrylate
Peroxybenzoate	t-butyl-3,5,5-trimethylhexanoate (Acros)
BENZOFLEX 9-88	polyether benzoate (Eastman Chemical Company, Kingsport,

	Tennessee)
	Benzyl phenyl barbituric acid
MX 921	tetrahydrofurfuryl methacrylate with 25% acrylic core shell (Kaneka Corporation, Osaka, Japan)
SR203	tetrahydrofurfuryl methacrylate (Sartomer)
SR340	phenoxy ethyl methacrylate (Sartomer)
NYAD 1250	wollastonite clay, aspect ratio 3:1 l:d (NYCO Minerals, Inc., Willsboro, New York)
MINEX 7	aluminum silicate, spherical (UNIMIN Specialty Materials, Inc., New Canaan, Connecticut)
DRAGONITE XR	halloysite clay (Applied Minerals, Inc., New York, New York)

Examples

5 [0056] The following examples are merely for illustrative purposes and are not meant to limit in any way the scope of the appended claims. All parts, percentages, ratios, and the like in the examples are by weight, unless noted otherwise.

Accelerator Side:

10 [0057] All adhesive compositions used an accelerator having 82.7 pph BENZOFLEX 9-88, 13.5 pph benzyl phenyl barbituric acid, 1.9 pph peroxybenzoate, 1.9 pph CAB-O-SIL TS 720. The components were weighed into a plastic container, then placed in a planetary-type mixer such as that available under the trade designation “SPEED MIXER”, Model DA 400 FV, from Synergy Devices Limited, Buckinghamshire, United Kingdom) set at a speed of 2500 rpm for 2 minute, followed by impellor 15 mixing until no agglomerates of the barbituric acid were observed.

Base side of adhesives for Examples 1-2 and CE 1-2:

20 [0058] A solution of 70 parts MMA with 30 parts NANOSTRENGTH E21 was prepared by dispersing the NANOSTRENGTH E21 into the MMA in a jar, then rolling the jar overnight to obtain a clear solution.

Stock solution for EX 1, EX 2, CE1 and CE2:

25 [0059] A solution of 5.5% N+Cl- in HEMA was prepared by adding the 5.5g N+Cl- to 94.5 g HEMA and manually shaking until the N+Cl- was completely dissolved. The weight percents are based on the total weight of the solution. An adhesive stock solution was then prepared by mixing 200g of the MMA/E21solution prepared previously, 3.8g PAM 200, 0.3g CUNAP, and 6.9g of the N+Cl-/HEMA solution .

[0060] The adhesive compositions shown in the following Table 1 were prepared by weighing the specified components into DAC Speedmixer cups and then mixed using a DAC Speedmixer at approximately 2500 rpm for 2 minutes.

5 Table 1

Example	Stock Solution	SR 541	VTBN 33	ESS50F	INHANCE PEF	POLYFIL WC	CAB-O-SIL TS 720
EX1	50.0 g	2.0 g	3.0 g	2.0 g			
EX2	50.0 g	2.0 g	3.0 g		2.0 g		
CE1	50.0 g	2.0 g	3.0 g			5.0 g	0.5 g
CE2	50.0 g	2.0 g	3.0 g			10.0 g	0.5 g

[0061] For Comparative Example 1 (CE1) and Comparative Example 2 (CE 2), the amount of POLYFIL WC was increased to nearly 2.5 times the amount of ESS50F or INHANCE PEF used in Examples 1 and 2, respectively, in order to provide approximately the same volume percent of filler material for all 10 samples. This was done because the density of the POLYFIL WC is 2.6 g/cm³, which is nearly 2.5 times the density ESS50F or INHANCE PEF. CAB-O-SIL TS 720 was added to CE1 and CE2 to reduce settling of the POLYFIL WC.

[0062] These adhesive compositions were evaluated for overlap shear and peel strengths, and failure 15 mode according to the test method outlined above. Results for these tests are reported in Table 2.

Table 2

		Shear (MPa)	Peel (kN/m)
	Ave.	25.4	4.46
EX1	standard dev (SD)	1.25	0.017
	failure	cohesive	cohesive
	Ave.	24.85	3.73
EX2	SD	.51	.14
	failure	cohesive	cohesive
	Ave.	31.2	2.12
CE1	SD	3.87	.105
	failure	mixed adhesive	very thin cohesive
	Ave.	29.9	1.40
CE2	SD	1.83	.21
	failure	mixed adhesive	cohesive

[0063] Table 2 shows the improved overall performance using the ESS50F or INHANCE PEF versus using POLYFIL WC.

5 Base side of adhesives for EX3, EX4, EX5 and CE3:

[0064] Using the MMA/Nanostrength E21 and N+Cl-/HEMA solutions described above a stock solution was prepared having 220g MMA/E21, 11.0g SR 540, 11.0g VTBN 33, 2.3g PAM 200, 0.32g CUNAP (in mineral spirits), and 7.6g N+Cl-/HEMA stock solution. The adhesive compositions shown in the following Table 3 were prepared as described in EX1:

10 Table 3

Example	Stock Solution	ESS50F	POLYFIL WC	CAB-O-SIL TS 720
EX3	47.0 g	3.0 g		
CE3	47.0			3.0 g
EX4	47.0	1.5 g		1.5 g
EX5	47.0	1.0 g	1.0 g	1.0

[0065] The adhesive compositions shown in Table 3 were evaluated for overlap shear and peel strength and failure mode according to the test method outlined above. Results for these tests are reported in Table 4.

15 [0066] Table 4

		Shear (MPa)	Peel (kN/m)
	Ave.	22.6	3.15
EX3	SD	1.53	0.017
	failure	cohesive	cohesive
	Ave.	20.86	3.64
CE3	SD	4.26	0.017
	failure	mixed adhesive	thin cohesive
	Ave.	24.9	4.46
EX4	SD	1.14	0.035
	failure	cohesive	thin cohesive
	Ave.	24.7	5.03
EX5	SD	4.84	0.11
	failure	cohesive	cohesive

[0067] Base Side of adhesives for EX6-10 and CE4-14.

[0068] A solution of 70 parts MMA with 30 parts NANOSTRENGTH E21 or NANOSTRENGTH M53 was prepared by dispersing the NANOSTRENGTH E21 or NANOSTRENGTH M53 into the MMA in a jar, then rolling the jar overnight using a roller table to obtain a clear solution.

5 Stock solution for EX6-10 and CE4-14:

[0069] A stock solution of 5.5% N+Cl- in HEMA was prepared as described previously and used to prepare the following solutions.

10 Master Batches EX6-10 and CE4-14:

[0070] The MMA/Nanostrength M53 (EX 6-7 and CE4-6) or E21(EX8-9 and CE7-9) solution and all other components, totaling 275 g, were weighed into MAX 300 DAC Speedmixer in the amount given in Table 5 below and then mixed for 2 minutes at 2500 rpm. Separate MAX 100 cups were then each charged with 46.0 g of the mixtures obtained and the various fillers were added and mixed for 1 minute at 2500 rpm. The fillers used are summarized in Table 6. The resulting adhesive compositions are shown in Table 7 and Table 8. These adhesive compositions were loaded into the 10 part compartment of 10:1 cartridges, with the accelerator described above loaded into the 1 part compartment.

Table 5

Material	pph
MMA (from stock)	54.9
NANOSTRENGTH M53 or E21 (from stock)	23.5
VTBN 33 or VTBN 43	11.7
SR541 or SR 540	4.0
CUNAP	0.091
PAM200	1.96

20

Table 6

Sample Number	Filler
CE4 and CE7	None
EX6 and EX8	DRAGONITE
EX7 and EX9	DRAGONITE
CE5 and CE8	POLYFIL WC
CE6 and CE9	NYAD 1250
N+Cl- (from stock)	0.21
HEMA (from stock)	3.71

25

Table 7

	CE4	EX6	EX7	CE5	CE6
MMA	53.68	52.02	50.46	50.46	50.46
NANOSTRENGTH M53	23.01	22.30	21.63	21.63	21.63
VTBN 43	11.42	11.07	10.73	10.73	10.73
SR541	3.91	3.79	3.68	3.68	3.68
CUNAP	0.09	0.09	0.08	0.08	0.08
PAM200	1.92	1.86	1.81	1.81	1.81
TS 720	2.13	0.00	3.00	3.00	3.00
N+Cl-	0.21	0.20	0.20	0.20	0.20
HEMA	3.63	3.52	3.41	3.41	3.41
Filler	0.00	5.15	5.00	5.00	5.00
Total	100	100	100.00	100.00	100.00

Table 8

	CE7	EX8	EX9	CE8	CE9
MMA	58.77	57.55	55.827	55.827	55.827
NANOSTRENGTH E21	25.19	24.67	23.926	23.926	23.926
VTBN 33	5.45	5.34	5.175	5.175	5.175
SR 540	3.32	3.25	3.155	3.155	3.155
CUNAP	0.09	0.09	0.089	0.089	0.089
PAM200	1.12	1.10	1.063	1.063	1.063
TS 720	3.16	0.00	3.000	3.000	3.000
N+Cl-	0.16	0.16	0.152	0.152	0.152
HEMA	2.75	2.69	2.613	2.613	2.613
Filler	0.00	5.15	5.000	5.000	5.000
Total	100.00	100.00	100.000	100.000	100.000

5

[0071] The adhesive compositions shown in Tables 7 and 8 were evaluated for overlap shear, strength, peel strengths and failure mode according to the test methods outlined above. Results for these tests are reported in Table 9.

Table 9

	OLS (MPa)	Peel(kN/m)
CE4	30.9	2.99
	mixed adhesive	adhesive
EX6	26.8	4.38
	mixed adhesive/cohesive	thin cohesive
EX7	28.3	7.22
	mixed thin cohesive	thin cohesive
CE5	30.4	4.55
	mixed adhesive	mixed adhesive/cohesive
CE6	28.7	4.76
	mixed adhesive	mixed adhesive/cohesive
CE7	26.8	4.94
	mixed adhesive	thin cohesive
EX8	31.5	2.47
	cohesive	thin cohesive
EX9	29.5	4.48
	cohesive	thin cohesive
CE8	15.0	3.73
	mixed cohesive	thin cohesive
CE9	28.7	4.74
	mixed cohesive	thin cohesive

5 Example 10 and Comparative Examples 10-14

[0072] Adhesive components, totaling 300g, were weighed into MAX 300 DAC Speedmixer in the relative amounts given in Table 10 below and then mixed for 2 minutes at 2500 rpm. The stock solutions of N+Cl- previously described was used. Separate MAX 100 cups were then each charged with 50.0 g of 10 the mixture obtained and 5.0g of the various fillers and mixed for 1 minute at 2500 rpm, giving final formulations described in Table 11 with the various fillers identified in Table 12.

Table 10

Material	pph
SR203	19.5
THFMX	16.9
SR340	11.9
HEMA	16.1
VTBN 33	21.2
Cu	0.10
PAM	3.4
TS720	2.50
N+Cl-/HEMA	5.1
ESS50F	3.4

5

Table 11

Material	pph
SR203	17.60
THFMX	15.33
SR340	10.72
HEMA	18.95
VTBN 33	19.40
CUNAP	0.12
PAM	3.10
TS720	2.33
N+Cl-	0.26
ESS50F	3.10
Filler	9.09
	100.00

Table 12

Sample Number	Filler
EX10	DRAGONITE
CE10	POLYFIL WC
CE11	INHANCE HD 1800
CE12	NYAD 1250
CE13	AEROSIL R 7200
CE14	MINEX 7

10

[0073] This adhesive set represents a lower odor acrylic adhesive relative to the MMA adhesives described above. These adhesives were used to bond overlap shear and peel samples as described above. The results of this testing are reported in Table 13.

15

Table 13

	OLS (MPa)	Peel (kN/m)
EX10	19.7	5.50
	cohesive	cohesive
CE10	19.1	3.20
	mixed adhesive	cohesive
CE11	18.4	5.01
	mixed adhesive/cohesive	cohesive
CE12	17.1	5.57
	mixed adhesive/cohesive	cohesive
CE13	18.1	4.25
	mixed adhesive	cohesive
CE14	17.8	5.53
	mixed adhesive/cohesive	cohesive

What is Claimed is:

1. An adhesive composition comprising:
 - a) at least one acrylic functional monomer;
 - b) a first toughening agent;
 - c) a second toughening agent;
 - d) an adhesion promoter; and
 - e) a high aspect ratio filler selected from at least one of a high aspect ratio fibrillated filler and a halloycite clay filler.
- 5 2. The adhesive composition of claim 1 wherein the high aspect ratio filler is surface treated to improve miscibility with resins.
- 10 3. The adhesive composition of claims 1 or 2 further comprising fumed silica.
4. The adhesive composition of any of the preceding claims wherein the first toughening agent is selected from at least one of a block copolymer, a core-shell particle, and combinations thereof.
- 15 5. The adhesive composition of claim 4 wherein the block copolymer is selected from a polystyrene-b-butadiene-b-(methyl methacrylate) block copolymer or a poly(methyl methacrylate)-b-poly (n-butyl acrylate)-b-poly(methyl methacrylate) block copolymer.
6. The adhesive composition of any of the preceding claims wherein the second toughening agent is a methacrylate terminated liquid rubber.
- 20 7. The adhesive composition of any of the preceding claims wherein the adhesion promoter is an acidic adhesion promoter.
8. The adhesive composition of any of the preceding claims wherein the high aspect ratio fibrillated filler is micro-fibrillated.
9. The adhesive composition of claim 3 wherein the composition has a peel value of greater than 3.5 kN/m.
- 25 10. The adhesive composition of any of claim 3 wherein the composition has a peel value of greater than 4.4 kN/m.
11. The adhesive composition of any of the preceding claims having substantially cohesive failure.
12. The adhesive composition of any of the preceding claims further comprising a cure initiator system.
- 30 13. The adhesive composition of claim 12 wherein the cure initiator system comprises a barbituric acid derivative and a metal salt.

14. The adhesive composition of claim 13 wherein the cure initiator system further comprises an organic peroxide, ammonium chloride salt, or a mixture thereof.

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2013/026814

A. CLASSIFICATION OF SUBJECT MATTER
INV. C09J4/00 C08K3/00 C09J133/00
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
C09J C08K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2004/131827 A1 (MISIAK HANNS ROLAND [IE]) 8 July 2004 (2004-07-08) the whole document paragraph [0018] - paragraph [0021] -----	1-14
Y	JP 2004 182831 A (SHINETSU POLYMER CO) 2 July 2004 (2004-07-02) abstract -----	1-14
Y	JP H01 299881 A (NIPPON SYNTHETIC CHEM IND) 4 December 1989 (1989-12-04) abstract -----	1-14



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
23 May 2013	31/05/2013
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Droghetti, Anna

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No
PCT/US2013/026814

Patent document cited in search report	Publication date	Patent family member(s)			Publication date
US 2004131827	A1	08-07-2004	AU	2003263563 A1	29-07-2004
			US	2004131827 A1	08-07-2004
			US	2006014882 A1	19-01-2006
			WO	2004061030 A1	22-07-2004
JP 2004182831	A	02-07-2004	NONE		
JP H01299881	A	04-12-1989	JP	2724719 B2	09-03-1998
			JP	H01299881 A	04-12-1989