

19



Europäisches Patentamt
European Patent Office
Office européen des brevets



11 Publication number:

0 323 724 B1

12

EUROPEAN PATENT SPECIFICATION

45 Date of publication of patent specification: **09.09.92** 51 Int. Cl.⁵: **C10G 65/04, C10G 45/10**

21 Application number: **88311988.5**

22 Date of filing: **16.12.88**

54 **A method for stabilizing hydroisomerates.**

30 Priority: **18.12.87 US 135149**

43 Date of publication of application:
12.07.89 Bulletin 89/28

45 Publication of the grant of the patent:
09.09.92 Bulletin 92/37

84 Designated Contracting States:
BE DE ES FR GB IT NL

56 References cited:
FR-A- 2 267 360
US-A- 3 979 279

73 Proprietor: **EXXON RESEARCH AND ENGINEERING COMPANY**
P.O.Box 390, 180 Park Avenue
Florham Park, New Jersey 07932(US)

72 Inventor: **Cody, Ian Alfred**
2104 Huron Shores Drive
Clearwater Ontario N7T 7H6(CA)
Inventor: **Eadie, Donald T.**
3235 Wayne Avenue
North Vancouver British Columbia V7N 4B9(CA)
Inventor: **Hamner, Glen Porter**
(Deceased)
deceased(US)
Inventor: **MacDonald, John MacKillop**
152 Norman Street
Sarnia Ontario N7T 6V7(CA)

74 Representative: **Somers, Harold Arnold et al**
ESSO Engineering (Europe) Ltd. Patents & Licences
Mailpoint 72 Esso House Ermyn Way
Leatherhead, Surrey KT22 8XE(GB)

EP 0 323 724 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

Description

Oils in the lube boiling range produced by the hydroisomerization of waxes which oils are suitable for use as lube oil base stocks or blending stocks exhibit unacceptable levels of daylight stability and oxidation stability. It has been discovered that such oils can have their daylight and oxidation stability significantly improved by treating such oils under mild conditions over catalyst comprising Group VIII on supports or Group VIII on halogenated supports. The Group VIII metal component is preferably platinum. The catalysts of choice are selected from Group VIII on halogenated alumina or material containing alumina support, preferably alumina or material consisting predominantly (i.e. >50%) of alumina catalyst, preferably Group VIII on fluorided or chlorinated support, more preferably platinum on fluorided alumina support, most preferably platinum on fluorided γ alumina catalyst. These preferred catalysts are preferred hydrosomerization catalyst in which service they are employed under moderate to severe operating conditions.

Slack wax containing from 0% to 25% oil coming from the dewaxing of conventional petroleum crude oils is subjected to hydrotreating over conventional hydrotreating catalyst so as to reduce the sulfur and nitrogen content levels of the wax. This hydrotreating is necessary so as to avoid deactivation of the typical Group VIII on halogenated refractory metal oxide isomerization catalyst. If other, less sensitive isomerization catalyst, such as combination Group VI-Group VIII metal on refractory metal oxide catalysts are used, since such catalyst are usually sulfided prior to use, the need for prehydrotreating is lessened, if not eliminated. In such an instance, however, the feed from an isomerization unit utilizing such a catalyst would have to be treated to remove sulfur and/or nitrogen prior to being contacted with the Group VIII metal on refractory metal oxide or Group VIII metal on halogenated refractory metal oxide catalyst used in the present invention in the mild hydrorefining step following isomerization.

The total liquid product of isomerized slack wax from the isomerization unit is then contacted with the Group VIII metal on refractory metal oxide catalyst or Group VIII on halogenated refractory metal oxide catalyst under mild hydrorefining conditions, which step is followed by a subsequent fractionation into various cuts boiling in the different lube basestock boiling ranges, dewaxing and final fractionation. While these steps can be practiced in different sequences it is preferred that the total liquid product from the isomerization unit be subjected to the herein described mild hydrorefining. It was unexpected that the mild hydrorefining can effectively treat this total liquid product since in the past it had been thought necessary to conduct such hydrofinishing procedures on fractions of oils and not on broad cuts of oils.

While it has been found that fractionated isomerized wax products can be hydrofined it has also been unexpectedly discovered that unfractionated isomerized wax product, the total liquid product from the isomerization unit can be hydrorefined under mild conditions to produce a material of improved daylight stability.

US-A-3979279 describes and claims a process for forming a stabilized lubricating oil resistant to oxidation and sludge formation upon exposure to a highly oxidative environment which comprises contacting a high boiling hydrocarbon fraction lubrication oil stock having a sulfur content above about 0.4 weight percent with hydrogen in the presence of a catalyst of low acidity having a chlorine content of less than about 1.5 weight percent comprised of from about 0.1 to about 10 weight percent metal selected from the the group consisting of platinum, palladium and a combination of thereof on a solid refractory inorganic oxide support, said contacting being at a temperature of about 400° F (204.4° C), a (gauge) pressure in the range of from about 150 psig (1.03MPa) to about 1200 psig (8.274MPa) and a weight hourly space velocity in the range of from about 0.1 to about 10.

Description of the Figures

Figure 1 is a schematic of an overall wax isomerization process utilizing a light slack wax feed and including the mild condition second stage hydrotreating of the present invention.

Figure 2 is a schematic of an overall wax isomerization process utilizing a heavy micro-crystalline wax feed, including fractionator bottoms recycle and employing the mild condition second stage hydrotreating of the present invention.

Detailed Description of the Invention

In the present invention it has been discovered that lube oil base stocks or blending stock oils made by the isomerization of slack waxes can have their daylight stability markedly improved by a process comprising contacting the total liquid product from the isomerization unit with a Group VIII metal on refractory metal oxide support catalyst or Group VIB-Group VIII metal on halogenated refractory metal oxide

hydroisomerization catalyst under mild conditions. This mild condition hydrofinishing is performed at a temperature of from 170 °C to 270 °C, preferably 180 to 220 °C, a flow velocity of 0.25 to 10 V/V/hr, preferably 1 to 4 V/V/hr, a pressure of from 300 to 1500 psi (2.069 to 10.343 MPa) H₂, preferably 500 to 1000 psi (3.448 to 6.895 MPa) H₂ and a hydrogen gas rate of 500 to 10,000 SCF/bbl (89.05 to 1780.94 liter gas/liter oil), preferably 1000 to 5000 SCF/bbl (178.09 to 890.47 liter gas/liter oil). Temperatures at the high end of the range should be employed only when similarly employing pressures at the high end of their recited range. Temperatures in excess of those recited may be employed if pressures in excess of 1500 psi (10.34 MPa) are used, but such pressures may not be practical or economic.

In conjunction with the isomerization step any necessary hydrotreating of the slack wax feed is performed employing commercial catalyst, such as Co/Mo-Ni/Mo on alumina, under standard commercially accepted conditions, e.g., temperature of 320 °C to 400 °C, space velocity of 0.1 to 2.0 v/v/hr, pressure of from 500 to 3000 psig (3.448 to 20.685 MPa) H₂, and gas rates of from 500 to 5000 SCF/B (89.05 to 890.47 liter gas/liter oil).

Isomerization is conducted over a catalyst containing a hydrogenating metal component typically one from Group VI or Group VIII or mixtures thereof, preferably Group VIII, more preferably noble Group VIII most preferably platinum on a halogenated refractory metal oxide support. The catalyst typically contains from 0.1-5.0 wt.% metal, preferably 0.1 to 1.0 wt.% metal, most preferably 0.2-0.6 wt.% metal. The refractory metal oxide support is typically a transition e.g. gamma or eta alumina and the halogen is most usually fluorine. Isomerization is accomplished under moderate to high temperature conditions of 270 °C to 400 °C, preferably 300 °C to 360 °C. Space velocity ranges from 0.10 to 10 v/v/hr, preferably 1.0 to 2.0 v/v/hr. Pressure ranges from 500 to 3000 psi (3.448 to 20.685 MPa) H₂, preferably 1000 to 1500 psi (6.895 to 10.343 MPa) H₂. Hydrogen gas rate ranges from 1000 to 10,000 SCF/B (178.09 to 1780.94 liter gas/liter oil). Moderate levels of conversion of wax to isomerate are preferred. Conversions to a level such that about 40% or less unconverted wax remains in the 370 °C+ fraction sent to the dewaxer, preferably 15-35% unconverted wax remains in the 370 °C+ fraction sent to the dewaxer are preferred.

As previously stated, if the isomerization catalyst is of the family which is normally presulfided before use, the prehydrotreating step can be dispensed with, but the isomerized wax product would still have to be freed of H₂S and NH₃ prior to being contacted with the second stage catalyst. This could be done by flashing or stripping of the product to remove H₂S and NH₃.

A preferred catalyst for use in the present process contains a hydrogenation metal component which is a Group VIII noble metal or mixture thereof, preferably noble Group VIII metal, most preferably platinum on a fluorided alumina or material containing alumina, preferably alumina or material consisting predominantly (i.e. >50%) of alumina, most preferably gamma or eta alumina wherein said catalyst in its as introduced to waxy feed form is characterized by possessing (1) a hydrate level of 60 or less, preferably 10 to 60 determined as the relative amount of hydrate represented by a peak in the X-ray diffraction (XRD) pattern at $2\theta = 5.66\text{\AA}$ (0.566 nm) when a hydrate level of 100 corresponds to the XRD peak height exhibited by a standard material constituting 0.6 wt% Pt on 150 m²g γ -alumina containing 7.2 wt% F wherein the fluorine has been deposited using an aqueous solution containing a high concentration of HF, i.e. 10 wt% and greater, preferably 10 to 15 wt% HF and the material dried at 150 °C for 16 hours; (2) a surface nitrogen content N/Al ratio of 0.01 to less, preferably 0.007 or less, most preferably 0.004 or less, as determined by X-ray photoelectron spectroscopy (XPS); (3) a bulk fluorine concentration of 2 to 10 wt% and (4) a surface fluorine concentration, defined as the amount of fluorine present in a layer extending from the surface to a depth of 1/100 inch (0.254 mm) of less than 3 wt%, preferably less than 1 wt%, most preferably less than 0.5 wt% provided that the surface fluoride concentration is less than the bulk fluoride concentration.

The fluoride content of the catalyst can be determined in a number of ways.

One technique analyzes the fluorided catalysts using oxygen combustion methodology which is well established in the literature. Approximately 8-10 mg of sample is mixed with 0.1 g benzoic acid and 1.2 g of mineral oil in a stainless steel combustion capsule which is mounted in a 300 ml Parr oxygen combustion bomb. The "sample" is purged of air and subsequently combusted under 30 Atms of pure oxygen. Combustion products are collected in 5 ml of deionized water. Once the reaction has gone to completion (about 15 minutes), the absorbing solution is quantitatively transferred and made to fixed volume.

Fluoride concentration of the sample is determined by ion chromatography analysis of the combustion product solution. Calibration curves are prepared by combusting several concentrations of ethanolic KF standards (in the same manner as the sample) to obtain a 0-10 ppm calibration range. Fluoride concentration of the catalyst is calculated on an ignition-loss-free-basis by comparison of the sample solution response to that of the calibration curve. Ignition loss is determined on a separate sample heated to 800 degrees F (426.7 °C) for at least 2 hours. Ion chromatographic analysis uses standard anion conditions.

Another procedure employs the use of fluoride distillation with a titrimetric finish. Fluorides are

converted into fluorosilicic acid (H_2SiF_6) by reaction with quartz in phosphoric acid medium, and distilled as such using super heated steam. This is the Willard-Winter-Tananaev distillation. It should be noted that the use of super heated, dry (rather than wet) steam is crucial in obtaining accurate results. Using a wet steam generator yielded results 10-20% lower. The collected fluorosilicic acid is titrated with standardized sodium hydroxide solution. A correction has to be made for the phosphoric acid which is also transferred by the steam. Fluoride data are reported on an ignition-loss-free-basis after determination of ignition loss on a sample heated to 400 degree C for 1 hour.

Another preferred catalyst is a catalyst prepared by a process involving depositing a hydrogenation metal on an alumina or material containing alumina support, calcining said metal loaded support typically at between 350 to 500 °C, preferably 450 to 500 °C for 1 to 5 hours, preferably 1 to 3 hours and fluoriding said metal loaded support using a high pH fluorine source solution to a bulk fluorine level of about 8 wt% or less (e.g., 2 to 8 wt%), preferably about 7 wt% or less, said high pH source solution being at a pH of 3.5 to 4.5 and preferably being a mixture of NH_4H and HF followed by rapid drying/heating in a thin bed or rotary kiln to insure thorough heating in air, an oxygen containing atmosphere or an inert atmosphere to a temperature between 350 to 450 °C in about 3 hours or less, preferably 375 to 400 °C, and holding at the final temperature, if necessary, for a time sufficient to reduce the hydrate content to the aforesaid level (e.g. 1 to 5 hours) or using a low pH fluorine source solution having a pH of less than 3.5 using aqueous solutions of HF or appropriate mixtures of HF and NH_4F to a bulk fluorine level of about 10 wt% or less (e.g., 2 to 10 wt%), preferably about 8 wt% or less followed by drying/heating in a thin bed or rotary kiln to a temperature of 350 to 450 °C, preferably 375 to 425 °C in air an oxygen containing atmosphere, or an inert atmosphere and holding for 1 to 5 hours. The alumina or alumina containing support material is preferably in the form of extrudates, and are preferably at least about 1/32 inch (0.7938 mm) across the longest cross-sectional dimension. If the low pH prepared catalyst is first charged to a unit, the catalyst must be held at the final activation temperature for longer than 5 hours, preferably longer than 10 hours and preferably at temperatures of 400 to 450 °C.

The above catalysts typically contain from 0.1 to 5.0 wt% metal, preferably 0.1 to 1.0 wt% metal, most preferably 0.2 to 0.6 wt% metal.

The dried/heated catalyst has a surface nitrogen content N/Al of 0.01 or less by X-ray photoelectron spectroscopy (XPS, preferably an N/Al of 0.007 or less, most preferably an N/Al of 0.004 or less by XPS.

The catalyst following the above recited heating step can be charged to the isomerization reactor and brought quickly up to operating conditions. Alternatively following the above recited heating step the catalyst prepared using the pH 3.5 to 4.5 solution technique can be activated, preferably in pure or plant hydrogen (60 to 70% H_2) at 350 to 450 °C, care being taken to employ short activation times, from 1 to 24 hours, preferably 2 to 10 hours being sufficient. Long activation times (in excess of 24 hours) have been found to be detrimental to catalyst performance. By way of comparison, catalysts made using solutions of pH less than 3.5 can be activated in pure or plant hydrogen at 350 to 500 °C for from 1 to 48 hours or longer. In fact, if catalyst prepared using solutions of pH less than 3.5 are not heated first, then it is preferred that they be subsequently activated at more severe conditions, i.e. for longer times and/or at higher temperatures. On the other hand, if they are heated first, then moderate activation condition procedures similar to those employed with catalysts made from higher pH solution techniques will suffice.

A typical activation profile shows a profile of 2 hours to go from room temperature with 100 °C with the catalyst being held at 100 °C for 0 to 2 hours then the temperature is raised from 100 to 350 over a period of 1 to 3 hours with a hold at the final temperature of from 1 to 4 hours. Alternatively the catalyst can be activated by heating from room temperature to the final temperature of 350 to 450 °C over a period of 2 to 7 hours with a hold at the final temperature of 0 to 4 hours. Similar activation can be accomplished by going from room temperature to the final temperature of 350 to 450 °C in 1 hour.

It is possible to dispense with a separate activation procedure entirely (provided the catalyst has been first heated in air). In these instances, the calcined catalyst is simply charged to the reactor, heated to just above the melting point of the wax feed, feed and hydrogen introduced onto the catalyst and thereafter the unit brought quickly up to operation conditions.

Another preferred catalyst comprises a hydrogenating metal on fluorided alumina or material containing alumina support made by depositing the hydrogenation metal on the support and fluoriding said metal loaded support using acidic fluorine sources such as HF by any convenient technique such as spraying, soaking, incipient wetness, etc. to deposit between 2-10% F preferably 2-8% F. Following halogenation the catalyst is dried, typically at 120 °C and then crushed to expose inner surfaces, the crushed catalyst is double sieved to remove fines and uncrushed particles. This sized catalyst is 1/32 inch (0.7938 mm) or less and typically from 1/64 to 1/32 inch (0.3969 to 0.7938 mm) in size across its largest cross-sectional dimension.

The starting particle or extrudate may be of any physical configuration. Thus, particles such as cylinders, trilobes or quadrilobes may be used. Extrudates of any diameter may be utilized and can be anywhere from 1/32 of an inch (0.7938 mm) to many inches (or mm) in length, the length dimension being set solely by handling considerations. It is preferred that following sizing the particle have a length smaller than the initial extrudate diameter.

Following deposition of the hydrogenation metal and the fluoriding of the particle or extrudate, the particle or extrudate is crushed or fractured to expose inner surfaces.

The crushing is conducted to an extent appropriate to the particle or extrudate with which one is starting. Thus, an extrudate which is 1 foot (30.48 cm) long and 1/16 inch (1.5875 mm) in diameter would be sized into pieces which range anywhere from 1/64 to 1/32 inch (0.3969 to 0.7938 mm) across its longest cross-sectional dimension. Similarly, if the extrudate is only 1/16 inch (1.5875 mm) to begin with it will be enough simply to break it in half, into two 1/32 inch (0.7938 mm) pieces, for example.

Alternatively, one can take a metal loaded support particle which is already about 1/32 inch (0.7938 mm) in size or smaller and fluoride it as described above using HF.

Generally, therefore, the sized material will range in size between 1/64 to 1/32 inch (0.3969 to 0.7938 mm) in size.

The uncalcined catalyst is activated in a hydrogen atmosphere such as pure hydrogen or plant hydrogen containing 60 to 70 vol% H₂ by heating to 350 to 500 °C, preferably 350 to 450 °C for from 1 to 48 hours or longer. The hydrogen activation profiles previously described may be used here.

This sized catalyst is unexpectedly superior for wax isomerization as compared to the uncrushed particle or extrudate starting material. It has also been discovered that 370 °C+ oil products made using the sized catalyst as compared to the uncrushed or extrudate material starting with wax possessing about 5 to 10% oil exhibit higher VI's than 370 + °C oil products made starting with wax possessing 0% oil (on the one hand) and about 20% oil (on the other). Therefore, to produce products having the highest VI one would isomerize wax having from 5 to 15% oil, preferably 7 to 10% oil using the "sized" catalyst produced using HF.

One desiring to maximize the production of lube oil having a viscosity in the 5.6 to 5.9 cSt/100 °C range should practice the isomerization process under low hydrogen treat gas rate conditions, treat gas rates on the order of 500 to 5000 SCF/bbl H₂ (89.05 to 890.47 liter gas/liter oil), preferably 2000 to 4000 SCF/bbl H₂ (356.19 to 712.38 liter gas/liter oil), most preferably about 2000 to 3000 SCF/bbl H₂ (356.19 to 534.28 liter gas/liter oil).

The isomerized wax material is then subjected to second stage catalyst using a Group VIII metal on refractory metal oxide catalyst or Group VIII metal on halogenated refractory metal oxide catalyst. The halogenated catalyst can be the same or different than the Group VIII metal on halogenated refractory metal oxide catalyst used in the prior isomerization reactor. If the same catalyst is used, the process can be run in blocked sequence,, the reactor first used to produce isomerate by being run at severe conditions with the isomerate going to tankage, the stored isomerate being subsequently recycled through the unit now run under mild conditions to remove trace quantities of polynuclear aromatics and other constituents detrimental to daylight and oxidation stability, but which conditions are not sufficient to effect further isomerization of the hydrocarbon components. This second stage zone is run at a temperature of 170 °C to 270 °C, preferably 180 °C to 220 °C, a flow velocity of 0.25 to 10 v/v/hr, preferably 1 to 4 v/v/hr, a pressure of from 300 to 1500 psi (2.068 to 10.342 MPa) H₂, preferably 500 to 1000 psi H₂ (3.448 to 6.895 MPa), and a hydrogen gas rate of 500 to 10,000 SCF/B (89.05 to 1780.94 liter gas/liter oil), preferably 1000 to 5000 SCF/B (178.09 to 890.47 liter gas/liter oil). Higher temperatures may be employed if pressures in excess of 1500 psi are used, but such high pressures may not be practical.

Following isomerization and the mild second stage treatment described herein the isomerate is fractionated into a lubes cut and fuels cut, the lubes cut being identified as that fraction boiling in the 330 °C+ range, preferably the 370 °C+ range and even higher. This lubes fraction is then dewaxed to a pour point of about -21 °C or lower. Dewaxing is accomplished by techniques which permit the recovery of unconverted wax, since in the process of the present invention this unconverted wax is recycled to the isomerization unit. It is preferred that this recycle wax be recycled to the main wax reservoir and be passed through the hydrotreating unit to remove any quantities of entrained dewaxing solvent which solvent could be detrimental to the isomerization catalyst. Alternatively, a separate stripper can be used to remove entrained dewaxing solvent or other contaminants. Since the unconverted wax is to be recycled dewaxing procedures which destroy the wax such as catalytic dewaxing are not recommended. Solvent dewaxing is utilized and employs typical dewaxing solvents. Solvent dewaxing utilizes typical dewaxing solvents such as C₃-C₆ ketones (e.g. methyl ethyl ketone, methyl isobutyl ketone and mixtures thereof), C₆-C₁₀ aromatic hydrocarbons (e.g. toluene), mixtures of ketones and aromatics (e.g. MEK/toluene), autorefrigerative sol-

vents such as liquefied, normally gaseous C₂-C₄ hydrocarbons such as propane, propylene, butane, butylene and mixtures thereof, etc. at filter temperature of -25 to -30 °C. The preferred solvent to dewax the isomerate, especially isomerates derived from heavier waxes (e.g. Bright Stock Waxes) under miscible conditions and thereby produce the highest yield of dewaxed oil at a high filter rate is a mixture of
 5 MEK/MIBK (20/80 v/v) used at a temperature in the range -25 to -30 °C. Pour points lower than -21 °C can be achieved using lower filter temperatures and other ratios of said solvent but a penalty is paid due to operation under immiscible conditions, the penalty being lower filter rates. Further when dewaxing isomerate made from a microwax, e.g. Bright Stock slack wax it has been found to be preferred that the fraction of the isomerate which is sent to the dewaxer is the "broad heart cut" identified as the fraction
 10 boiling between 330 to 600 °C, preferably 370 to 580 °C after such fractionation the fraction sent to the dewaxer has between 25 to 40% unconverted wax. The heavy bottoms fraction contains appreciable wax and can be recycled to the isomerization unit directly. However, if any hydrotreating or deoiling is deemed necessary or desirable then the fractionation bottoms are recycled by being sent first to the fresh feed reservoir and combined with the wax therein. As an alternative the isomerate from the second stage catalyst
 15 zone can be fractionated into narrow cuts and each cut individually dewaxed.

Figures 1 and 2 present schematic representations of preferred embodiments of the wax isomerization process.

In Figure 1 slack wax feed derived from for example a lighter oil such as 600N oil or lighter is fed from the reservoir (1) to a hydrotreater (3) via line 2 wherein heteroatom compounds are removed from the wax.
 20 This hydrogenated slack wax is then fed via line 4 to the isomerization unit (5) after which the total liquid product is fed first via lines 6 and 6A to a low temperature, mild condition second stage treating unit (unit 7) wherein the TLP is contacted with the isomerization catalyst or simply a noble Group VIII metal on aluminum catalyst to produce a stream which is then sent via line 6B to the fractionator tower (unit 8). The tube stream boiling in the 370 °C+ range is then forwarded via line 9 to the solvent dewaxer (unit 10) for
 25 the separation of waxy constituents therefrom, the dewaxed oil fraction being recovered via line 11 and forwarded to other conventional treatment processes normally employed on base stock or blending stock oils. The recovered wax is recycled either directly to the slack wax stream being fed to the isomerization unit or it is recycled to the wax reservoir (1) via line 12B for passage through the hydrotreater prior to being recycled to the isomerization unit.

In Figure 2 the wax processing stream is much like that of Figure 1, the main difference being that Figure 2 represents the scheme for handling heavier slack wax feeds, such as a wax feed derived from Bright Stock oil. In such a case the wax from reservoir 1 is fed via line 2 to the hydrotreater (3) prior to being sent via line 4 to the isomerization unit (unit 5) after which it is fed via lines 6 and 6A to a low temperature mild condition second stage treating unit (unit 7) wherein it is contacted with a further charge of
 35 isomerization catalyst or simply noble Group VIII metal on alumina and fed via line 6B to the fractionator tower (unit 8). In the fractionator tower the isomerate made using the heavy wax is fractionated into a light fraction boiling in the 370 °C- (a fuels cut) a lube cut boiling in the 370 °C+ range and a bottoms fraction boiling in the 580 °C+ range. The lubes fraction, a broad cut boiling in the 370 °C to 580 °C range is sent via line 9 to the dewaxer (unit 10) as previously described. The 580 °C+ bottoms fraction contains
 40 appreciable wax and is recycled via lines 13, 13A, 13B and 4 to the isomerization unit (5). This bottoms fraction optionally can be combined via lines 13 and 13C with the wax in line 12 recovered from the dewaxing unit (10) in which case the total recycled stream can be fed directly to the isomerization unit via lines 12A, 13B and 4 or it can be sent to the wax reservoir (1) via line 12B for treatment of the hydrotreater prior to being fed to the isomerization unit.

45 LIST OF CATALYSTS USED

In the following examples, the following catalysts were used either as first stage isomerization catalyst and/or as second stage mild condition hydrofinishing catalyst. Which catalyst was used in what service is
 50 identified in each example.

Catalyst A: Commercially available platinum on γ -alumina reforming catalyst comprising 0.62% Pt on γ -alumina and containing about 1% chlorine.

Catalyst B: Platinum on fluorided γ -alumina made by soaking a commercially available Pt/ γ -Al₂O₃ base (Catalyst A) in NH₄F/HF solution having a pH of about 4. The soaked material was
 55 washed, then dried and then heated for two hours at 400 °C in air. The catalyst was analyzed and had a bulk fluorine content of 4.5%, platinum content of 0.62 wt%, surface N/Al ratio (by X-ray photo spectroscopy) of .0037. The catalyst was activated by heating to 450 °C in H₂ at 344.8 kPa (50 psi) in the following manner: room temperature to 100 °C

EP 0 323 724 B1

in two hours, hold at 100 °C for one hour; heat from 100 °C to 400 °C in three hours, hold at 450 °C for four hours.

Catalyst C: Platinum on fluorided γ -alumina made by soaking a commercially available Pt/ γ -Al₂O₃ base (Catalyst A) in NH₄F/HF solution made up to a pH of about 4. The soaked material was washed, then dried then heated for two hours at 400 °C in air. The catalyst was analyzed and had a bulk fluorine content of 6.9 wt%, platinum content of 0.62 wt%, surface N/Al ratio (by XPS) of 0.0040. This catalyst was activated by heating to 350 °C in H₂ at 50 psi (344.8 kPa) in the following manner; room temperature to 100 °C in two hours, hold at 100 °C for one hour; heat from 100 °C to 350 °C in two hours, hold at 350 °C for one hour.

Catalyst D: Platinum on fluorided γ -alumina made by soaking a commercially available Pt/ γ -Al₂O₃ base (Catalyst A) in 10% HF. The soaked material was washed and dried at 150 °C in air. The catalyst was analyzed and had a bulk fluorine content of 8.0%, platinum content of 0.62 wt%. The catalyst was activated by heating to 400 °C in H₂ at 300 psi (2.069 MPa) in the following manner; room temperature to 100 °C at 35 °C per hour, hold at 100 °C for 6 hours, heat from 100 °C to 250 °C at 10 °C per hour, hold at 250 °C for 12 hours; heat to 400 °C at 10 °C per hour; hold at 400 °C for 3 hours.

Catalyst E: Commercially available platinum on γ -alumina comprising 0.5% Pt on γ -alumina from which halogen had been removed and activated by heating in 275.84 kPa (40 psi) H₂ as follows: room temperature to 100 °C in 2 hours, hold at 100 °C for 1 hour; heat to 350 °C over 2 hours, hold at 350 °C for 1 hour.

Slack Wax Hydrotreating

In the following examples raw slack waxes from the dewaxing of petroleum oils were hydrotreated to remove polar materials, as well as heteroatomic compounds (sulfur and nitrogen containing compounds) which would deactivate the platinum on fluorided alumina hydroisomerization catalysts. Any conventional hydrotreating catalyst can be used, e.g., Cyanamid's HDN-30; Katalco's NM-506; Ketjen's KF-840; etc. The prime processing targets for the hydrotreated material are a sulfur content of about 10 ppm or less and a nitrogen content of 1 ppm or less. In the present Example Ketjen KF-840 was used in the form of 1/20 inch (1.27 mm) quadrilobes. The catalyst, as received from the manufacturer, had 4% NiO and 19.5% MoO₃ on an alumina base, and had a surface area of 180 m²/gram, with an average pore volume of 0.35 cm³/g, and an average pore radius of 38Å (3.8 nm). Twelve liters of this catalyst was packed into a tubular fixed bed 189 cm long and 9.9 cm in diameter and sulfided by exposure to H₂S in hydrogen and a sulfur containing vacuum distillate. The hydrotreating unit can be run in either up-flow or down-flow mode. Two different slack waxes were hydrotreated, a Western Canadian 600N slack wax, and an Augusta Bright Stock slack wax. Typical properties of each feed are given below in Table 1.

TABLE 1

Slack Wax Source	600 Neutral	Bright Stock
Gravity, ° API	36.2	31.5
Viscosity, 100 °C, cSt	6.93	18.25
Sulphur, wppm	710	2290
Total Nitrogen, wppm	13	120
Basic Nitrogen, wppm	6	34
Asphaltenes, Wt. %	-	0.14
Dewaxing Aid, Wt. %	-	0.17
GC Distillation, initial °C	372	367
1%, °C	384	430
5%, °C	416	497
50%, °C	488	606
93%, °C	538	-
Oil Content, Wt. %	19.6	12.9
Aromatic Content, Wt. %	4	6

The above are representative assays of typical samples of the identified slack waxes.

EP 0 323 724 B1

In point of fact significant changes, especially in sulphur and nitrogen contents, are seen in different samples of these slack waxes over time, reflecting variations between various crude samples and processing severities.

The 600N slack wax was hydrotreated in an up-flow mode at 0.5 v/v/hr, 1000 psig (6.895 MPa) hydrogen pressure and a gas treat rate of 1500 SCF H₂/B (267.14 liter gas/liter oil). For the first 2080 hours of operation reaction temperature was held at 320 °C and thereafter at 330 °C. The slack wax sulphur contents ranged from 0.073 weight percent to 0.113 weight percent and nitrogen content ranged from 12 to 17 wppm. Periodic analysis of the hydrotreated wax showed that sulphur contents were consistently 4 wppm and lower, while nitrogen contents were always 2 wppm or less.

The Bright Stock slack waxes feeds having different oil contents were hydrotreated in an up-flow mode at 380 °C, 1000 psig (6.895 MPa) hydrogen pressure and 1500 SCFH₂/B (267.14 liter gas/liter oil) treat gas rate. The space velocity was varied from 0.42 to 0.5, in order to obtain the desired sulfur and nitrogen reduction. Inspections of the hydrotreated wax feeds used in the examples are given below in Table 2.

TABLE 2

Slack Wax Inspection Following Hydrotreating			
Wax Source	600N	Bright Stock	
		A	B
Gravity, ° API @15 ° C	36.3	35.7	34.1
Viscosity, 100 ° C, cSt	6.77	11.05	10.52
Sulphur, wppm	2	2	1
Nitrogen, wppm	<1	<1	<1
Asphaltenes, Wt. %	-	0.05	
Dewaxing Aid, Wt. %	-	0.00	
GC Distillation, Initial, ° C	367	189	211
1%, ° C	378	211	230
5%, ° C	412	313	307
50%, ° C	482	366	553
95%, ° C	547	-	-
Oil Content, Wt. %	19.5	17.1	23.6
Aromatic Content, Wt. %	2	4	-

Hydroisomerization Operation

The slack waxes from the hydrotreater freed of H₂S and NH₃ were isomerized over various of the Pt-F/Al₂O₃ catalysts described earlier. The 370 °C+ dewaxed oil yields reported herein below were determined by "Standard Test Method for Solvent Extractable on Petroleum Waxes" ASTM Test D-3235-73 (Reapproved 1983).

(A) The hydrotreated Bright Stock slack wax (B) was isomerized at 320 °C, 0.89 v/v/hr space velocity, 1000 psi (6.895 MPa) (H₂) pressure and 5000 SCF/bbl, H₂ (890.47 liter H₂ gas/liter oil), gas rate over a 200 cm³ charge of Catalyst B. The hydroconversion was conducted upflow mode and operated at a mass velocity was 160 pounds per hour/square foot (781.23 kg/m²) (i.e. low mass velocity).

The isomerate total liquid product (TLP) produced at conditions that gave 37.5 wt% conversion to 370 °C- when dewaxed at standard conditions gave a 370 °C+ dewaxed oil yield of 48.5 wt% (Based on Feed).

(B) The hydrotreated Bright Stock slack wax (B) was isomerized at low mass velocity at 325-330 °C at .89 v/v/h, 1000 psig (6.895 MPa), H₂, 5000 SCF H₂/bbl (890.47 liter gas/liter oil) over a 200 cm³ charge of Catalyst C. The isomerate Total Liquid Product (TLP) produced at conditions that gave 20.6 wt% conversion to 370 °C- when dewaxed at standard conditions gave a 370 °C+ dewaxed oil yield 41.7 wt% (based on feed).

(C) The hydrotreated Bright Stock slack wax (A) was isomerized over a 3500 cm³ charge of Catalyst D in a series of six reactors at high mass velocity conditions (2000 pounds/hr/square foot (9765.3 kg/m²/h)) at two sets of isomerization conditions: (i) 313 °C at 0.5 v/v/hr., 1000 psi (6.895 MPa), 5000 SCF H₂/bbl (890.47 liter gas/liter oil) and (ii) 325 °C at 1.0 v/v/hr., 1000 psi (6.895 MPa), 5000 SCF H₂/bbl (890.47

EP 0 323 724 B1

liter gas/liter oil) yielding an isomerate blend (ii/i of 80/20) of product. Conversion (based on the blend) to 370 °C- was 25.1 wt%. The 370 °C+ dewaxed at standard conditions give a dewaxed oil yield (based on blend) of 50.0 wt%.

5 (D) The hydrotreated 600N slack wax was isomerized over 3500cm³ charge of Catalyst D in a series of six (6) reactors at high mass velocity conditions, 2000 pounds/hr/sq.ft. (9765.3 kg/m²/h) at 326 °C, 1000 psi (6.895 MPa), 5000 SCF H₂/bbl (890.47 liter H₂ gas/liter oil), 1.0 v/v/hr. Conversion to 370 °C- was 25.8%. The yield of 370 °C+ dewaxed oil was 51.0 wt% (based on feed).

DEWAXED BASE OIL PROPERTIES

10

Base oils were prepared from the total liquid product coming from the isomerization zone by fractionating said TLP into various lube fractions and dewaxing said lube fraction to a pour point of -21 °C.

1. The 600N slack wax isomerate (D) TLP was topped to 370 °C+ and this lube oil fraction dewaxed to a pour point of -21 °C by batch dewaxing using 100% MIBK solvent at a dilution rate of 4 volumes of solvent to one volume of oil at a -26 °C filter temperature.

15 2. Bright Stock isomerate (B) was topped to 370 °C+ and dewaxed to -21 °C by batch dewaxing using 100% MIBK solvent at 4 volumes of solvent to 1 volume of oil at -26 °C filter temperature.

3. Bright Stock isomerate (C) was vacuum distilled to give a 370-582 °C heart-cut and dewaxed at -27 °C using 15/85 MEK/MIBK at 4 volumes of solvent to 1 volume of oil to a -21 °C pour. This dewaxed oil was then vacuum fractionated into 2% cuts at the front and back end of the desired heart-cut in order to allow blending to a final viscosity of 4.5 cSt at 100 °C.

20 4. As in 3 (above) but the incremental cuts were blended to final dewaxed oil viscosities ranging from 8.0 to 8.3 cSt at 100 °C.

5. As in 3 (above) but using Bright Stock isomerate (A) the incremental cuts from the "A" product distillation were blended to a final dewaxed oil viscosity of 8.0 cSt at 100 °C.

25 In the following examples daylight stability was determined on the products from 1 through 5 (above) by exposing 5 ml samples in the presence of air continuously in a light box apparatus in which the lamp used was an Excella fluorescent tube from Sunburst Electric which simulated the intensity and frequency range of actual solar radiation. Samples were rated daily on the degree of haze, floc and sludge formation as to time exposed to air and radiation.

30

Example 1

The dewaxed base stock oils above 1-5 were evaluated for daylight stability and found to exhibit the following:

35

TABLE 3

40

Dewaxed Base Oil #	Daylight Stability
1	Light haze, 48 hrs; distinct haze 96 hrs.
2	Haze/sludge ≤ 24 hours
3	Haze/sludge ≤ 24 hours
4	Haze/sludge ≤ 24 hours
5	Haze/sludge ≤ 24 hours

45

It is seen that none of these dewaxed isomerate base oil products exhibit acceptable daylight stability since conventional lube base oils normally have daylight stability in excess of 10 days.

50

Example 2

HYDROFINISHED DEWAXED BASE OILS

55

Base oils 3 and 4 were hydrofinished over sulfided KF-840 (Ni-Mo/Al₂O₃) at 300 °C at 500 psi (3.447 MPa), 500 SCF H₂/bbl (89.05 liter H₂ gas/liter oil) and 1 v/v/hr. These hydrofinished base oils were evaluated for daylight stability and found to exhibit the following somewhat improved but still unacceptable daylight stabilities:

TABLE 4

KF-840 Hydrofined Dewaxed Base Oil	Daylight Stability
3	Haze/sludge, 50 hours
4	Haze/sludge, 100 hours

5

10 Example 3

HYDROFINISHED BASE OILS
(Pt/F-Al₂O₃ Catalyst)

15 Dewaxed base oils 3, 4 and 5 were hydrofinished over Pt/F-Al₂O₃ Catalyst B under a number of conditions (recited in Table 4). The hydrofinished base oils were evaluated for daylight stability and found to exhibit the following:

20

25

30

35

40

45

50

55

TABLE 5

Dewaxed Base Oil							
Feed	3			4*		5	
Catalyst	B			B		B	
<u>Hydrofinishing Conditions</u>							
Temperature °C	160	180	200	200	225	200	
Pressure, MPa (psi) H ₂	^{6.895} L(1000)	^{6.895} L(1000)	^{6.845} L(1000)	^{6.895} L(1000)	^{6.895} L(1000)	^{6.895} L(1000)	
Space Velocity v/v/hr	0.9	0.9	2.0	0.9	0.9	0.9	
Gas Rate, liter H ₂ gas/liter feed oil (SCF H ₂ /B)	^{404.3} L(2270)	^{404.3} L(2270)	^{404.3} L(2270)	^{404.3} L(2270)	^{404.3} L(2270)	^{890.5} L(5000)	
<u>Inspection of Hydrofinished Oil</u>							
Time to Form a Distinct Haze, days							
	3	6	13	10	8	>60	

* Prior to hydrofinishing feed 4 had already developed a sludge which was filtered out prior to hydrofinishing and evaluation.

When dealing with isomerate fractions, it is seen that hydrofinishing under higher treat gas rates gave a product of improved stability.

In the following examples 4 to 9, stabilized unfractionated total liquid isomerate products were hydrofinished under various conditions and over various catalysts and subsequently evaluated for daylight stability.

Example 4

600N slack wax isomerate total liquid product (TLP), from the hydroisomerization (d) operation with catalyst D (Ni/Mo/Al₂O₃) was hydrofinished over KF-840 (conditions recited below). The hydrofinished material was fractionated to obtain the 370°C+ fraction for subsequent dewaxing to -21°C pour using 100% MIBK solvent at a 4/1 solvent to oil dilution ratio and -26°C filter temperature. This dewaxed oil fraction was evaluated for daylight stability.

TABLE 6

Hydrofinishing Conditions:		
Temperature °C	200	200
Pressure, MPa (psi), H ₂	6.895 (1000)	3.448 (500)
Gas Rate, (SCF/B, H ₂) liter H ₂ gas/liter feed	(2500) 445.2	(2500) 445.2
Space Velocity v/v/hr	2.0	2.0
Inspection of Hydrofinished Oil		
Time for dewaxed to form a slight Haze (days)	3	3
Time for Dewaxed Oil to form a Distinct Haze (days)	10 to 13	10 to 13

From the above it is apparent that treating a total liquid product with a conventional hydrofinishing catalyst produces a final material which exhibits unacceptable performance characteristics as regards daylight stability.

Example 5

The 600N slack wax isomerate (TLP), feed D and Bright Stock slack wax isomerate (TLP) feed B were hydrofinished over Pt/alumina, catalyst E (previously described), under the conditions recited below. The hydrofinished materials were fractionated into 370°C+ fraction and dewaxed to -20°C pour as recited in Example 4. The dewaxed fraction were evaluated for daylight stability (Table 7).

TABLE 7

Hydroisomerization (TLP)

Feed

D

B

Hydrofinishing

Conditions:

Temperature °C	200	200	200
Pressure, (psi) ^{MPa} /H ₂	(1000)6.895	(500)3.448	(1000)6.895
Gas Rate, SCF/B, H ₂	2500	2500	2500
Space Velocity ^{liter H₂ gas/liter oil feed}	445.2	445.2	445.2
v/v/hr	2.0	2.0	0.9

Inspection of Hydrofinished Dewaxed Oil

Time to Form a

Slight Haze, days	16	16	10
--------------------------	-----------	-----------	-----------

It is seen that hydrofinishing a total liquid product over a platinum on alumina catalyst produces a material having improved daylight stability as compared to materials derived from TLP's hydrofinished over conventional hydrofinishing catalysts.

Example 6

EP 0 323 724 B1

The 600N slack wax isomerate (TLP), feed D, was hydrofinished over Pt on alumina (1% Cl), Catalyst A, (previously described), under the conditions recited below. The hydrofinished isomerate was fractionated to obtain the 370 °C+ fraction for solvent dewaxing to -21 °C pour using 100% MIBK solvent at 4/1 solvent to oil dilution ratio and -26 °C filter temperatures to dewax as recited in Example 4. The dewaxed fraction was evaluated for daylight stability (Table 8).

TABLE 8

Hydrofinishing Conditions:		
Temperature °C	200	200
Pressure (psi) MPa H ₂	(1000) 6.895	(500) 3.448
Gas Rate, SCF/B, H ₂	2500	2500
liter H ₂ gas/liter feed	445.2	445.2
Space Velocity v/v/hr	2.0	2.0
Inspection of Hydrofinished dewaxed Oil		
Time to Form a Slight Haze, days	60	60

From this it is seen that hydrofinishing a TLP over a platinum on halogenated alumina isomerization catalyst produces a material which exhibits remarkable daylight stability.

Example 7

The 600N slack wax isomerate (TLP), feed D, was hydrofinished over Pt/F-Al₂O₃, Catalyst C, conditions recited below. The hydrofinished isomerate was fractionated to obtain the 370 °C+ fraction for segment dewaxing to -21 °C pour using 100% MIBK solvent at 4/1 solvent to oil dilution ratio and -26 °C filter temperature to dewax as recited in Example 4. The dewaxed fraction was evaluated for daylight stability (Table 9).

TABLE 9

Hydrofinishing Conditions:							
Temperature °C	200	220	180	200	150	300	
Pressure, psi H ₂	1000	1000	1000	500	1000	1000	
MPa	6.895	6.895	6.895	3.448	6.895	6.895	
Gas Rate, SCF/B, H ₂	2500	2500	2500	2500	2500	2500	
liter H ₂ gas/liter feed	445.2	445.2	445.2	445.2	445.2	445.2	
Space Velocity v/v/hr	2.0	2.0	2.0	2.0	2.0	2.0	
Inspection of Hydrofinished Dewaxed Oil							
Time to form a Slight Haze, days	17	17	17	17	5	7	
Time to form a Distinct Haze, days	48	48	20	20	5	9	

From the above it is seen that a window of hydrofinishing conditions exists within which daylight stability of materials made from isomerate total liquid products is maximized. Hydrofinishing at temperatures between 180 to 300 °C appears to favor improved daylight stability.

Example 8

Bright Stock slack wax isomerate (TLP), feed (a) was hydrofinished over Pt/F-Al₂O₃, Catalyst B, conditions recited below. The unhydrofinished TLP and the hydrofinished materials were vacuum distilled to produce 460 to 550 °C fractions, then dewaxed. These fractions were dewaxed with 5% toluene/95% MIBK at a solvent oil ratio of 4:1 and a filter temperature of -27 °C. Each dewaxed fraction was then evaluated for daylight stability.

TABLE 10

5	Feed	Hydroisomerate (a)		
	<u>Hydrofinishing Conditions</u>			
	Temperature, °C	-	200	270
10	Pressure, psi H ₂	-	1000	1000
			6.825	6.825
	Gas Rate, SCF/B, H ₂	-	5000	5000
			490.4	490.4
	Space Velocity, Liter H ₂ gas / Liter feed			
15	v/v/hr	-	0.9	0.9
	Inspections of	<u>Un-hydrofinished</u>	<u>Hydrofinished</u>	
20	<u>Dewaxed Oil</u>			
	(460-550°C Fraction)			
25	Viscosity at 100°C,			
	cSt	7.2	6.8	7.1
30	Time to Form a			
	Distinct Haze, days	≤1	13	10

35 From this it is seen that hydrofinishing at a temperature lower than about 270 °C is preferred for producing daylight stable base oil products from TLP's.

Example 9

40 Bright Stock slack wax, isomerate TLP, feed (c), was hydrofinished over Pt/F-Al₂O₃, Catalyst B, at conditions recited below. The hydrofinished materials were vacuum distilled to produce heart-cut fractions boiling in the 370 °C to 580 °C range. These fractions were dewaxed with 100% MIBK using a solvent:oil ratio of 4:1 and a filter temperature of -30 °C. The dewaxed heart-cut fractions were then further fractionated into light (4.5 cSt) and heavy (8.4 cSt) dewaxed oil fractions as shown in Table 11 and evaluated for daylight stability.

45

50

55

TABLE 11**Hydrofinishing****Conditions:**

Temperature, °C	200	200
Pressure, psi, H ₂	1000	1000
Gas Rate, SCF/B, H ₂	5000	2274
Space Velocity v/v/hr	0.9	2.0

MPa 6.895
liter H₂ gas/liter feed 890.4
404.99

Inspections of Dewaxed Oil

Boiling Range, °C	417	460+	435	460+
	to		to	
	460		460	
Viscosity at 100°C cSt	4.5	8.4	4.5	8.4
Pour Point, °C	-27	-24	-33	-30
Time to Form a Distinct Haze, days	12	10	11	11

From the above examples, it is clear that hydrofinishing the total liquid products coming from the isomerization unit using the Group VIII metal on refractory metal oxide or Group VIII metal on halogenated refractory metal oxide catalyst produce dewaxed base oils which exhibit superior daylight stability as compared to the unhydrofinished dewaxed base oils and dewaxed base oils hydrofinished using conventional hydrofinishing catalyst. The examples show that hydrofinishing must be performed within a narrow window of temperature conditions, i.e. about 170-270 °C, preferably 180-220 °C when operating under consistent mild pressure, treat gas rate and flow velocity conditions.

Comparative Example 1

The following Example demonstrates the effect of mild condition hydrofinishing on a fractionated lube hydrocrackate.

A hydrocracked lube basestock was prepared as follows:

Recycle from a fuels hydrocracker was withdrawn with the hydrocracker operating at the following conditions:

EP 0 323 724 B1

Feed	Heavy Coker Gas Oil
Fresh Feed Rate, kB/Day	11.2
Conversion, Wt.%	90.6
Recycle Withdrawal, kB/Day	1.05
Reactor 1 temperature, ° C	401.6
Reactor 2 temperature, ° C	376.5
Total Pressure,(psi) MPa	(2100) 14.48

5

10 This recycle was fractionated to give a lube stream in 26.3 LV% yield. The lube distillate was solvent dewaxed using a 40/60 mixture of MEK/MIBK, solvent to oil ratio of 2/1, and a filter temperature of -22 ° C. The resulting dewaxed oil had the following properties:

Viscosity at 40 ° C cSt	13.44
Viscosity Index	109
Saturates, Wt.%	96.0

15

20 This basestock has excellent viscometric properties. A sample of this basestock was hydrofinished over a conventional sulphided Ni/Mo on Al₂O₃ catalyst (KF-840) at 300 ° C, 2.0 LHSV, 350 psi (2.413 MPa) H₂, 500 SCF/B, H₂, (89.05 liter H₂ gas/liter feed) treat gas rate. A similar sample of fractionated hydrocrackate was hydrofinished according to the invention over a Pt/F/Al₂O₃ catalyst (Catalyst B) at 200 ° C, 1.0 LHSV, 1000 psi (6.895 MPa) H₂ and 5000 SCF/bbl (890.47 liter gas/liter feed) treat gas rate. These three different oils were tasted for daylight stability by two different methods. In method 1, a 5 ml vial was three-quarters
 25 filled with sample, loosely plugged with cotton wool, exposed to daylight in a north-facing window, and checked daily when possible for appearance. In method 2 oil samples (again in a 5 ml vial plugged with cotton wool) were exposed continuously in a light box apparatus in which the lamp used Excella fluorescent tube from Sunburst Electric) simulates the intensity and frequency range of actual radiation. Samples were rated daily in terms of time to haze, floc and sludge.

30 The results are presented in Table 12

35

40

45

50

55

Table 12

Test Method 1 (North Window)

	<u>Unhydrofinished</u>	<u>Conventional Hydrofinishing</u>	<u>Mild Hydrofinishing</u>
Time to Light Sludge (days)	5	12	> 16 days
Time to Heavy Sludge (days)	12	-	-

Appearance of light sludge or haze indicates the sample has failed. The oil treated according to the present invention as clear and white after 16 days, indicating excellent stability in this test. The unhydrofinished and conventionally hydrofinished oils produced sludge in an unacceptably short period of time.

Test Method 2 (Light Box)

	<u>Unhydrofinished</u>	<u>Conventional Hydrofinishing</u>	<u>Mild Hydrofinishing</u>
Time to Light Haze (hours)	24	48	120
Time to Light Sludge (hours)	48	55	169
Time to Heavy Sludge (hours)	120	120	288

Again, the oil hydrofinished over the Pt/F/Al₂O₃ catalyst at low temperatures is considerably improved in daylight stability compared with conventional hydrofinishing and unfinished oil.

From this it is apparent that mild hydrofinishing of hydrocrackate fractions produces base oil materials which exhibit improved daylight stability.

Comparative Example 2

EP 0 323 724 B1

An experiment was conducted to determine the effect of practicing mild hydrofining on a total liquid product hydrocrackate. In this example the feed, the total liquid product hydrocrackate is the recycle from the fuels hydrocracker described in Comparative Example 1. A portion of this stream, without fractionation was passed over Catalyst D at 200 ° C, 1.0 LHSV 1000 psi (6.895 MPa) H₂ and 5000 SCF/bbl, H₂, (890.47 liter H₂ gas/liter feed) while a second portion was treated conventionally using KF-840 under the conditions recited in Comparative Example 1. These materials were then fractionated and dewaxed to produce lube oil products which were evaluated for daylight stability using the light box procedure recited in Comparative Example 1. The results are presented in Table 13.

10

15

20

25

30

35

40

45

50

55

5
10
15
20
25
30
35
40
45
50

Table 13

Test Method 2 (Light Box)

	Unhydrofinished	Conventional Hydrofinishing as a TLP	Mild Hydrofinishing as a TLP
Time to Light Haze (hours)	18	18	45
Time to Light Sludge (hours)	32	32	54
Time to Heavy Sludge (hours)	54	79	97

While it is seen that mild hydrofinishing of the TLP hydrocrackate improves the daylight stability of a base oil produced from sold material to some extent as compared to conventional hydrofinishing, it is clear that the level of improvement is not such as to significantly alter the behavioral properties of the oil.

55 This Example does show, however, that the improvements to daylight stability observed for wax isomerate TLP resulting from mild hydrorefining are significant and unexpected.

Claims

1. A method for improving the daylight stability of a lube oil base stock or blending stock produced by the isomerization of wax, said method comprising hydrorefining either (a) the total liquid product produced in the wax isomerization unit or (b) the lube boiling range fraction of the isomerate, said hydrorefining employing a catalyst selected from Group VIII metal on refractory metal oxide and Group VIII metal on halogenated refractory metal oxide, a temperature in the range of from 170 to 270 ° C, a flow velocity of from 0.25 to 10 v/v/hr., a pressure of from 300 to 1500 psi (2.069 to 10.343 MPa) H₂ and a hydrogen gas rate of from 500 to 10,000 SCF/B (89.05 to 1780.94 liters gas/liter oil).
2. The method of claim 1 wherein the hydrorefined total liquid product is fractionated to yield a lube oil fraction and dewaxing said lube oil fraction.
3. The method of claim 1 or claim 2 wherein the hydrorefining step is effected at a temperature in the range of from 180 to 220 ° C, a flow velocity of from 1 to 4 v/v/hr., a pressure of from 500 to 1000 psi (3.448 to 6.895 MPa) H₂ and a hydrogen gas rate of from 1000 to 5000 SCF/B (178.09 to 890.47 liters gas/liter oil).
4. The method of any one of claims 1 to 3 wherein the catalyst used in the hydrorefining step is platinum or palladium on refractory metal oxide or platinum or palladium on halogenated refractory metal oxide.
5. The method of any one of claims 1 to 4 wherein the catalyst used in the mild hydrorefining step is platinum or palladium on fluorided or chlorinated silica, silica/alumina or alumina.
6. The method of any one of claims 1 to 5 wherein the catalyst is platinum on fluorided transition alumina.

Patentansprüche

1. Verfahren zur Verbesserung der Tageslichtstabilität eines durch die Isomerisierung von Paraffin hergestellten Schmieröl-Grundmaterials oder -Mischproduktes, welches die hydrierende Raffination entweder (a) des gesamten, im Paraffinisomerisierungsschritt hergestellten, flüssigen Produktes oder (b) der Schmieröl-Siedebereichs-Fraktion des Isomerisats umfaßt, wobei zur hydrierenden Raffination ein aus den Gruppe VIII-Metallen auf einem hochschmelzenden Metalloxid und den Gruppe VIII-Metallen auf einem halogenierten hochschmelzenden Metalloxid ausgewählter Katalysator, eine Temperatur im Bereich vom 170 bis 270 ° C, eine Durchflußgeschwindigkeit von 0,25 bis 10 Vol./Vol./Std., ein Druck von 300 bis 1500 psi (2,069 bis 10,343 MPa) H₂ und ein Wasserstoffgas-Verhältnis von 500 bis 10 000 SCF/B (89,05 bis 1780,94 Liter Gas/Liter Öl) angewandt werden.
2. Verfahren des Anspruchs 1, wobei das gesamte im Schritt der hydrierenden Raffination hergestellte, flüssige Produkt fraktioniert wird, um eine Schmieröl-Fraktion zu ergeben, und diese Schmieröl-Fraktion entparaffiniert wird.
3. Verfahren des Anspruchs 1 oder Anspruchs 2, wobei der Schritt der hydrierenden Raffination bei einer Temperatur im Bereich von 180 bis 220 ° C, einer Durchflußgeschwindigkeit von 1 bis 4 Vol./Vol./Std., einem Druck von 500 bis 1000 psi (3,448 bis 6,895 MPa) H₂ und einem Wasserstoffgas-Verhältnis von 1000 bis 5000 SCF/B (178,09 bis 890,47 Liter Gas/Liter Öl) durchgeführt wird.
4. Verfahren eines der Ansprüche 1 bis 3, wobei der im Schritt der hydrierenden Raffination verwendete Katalysator Platin oder Palladium auf einem hochschmelzenden Metalloxid oder Platin oder Palladium auf einem halogenierten hochschmelzenden Metalloxid ist.
5. Verfahren eines der Ansprüche 1 bis 4, wobei der im Schritt der milden hydrierenden Raffination verwendete Katalysator Platin oder Palladium auf fluoriertem oder chloriertem Siliciumdioxid, Siliciumdioxid/Aluminiumoxid oder Aluminiumoxid ist.
6. Verfahren eines der Ansprüche 1 bis 5, wobei der Katalysator Platin auf fluoriertem Übergangs-Aluminiumoxid ist.

Revendications

- 5
- 10
- 15
- 20
- 25
- 30
- 35
- 40
- 45
- 50
- 55
1. Procédé pour améliorer la stabilité à la lumière du jour d'une huile de base lubrifiante ou d'une huile mélangée de base produite par isomérisation de paraffine, ledit procédé comprenant l'hydroraffinage (a) du produit liquide total produit dans l'unité d'isomérisation de la paraffine, ou bien (b) de la fraction de domaine d'ébullition lubrifiant de l'isomérisat, ledit hydroraffinage employant un catalyseur choisi parmi un métal du groupe VIII sur un oxyde métallique réfractaire et un métal du groupe VIII sur un oxyde métallique réfractaire halogéné, une température dans la gamme de 170 à 270 ° C, une vitesse d'écoulement de 0,25 à 10 v/v/h, une pression de 300 à 1500 psi (2,069 à 10,343 MPa) de H₂ et un débit d'hydrogène gazeux de 500 à 10 000 SCF/B (89,05 à 1780,94 litres de gaz/litre d'huile).
 2. Procédé selon la revendication 1, dans lequel le produit liquide total hydroraffiné est fractionné pour donner une fraction d'huile lubrifiante et le déparaffinage de ladite fraction d'huile lubrifiante.
 3. Procédé selon la revendication 1 ou la revendication 2, dans lequel l'étape d'hydroraffinage est effectuée à une température dans la gamme de 180 à 220 ° C, à une vitesse d'écoulement de 1 à 4 v/v/h, sous une pression de 500 à 1000 psi (3,448 à 6,895 MPa) de H₂ et à un débit d'hydrogène gazeux de 1 000 à 5 000 SCF/B (178,09 à 890,47 litres de gaz/litre d'huile).
 4. Procédé selon l'une quelconque des revendications 1 à 3, dans lequel le catalyseur utilisé dans l'étape d'hydroraffinage est le platine ou le palladium sur un oxyde métallique réfractaire ou le platine ou le palladium sur un oxyde métallique réfractaire halogéné.
 5. Procédé selon l'une quelconque des revendications 1 à 4, dans lequel le catalyseur utilisé dans l'étape d'hydroraffinage modérée est le platine ou le palladium sur de la silice, de la silice/alumine ou de l'alumine fluorées ou chlorées.
 6. Procédé selon l'une quelconque des revendications 1 à 5, dans lequel le catalyseur est le platine sur de l'alumine de transition fluorée.

**SLACK WAX ISOMERIZATION PROCESS
FOR SINGLE FEED / BASESTOCK**

FIG.1

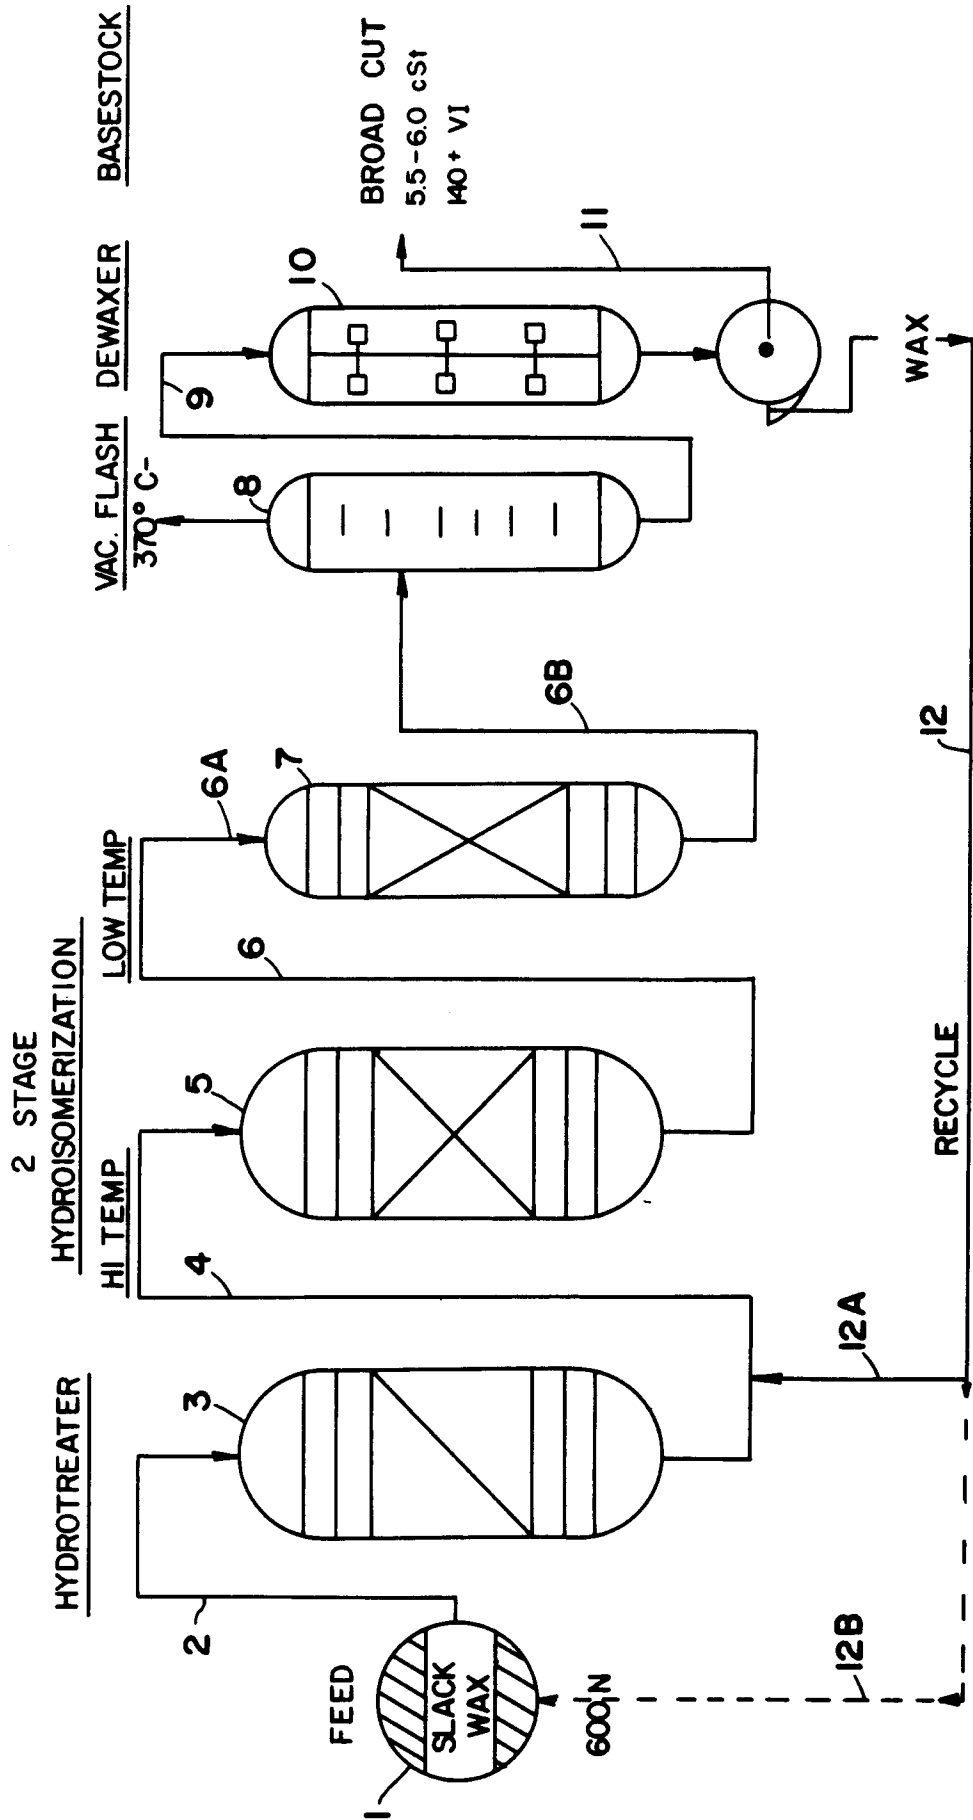


FIG. 2 SLACK WAX ISOMERIZATION PROCESS

