



(11)

EP 2 320 174 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

03.04.2019 Bulletin 2019/14

(51) Int Cl.:

F25D 11/02 ^(2006.01) **F25D 23/02** ^(2006.01)
F25D 25/00 ^(2006.01) **F25D 23/08** ^(2006.01)
F25D 25/02 ^(2006.01)

(21) Application number: **09765417.2**

(86) International application number:

PCT/CN2009/072353

(22) Date of filing: **19.06.2009**

(87) International publication number:

WO 2009/152778 (23.12.2009 Gazette 2009/52)

(54) **AN ELECTRIC REFRIGERATOR**

ELEKTRISCHE KÜHLVORRICHTUNG

RÉFRIGÉRATEUR ÉLECTRIQUE

(84) Designated Contracting States:

**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL
PT RO SE SI SK TR**

(30) Priority: **20.06.2008 CN 200810126724**

(43) Date of publication of application:

11.05.2011 Bulletin 2011/19

(73) Proprietors:

- **Haier Group Corporation**
Qingdao, Shandong 266101 (CN)
- **Qingdao Haier Joint Stock Co., Ltd.**
Qingdao, Shandong 266101 (CN)

(72) Inventors:

- **MA, Jie**
Qingdao
Shandong 266101 (CN)

• **ZHAO, Minghua**
Qingdao
Shandong 266101 (CN)

• **CHEN, Lei**
Qingdao
Shandong 266101 (CN)

• **REN, Wei**
Qingdao
Shandong 266101 (CN)

(74) Representative: **Ziebig & Hengelhaupt**

Patentanwälte PartG mbB
Leipziger Straße 49
10117 Berlin (DE)

(56) References cited:

CN-Y- 2 185 872 **CN-Y- 2 255 593**
CN-Y- 2 684 112 **JP-A- 7 248 171**
JP-A- H1 054 640 **JP-A- 10 300 338**
JP-A- H08 271 132 **JP-A- 2004 020 162**
US-A1- 2005 223 646

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Filed of the Invention

[0001] The present invention relates to a refrigerator, in particular to a refrigerator with a drawer door body.

Background of the Invention

[0002] A refrigerator, as a household refrigerating/freezing device, is being currently used by a large majority of families. The refrigerator is classified into many types, one type of which is designed as locating a freezing chamber on the upper side of the refrigerator and a refrigerating chamber on the lower side of the refrigerator, and another type of which is designed as locating a freezing chamber on the lower side of the refrigerator and a refrigerating chamber on the upper side of the refrigerator. As for the latter type of refrigerator, the door body of the freezing chamber is classified into several types of a single door body, a double door body, or a drawer type door body, etc.

[0003] In recent years, a refrigerator, commonly referred to as a French opposite-opening door refrigerator, emerges. The upper part of said refrigerator is a refrigerating chamber which is enclosed by a set of opposite-opening doors, and the lower part thereof is a freezing chamber which is enclosed by a drawer type door body. In order to obtain larger storage space, the freezing chamber at the lower part of this type of refrigerator is generally designed to have a relatively large volume.

[0004] During realizing the present invention, the inventor found that at least the following problem is present in the prior art: since the freezing chamber is merely provided with one drawer door body for accommodating objects, when pulling the drawer door body forward and taking out objects, the whole freezing chamber is open to external environment, resulting in excessive leakage of cool air, thereby prolonging the subsequent refrigerating process or frequently starting up a refrigerating system, so as to cause more consumption of electric energy.

[0005] JP H08 271132 discloses two drawer type doors which are arranged at a freezing chamber. A partition plate to close a gap between the two doors is disposed at the lower side of the upper drawer type door. The partition plate is formed in such a manner to be horizontally supported during opening of a door and brought into a vertical state when the door is closed..

[0006] JP 2004 020162 provides a refrigerator which comprises a drawing type door for opening/closing an opening part of a storage chamber partitioned by a front surface partitioning plate, L-cross-sectional support frames retaining a bottom surface on both sides of a container drawn out by the open door.

[0007] JP H10 054640 relates to a drawer-type refrigerating storage chamber, with installation of a seal member on a part projected to the inner side of a chamber on an inner circumferential side of a packing on an inner

surface of a door.

Summary of the Invention

[0008] In view of the above, the object of the present invention is to provide a refrigerator having one freezing chamber and plural drawing-pulling door bodies, said refrigerator having a reduced energy consumption. This object is achieved by the features of independent claim 1. Further preferred embodiments of the invention are defined by the features of the dependent claims.

[0009] In order to realize the above object, one embodiment of the present invention provides a refrigerator having a refrigerating chamber and a freezing chamber, wherein the freezing chamber is provided with plural drawer door bodies and sealing members; and the sealing member is used for sealing a clearance between adjacent drawer door bodies. In this way, the internal structure of the freezing chamber is not reconstructed, but only a sealing member is added at the opening part. Therefore, each time that one drawer door body is opened for taking out an object, the opening of the freezing chamber laid open to the external environment is relatively small to reduce cool air leakage and energy consumption.

[0010] The sealing member is provided at the opening of the freezing chamber, and comprises a support frame and a decorative plate. Arranging the sealing member at the opening allows a simple structure and easy assembly. Moreover, the sealing member comprises a support frame and a decorative plate, with the support frame capable of having a better supporting function and the decorative plate abutting against the drawer door body for sealing.

[0011] A mounting trough is formed on the support frame; a thermal preservation bar is provided between the support frame and the decorative plate; and the thermal preservation bar is provided in the mounting trough of the support frame. By using such a structure, better effects of thermal preservation and heat insulation can be achieved and the leakage of cool air from the freezing chamber can be further prevented.

[0012] Preferably, plural reinforced ribs are provided in the mounting trough of the support frame. Thus, the strength of the support frame can be improved.

[0013] Preferably, an auxiliary sealing bar is provided on the surface of the side of the thermal preservation bar adjacent to the decorative plate. In this way, the effects of thermal preservation and heat insulation can be improved better and the leakage of cool air from the freezing chamber can be further prevented.

[0014] Preferably, through holes are provided on the end parts of the support frame and the decorative plate, and the support frame and the decorative plate are mounted via bolts passing through the through holes onto the opening of the freezing chamber of the refrigerator. In this way, the assembly structure is further simplified.

[0015] Preferably, the drawer door bodies are divided

into two sets. By arranging two sets of drawer door bodies, the door bodies are made to be less, which allows more utilization of the space of the freezing chamber.

[0016] Preferably, the refrigerating chamber is enclosed by a set of opposite-opening door bodies. So taking out the objects inside the refrigerating chamber is easy.

[0017] Preferably, the refrigerating chamber is arranged at the upper part, and the freezing chamber is arranged at the lower part.

[0018] Plural drawer door bodies are provided in the freezing chamber and a sealing member is provided between adjacent drawer door bodies. In this way, on one hand, only one freezing chamber is provided, which facilitates the overall design of the refrigerator and the layout of the refrigeration units; and on the other hand, plural drawer door bodies are provided, each of which can be opened and closed independently. Thus, when each drawer door body is opened separately, the freezing chamber only has an opening part corresponding to the drawer door body opening to the external environment, thereby reducing cool air leakage and accordingly reducing energy consumption. In addition, providing plural drawer door bodies means that plural drawers are available, such that the objects are accommodated more assortatively, for facilitating utilization for a user.

Brief Description of the Drawings

[0019]

Fig. 1 is a perspective view of a refrigerator according to one embodiment of the present invention;

Fig. 2 is an explanatory view of the refrigerator in Fig. 1 when the lower drawer thereof is pulled out; and

Fig. 3 is an explanatory exploding view of partition bars of a sealing member.

Detailed Description of the Preferred Embodiments

[0020] Hereinafter, one embodiment of the refrigerator of the present invention is described with reference to the drawings. In addition, in the following description, if no special explanation is made, the so-called left side and right side represent the left hand side and the right hand side of a person facing the refrigerator, and the upper side and the lower side represent an upper side and a lower side based on human sensory feeling.

[0021] As shown in Fig. 1, it is an embodiment of a refrigerator 1 of the present invention. Said refrigerator 1 is commonly called as a French refrigerator, viz. the upper part of the refrigerator 1 is a refrigerating chamber 2, which, thus, facilitates operation. Obviously, the refrigerating chamber 2 can also be located at the lower part of the refrigerator 1, whose opening is enclosed by a set

of opposite-opening door bodies 2a, 2b. The lower part of the refrigerator 1 is a freezing chamber 3, which is also shown in Fig. 2. Of course, the freezing chamber 3 of the refrigerator 1 can also be located at the upper part. The opening of the freezing chamber 3 is enclosed by two drawer door bodies 7, 8. Obviously, the drawer door body of the freezing chamber 3 can be divided into three or more drawer door bodies. In addition, although it is not indicated in detail in the figure, said freezing chamber 3 is a single freezing chamber. In other words, said freezing chamber 3 performs the refrigeration by one refrigeration unit (no shown in the figure). The spaces corresponding to the above two drawer door bodies are communicated with each other.

[0022] In addition, as shown in Fig. 1, a cool drink supply mechanism is provided at the left door body 2a of the opposite-opening door bodies 2a, 2b. Since the mechanism is only slightly related with the inventive key of the present invention, the description related to the mechanism is omitted.

[0023] As shown in Fig. 2, one embodiment of the present invention provides a refrigerator 1 comprising a refrigerating chamber 2 and a freezing chamber 3, wherein the freezing chamber 3 is provided with plural drawer door bodies 7, 8 and a sealing member 5; and the sealing member 5 is used for sealing a clearance between the adjacent drawer door bodies 7, 8. In this way, when each drawer door body is opened independently, the opening of the freezing chamber 3 only has the part corresponding to the drawer door body opening to the external environment, thereby reducing cool air leakage and accordingly reducing energy consumption. Arranging plural drawer door bodies implies that plural drawers are available, such that the objects are accommodated more assortatively, facilitating utilization of the user.

[0024] As shown in Fig. 1 and Fig. 2, the refrigerating chamber is located at the upper part and the freezing chamber 3 is located at the lower part. In this way, the refrigerating chamber 2 with higher utilization rate is placed at the position of easy opening/closing, which facilitates usage. Of course, the freezing chamber 3 can also be located at the upper part, and the refrigerating chamber 2 can also be located at the lower part.

[0025] As shown in Fig. 2, a mounting trough is provided in the right and left edges of the opening of the freezing chamber 3, respectively. A sealing member 5 is mounted at the opening of the freezing chamber by the mounting troughs. The sealing member 5 partitions the opening 4 into an upper opening 4a and a lower opening 4b. As described above, although the opening 4 of the freezing chamber 3 is partitioned to form the upper opening 4a and the lower opening 4b, the inner sides thereof are communicated with each other. In addition, the drawer door body 7 corresponds to the upper opening 4a, and the drawer door body 8 corresponds to the lower opening 4b. When the drawer door body 7 is pushed in the direction indicated by an arrow into the upper opening 4a, a

sealing bar (not shown) mounted on the face of the side of the drawer door body 7 adjacent to the freezing chamber 3 is used for sealing the upper opening 4a. When the drawer door body 8 is pushed in the direction indicated by an arrow in the figure into the lower opening 4b, a sealing bar (not shown) mounted on the drawer door body 8 is used for sealing the lower opening. These two sealing bars can be arranged in many manners of the prior art. No description thereof is made herein.

[0026] In addition, as shown in Fig. 2, a square drawer is provided and connected to the drawer door body 7, and a sealing bar is mounted at the side of the drawer door body 7 adjacent to the drawer (inner surface side). Sliding rails 7a (although only one sliding rail is indicated in the figure, the other identical sliding rail is provided on the other side) are mounted at two sides of the drawer. Said sliding rails 7a fit with guide rails 7b mounted at the corresponding position of the inner wall of the freezing chamber 3 (only the right guide rail is shown in the figure, however, a guide rail is provided at the left side of the inner wall as well). The drawer door body 7 is supported and guided by the guide rails 7b. Since the connection and fitting relationships between the sliding rails 7a and the guide rails 7b are the prior art, no description thereof is made herein.

[0027] In addition, a drawer with a square opening is also mounted at the drawer door body 8. Due to the structure of the refrigerator, the lower the position of the drawer is, the smaller the area of the cross section thereof in a horizontal direction is. Similar to the structure of the above drawer door body 7, two sliding rails 8a are also arranged in the drawer door body 8. Moreover, two guide rails 8b are also arranged at the corresponding position of the inner wall of the freezing chamber 3. Since the structure thereof is similar to that of the above drawer door body 7 and is a common structure in the prior art, no description thereof is made herein.

[0028] Hereinafter, the particular structure of the sealing member 5 of the present invention is described in detail with reference to Fig. 3.

[0029] As shown in Fig. 3, on the sealing member 5, there are sequentially provided a support frame 5a, a thermal preservation bar 5b, and a decorative plate 5c in a direction from the freezing chamber 3 to the external environment.

[0030] The support frame 5a is an elongated member, inside which a mounting trough 15a is formed. Thus, its longitudinal cross section approximately renders a U shape, with one side being opening and the other side of a curved surface. Two through holes 21, 21 are provided at both ends of the support frame 5a. In addition, plural reinforced ribs 25a are formed at the inner side of the support frame 5a along the interior of the mounting trough 15a. As shown in Fig. 3, since the support frame 5a is in a thin plate structure, these reinforced ribs 25a are provided to further enhance its strength and ability of standing against deformation and twist. In addition, the structure of said support frame 5a is not limited there-

to, but can merely be in form of a thin plate with plural reinforced ribs formed around its periphery and a mounting hole formed in the middle.

[0031] The thermal preservation bar 5b is also a elongated member, with the length equivalent to or slightly smaller than the length of the above mounting trough 15a, the width equivalent to or slightly smaller than the gap (the width of the mounting trough 15a in the up and down direction) formed by the above reinforced ribs 25a in the up and down direction, and the thickness equivalent to or slightly smaller than the depth of the reinforced rib 25a in a horizontal direction. Therefore, the thermal preservation bar 5b can be embedded into the above mounting trough 15a.

[0032] In addition, auxiliary sealing bars 15b, 15b, extending along the horizontal direction, are arranged on the face of the thermal preservation bar 5b adjacent to the outer side. Moreover, the height of the auxiliary sealing bars 15b, 15b is designed to satisfy the following conditions, viz. when an adjusting bar is mounted in the mounting trough 15a, the auxiliary sealing bars 15b, 15b protrude more outwardly than the support frame 5a and abut against the decorative plate 5c.

[0033] The decorative plate 5c is an elongated flat member made of resin, metal or other hard materials. When the decorative plate 5c is mounted onto the support frame 5a, its inner surface abuts against the auxiliary sealing bars 15b, 15b of the thermal preservation bar 5b. Moreover, the thermal preservation bar 5b is sandwiched between the decorative plate 5c and the support frame 5a. In addition, the decorative plate 5c is provided with through holes 22, 22 at both ends, and when the decorative plate 5c is mounted onto the support frame 5a with the thermal preservation bar 5b interposed therebetween, the through holes 22, 22 correspond to the through holes 21, 21 of the mounting frame 5a, respectively.

[0034] As shown in Fig. 3, when the bolts 23, 23 pass through the through holes 22, 22 and the through holes 21, 21 to fix the sealing member 5 into the mounting trough on the edge of the opening 4 of the freezing chamber 3, said decorative plate 5c substantially flushes with the opening 4 of the freezing chamber 3 in a forth and back direction,. Thus, when the drawer door body 7 (or drawer door body 8) is closed, the sealing bar mounted on the drawer door body 7 (or the drawer door body 8) abuts against the decorative plate 5c and the opening 4 of the freezing chamber 3 to realize sealing the upper opening 4a (or the lower opening 4b) of the freezing chamber 3.

[0035] In addition, the drawer door bodies 7, 8 are coupled to and mounted in the freezing chamber 3 via sliding rails in the above embodiments, however, it is not limited thereto. Other types of door bodies can be used, for example, a door body which can be opened directly, a sliding door, etc.

[0036] The descriptions above are only preferable embodiments of the present invention, which are not used

to restrict the present invention.

[0037] The scope of protection of the present invention is defined by the appended claims.

Claims

1. A refrigerator, comprising a refrigerating chamber (2) and a freezing chamber (3), wherein the freezing chamber (3) is provided with plural drawer door bodies (7, 8) and a sealing member (5) for sealing the clearance between the adjacent drawer door bodies (7, 8), the sealing member (5) is provided at an opening of the freezing chamber (4) and comprises a support frame (5a) and a decorative plate (5c), **characterized in that** a mounting trough (15a) is formed in the support frame (5a); a thermal preservation bar (5b) is provided between the support frame (5a) and the decorative plate (5c); and the thermal preservation bar (5b) is provided in the mounting trough (15a) of the support frame (5a).
2. The refrigerator according to Claim 1, **characterized in that**, plural reinforced ribs (25a) are provided in the mounting trough (15a) of the support frame (5a).
3. The refrigerator according to Claim 1 or Claim 2, **characterized in that**, an auxiliary sealing bar (15b) is provided on the surface of the side of the thermal preservation bar (5b) adjacent to the decorative plate (5c).
4. The refrigerator according to any one of Claims 1 to 3, **characterized in that**, through holes (21, 22) are provided on the end parts of the support frame (5a) and the decorative plate (5c), and the support frame (5a) and the decorative plate (5c) are mounted via bolts (23) passing through the through holes (21, 22) onto the opening of the freezing chamber (4) of the refrigerator.
5. The refrigerator according to any one of Claims 1 to 4, **characterized in that**, the drawer door bodies (7, 8) are provided as two sets.
6. The refrigerator according to any one of Claims 1 to 5, **characterized in that**, the refrigerating chamber (2) is enclosed by a set of opposite-opening door bodies (2a, 2b).
7. The refrigerator according to any one of Claims 1 to 6, **characterized in that**, the refrigerating chamber (2) is arranged at the upper part, and the freezing chamber (3) is arranged at the lower part.

Patentansprüche

1. Kühlschrank, umfassend eine Kühlkammer (2) und eine Gefrierkammer (3), wobei die Gefrierkammer (3) mit einer Mehrzahl von Schubfachtürkörpern (7, 8) und einem Dichtungselement (5) zur Abdichtung des Zwischenraums zwischen den benachbarten Schubfachtürkörpern (7, 8) versehen ist und das Dichtungselement (5) an einer Öffnung der Gefrierkammer (4) vorgesehen ist und einen Stützrahmen (5a) und eine Dekorplatte (5c) umfasst, **dadurch gekennzeichnet, dass** in dem Stützrahmen (5a) eine Befestigungsmulde (15a) ausgebildet ist; zwischen dem Stützrahmen (5a) und der Dekorplatte (5c) eine Temperatúraufrechterhaltungsleiste (5b) vorgesehen ist; und die Temperatúraufrechterhaltungsleiste (5b) in der Befestigungsmulde (15a) des Stützrahmens (5a) vorgesehen ist.
2. Kühlschrank nach Anspruch 1, **dadurch gekennzeichnet, dass** in der Befestigungsmulde (15a) des Stützrahmens (5a) eine Mehrzahl von verstärkten Rippen (25a) vorgesehen ist.
3. Kühlschrank nach Anspruch 1 oder Anspruch 2, **dadurch gekennzeichnet, dass** auf der Oberfläche der Seite der Temperatúraufrechterhaltungsleiste (5b), die der Dekorplatte (5c) benachbart ist, eine zusätzliche Dichtungsleiste (15b) vorgesehen ist.
4. Kühlschrank nach einem der Ansprüche 1 bis 3, **dadurch gekennzeichnet, dass** an den Endabschnitten des Stützrahmens (5a) und der Dekorplatte (5c) Durchgangslöcher (21, 22) vorgesehen sind und der Stützrahmen (5a) und die Dekorplatte (5c) mit Bolzen (23), die die Durchgangslöcher (21, 22) durchlaufen, an der Öffnung der Gefrierkammer (4) des Kühlschranks befestigt sind.
5. Kühlschrank nach einem der Ansprüche 1 bis 4, **dadurch gekennzeichnet, dass** die Schubfachtürkörper (7, 8) als zwei Sätze vorgesehen sind.
6. Kühlschrank nach einem der Ansprüche 1 bis 5, **dadurch gekennzeichnet, dass** die Kühlkammer (2) von einem Satz sich entgegengesetzt öffnender Türkörper (2a, 2b) umschlossen ist.
7. Kühlschrank nach einem der Ansprüche 1 bis 6, **dadurch gekennzeichnet, dass** die Kühlkammer (2) im oberen Teil angeordnet ist und die Gefrierkammer (3) im unteren Teil angeordnet ist.

Revendications

1. Réfrigérateur, comprenant une chambre de réfrigération (2) et une chambre de congélation (3),

la chambre de congélation (3) étant munie de plusieurs corps à porte à tiroir (7, 8) et d'un élément d'étanchéité (5) pour fermer l'espace entre les corps à porte à tiroir adjacents (7, 8), l'élément d'étanchéité (5) étant fourni sur une ouverture de la chambre de congélation (4) et comprenant un cadre support (5a) et une plaque décorative (5c), **caractérisé en ce qu'un bac de montage (15a) est formé dans le cadre support (5a) ; en ce qu'une barre de conservation thermique (5b) est fournie entre le cadre support (5a) et la plaque décorative (5c) ; et en ce que la barre de conservation thermique (5b) est fournie dans le bac de montage (15a) du cadre support (5a).**

2. Réfrigérateur selon la revendication 1, **caractérisé en ce que** plusieurs nervures renforcées (25a) sont fournies dans le bac de montage (15a) du cadre support (5a). 15
3. Réfrigérateur selon la revendication 1 ou selon la revendication 2, **caractérisé en ce qu'une** barre d'étanchéité auxiliaire (15b) est fournie sur la surface du côté de la barre de conservation thermique (5b) adjacente à la plaque décorative (5c). 20
4. Réfrigérateur selon l'une quelconque des revendications 1 à 3, **caractérisé en ce que** des trous traversants (21, 22) sont fournis sur les parties d'extrémité du cadre support (5a) et de la plaque décorative (5c), et **en ce que** le cadre support (5a) et la plaque décorative (5c) sont montés via des boulons (23) passant par les trous traversants (21, 22) sur l'ouverture de la chambre de congélation (4) du réfrigérateur. 25
5. Réfrigérateur selon l'une quelconque des revendications 1 à 4, **caractérisé en ce que** les corps à porte à tiroir (7, 8) sont fournis comme deux ensembles. 30
6. Réfrigérateur selon l'une quelconque des revendications 1 à 5, **caractérisé en ce que** la chambre de réfrigération (2) est fermée par un ensemble de corps à portes à ouverture opposée (2a, 2b). 35
7. Réfrigérateur selon l'une quelconque des revendications 1 à 6, **caractérisé en ce que** la chambre de réfrigération (2) est disposée sur la partie supérieure, et **en ce que** la chambre de congélation (3) est disposée sur la partie inférieure. 40

45

50

55

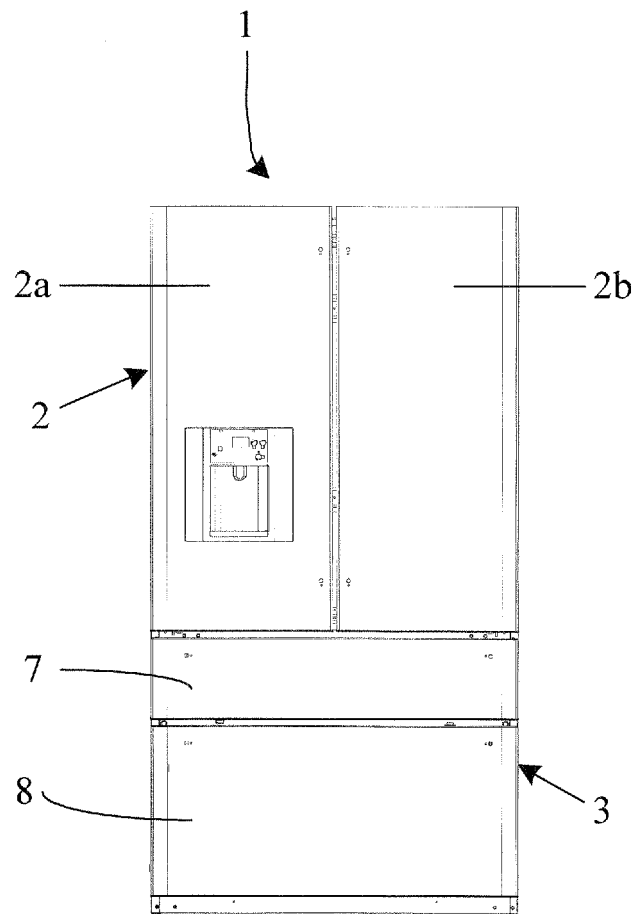


Fig.1

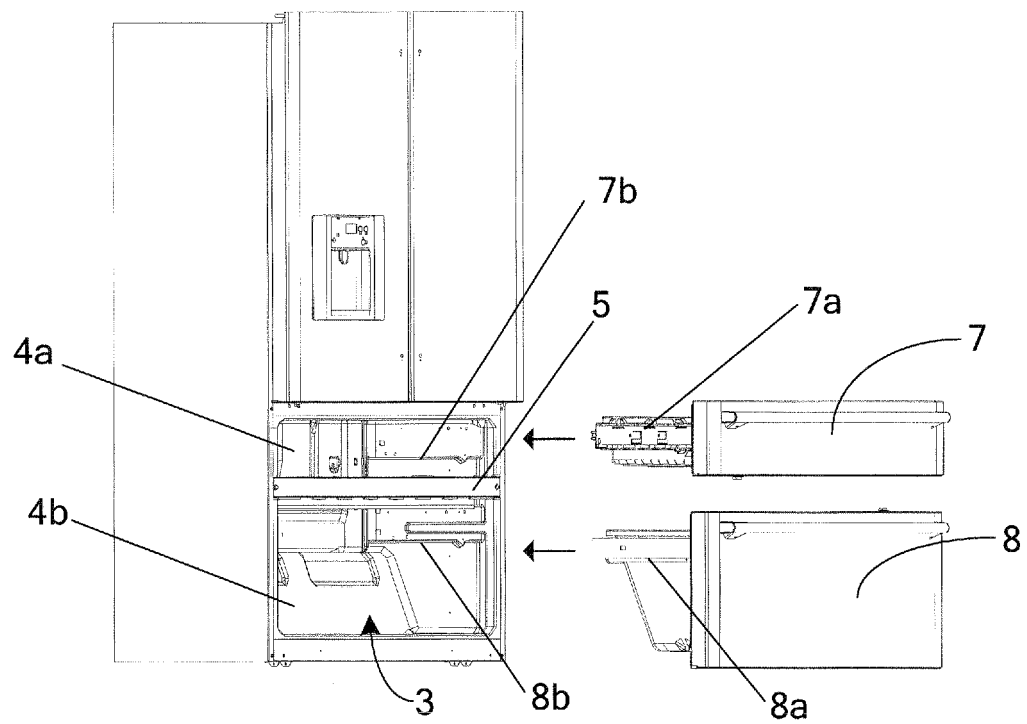


Fig.2

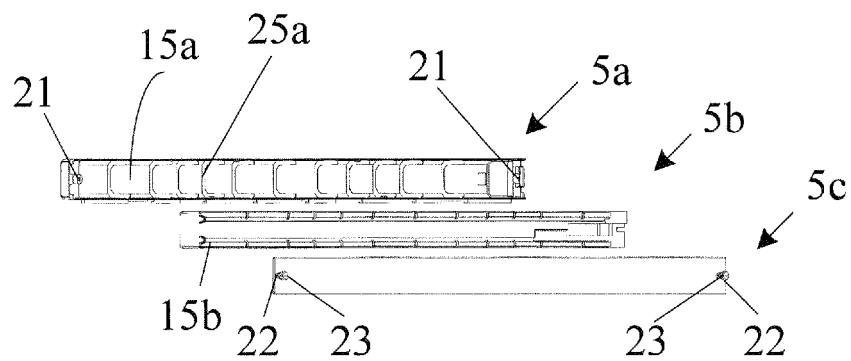


Fig.3

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP H08271132 B [0005]
- JP 2004020162 A [0006]
- JP H10054640 B [0007]