

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
7 June 2007 (07.06.2007)

PCT

(10) International Publication Number
WO 2007/064622 A1

(51) International Patent Classification:

H01J 61/12 (2006.01)

(21) International Application Number:

PCT/US2006/045505

(22) International Filing Date:

28 November 2006 (28.11.2006)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

11/289,976 30 November 2005 (30.11.2005) US

(71) Applicant (for all designated States except US): GENERAL ELECTRIC COMPANY [US/US]; 1 River Road, Schenectady, NY 12345 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): RAHMANE, Mohamed [CA/US]; 4, Park 200, Apartment 5N, Clifton Park, NY 12065 (US). BREWER, James, Anthony [US/US]; 7 Hillside Court, Scotia, NY 12302 (US). ACETO, Steven,

Charles [US/US]; 303 Geiser Road, Wynantskill, NY 12198 (US). ZALYUBOVSKIY, Sergiy [UA/US]; 105 Cannon Court, Niskayuna, NY 12309 (US).

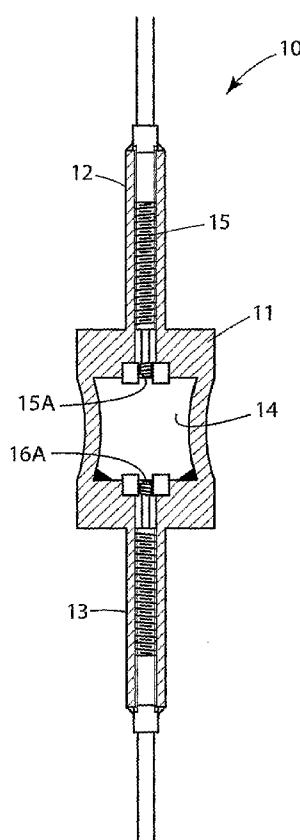
(74) Agents: GNIBUS, Michael et al.; General Electric Company, Global Patent Operation, 187 Danbury Road, Suite 204, Wilton, CT 06897 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: MERCURY-FREE METAL HALIDE DISCHARGE LAMP



(57) Abstract: A metal halide discharge lamp (10) comprises a lamp body (11) and a chamber (14) formed within the body (11). A pair of electrodes (15) and (16) extends into the chamber (14) and have electrode tips (15A) and (16A) spaced apart from one another. A discharge medium composition is sealed within the chamber (14) that generates a plasma, which generates visible light. The composition comprises a rare gas, a first metal halide that produces a luminous flux and a second metal halide that generates a desired lamp operating voltage. The composition may also comprise a metal, sealed in the chamber (14), in elemental form and is not derived from the first metal halide or the second metal halide. The second metal halide serves as a substitute for mercury for purposes of generating desired lamp operating voltage.



European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

MERCURY-FREE METAL HALIDE DISCHARGE LAMP

FIELD OF THE INVENTION

The present invention pertains to High Intensity Discharge (HID) lamps. More specifically, the invention pertains to quartz or ceramic metal halide discharge lamps.

BACKGROUND OF THE INVENTION

A typical metal halide discharge lamp 10 is illustrated in FIG. 1, and includes a body 11 and a first leg 12 and a second leg 13 integrally attached to the body 11. Each leg 12 and 13 extends from an opposing side of the body 11. The legs 12 and 13 and body 11 are usually fabricated from a quartz - material or an alumina based ceramic material (e.g., polycrystalline alumina, sapphire, or yttrium aluminum garnet). A first electrode 15 and second electrode 16 extend through the first leg 12 and second leg 13 respectively and terminate in a chamber 14 formed in the body 11 of the lamp 10. The tips 15A and 16A of the electrodes are spaced apart a determined distance within the chamber 14, ranging from about 1 mm to about 20 mm forming an arc region between the electrode tips 15A and 16A. The volume of the chamber 14 is typically within the range of about 0.01 cc to about 3 cc. The chamber 14 is sealed under pressure at the ends of the legs 12 and 13 distal the chamber.

Before the chamber 14 is sealed, a composition including an inert gas, a metal halide dose and mercury is injected and sealed, under controlled atmosphere, in the chamber of the discharge lamp. The metal halide dose is typically a combination of metal halides such as sodium iodide and scandium iodide or sodium iodides, thallium iodide, dysprosium iodide, holmium iodide and thulium iodide. The metal halides serve as light emitting elements. While mercury contributes slightly to the emitted spectrum of a discharge lamp in the blue range, it mainly serves to increase the electrical resistance in the arc region in order to raise the voltage to a desired value. Raising the voltage to a desired value has two effects: 1) the lamp operating current can be maintained at a low value to minimize electrode erosion for better lumen maintenance and lamp life; and, 2) minimizing end-losses for better lamp efficiency. A desired operating voltage for a high intensity discharge lamp is typically from 70V

to 150V so the current can be maintained from about 0.2 amps to about 3.5 amps depending on the type of lamp and a desired power.

When power is supplied to the electrodes, and an electric arc strikes between the electrode tips 15A and 16A, creating a plasma discharge within the chamber 14. Initially an arc discharge is created by the rare gas (typically argon or xenon) reaching a temperature of about 7000K. The arc discharge heats the chamber 14 raising its temperature to about 1000°K or higher. Then the mercury and metal halide dose start evaporating. After this warm-up phase, the lamp reaches a steady state of operation, where the plasma discharge becomes a mixture of rare gas atoms (argon or xenon), Hg atoms and ions, metal atoms and molecules coming from the metal halide dose as well as their ions and the electrons. The temperature of the plasma discharge may range typically from about 1000°K to about 6000°K.

The lamp voltage depends strongly on the electrical conductivity of the gas mixture forming the arc. In typical HID lamps, mercury serves as a buffer gas by maintaining a certain desired lamp operating voltage. Mercury may achieve the desired voltage because of its relatively low electrical conductivity, which is the function of several parameters including atom density (or vapor pressure), electron density (or ionization energy) and electron-atom momentum transfer cross-section for the so-called buffer gas.

Mercury, as a buffer gas, has a high enough electron-atom momentum transfer cross-section and high enough vapor pressure to provide a sufficient electrical resistance at the arc region and therefore a desired lamp voltage. The collision between electrons and the metal halide compounds causes excitation of the metal atoms, which release photon energy in the form of light within the visible spectrum.

Despite the effectiveness of mercury, there are disadvantages to using this metal. Most notably, mercury is very toxic and raises health and environmental concerns. Laws and regulations have been adopted and/or proposed throughout the world limiting or, in some cases eliminating the use of mercury in all products. Accordingly, efforts are being made to replace mercury with other elements or

compounds that have properties similar to mercury for purposes of generating light in a high intensity discharge lamp.

Zinc iodide has been disclosed as a substitute for mercury in the presence of metal halide additives sodium iodide (NaI) and scandium iodide (ScI₃) in a quartz lamp. However, scandium is aggressive toward and reactive with alumina-based ceramics, which is the envelope material to be used in the next generation automotive headlamps.

Rare earth metal halides, such as dysprosium iodide and neodymium iodide have been disclosed as a substitute for scandium iodide (ScI₃) in combination with a second metal halide that is substituted for mercury in a quartz lamp. The second metal halides include aluminum iodide, iron iodide, zinc iodide, antimony iodide, manganese iodide, chromium iodide, gallium iodide, beryllium iodide and titanium iodide.

With respect to the subject inventions various combinations of metal halides, including but not limited to zinc iodide, as a substitute for mercury, in combination with one or more rare earth metal halides, sodium iodide and thallium iodide as light emitting additives, were combined and tested in a ceramic metal halide lamp. The performance of these compounds were compared to metal halide ceramic lamps having a composition of mercury combined with the same combinations of the rare earth metal halides, sodium iodide and thallium iodide as the light emitting elements. Theoretical calculations supported by experimental tests have shown that mercury substitute metal halides disassociate into metal atoms and free iodine atoms within the arc region causing a high pressure of free iodine atoms. Iodine is known to be very electronegative. That is free electrons within the arc region attach relatively easily to the iodine atoms creating negative ions of iodine. This effect causes a significant reduction in the electrons density within the arc region. Furthermore, the iodine reacts with the rare earth metal forming stable compounds, i.e. dysprosium iodide, which causes the reduction in the density of rare earth metal atoms (light emitting species). The reduction of both electron density and light emitting species atoms (rare earth) caused by the high-pressure of free iodine affect directly in a negative way the

lamp performance by reducing the amount of radiated power in the visible range (lamp lumens)

The pressure of the iodine and iodine negative ions in ZnI_2 dosed lamp is almost one order of magnitude greater than in the mercury-dosed lamps. This means that the electron density in the arc region as well as the light emitting atom densities are significantly lower in a ZnI_2 dosed lamp than in mercury lamp for instance. The net effect is reduced lumens because the electrons and the light emitting atoms are responsible for the creation of the excited states of light emitting metal atoms.

BRIEF DESCRIPTION OF THE INVENTION

The present invention is for a mercury-free metal halide discharge lamp, and/or a composition for the same. The discharge lamp comprises a discharge medium composition having a first metal halide that produces a luminous discharge and a second metal halide that generates a lamp voltage as a substitute for mercury. In one embodiment the composition also contains a metal in pure form that is not derived from either the first metal halide or the second metal halide.

During operation of a discharge lamp the first and second metal halides dissociate producing halogen atoms and metal atoms. The metal atoms of the first halide provide the desired light output of the lamp and the metal atoms of the second halide provide the desired lamp voltage. A portion of the halogen atoms of the second halide attaches to the electrons to form negative ions and another portion reacts with the metal of the first halide. The phenomenon results in a reduced amount of lumens because fewer electrons and the first metal halide atoms are available for collisions resulting in a lower lumens output. The excess metal in a pure form attracts, or reacts with the halogen, making available electrons and the first metal halide in a form that produces a luminous flux during operation of the lamp. In other words, the excess metal in a pure form acts as "getter" for the excess halogen free atoms.

BRIEF DESCRIPTION OF THE DRAWINGS

A more particular description of the invention briefly described above will be rendered by reference to specific embodiments thereof that are illustrated in the appended drawings. Understanding that these drawings depict only typical embodiments of the invention and are not therefore to be considered to be limiting of its scope, the invention will be described and explained with additional specificity and detail through the use of the accompanying drawings.

FIG. 1 is a schematic drawing of a metal halide discharge lamp.

FIG. 2 is a graph plotting the partial pressure of iodine in a metal halide test lamp and an Hg-CMH lamp.

FIG. 3 is a graph plotting the partial pressure of iodine negative ion in a metal halide test lamp and an Hg-CMH lamp.

FIG. 4 is a graph plotting the partial pressure of electron in a metal halide test lamp and an Hg-CMH lamp.

FIG. 5 is a graph plotting the partial pressures of dysprosium species in a metal halide test lamp.

FIG. 6 is a graph plotting the partial pressures of dysprosium species in an Hg-CMH lamp.

FIG. 7 is a graph plotting the partial pressures of dysprosium atoms in a ZnI_2 test lamp, a ZnI_2 test lamp dosed with excess Zn and an Hg-CMH lamp.

FIG. 8A is a graph of a sine waveform current.

FIG. 8B is a graph of a square waveform current.

DETAILED DESCRIPTION OF THE INVENTION

The present invention for a mercury-free high intensity metal halide discharge lamp contains a discharge medium that comprises a rare gas (e.g., Ar or Xe), and a first

metal halide as a light emitting element or additive that emits light within a desired range of the light spectrum and with a desired amounts of lumens. The medium also comprises a second metal halide that replaces mercury to maintain a desired operating voltage of the lamp. The discharge lamp structure comprises typical elements of a discharge lamp as illustrated in FIG. 1 and previously described.

In one embodiment, the invention also includes a metal that is reactive with a halogen and/or halogen ions that are generated during the operation of the discharge lamp. During the operation of the discharge lamp containing the above referenced discharge medium of rare gas, the first metal halide and second metal halide, the molecules of both metal halides dissociate within the arc region into metal atoms and halogen atoms. It has been determined that the largest portion of the free halogen atoms originates from the dissociation of the second metal halide: that is the voltage riser halide. The halogen atoms produced from the dissociation of the metal halides react with the metal of the first metal halide, forming stable molecular compounds that may not or will not release photons necessary for generating light thereby reducing the lumens output of the lamp.

Discharge lamps having a similar construction to the lamp illustrated in FIG. 1 and representative of ceramic metal halide lamps used for automotive headlamps were tested using various compositions of the discharge medium. The discharge lamps were seventy-watt (70W) ceramic metal halide lamps with an arc tube fabricated from a polycrystalline alumina (PCA) ceramic. The volume of the chamber of the discharge lamps was 0.28 cubic centimeters (cc), and the distance between the electrode tips was seven millimeters (7mm). The electrodes were comprised of a combination of conductive metals including Niobium (Nb), Molybdenum (Mo) and tungsten (W), which formed the electrode tips. However, the discharge medium of the present invention may be used in lamps fabricated from other materials such as quartz, YAG (Yttrium aluminum garnet) or sapphire or different size lamps. For example, the discharge medium may be used in lamps used for general lighting having volumes ranging from about 0.01cc to about 3 cc, the distance between electrode tips may range from about 1mm to about 20mm and the wattage may range from about twenty watts (20W) to about four hundred watts (400W). For optical

applications such as automotive or video uses, the volume of the lamp chamber may range from about 0.01cc to about 0.1 cc and the spacing between the electrode tips may range from about 1mm to about 6mm.

The lamps tested included discharge lamps using the same amounts of a first metal halide that served as the light emitting material and various combinations and amounts of a second metal halide that served as a voltage "riser" or mercury substitute. The tests monitored the performance of the lamps in terms of lamp operating voltage and lumens considering various factors such as the dose type, amount, density and composition of the second metal halide, the lamp operating current and power. These test results were compared to similar tests conducted on standard ceramic metal halide lamps (Hg-CMH lamps) that included mercury as the voltage riser. The test lamps and the Hg-CMH lamps both included identical combinations and amounts of the light emitting elements or first metal halide as well as the amount or pressure of the rare gas. More specifically, all the lamps included NaI and rare earth metal halides TlI, DyI₃, HoI₃ and TmI₃ as well as 200 torr of Ar. The first metal halide should refer to one or more light emitting elements or additives. In one embodiment, the total dose of the light-emitting element includes 10 mg, or about 36 mg/cc, including of 66.8 percent by weight of NaI, 9.2 percent by weight of TlI, 12 percent by weight of DyI₃, 6 percent by weight of HoI₃ and 6 percent by weight of TmI₃. However, one skilled in the art will appreciate that the dose ratios, amounts or compounds may vary according to type of discharge lamp used. In addition, all lamps contained the inert gas argon sealed in the chamber at 200 torr. The pressure of argon in the lamp may range from about 100 torr to about 300 torr.

Prior to conducting the tests various metal iodides were selected having properties comparable to mercury, namely a high vapor pressure (or high atoms density), high ionization energy (or low electron density) and a large electron-atoms momentum transfer cross-section. The vapor pressures of various metal iodides were computed for a 1200°K cold spot temperature for an automotive ceramic metal halide lamp. The parameters chosen for computing the vapor pressure were determined by the specific discharge lamp used in the testing, however, these parameters may differ

depending on the type of discharge lamp to be tested. In addition, other halogens may be used, such as bromine and chlorine, for providing an acceptable metal halide.

Those metal halides selected as candidates for replacing mercury included metal halides having a vapor pressure of at least 1 atm and an ionization energy of at least 6eV at a cold spot temperature of 1200°K. Those metals chosen included zinc, aluminum, indium, gallium, zirconium, hafnium, antimony, nickel, titanium, iron, magnesium, copper and beryllium. The selection parameters, such as a minimum vapor pressure or minimum ionization energy of the metal halide compound will differ according to the type of lamp tested or used.

The performance of the test lamps in terms of the operating voltage and lumens was compared to the performance of the Hg-CMH lamps to determine which of the metal halide mercury substitutes performed comparatively with mercury in terms of maintaining an acceptable voltage and lumens at an acceptable current.

Table I below provides a list of the metal iodides, including the dose amounts and test results of sample test lamps showing the performance of test lamps that operated within a range of power about 66 watts to about 71 watts, similar to that of the Hg-CMH lamps.

TABLE I

Sample #	Dose Type	Dose (mg)	1 Dose (mg)	2 Dose (mg)	Total	Voltage (V)	Current (A)	Power (W)	Luminous Flux (Lms)	LPW (Lms/W)
521	CMH-Hg	4.4	--	4.4	69	0.95	66	5488	84	
629	ZnI ₂ /AlI ₃	3.8	3.5	7.3	49	1.40	69	3330	48	
660	InI	4.3	--	4.3	39	1.72	67	3070	46	
574	ZnI ₂	9.1	--	9.1	42	1.62	68	3018	44	
700	ZnI ₂ /Gal ₂	5.4	5	10.4	96	0.74	70	3021	43	
575	AlI ₃	10.1	--	10.1	47	1.41	66	2600	40	
668	InI ₃	2.4	--	2.4	47	1.42	67	2607	39	
565	Gal ₂	11.2	--	11.2	79	0.88	69	1321	19	
636	MgI ₂	13.5	--	13.5	28	1.51	43	801	19	
532	SnI ₄	15.3	--	15.3	24	1.41	34	406	12	
539	CuI	16.3	--	16.3	19	1.63	31	156	5	
611	SbI ₃	6.8	--	6.8	51.3	0.78	40	171	4	
538	FeI ₂	18	--	18.0	28	1.24	35	131	4	
643	NI ₂	7.3	--	7.3	27	1.48	38	70	2	

By way of example the Hg-CMH lamp included a dose of 4.4 mg of mercury, operated at a power of 66 watts, produced a voltage of 69 volts and maintained an efficacy of 84 lumens per watts. Test lamp 660 included a dose amount of 4.3 mg of indium iodide (InI₃) as the second metal halide mercury substitute. At a power of 67.15 watts, the test lamp 660 maintained a voltage of 39 watts and an efficacy of 46 lumens per watts.

Test lamp 629 included a dose amount of 3.8 mg of ZnI₂ and a dose amount of 3.5 mg of AlI₃ as the second metal halide mercury substitute. This test lamp, operating at 69

watts, produced an operating voltage of 49 volts, and an efficacy of 48 lumens per watts.

The test lamps including MgI_2 , SnI_4 , CuI , SbI_3 , FeI_2 or NiI_2 did not operate at sufficiently high power to produce lumens output to serve as an acceptable substitute for mercury.

It was found that increasing the amount, or density, of the second metal halide did help in increasing the lamp operating voltage but did not necessarily result in increasing the lumens per watts of the test discharge lamps. Indeed, increasing voltage with the amount of the second metal halide the lumens degraded. With respect to Tables II test results are listed for eight test lamps each containing different amounts of Gal_2 .

TABLE II

Sample #	Dose Type	Dose (mg)	Dose Density (mg/cc)	Volts (V)	Current (A)	Power (W)	Luminous Flux (lms)	LPW (lms)
583	Gal_2	1.9	6.8	29	2.24	66	2418	37
581	Gal_2	4.0	14.4	38	1.72	65	2398	37
582	Gal_2	4.5	16.2	45	1.60	72	2498	35
567	Gal_2	6.2	22.3	70	1.16	70	2087	30
568	Gal_2	6.8	24.5	58	1.16	68	2118	31
593	Gal_2	8.1	29.2	81	0.81	65	1744	27
565	Gal_2	11.2	40.3	79	0.88	69	1321	19
565	Gal_2	11.2	40.3	77	0.83	64	1196	19

As shown in Table II, test lamp 581 produced the highest lumens output of 37 lumens per watts, having a 4.0 mg dose of Gal_2 or a density of 16.2 mg/cc as the second metal halide mercury substitute. The test lamp 582 contained a 4.5 mg dose of Gal_2 and the

lumens output dropped slightly to 35 lumens per watts. The lumens output dropped more significantly with test lamp 567 which contained a 6.2 mg dose or 22.3 mg/cc of GaI_2 and produced 30 lumens per watts. Based on the tests conducted it was determined that dose amounts of the second metal halide mercury substitute may range from about 1 mg/cc up to about 100 mg/cc may produce sufficient voltage and lumens for operation of a metal halide discharge lamp. A preferred range of the dose amount is from about 5 mg/cc to about 20 mg/cc with a preferable dose amount being about 18 mg/cc.

Although the test lamps did not produce lumens output as high as the Hg-CMH lamps, increasing the cold spot temperature of the lamp chamber may increase the lumens. This may be accomplished by changing the geometry of the chamber namely reducing the length, diameter and/or volume of the chamber and or by changing the parameters related to the dose of light emitting metal halides (first halide). By increasing the cold spot temperature, the vapor pressure within the chamber of both the first metal halide and second metal halide can be increased leading to increased lumens output. Also, selecting an adequate dose type and composition of the light emitting metal halide elements can enhance the lumens.

In addition to the above-described tests, the partial pressures for iodine, iodine negative ions, electrons, and dysprosium species were calculated for a metal halide (ZnI_2) test lamp and a standard Hg-CMH lamp for temperatures ranging from about 1000°K to about 6000°K. This is the range of operating temperatures of the arc region depending on the location within the arc region from which the temperature is measured. With respect to FIG. 2, the pressure of iodine within the lamp chamber is plotted versus the temperature within the lamp chamber. As noted above the metal halide mercury substitute in the lamp was ZnI_2 . The iodine pressure is substantially and consistently higher in the ZnI_2 test lamp in comparison to the mercury Hg-CMH lamp.

Similarly, the partial pressure of the iodine negative ions in the chamber of the ZnI_2 test lamp was higher than in the Hg-CMH lamp. With respect to FIG. 3, the partial pressure of iodine negative ions within the lamp chamber is plotted versus the

temperature within lamp chamber. The iodine negative ion partial pressure is consistently higher in the ZnI_2 test lamp in comparison to the mercury Hg-CMH lamp in the temperature of about 3000°K to about 6000°K.

The increased iodine partial pressure in the test lamp indicates that dissociation of the ZnI_2 takes place producing iodine and thereafter iodine negative ions. Given the high electronegative nature of iodine, the electron partial pressure was calculated at temperature ranges from about 3000°K to about 6000°K. The FIG.4 is a graph plotting the electron partial pressure versus the temperature within the lamp chamber. The electron pressure in the ZnI_2 test lamp is consistently lower than the electron pressure of the Hg-CMH test lamp. It has been concluded that the iodine attracts electrons in the arc region, thereby reducing the number of electrons available in the arc region for the excitation of the metal of the first metal halide (the light emitting elements). This resulted in reduced lumens output of the metal halide mercury substitute test lamps.

In addition, the partial pressures of the dysprosium species were calculated within the temperature. At such high temperatures the dysprosium iodide dissociates like the zinc iodide. The iodine will react with dysprosium atoms forming more stable DyI , DyI_2 and DyI_3 molecules, which do not emit light or do not emit light as well as the dysprosium atoms. With respect to FIGs. 5 and 6, the partial pressures of the dysprosium species were calculated within a temperature range from about 1000°K to about 6000°K for the metal halide test lamp and the Hg-CMH lamp. As shown in FIGs. 5 and 6, for example at 4000°K, the partial pressure of dysprosium in the ZnI_2 test lamp is substantially lower than in the Hg-CMH test lamp. In contrast, at that same temperature, the partial pressure of DyI_3 , DyI_2 and DyI are substantially higher in the ZnI_2 test lamp than in the Hg-CMH lamp.

The effect of high-pressure of free iodine on the reduction of the partial pressure of the light emitting elements in the ZnI_2 lamps has been illustrated here for the dysprosium but the same effect was found for the other light emitting elements, namely sodium, thallium, Holmium and thulium

In order to overcome the effect of iodine and iodine negative ions in reducing the pressures and/or amounts of electrons and light emitting elements, a metal in its pure form (not metal halide) was added to the discharge medium composition of the metal halide test lamps. For example, zinc was included with a zinc iodide dose. Other metals added included aluminum, gallium and indium, or a combination two, three or four of these metals. Table III below lists sample test lamps that included a dose of zinc iodide as a mercury substitute and a dose of zinc. The same light emitting elements (first metal halide) at the same dose amounts were used in these test lamps as in all other test lamps. In addition, argon was also injected into the chamber at the same pressure.

TABLE III

Sample #	Zn/ZnI ₂	ZnI ₂ Dose Type (mg)	ZnI ₂ Dose Density (mg/cc)	Dose	Volts (V)	Current (A)	Power (W)	Luminous Flux (lms)	LPW (lms)
676	Zn/ZnI ₂	5.8	20.9	67	0.83	71	3672	52	
677	Zn/ZnI ₂	6.1	22.0	75	0.87	71	3954	55	
684	Zn/ZnI ₂	6.9	24.8	73	0.96	70	3846	55	
693	Zn/ZnI ₂	7.1	25.6	78	0.90	70	3857	55	
692	Zn/ZnI ₂	9.2	33.1	80	0.88	70	3456	49	
679	Zn/ZnI ₂	9.5	34.2	83	0.86	71	3609	51	
678	Zn/ZnI ₂	10.3	37.1	84	0.82	70	3271	47	
690	Zn/ZnI ₂	10.9	39.2	86	0.82	70	3124	45	
667	Zn/ZnI ₂	14.5	52.2	89	0.78	69	2845	41	

When combined with zinc iodide, the dose amount of zinc ranged from about 4 mg up to about 14.5 mg; however different amounts of zinc, other metals and combinations can be used in combination with one or metal halide mercury substitutes.

The test results of those test lamps that operated at voltages similar to that of Hg-CMH lamps, or in a range of about 65 watts to about 71 watts, were compared to the test results of the other test lamps having a metal halide mercury substitute and the Hg-CMH lamps. Table IV below lists sample test lamps having a metal dose in combination with doses of one or more metal halide mercury substitutes. The zinc was added as an "iodine collector." That is zinc reacted with available iodine or iodine ions forming zinc mono-iodide and other zinc iodide species; thereby, preventing a significant portion of iodine atoms from collecting or reacting with free electrons and metal atoms of the first metal halide available to produce a light discharge.

TABLE IV

Sample #	Dose Type	Total			Voltage (V)	Current (A)	Power (W)	Luminous Flux (lms)	LPW (lms/
		Dose 1 (mg)	Dose 2 (mg)	Dose 3 (mg)					
521	CMH-Hg	4.4	--	--	4.4	69	0.95	66	5488
677	Zn/Znl ₂	13.5	6.1	--	19.6	75	0.87	71	3954
695	Zn/Znl ₂ /Gal ₂	19.6	4.2	3.8	27.6	77	0.91	70	3846
705	Zn/Znl ₂ /AlI ₃	15	4.1	4.3	23.4	83	0.84	70	3437
629	ZnI ₂ /AlI ₃	3.8	3.5	--	7.3	49	1.40	69	3330
660	InI	4.3	--	--	4.3	39	1.72	67	3070
574	Znl ₂	9.1	--	--	9.1	42	1.62	68	3018
700	Znl ₂ /Gal ₂	5.4	5	--	10.4	96	0.74	70	3021
575	AlI ₃	10.1	--	--	10.1	47	1.41	66	2600
668	InI ₃	2.4	--	--	2.4	47	1.42	67	2607
565	Gal ₂	11.2	--	--	11.2	79	0.88	69	1321
636	Mgl ₂	13.5	--	--	13.5	28	1.51	43	801
532	SnI ₄	15.3	--	--	15.3	24	1.41	34	406
539	Cul	16.3	--	--	16.3	19	1.63	31	156
611	Sbl ₃	6.8	--	--	6.8	51	0.78	40	171
538	FeI ₂	18	--	--	18	28	1.24	35	131
643	Nil ₂	7.3	--	--	7.3	27	1.48	38	70

The test lamps having the excess metal consistently produced higher voltage and lumens values at acceptable currents. The highest lumens output for those test lamps having a metal halide mercury substitute dose without a dose of a metal was from test lamp 629. This test lamp included a combination of ZnI₂ and AlI₃ in dose amounts of

3.8 mg and 3.5 mg respectively. The lumens output was 48 lumens per watts; however, the voltage was relatively low at 49 volts. The highest voltage output for such test lamps was from test lamp 565. This lamp included an 11.2 mg dose of GaI_2 as the mercury substitute and produced a voltage of 79 volts; however the lumens was relatively low at 19 lumens per watts.

In comparison, test lamp 677 included a 13.5 mg dose of Zn and a 6.1 mg dose of ZnI_2 . This lamp produced a voltage of 75 volts and lumens of 55 lumens per watts. Indeed, each of the test lamps 695 and 705 that included a dose amount of zinc in combination with a dose amount of one or more of the second metal halides produced higher voltages and lumens than test lamps not having the excess metal combined with the second metal halide. The dose amount of excess metal in the chamber may range from about 1 mg to about 15 mg., or may have a density ranging from about 3.6 mg/cc to about 72 mg/cc. Preferably, the dose amount of the excess metal may range from about 2 mg to about 5 mg, or the density may range from about 7.2 mg/cc to about 18 mg/cc.

The partial pressure for dysprosium was calculated within temperature ranges of 1000°K to about 6000°K. With respect to FIG. 7, a graph plotting the pressure of dysprosium versus the temperature within the chamber is shown. This graph illustrates that within the selected temperature range the dysprosium partial pressure of the test lamp having the excess zinc was consistently higher than the test lamp without the metal. More dysprosium was available as a light emitting element, which resulted in higher lumens values. Accordingly, it was found that zinc, aluminum, gallium or indium metal halides may serve as acceptable substitutes for mercury in a metal halide discharge lamp. Adding a metal that is reactive with a halogen or halogen ions that is produced during the operation of the lamp, in order to make available the light emitting element and electrons for a luminous discharge, enhances the efficacy of the lamp.

Most mercury ceramic metal halide used in general lighting typically operate with a ballast that produces a current sine waveform. In as much as the test lamps were replicas of ceramic metal halide lamps, the ballast used produced a current sine

waveform. It was found that the test lamps could not operate in a stable manner or not operate at all employing a current sine waveform. Most of the lamps extinguished after operating about thirty seconds to about a minute.

The re-ignition voltage was too high with a current sine waveform. This was due to the high pressure of halogen and to its electronegative effect. With any AC current waveform, the applied current goes through zero during the polarity change and thereby the plasma temperature and electron density is significantly reduced. Just after the polarity change, the plasma "re-ignites" again and the electron density is increased again. This phenomenon usually manifests itself on the waveform of the lamp operating voltage with a spike called "re-striking voltage". In the presence of high-pressure of iodine, as it is the case of Hg-free lamps where Hg is substituted by a metal halide dose, the electrons density is further reduced during the polarity change due to the electronegative effect of iodine. This makes it difficult for the plasma to "re-ignite", which leads to an extremely high "re-striking voltage" spike. The net effect is that the Hg-free lamps operated with a sine waveform are either unstable or they extinguishes about thirty seconds to sixty seconds after they start.

It has been found in the work related to this invention that this problem can be solved by changing the current waveform from a sine shape to a square shape. With respect to FIGs. 8A and 8B, the transition time between the absolute values of maximum current in the first half cycle and second half cycle is significantly larger for a current waveform of sine shape than a current waveform of square shape. For example, for an operating frequency of 60Hz, this transition time is about 8.3 milliseconds for the waveform of sine shape and about 50micro-seconds for the waveform of square shape. Therefore, with the square waveform, the transition time can be significantly reduced. By doing so, the period of time, during which the plasma temperature is reduced and where the electrons have a chance to recombine, is significantly reduced. In summary, the "re-striking voltage" with a square waveform for the Hg-free lamp was comparable to the of Hg lamp and all the Hg-free lamp tested in the work related to this invention operated with square waveform operated in a stable manner.

While the preferred embodiments of the present invention have been shown and described herein, it will be obvious that such embodiments are provided by way of example only. Numerous variations, changes and substitutions will occur to those of skill in the art without departing from the invention herein. Accordingly, it is intended that the invention be limited only by the spirit and scope of the appended claims.

WHAT IS CLAIMED IS::

1. A mercury-free metal halide discharge lamp 10, comprising:
 - an arc tube 11 having a sealed chamber 14;
 - a pair of electrodes 15 and 16 positioned within the chamber 14, having electrodes tips 15A and 16A spaced apart a determined distance from one another forming an arc region there between;
 - an inert gas sealed within the chamber 14 under pressure;
 - a first metal halide sealed within the chamber 14 that produces a luminous flux;
 - a second metal halide sealed within the chamber 14 and having a metal selected from the group consisting of aluminum, gallium, indium and zinc;
 - a metal sealed within the chamber 14 in elemental form and not derived from the first metal halide or second metal halide.
2. A discharge lamp according to Claim 1 wherein the metal of the second metal halide is selected from the group consisting of aluminum, gallium, indium and zinc.
3. A discharge lamp according to Claim 1 wherein the first metal halide comprises a metal that is selected from a group consisting of dysprosium, thallium, thulium, praseodymium, scandium, cerium and holmium.
4. A discharge lamp according to Claim 1 further comprising a dose amount of sodium iodide and wherein the first metal halide comprises a combination of dysprosium iodide, thallium iodide, thulium iodide and holmium iodide, scandium iodide, cerium iodide, praseodymium iodide or neodymium iodide.
5. A discharge lamp according to Claim 1 wherein the dose amount of the first metal halide is about 36 mg/cc and includes a percent by weight of each of the metal halides is 66.8% of sodium iodide, 9.2% of thallium iodide, 12% dysprosium iodide, 6% of holmium iodide and 6% of thulium iodide.

6. A discharge lamp according to Claim 1 further comprising a dose of sodium iodide.
7. A discharge lamp according to Claim 1 wherein the halogen of the first metal halide is selected from the group consisting of iodine, bromine or chlorine.
8. A discharge lamp according to Claim 1 wherein the first metal halide is present within the chamber in a dose amount about 5 mg/cc to about 100 mg/cc.
9. A discharge lamp according to Claim 1 wherein the first metal halide is present within the chamber 14 in a dose amount about 10 mg, or 36 mg/cc.
10. A discharge lamp according to Claim 1 wherein the second metal halide is present within the chamber 14 in a dose amount of about 3 mg/cc to about 72 mg/cc.
11. A discharge lamp according to Claim 1 wherein the second metal halide is present within the chamber 14 in a dose amount of about 6 mg/cc to about 18 mg/cc.
12. A discharge lamp according to Claim 1 wherein the metal is present within the chamber 14 in a dose amount of about 3 mg/cc to about 18 mg/cc.
13. A discharge lamp according to Claim 1 wherein the metal is present within the chamber 14 in a dose amount of about 3 mg/cc to about 54 mg/cc.
14. A discharge lamp according to Claim 1 wherein a current is supplied to the lamp 10 from a ballast producing a current with square waveform.
15. A mercury-free metal halide discharge lamp 10, comprising:

an arc tube 11 having a sealed chamber 14;

a pair of electrodes 15 and 16 positioned within the chamber and having electrodes tips 15A and 16A spaced apart a determined distance from one another forming an arc region there between;

an inert gas sealed within the chamber 14;

a first metal halide sealed within the chamber 14 that produces a luminous flux;

a second metal halide sealed within the chamber 14 to generate a lamp operating voltage; and,

a metal sealed within the chamber 14 that reacts with a portion of the the halogen atoms or ions produced from the second metal halide preventing the halogen atoms from reacting with the free electrons and with the metal of the first metal halide to generate the lamp luminous flux.

16. A discharge lamp according to Claim 15 wherein the inert gas is one or more gases selected from a group consisting of argon and xenon.

17. A discharge lamp according to Claim 15 wherein the first metal halide has a metal selected from a group consisting of rare earth metals.

18. A discharge lamp according to Claim 15 wherein the second metal halide comprises a metal selected from a group consisting of aluminum, gallium, indium and zinc.

19. A discharge lamp according to Claim 15 wherein the halogen of the second metal halide is selected from a group consisting of iodine, bromine and chlorine.

20. A discharge lamp according to Claim 15 wherein the first metal halide comprises a metal selected from a group consisting of dysprosium, thallium, thulium and holmium.

21. A discharge lamp according to Claim 15 further comprising a dose of sodium iodide.

22. A discharge lamp according to Claim 15 wherein the halogen of the first metal halide is selected from the group consisting of iodine, bromine or chlorine.

23. A discharge lamp according to Claim 15 wherein the first metal halide is present within the chamber 14 in a dose amount of about 5 mg/cc to about 100 mg/cc.

24. A discharge lamp according to Claim 15 wherein the first metal halide is present within the chamber 14 in a dose amount of about 10 mg, or 36 mg/cc.

25. A discharge lamp according to Claim 15 wherein the second metal halide is present within the chamber 14 in a dose amount of about 3 mg/cc to about 72 mg/cc.

26. A discharge lamp according to Claim 15 wherein the second metal halide is present within the chamber 14 in a dose amount of about 6 mg/cc to about 18 mg/cc.

27. A discharge lamp according to Claim 15 wherein the metal is present within the chamber 14 in a dose amount of about 3 mg/cc to about 18 mg/cc.

28. A discharge lamp according to Claim 15 wherein the metal is present within the chamber 14 in a dose amount of about 3 mg/cc to about 54 mg/cc.

29. A discharge lamp according to Claim 15 wherein a current is supplied to the lamp 10 from a ballast material producing a current square waveform.

30. A mercury-free metal halide discharge lamp 10, comprising:

an arc tube 11 having a sealed chamber 14;

a pair of electrodes 15 and 16 positioned within the chamber, having electrodes tips 15A and 16A spaced apart a determined distance from one another forming an arc region there between;

an inert gas sealed within the chamber 14 under pressure;

a first metal halide element sealed within the chamber 14 that produces a luminous flux;

a second metal halide sealed within the chamber 14 to generate a lamp operating voltage and having a metal selected from the group consisting of aluminum, gallium, indium and zinc; and,

a third metal halide sealed within the chamber 14 to generate a lamp voltage and having a metal selected from the group consisting of aluminum, gallium, indium and zinc and the metal is not the same as the metal of the first metal halide.

31. A discharge lamp according to Claim 30 further comprising a metal sealed within the chamber 14 in elemental form and not derived from the first metal halide, second metal halide or third metal halide.

32. A mercury-free metal halide discharge lamp 10, comprising:

an arc tube 11 having a sealed chamber 14;

a pair of electrodes 15 and 16 positioned within the chamber 14, having electrode tips 15A and 16 spaced apart a determined distance from one another forming an arc region there between, and each of the electrodes is in communication with a power source and a ballast material that produces a current square waveform;

an inert gas sealed within the chamber 14 under pressure;

a first metal halide element sealed within the chamber 14 that produces a luminous flux; and,

a second metal halide sealed within the chamber 14 to generate a lamp operating voltage.

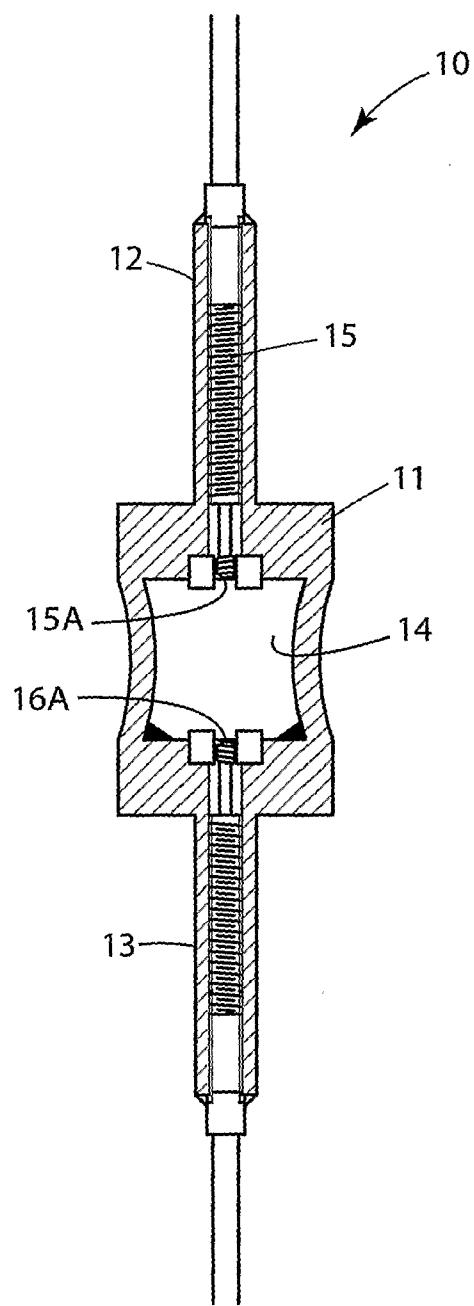
33. A discharge lamp according to Claim 32 further comprising a metal sealed within the chamber 14 in elemental form and not derived from the first metal halide or second metal halide.

34. A discharge lamp according to Claim 32 wherein the second metal halide has a metal selected from the group consisting of aluminum, gallium, indium and zinc.

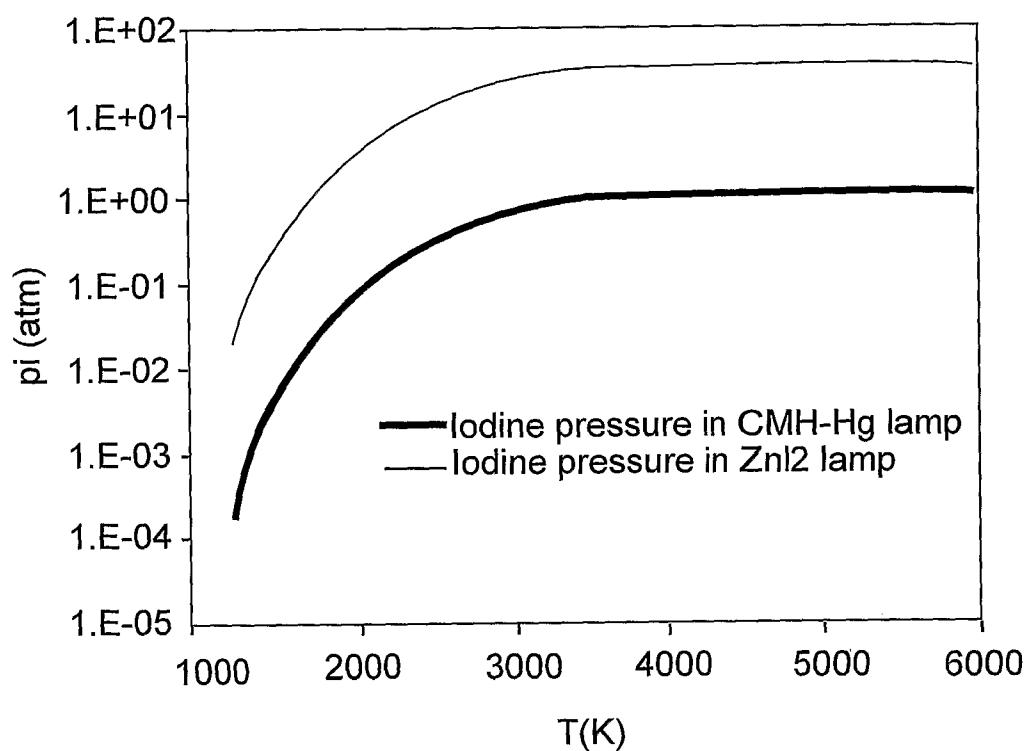
35. A discharge lamp according to Claim 32 wherein the lamp 10 is used as an automotive headlamp, and the lamp body and legs are comprised of a ceramic material.

1/7

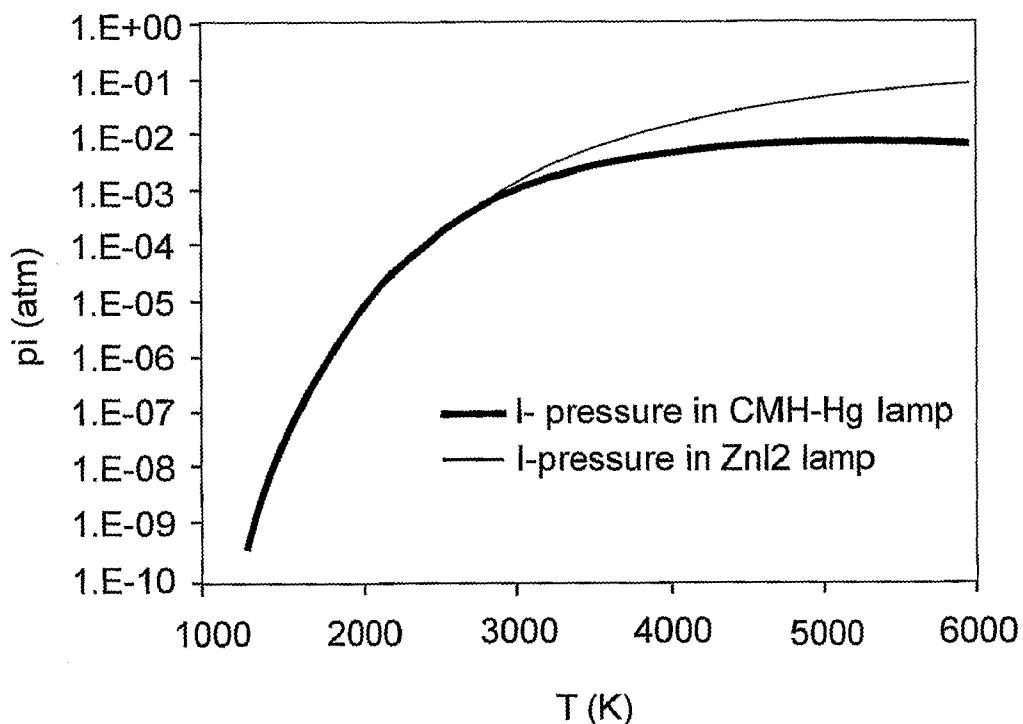
FIG. 1



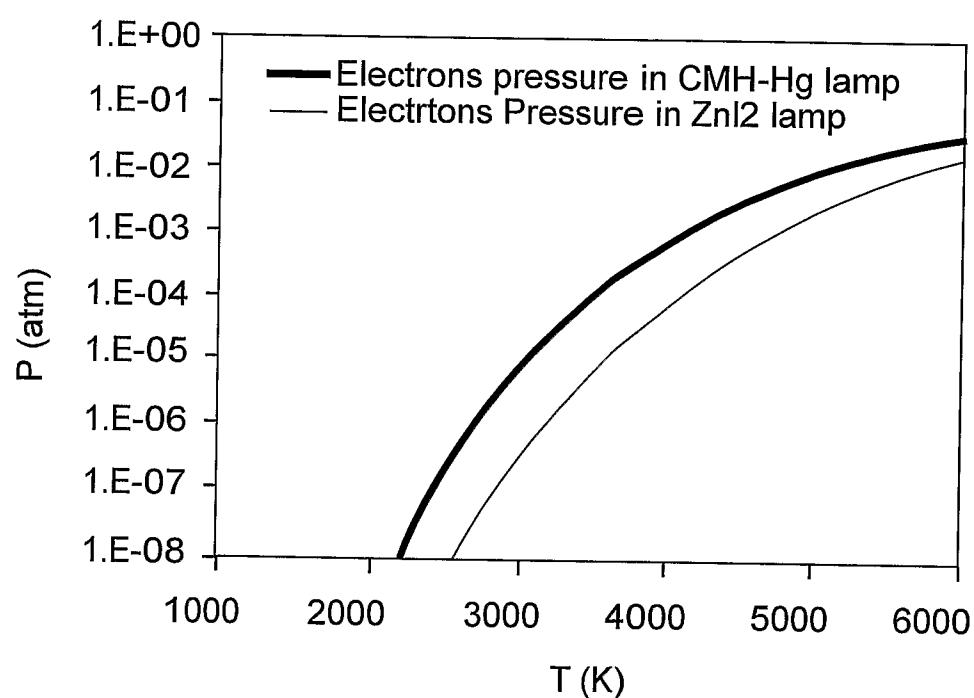
2/7

FIG. 2

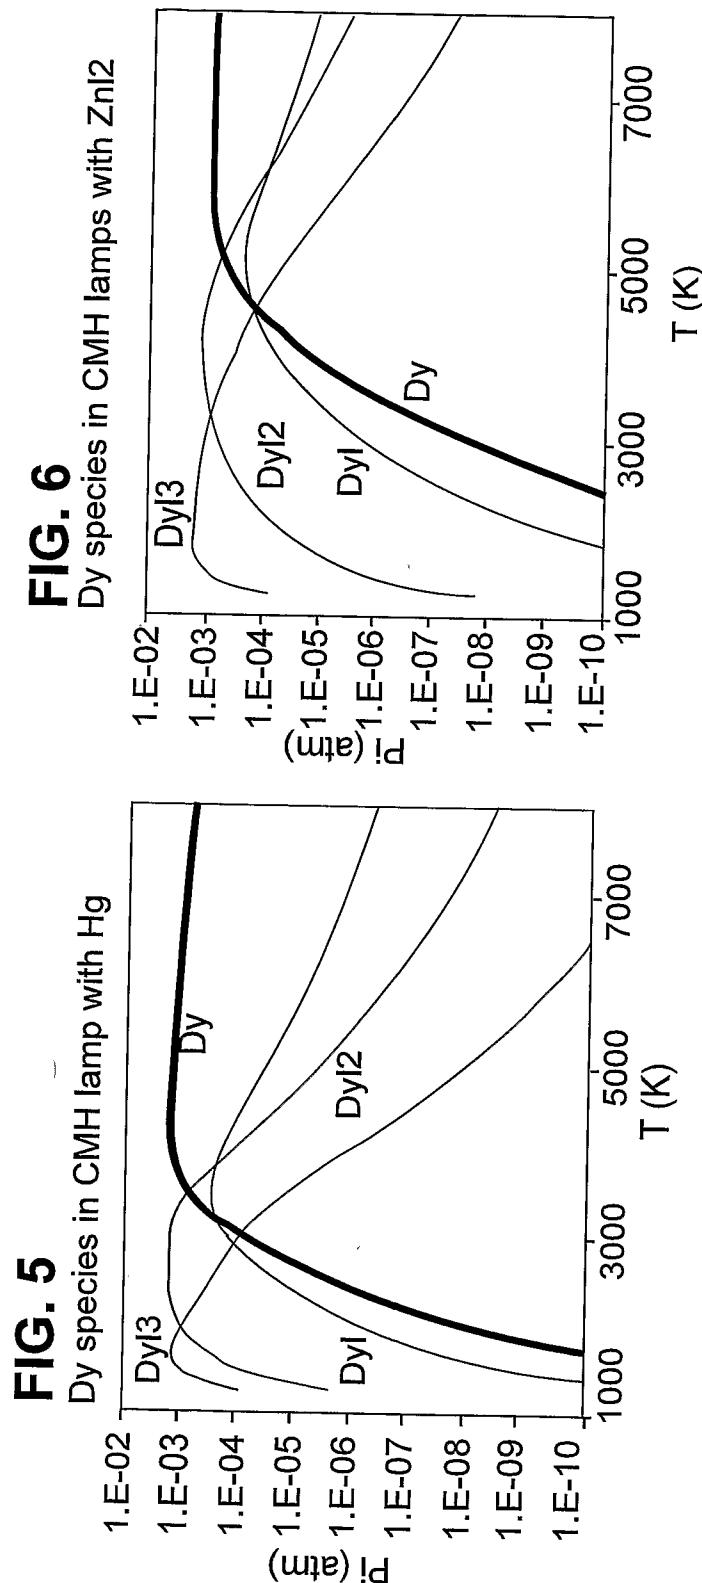
3/7

FIG. 3

4/7

FIG. 4

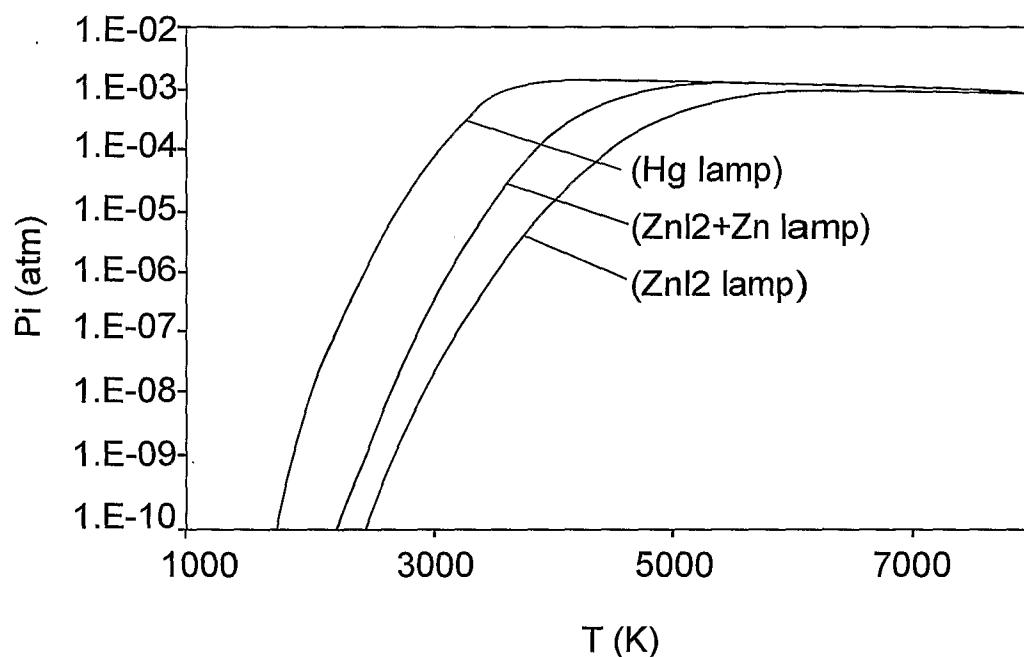
5/7



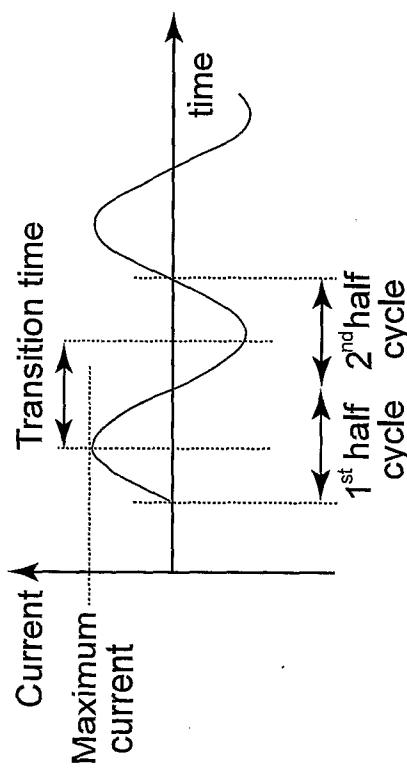
6/7

FIG. 7

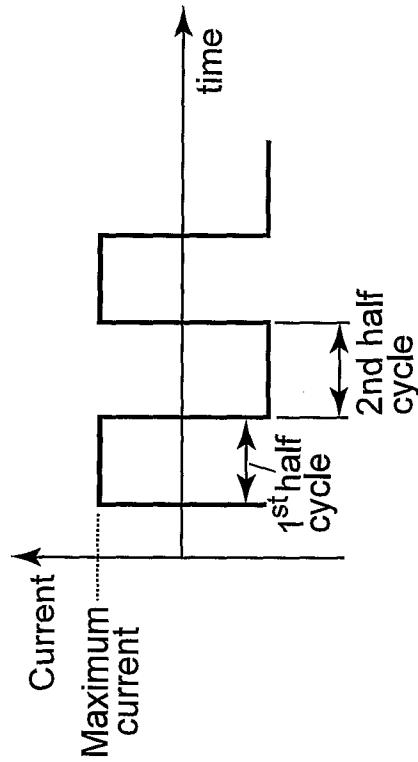
Dy pressure in Hg, Znl2 and (Zn+Znl2) lamps



7/7

FIG. 8A

Sine Waveform Current

FIG. 8B

Square Waveform Current

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2006/045505

A. CLASSIFICATION OF SUBJECT MATTER
INV. H01J61/12

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H01J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 069 456 A1 (FROMM DIETRICH [DE] ET AL) 30 May 2000 (2000-05-30) column 3, line 66 – column 5, line 5; column 9, line 67 – column 10, line 25; column 11, line 21 – line 25; claims 1,5-7,9,10,12,18; figure 1; tables 2,3 -----	1-35
X	US 6 469 446 B1 (PATRA PATENT TREUHAND) 22 October 2002 (2002-10-22) column 1, line 48 – column 2, line 21; column 3, line 11 – line 20; claims 1-4,7-9; table 1 ----- -/-	1-4, 6-13, 15-28, 30,31

 Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

15 March 2007

Date of mailing of the international search report

26/03/2007

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL – 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Smith, Christopher

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2006/045505

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 483 241 B1 (PATRA PATENT TREUHAND) 19 November 2002 (2002-11-19) column 4, line 6 – line 8; column 4, line 53 – line 61; column 6, line 64; column 7, line 3 – line 5; column 7, line 14 – line 18; claims 1,4,9,10; figure 1; table 1 -----	1-4, 6-11, 14-26, 29-35

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2006/045505

Patent document cited in search report	Publication date	Patent family member(s)			Publication date
US 6069456	A1	NONE			
US 6469446	B1	22-10-2002	AT 272895 T		15-08-2004
			CA 2315492 A1		10-02-2001
			CN 1283867 A		14-02-2001
			DE 19937312 A1		15-02-2001
			EP 1076353 A1		14-02-2001
			ES 2224949 T3		16-03-2005
			HU 0003245 A2		28-03-2001
			JP 2001076670 A		23-03-2001
			KR 20010050037 A		15-06-2001
US 6483241	B1	19-11-2002	CA 2292142 A1		14-06-2000
			DE 19857585 A1		15-06-2000
			EP 1011126 A2		21-06-2000
			HU 9904194 A2		28-06-2000
			JP 2000182564 A		30-06-2000