

(19)  
(12)

(KR)  
(A)

(51) 。 Int. Cl.7  
D07B 1/06

(11)  
(43)

10-2004-0025650  
2004 03 24

(21) 10-2003-0066092  
(22) 2003 09 19

(30) 1020020057283 2002 09 19 (KR)

(71) 가 2 645-32 20/4 3 102

(72) 가 2 645-32 20/4 3 102

(74)

:

(54)

가 가 가 ( ),  
3 ; 가

도 5

1 7x7

2 가 가

3 가

4  
5 4 1 , 5b 2 , 5c 5a

6 5

7 가

8 , 8a , 8b

9

10

< >

W: S:

(Grommet Sling) 가 (Sling) 가

가 ( (鋼線) )

)x( ) , ' ' , ( ,

1 6 ( 3 8 가 7x7 (1) (2)가 (3)  
(4) 6 (5) (Ordinary Lay) (Regular Lay)

가 2 가 (6)

가 , EYE 가 , 가 가 (Swivels) 가 (Shackle)

, 가  
가

가  
(Endless Sling)

4

(1)

가  
가

가

( 가 )

가  
가

가

가

가

;  
;

가

3

00

3

3

(Fe)

(11)

(S)

(W)

(11)

(10)

5  
(10)

6a (10) 6c (10) 3 가 (10) (W)

(W) (10) 3 (10) 가

(10) 7a (W)가 (20) (10) (10)

10) (W) 7b (W) ( ) ( )

(10) (10) (W) (10)

(10) (10) (W) (W) (10)

(10) 8a

(W) (10) 8b (S)

(S)

9 가 가

10 가 ,

가 (가)

[표 1]



로프지름(공칭경) Nominal rope diameter	단위중량 Weith/mass	파단하중 Calculated minimum breaking load tonnes
mm	kg/mt	
60	14.5	238
63	16.0	262
67	18.1	296
71	20.4	333
75	22.7	371
80	25.8	422
85	29.2	477
90	32.7	535




1 3. 2 ,

1 4. ,


1 5. ,

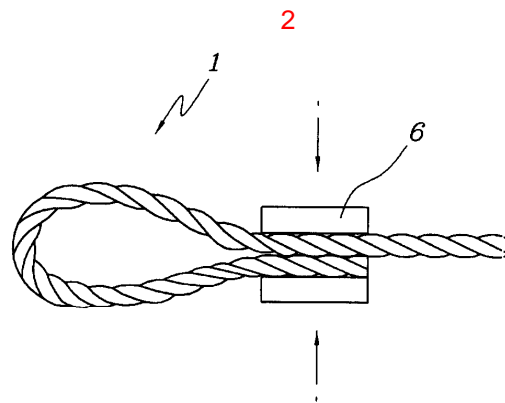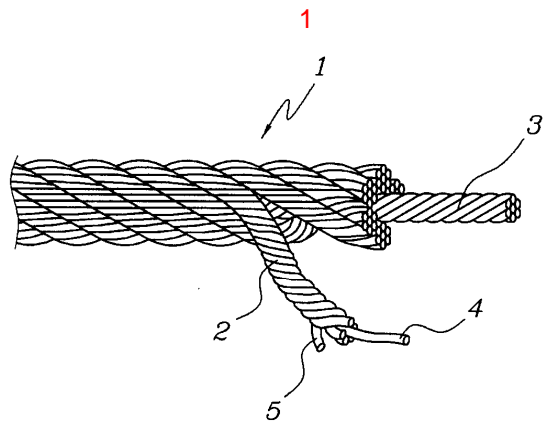


3a




3b

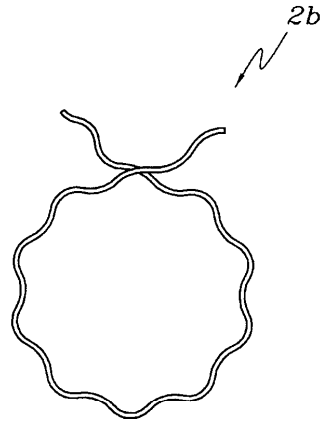


3c




3d

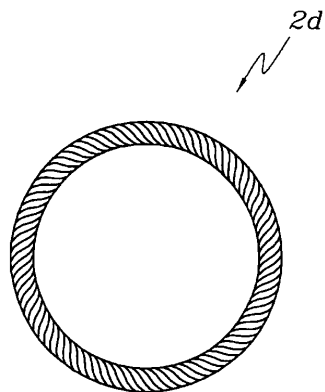

4

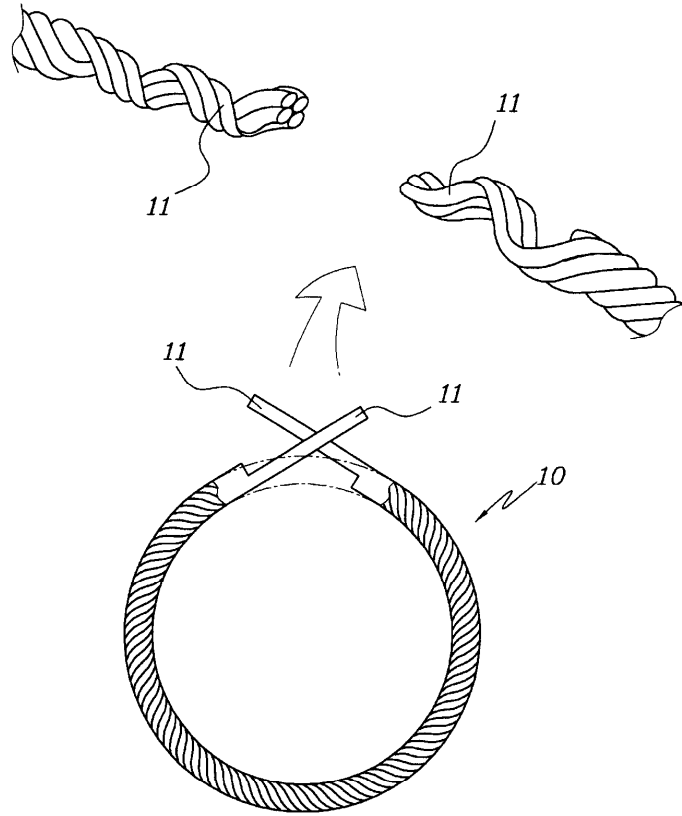


5a

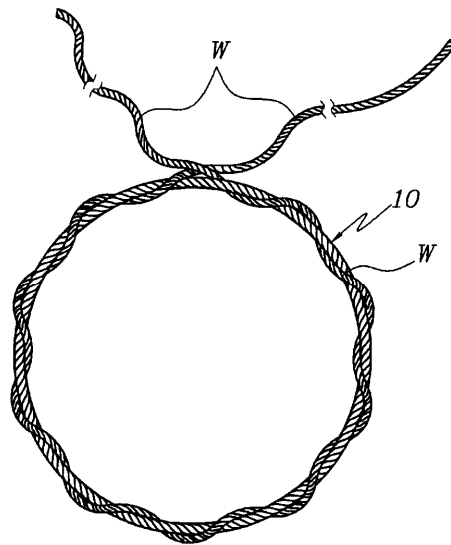



5b

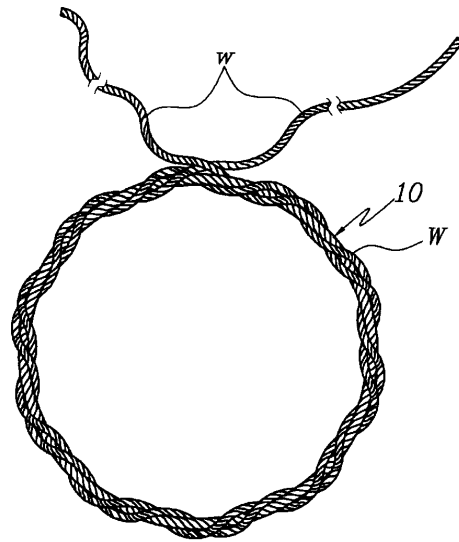

5c

