

(19)



(11)

**EP 4 031 789 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:  
**25.12.2024 Bulletin 2024/52**

(21) Application number: **20865729.6**

(22) Date of filing: **16.09.2020**

(51) International Patent Classification (IPC):

<b>F16K 31/12</b> <small>(2006.01)</small>	<b>F16K 17/04</b> <small>(2006.01)</small>
<b>F16K 1/46</b> <small>(2006.01)</small>	<b>B29C 49/42</b> <small>(2006.01)</small>
<b>F16K 11/07</b> <small>(2006.01)</small>	<b>F16K 31/122</b> <small>(2006.01)</small>
<b>F16K 3/24</b> <small>(2006.01)</small>	<b>F16K 27/04</b> <small>(2006.01)</small>
<b>F16K 31/06</b> <small>(2006.01)</small>	<b>F16K 31/124</b> <small>(2006.01)</small>
<b>B01D 46/71</b> <small>(2022.01)</small>	<b>B01D 46/04</b> <small>(2006.01)</small>
<b>B01D 46/42</b> <small>(2006.01)</small>	

(52) Cooperative Patent Classification (CPC):

**B01D 46/4272; B01D 46/71; F16K 3/24; F16K 11/07; F16K 27/041; F16K 31/0613; F16K 31/1221; F16K 31/124; B01D 46/04**

(86) International application number:

**PCT/US2020/050950**

(87) International publication number:

**WO 2021/055389 (25.03.2021 Gazette 2021/12)**

(54) **PULSE VALVE**

PULSVENTIL

SOUPAPE À IMPULSIONS

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR**

(30) Priority: **18.09.2019 US 201962902129 P**  
**15.09.2020 US 202017021283**

(43) Date of publication of application:  
**27.07.2022 Bulletin 2022/30**

(73) Proprietor: **MAC Valves Inc.**  
**Wixom**  
**Michigan 48393 (US)**

(72) Inventors:

- **JENKINS, Ray**  
**Waterford, MI 48327 (US)**

- **NEFF, Matthew**  
**Birmingham, MI 48009 (US)**
- **SIMMONDS, Jeffrey**  
**Commerce Township, MI 48382 (US)**
- **WILLIAMS, Kevin, C.**  
**Wixom, MI 48393 (US)**

(74) Representative: **Murgitroyd & Company**  
**165-169 Scotland Street**  
**Glasgow G5 8PL (GB)**

(56) References cited:

<b>WO-A1-2018/202670</b>	<b>KR-B1- 101 821 827</b>
<b>US-A- 3 384 122</b>	<b>US-A- 5 988 214</b>
<b>US-A1- 2007 044 857</b>	<b>US-A1- 2007 044 857</b>
<b>US-A1- 2010 252 132</b>	<b>US-A1- 2013 105 014</b>
<b>US-A1- 2013 105 014</b>	<b>US-A1- 2017 343 020</b>
<b>US-B2- 8 453 678</b>	

**EP 4 031 789 B1**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**Description**

## CROSS-REFERENCE TO RELATED APPLICATIONS

**[0001]** This application claims priority to U.S. Patent Application No. 17/021,283, filed on September 15, 2020, which claims the benefit of U.S. Provisional Application No. 62/902,129, filed on September 18, 2019.

## FIELD

**[0002]** The present disclosure relates to pulse valve assemblies, which may be adapted for use in dust collectors or plastic blow molding machines.

## BACKGROUND

**[0003]** This section provides background information related to the present disclosure which is not necessarily prior art.

**[0004]** Pulse valve assemblies are commonly used in dust collectors for cleaning purposes. Dust collectors are used in a wide variety of applications to collect environmental dust, saw dust, and other particulates. Typical dust collectors have one or more filter elements that remove and trap dust that is suspended in the fluid flow (e.g., air flow) passing through the dust collector. As a result, the fluid flow exiting the dust collector is substantially free of dust and/or other particulates. Pulse valve assemblies are used in dust collectors to provide a pulse or burst of high velocity fluid flow (e.g., air), which creates a pressure wave that acts on the one or more filter elements of the dust collector to knock or blow dust and/or other particulates off of the filter element. For example, in some systems, the dust collector is configured such that the pulse of air supplied by the pulse valve assembly causes the filter element to rapidly expand and then contract to its initial state. The dust and/or other particulate that has accumulated on or in the filter element falls off the filter element and into a container in the dust collector when this rapid expansion and contraction occurs, cleaning the filter element. This cleaning process can occur while the dust collector remains running. The pulse valve assembly is controlled to provide pulses of air at predetermined intervals to keep the filter element clean. WO 2018/202670 discloses a known pulse valve assembly including a main valve and a pilot valve.

## SUMMARY

**[0005]** This section provides a general summary of the disclosure, and is not a comprehensive disclosure of its full scope or all of its features.

**[0006]** According to a first aspect of the present invention, there is provided a pulse valve assembly including a main valve including a cylindrical main valve body, a main valve bore extending within the main valve body, and a main valve spool slidingly disposed in the main valve bore

for movement between a closed position and an open position. The pulse valve assembly also includes a pilot valve configured to selectively move the main valve spool between the closed position and the open position. The main valve body includes a plurality of axially extending and laterally spaced apart inlet ports located about a circumference of the cylindrical main valve body, a plurality of axially extending and laterally spaced apart outlet ports located radially inward from the plurality of inlet ports, a pilot valve inlet passage, a normally closed pilot valve outlet passage, and a normally open pilot valve outlet passage each disposed in fluid communication with the main valve bore. The main valve body has a first pressure chamber at one end of the main valve bore in fluid communication with the normally closed pilot valve outlet passage, and a second pressure chamber at an opposite end of the main valve bore in fluid communication with the normally open pilot valve outlet passage. The main valve spool includes a main valve member configured to block fluid flow between the inlet port and the outlet port when the main valve spool is in the closed position and permit fluid flow from the inlet port to the outlet port when the main valve spool is in the open position. The pilot valve is configured such that in a closed position of the pilot valve, fluid communication is permitted between the pilot valve inlet passage and the normally open pilot valve outlet passage, which pressurizes the second pressure chamber to maintain the main valve spool in the closed position to prevent fluid flow from the inlet port to the outlet port. The pilot valve is configured such that in an open position of the pilot valve, fluid communication is not permitted between the between the pilot valve inlet passage and the normally open pilot valve outlet passage, and is permitted between the pilot valve inlet passage and the normally closed pilot valve outlet passage, which pressurizes the first pressure chamber and depressurizes the second pressure chamber to move the main valve spool to the open position to permit fluid flow from the inlet port to the outlet port.

**[0007]** Advantageously, this configuration provides a higher-flow valve that has a less tortuous path through the pulse valve, which provides a more efficient pulse valve.

**[0008]** According to a second aspect of the present invention, the present disclosure provides a pulse valve assembly including a main valve including a cylindrical main valve body, a main valve bore extending within the main valve body, and a main valve spool slidingly disposed in the main valve bore for movement between a closed position and an open position; and a pilot valve configured to selectively move the main valve spool between the closed position and the open position. The main valve body includes a plurality of axially extending and laterally spaced apart inlet ports located about a circumference of the cylindrical main valve body, an outlet port located radially inward from the plurality of inlet ports, a pilot valve inlet passage, a normally closed pilot valve outlet passage, and a normally open pilot valve

outlet passage each disposed in fluid communication with the main valve bore. The main valve body has a first pressure chamber at one end of the main valve bore in fluid communication with the inlet ports and the outlet port, and a second pressure chamber at an opposite end of the main valve bore in fluid communication with the normally open pilot valve outlet passage. The main valve spool includes a main valve member configured to block fluid flow between the inlet ports and the outlet port when the main valve spool is in the closed position and permit fluid flow from the inlet ports to the outlet port when the main valve spool is in the open position. The pilot valve is configured such that in a closed position of the pilot valve, fluid communication is permitted between the pilot valve inlet passage and the normally open pilot valve outlet passage, which pressurizes the second pressure chamber to maintain the main valve spool in the closed position to prevent fluid flow from the inlet port to the outlet port; and the pilot valve is configured such that in an open position of the pilot valve, fluid communication is not permitted between the pilot valve inlet passage and the normally open pilot valve outlet passage, and is permitted between the pilot valve inlet passage and the normally closed pilot valve outlet passage to move the main valve spool to the open position to permit fluid flow from the inlet ports to the outlet ports.

**[0009]** According to the second aspect, the main valve spool includes a first piston positioned in the second pressure chamber that is configured to block a second pressure chamber outlet that communicates with the first pressure chamber when the main valve spool is in the closed position, and a second piston positioned in the first pressure chamber that seals the outlet port when the main valve spool is in the closed position, and when the main valve spool is in the open position, fluid is permitted to flow from the second pressure chamber through the second pressure chamber outlet to the first pressure chamber and exit the main valve body through the outlet port.

**[0010]** According to the second aspect, when fluid communication is permitted between the pilot valve inlet passage and the normally closed pilot valve outlet passage to move the main valve spool to the open position to permit fluid flow from the inlet ports to the outlet ports, the main valve spool is moved in a direction toward the pilot valve to open second pressure chamber outlet.

**[0011]** According to the second aspect, when the main valve spool is in the open position, fluid in the first pressure chamber that is received from the plurality of inlet ports and fluid received from the second pressure chamber outlet port is permitted to exit the outlet.

**[0012]** According to the second aspect, the pulse valve assembly may include a spring positioned about the main valve spool that biases the main valve spool to the closed position.

**[0013]** According to the second aspect, the pilot valve inlet passage communicates with the plurality of inlet ports.

**[0014]** According to the second aspect, the normally open pilot valve outlet passage communicates with the first pressure chamber to maintain the main valve spool in the closed position.

5 **[0015]** According to the second aspect, the normally open pilot valve outlet passage is in communication with a cavity formed in the main valve body, which communicates with the second pressure chamber via an aperture that separates the cavity and the second pressure chamber.

10 **[0016]** Lastly, accordingly to the second aspect, the pilot valve includes a pilot valve body defining a pilot valve bore having a pilot valve member located therein, the pilot valve member being actuated by a solenoid that moves the pilot valve member between a first position where fluid communication between the pilot valve inlet passage and the normally open pilot valve outlet is permitted, and a second position where fluid communication between the pilot valve inlet passage and the normally closed pilot valve outlet is permitted.

15 **[0017]** Advantageously, this configuration provides a higher-flow valve that has a less tortuous path through the pulse valve, which provides a more efficient pulse valve.

20

#### BRIEF DESCRIPTION OF THE DRAWINGS

**[0018]** Other advantages of the present invention will be readily appreciated, as the same becomes better understood by reference to the following detailed description when considered in connection with the accompanying drawings wherein:

35 Figure 1 is a perspective view of a pulse valve assembly according to a principle of the present disclosure;

Figure 2 is a bottom perspective view of the pulse valve assembly illustrated in Figure 1;

40 Figures 3-6 are perspective cross-sectional views of the pulse valve assembly illustrated in Figure 1 along line A-A; and

Figure 7 is a partial cross-sectional view of the pulse valve assembly illustrated in Figure 1;

45 Figure 8 is a perspective view of a pulse valve assembly according to a principle of the present disclosure;

Figure 9 is a bottom perspective view of the pulse valve assembly illustrated in Figure 1;

50 Figures 10-13 are perspective cross-sectional views of the pulse valve assembly illustrated in Figure 8 along line A-A; and

Figure 14 is a cross-sectional view of the pulse valve assembly illustrated in Figure 8 along line B-B.

#### 55 DETAILED DESCRIPTION

**[0019]** Example embodiments will now be described more fully with reference to the accompanying drawings.

The example embodiments are provided so that this disclosure will be thorough, and will fully convey the scope to those who are skilled in the art. Numerous specific details are set forth such as examples of specific components, devices, and methods, to provide a thorough understanding of embodiments of the present disclosure. It will be apparent to those skilled in the art that specific details need not be employed, that example embodiments may be embodied in many different forms. In some example embodiments, well-known processes, well-known device structures, and well-known technologies are not described in detail.

**[0020]** The terminology used herein is for the purpose of describing particular example embodiments only and is not intended to be limiting. As used herein, the singular forms "a", "an" and "the" may be intended to include the plural forms as well, unless the context clearly indicates otherwise. The terms "comprises," "comprising," "including," and "having," are inclusive and therefore specify the presence of stated features, integers, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, integers, steps, operations, elements, components, and/or groups thereof. The method steps, processes, and operations described herein are not to be construed as necessarily requiring their performance in the particular order discussed or illustrated, unless specifically identified as an order of performance. It is also to be understood that additional or alternative steps may be employed.

**[0021]** When an element or layer is referred to as being "on", "engaged to", "connected to" or "coupled to" another element or layer, it may be directly on, engaged, connected or coupled to the other element or layer, or intervening elements or layers may be present. In contrast, when an element is referred to as being "directly on", "directly engaged to", "directly connected to" or "directly coupled to" another element or layer, there may be no intervening elements or layers present. Other words used to describe the relationship between elements should be interpreted in a like fashion (e.g., "between" versus "directly between," "adjacent" versus "directly adjacent," etc.). As used herein, the term "and/or" includes any and all combinations of one or more of the associated listed items.

**[0022]** Although the terms first, second, third, etc. may be used herein to describe various elements, components, regions, layers and/or sections, these elements, components, regions, layers and/or sections should not be limited by these terms. These terms may be only used to distinguish one element, component, region, layer or section from another region, layer or section. Terms such as "first," "second," and other numerical terms when used herein do not imply a sequence or order unless clearly indicated by the context. Thus, a first element, component, region, layer or section discussed below could be termed a second element, component, region, layer or section without departing from the teachings of the ex-

ample embodiments.

**[0023]** Spatially relative terms, such as "inner," "outer," "beneath", "below", "lower", "above", "upper" and the like, may be used herein for ease of description to describe one element or feature's relationship to another element(s) or feature(s) as illustrated in the figures. Spatially relative terms may be intended to encompass different orientations of the device in use or operation in addition to the orientation depicted in the figures. For example, if the device in the figures is turned over, elements described as "below" or "beneath" other elements or features would then be oriented "above" the other elements or features. Thus, the example term "below" can encompass both an orientation of above and below. The device may be otherwise oriented (rotated 90 degrees or at other orientations) and the spatially relative descriptors used herein interpreted accordingly.

**[0024]** With reference to Figures 1-7, a pulse valve assembly 10 according a first embodiment of the present disclosure is illustrated. Pulse valve assembly 10 includes a cylindrical main valve 12 and a pilot valve 14 (shown in Figures 3-7). The main valve 12 includes a cylindrical main valve body 16, a main valve bore 18, and a main valve spool 20. The main valve bore 18 extends within the main valve body 16 along an axis 22. The main valve spool 20 is disposed in the main valve bore 18 and can move (i.e., slide) within the main valve bore 18 between a closed position (Figures 3 and 4) and an open position (Figures 5-7, as indicated by the arrow B).

**[0025]** The main valve body 16 has a mounting interface 24 that includes a plurality of axially extending and laterally spaced apart inlet ports 26 and a plurality of axially extending and laterally spaced apart outlet ports 28 located radially inwardly from the plurality of inlet ports 26. The size and number of inlet ports 26 and outlet ports 28, as well as the outlet ports 28 being located radially inwardly from the inlet ports 26 increases the efficiency of the out pulse and flow of the fluid (e.g., air) from the valve assembly 10. In this regard, the size of the inlet and outlet ports 26, 28 provides for an increased volume of fluid (e.g., air) that may be pulsed from the pulse valve 10, while the outlet ports 28 being located radially inwardly from the inlet ports 26 provides for a less tortuous flow path through the pulse valve 10. A base (not illustrated) may optionally be connected to the mounting interface 24 of the main valve body 16 by screws 17. The base provides an input in fluid communication with the inlet ports 26 of the main valve body 16 and is configured to connect to and receive pressurized fluid from a pressurized fluid source (not shown). Examples of pressurized fluid sources include, but are not limited to, storage tanks, pumps, and compressors. The output of the base provides fluid communication with the outlet ports 28 of the main valve body 16 and is configured to connect to and supply pressurized fluid to an accessory device (not shown). Examples of accessory devices include, but are not limited to, nozzles in a dust collector.

**[0026]** The main valve body 16 also includes a pilot inlet passage 30 that communicates with inlet ports 26, a normally closed pilot outlet passage 32 (Fig. 7) that is used to actuate spool 20 between the closed and open positions, and a normally open pilot outlet passage 34. As fluid (e.g., air) travels from inlet ports 26 to pilot inlet passage 30 while pilot valve 14 is in a closed position, the fluid will bypass normally closed pilot outlet passage 32 and travel into normally open pilot outlet passage 34. The inlet ports 26, outlet ports 28, pilot inlet passage 30, normally closed pilot outlet passage 32, and normally open pilot outlet passage 34 are all disposed in fluid communication with the main valve bore 18.

**[0027]** The main valve bore 18 of the main valve body 16 includes a first piston seat 36, a second piston seat 38, and a main valve member 40. The second piston seat 38 is axially spaced from the first piston seat 36 and the main valve member seat 40 is positioned axially between the first and second piston seats 36, 38 in the main valve body 16. The main valve spool 20 includes a first piston 42, a second piston 44, and a main valve member 46. The second piston 44 is axially spaced from the first piston 42, and the main valve member 46 is positioned axially between the first and second pistons 42, 44. The first piston 42 is disposed in sliding contact with the first piston seat 36 when the main valve spool 20 is in the open and closed positions such that the first piston 42 defines a first pressure chamber 48 (Fig. 7) at one end of the main valve spool 20. The first pressure chamber 48 is disposed in fluid communication with and receives pressurized fluid from the normally closed pilot outlet passage 32. The second piston 44 is disposed in sliding contact with the second piston seat 38 when the main valve spool 20 is in the open and closed positions such that the second piston 44 defines a second pressure chamber 52 at an opposite end of the main valve bore 18. The second pressure chamber 52 is disposed in fluid communication with and receives pressurized fluid from the normally open pilot outlet passage 34.

**[0028]** The main valve member 46 includes an abutment surface 54 that contacts the main valve member seat 40 when the main valve spool 20 is in the closed position (Figures 3, 4, and 7). As a result, the main valve member 46 blocks fluid flow between the inlet ports 26 and the outlet ports 28 in the main valve body 16 when the main valve spool 20 is in the closed position. In contrast, the main valve member 46 is axially spaced from the main valve member seat 40 when the main valve spool 20 is in the open position (Figures 5 to 7, as shown by the arrow B). As a result, the main valve member 46 permits (i.e., allows) fluid to flow from the inlet ports 26 to the outlet port 28 in the main valve body 16 when the main valve spool 20 is in the open position. Although not required, the main valve 12 includes a main valve spring 56 that is disposed in the second pressure chamber 52 of the main valve bore 18. The main valve spring 56 contacts the second piston 44 to bias the main valve spool 20 towards the closed position (Figures 3 and 4). In accordance with this

configuration, the main valve 12 acts as a two-way, normally closed valve.

**[0029]** Pilot valve 14 is mounted to a mounting surface 58 of main valve body 16. Pilot valve 14 includes a pilot valve body 60 that is fixed to mounting surface 58, and includes a lid 62 that encloses a solenoid-actuated pilot valve member 64. Pilot valve member 64 is slidable within pilot valve body 60 along a pilot valve bore 66 to open and close normally closed pilot outlet passage 32. Pilot valve bore 66 communicates with pilot inlet passage 30 and normally open pilot outlet passage 34 such that, as described above, fluid (e.g., air) flows from inlet ports 26 into pilot inlet passage 30, from pilot inlet passage 30 into pilot valve bore 66, and into normally open pilot outlet passage 34 when pilot valve member 64 is in the closed position. Upon actuation of pilot valve member 64 by a solenoid 68, the fluid (e.g., air) is then free to flow from pilot valve bore 66 into normally closed pilot outlet passage 32 to actuate main valve spool 20 into the open position (Figures 5 and 6). Pilot valve 14 may be a pilot valve described in U.S. Serial No. 16/196,318 assigned to MAC Valves, Inc., which is also the assignee of the present disclosure. Alternatively, pilot valve 14 may be any other type of pilot valve known to one skilled in the art.

**[0030]** As best seen in Figure 7, the pilot valve bore 66 extends within the pilot valve body 60 along a transverse axis 70 that is perpendicular to the axis 22 of the main valve bore 18. As described above, pilot valve member 64 is disposed in the pilot valve bore 66 and can move (i.e., slide) inside the pilot valve bore 66 along the transverse axis 70. However, it should be appreciated that other configurations are possible where pilot valve 14 is installed at a different location and/or orientation relative to the main valve 12.

**[0031]** Pilot valve 14 includes solenoid 68 for driving the pilot valve member 64 inside pilot valve bore 66 between two or more axially spaced positions. As a result, the position of the pilot valve member 64 in pilot valve bore 66 determines whether or not the pressurized fluid can flow from the pilot inlet passage 30 to the normally closed pilot outlet passage 32.

**[0032]** Pilot valve member 64 includes a first valve head 72 and a second valve head 74 longitudinally spaced apart from the first valve head 72. In a closed position of pilot valve 14 (i.e., when normally closed pilot outlet passage 32 is prevented from receiving pressurized fluid), first valve head 72 is in contact with a first valve seat 76 of pilot valve bore 66, and second valve head 74 is longitudinally spaced apart from a second valve seat 78 of pilot valve bore 66. In this state, pressurized fluid is free to enter pilot valve 14 through pilot valve inlet passage 30 and exit pilot valve 14 (not shown) into normally open pilot valve outlet passage 34. In this manner, the pressurized fluid is able to enter second pressure chamber 52 via normally open pilot valve outlet passage 34 to force spool 20 into the closed position where main valve member 46 is in engagement with main valve bore surface 40.

**[0033]** In an open position of pilot valve 14 (i.e., when

normally closed pilot outlet passage 32 is permitted to receive pressurized fluid), solenoid 68 is energized to force pilot valve member 64 in a direction away from solenoid 68, which moves first valve head 72 away from first valve seat 76 and moves second valve head 74 into contact with second valve seat 78 of pilot valve bore 66. In this state, pressurized fluid is free to enter pilot valve 14 through pilot valve inlet passage 30 and exit pilot valve 14 into normally closed pilot outlet passage 32, without entering normally open pilot valve outlet passage 34. In this manner, the pressurized fluid is prevented from reaching second pressure chamber 52 while being able to enter first pressure chamber 48. Because no pressurized fluid is in second pressure chamber 52 (or at least because the fluid in second pressure chamber 52 is no longer pressurized), the pressurized fluid in first pressure chamber 48 is sufficient to force main valve spool 20 in a direction away (i.e., in the direction of arrow B) from pilot valve 14 such that main valve member 46 is disengaged from main valve member seat 40. Thus, the pressurized fluid that enters inlet ports 26 is able to flow from inlet ports 26 into main valve bore 18 and around main valve member seat 40 into outlet ports 28.

**[0034]** The above-described pulse valve 10 provides a higher-flow valve that has a less tortuous path through the pulse valve 10, which provides a more efficient pulse valve 10. In this regard, the size and number of inlet ports 26 and outlet ports 28, as well as the outlet ports 28 being located radially inwardly from the inlet ports 26 increases the efficiency of the out pulse and flow of the fluid (e.g., air) from the valve assembly 10. More particularly, the size of the inlet and outlet ports 26, 28 provides for an increased volume of fluid (e.g., air) that may be pulsed from the pulse valve 10, while the outlet ports 28 being located radially inwardly from the inlet ports 26 provides for a less tortuous flow path through the pulse valve 10.

**[0035]** Now referring to Figures 8-14, a second embodiment of the present disclosure will be described. Pulse valve assembly 100 includes a cylindrical main valve 112 and a pilot valve 114 (Figs. 10-14). The main valve 112 includes a cylindrical main valve body 116, a main valve bore 118, and a main valve spool 120. The main valve bore 118 extends within the main valve body 116 along an axis 122. The main valve spool 120 is disposed in the main valve bore 118 and can move (i.e., slide) within the main valve bore 118 between a closed position and an open position (as indicated by the arrow B).

**[0036]** The main valve body 116 has a mounting interface 124 that includes a plurality of axially extending and laterally spaced apart inlet ports 126 and a single outlet port 128 located at a center of the mounting interface 124 that is located radially inwardly from the plurality of inlet ports 126. The size and number of inlet ports 126 and the outlet port 128, as well as the outlet port 128 being located radially inwardly from the inlet ports 126 increases the efficiency of the out pulse and flow of the fluid (e.g., air) from the valve assembly 100. In this regard, the size of the inlet ports 126 and the outlet port 128 provides for an

increased volume of fluid (e.g., air) that may be pulsed from the pulse valve 100 while the outlet port 128 being located radially inwardly from the inlet ports 126 provides for a less tortuous flow path through the pulse valve 100.

5 A base (not illustrated) may optionally be connected to the mounting interface 124 of the main valve body 116 by screws 117. The base provides an input in fluid communication with the inlet ports 126 of the main valve body 116 and is configured to connect to and receive pressurized fluid from a pressurized fluid source (not shown). Examples of pressurized fluid sources include, but are not limited to, storage tanks, pumps, and compressors. The output of the base provides fluid communication with the outlet port 128 of the main valve body 116 and is configured to connect to and supply pressurized fluid to an accessory device (not shown). Examples of accessory devices include, but are not limited to, nozzles in a dust collector.

**[0037]** The main valve body 116 includes a pilot inlet passage 130 that communicates with inlet ports 126. In this regard, as the fluid (e.g., air) enters each of the inlet ports 126, the fluid will collect in a first chamber 131 that surrounds main valve spool 120 before entering pilot inlet passage 130 and travelling to pilot valve 114. Main valve body 116 also includes normally closed pilot outlet passage 132 (Figs. 10-14) that is used to actuate main valve spool 120 between the closed and open positions, and a normally open pilot outlet passage 134. As fluid (e.g., air) travels from inlet ports 126 to pilot inlet passage 130 while pilot valve 114 is in a closed position, the fluid will bypass normally closed pilot outlet passage 132 and travel into normally open pilot outlet passage 134 to pressurize a second chamber 135 via a cavity 137 that communicates with normally open pilot outlet passage 134 via apertures 141 formed in main valve body 116, which keeps main valve spool 120 in the closed position. The inlet ports 126, outlet port 128, pilot inlet passage 130, normally closed pilot outlet passage 132, and normally open pilot outlet passage 134 are all disposed in fluid communication with the main valve bore 118. Any excessive pressure that builds in cavity 137 and second pressure chamber 135 may be relieved through a bleed passage 143 formed in pilot valve 114.

**[0038]** The main valve bore 118 of the main valve body 116 includes a first piston seat 136 in second chamber 135 and a second piston seat 138 in first chamber 131. The second piston seat 138 is axially spaced from the first piston seat 136. The main valve spool 120 includes a first piston 142 and a second piston 144. The second piston 144 is axially spaced from the first piston 142. The first piston 142 is disposed in sliding contact with the first piston seat 136 when the main valve spool 120 is in the open and closed positions.

**[0039]** The second pressure chamber 135, in addition to being in fluid communication with normally open pilot outlet passage 134, is also in fluid communication with and receives pressurized fluid from the normally closed pilot outlet passage 132 when pilot valve 114 is in the

open position, which actuates main valve spool 120 to move first piston 142 in a direction toward pilot valve 114 to open the valve 100. The second piston 144 is disposed in sliding contact with the second piston seat 138, and is used to seal and open outlet port 128. The first pressure chamber 131, in addition to being in communication with fluid inlet ports 126, is also in communication with second pressure chamber 135 via a second pressure chamber outlet 139 (Fig. 14) such that when valve spool 120 moves to the open position, each of first piston 142 and second piston 144 are moved in the direction of the arrow B to permit fluid communication between second chamber 135 and first chamber 131, and allow the fluid to exit the valve 100 through outlet port 128. A valve spring 156 may be positioned about valve spool 120 in the second pressure chamber 135 of the main valve bore 118. The valve spring 156 contacts the first piston 142 to bias the main valve spool 120 towards the closed position. In accordance with this configuration, the valve 100 acts as a two-way, normally closed valve.

**[0040]** Pilot valve 114 is mounted to a mounting surface 158 of main valve body 116. Pilot valve 114 includes a pilot valve body 160 that is fixed to mounting surface 158, and includes a lid 162 that encloses a solenoid-actuated pilot valve member 164. Pilot valve member 164 is slidable within pilot valve body 160 along a pilot valve bore 166 to open and close normally closed pilot outlet passage 132. Pilot valve bore 166 communicates with pilot inlet passage 130 and normally open pilot outlet passage 134 such that, as described above, fluid (e.g., air) flows from inlet ports 126 into pilot inlet passage 130, from pilot inlet passage 130 into pilot valve bore 166, and into normally open pilot outlet passage 134 when pilot valve member 164 is in the closed position. Upon actuation of pilot valve member 164 by a solenoid 168, the fluid (e.g., air) is then free to flow from pilot valve bore 166 into normally closed pilot outlet passage 132 to actuate main valve spool 120 into the open position (Figures 5 and 6). Pilot valve 114 may be a pilot valve described in U.S. Serial No. 16/196,318 assigned to MAC Valves, Inc., which is also the assignee of the present disclosure. Alternatively, pilot valve 114 may be any other type of pilot valve known to one skilled in the art.

**[0041]** As best seen in Figure 14, the pilot valve bore 166 extends within the pilot valve body 160 along a transverse axis 170 that is perpendicular to the axis 122 of the main valve bore 118. As described above, pilot valve member 164 is disposed in the pilot valve bore 166 and can move (i.e., slide) inside the pilot valve bore 166 along the transverse axis 170. However, it should be appreciated that other configurations are possible where pilot valve 114 is installed at a different location and/or orientation relative to the main valve 112.

**[0042]** Pilot valve 114 includes solenoid 168 for driving the pilot valve member 164 inside pilot valve bore 166 between two or more axially spaced positions. As a result, the position of the pilot valve member 164 in pilot valve bore 166 determines whether or not the pressur-

ized fluid can flow from the pilot inlet passage 130 to the normally closed pilot outlet passage 132.

**[0043]** Pilot valve member 164 includes a first valve head 172 and a second valve head 174 longitudinally spaced apart from the first valve head 172. In a closed position of pilot valve 114 (i.e., when normally closed pilot outlet passage 132 is prevented from receiving pressurized fluid), first valve head 172 is in contact with a first valve seat 176 of pilot valve bore 166, and second valve head 174 is longitudinally spaced apart from a second valve seat 178 of pilot valve bore 166. In this state, pressurized fluid is free to enter pilot valve 114 through pilot valve inlet passage 130 and exit pilot valve 114 (not shown) into normally open pilot valve outlet passage 134.

In this manner, the pressurized fluid is able to enter second pressure chamber 135 via normally open pilot valve outlet passage 134 via cavity 137 to force spool 120 into the closed position where first piston 142 is in engagement with first valve seat 136 of main valve bore 118.

**[0044]** In an open position of pilot valve 114 (i.e., when normally closed pilot outlet passage 132 is permitted to receive pressurized fluid as shown in Fig. 14), solenoid 168 is energized to force pilot valve member 164 in a direction toward solenoid 168, which moves first valve head 172 away from first valve seat 176 and moves second valve head 174 into contact with second valve seat 178 of pilot valve bore 166. In this state, pressurized fluid is free to enter pilot valve 114 through pilot valve inlet passage 130 and exit pilot valve 114 into normally closed pilot outlet passage 132, without entering normally open pilot valve outlet passage 134. As the fluid enters normally closed pilot outlet passage 132, pressure will increase in normally closed outlet passage 132 to an extent that first and second pistons 142 and 144 are moved in the direction of arrow B. When first piston 142 is moved in the direction of arrow B, the fluid is permitted to enter second pressure chamber 135 and the second pressure chamber outlet 139 is opened. Thus, the fluid that has entered second pressure chamber 135 will be permitted to flow into first pressure chamber 131. Further, because second piston 144 is also moved in the direction of arrow B to open outlet port 128, the pressurized fluid that entered first pressure chamber 131 from second pressure chamber 135 via second pressure chamber outlet 139 is permitted to exit the valve 100 through the open outlet port 128. In addition, it should be noted that inlet ports 126 will continue to receive fluid that upon entry into first pressure chamber 131 will also be permitted to exit outlet port 128. In this manner, an increased pulse of fluid can be emitted by valve 100 when valve 100 is in the open state.

**[0045]** The above-described pulse valve 100 provides a higher-flow valve that has a less tortuous path through the pulse valve 100, which provides a more efficient pulse valve 100. In this regard, as noted above, the amount of fluid that is emitted from valve 100 will include the amount of fluid that is required to actuate main valve spool 120 to the open position as well as the fluid that continues to

enter the valve 100 through inlet ports 126.

**[0046]** The foregoing description of the embodiments has been provided for purposes of illustration and description. It is not intended to be exhaustive or to limit the disclosure. Individual elements or features of a particular embodiment are generally not limited to that particular embodiment, but, where applicable, are interchangeable and can be used in a selected embodiment, whereas the scope of protection is defined by the appended claims.

## Claims

### 1. A pulse valve assembly (10) comprising:

a main valve (12) including a cylindrical main valve body (16), a main valve bore (18) extending within the main valve body, and a main valve spool (20) slidingly disposed in the main valve bore for movement between a closed position and an open position; and

a pilot valve (14) configured to selectively move the main valve spool between the closed position and the open position,

wherein the main valve body includes a plurality of axially extending and laterally spaced apart inlet ports (26) located about a circumference of the cylindrical main valve body, a plurality of axially extending and laterally spaced apart outlet ports (28) located radially inward from the plurality of inlet ports, a pilot valve inlet passage (30), a normally closed pilot valve outlet passage (32), and a normally open pilot valve outlet passage (34) each disposed in fluid communication with the main valve bore;

the main valve body has a first pressure chamber (48) at one end of the main valve bore in fluid communication with the normally closed pilot valve outlet passage, and a second pressure chamber (52) at an opposite end of the main valve bore in fluid communication with the normally open pilot valve outlet passage;

the main valve spool includes a main valve member (46) configured to block fluid flow between the inlet ports and the outlet ports when the main valve spool is in the closed position and permit fluid flow from the inlet ports to the outlet ports when the main valve spool is in the open position;

the pilot valve is configured such that in a closed position of the pilot valve, fluid communication is permitted between the pilot valve inlet passage and the normally open pilot valve outlet passage, which pressurizes the second pressure chamber to maintain the main valve spool in the closed position to prevent fluid flow from the inlet port to the outlet port; and

the pilot valve is configured such that in an open

position of the pilot valve, fluid communication is not permitted between the pilot valve inlet passage and the normally open pilot valve outlet passage, and is permitted between the pilot valve inlet passage and the normally closed pilot valve outlet passage, which pressurizes the first pressure chamber and depressurizes the second pressure chamber to move the main valve spool to the open position to permit fluid flow from the inlet ports to the outlet ports.

### 2. A pulse valve assembly (100) comprising:

a main valve (112) including a cylindrical main valve body (116), a main valve bore (118) extending within the main valve body, and a main valve spool (120) slidingly disposed in the main valve bore for movement between a closed position and an open position; and

a pilot valve (114) configured to selectively move the main valve spool between the closed position and the open position,

wherein the main valve body includes a plurality of axially extending and laterally spaced apart inlet ports (126) located about a circumference of the cylindrical main valve body, an outlet port (128) located radially inward from the plurality of inlet ports, a pilot valve inlet passage (130), a normally closed pilot valve outlet passage (132), and a normally open pilot valve outlet passage (134) each disposed in fluid communication with the main valve bore;

the main valve body has a first pressure chamber (131) at one end of the main valve bore in fluid communication with the inlet ports and the outlet port, and a second pressure chamber (135) at an opposite end of the main valve bore in fluid communication with the normally open pilot valve outlet passage;

the main valve spool includes a main valve member configured to block fluid flow between the inlet ports and the outlet port when the main valve spool is in the closed position and permit fluid flow from the inlet ports to the outlet port when the main valve spool is in the open position;

the pilot valve is configured such that in a closed position of the pilot valve, fluid communication is permitted between the pilot valve inlet passage and the normally open pilot valve outlet passage, which pressurizes the second pressure chamber to maintain the main valve spool in the closed position to prevent fluid flow from the inlet port to the outlet port; and

the pilot valve is configured such that in an open position of the pilot valve, fluid communication is not permitted between the pilot valve inlet passage and the normally open pilot valve outlet

- passage, and is permitted between the pilot valve inlet passage and the normally closed pilot valve outlet passage to move the main valve spool to the open position to permit fluid flow from the inlet ports to the outlet ports.
3. The pulse valve assembly according to claim 2, wherein the main valve spool includes a first piston (142) positioned in the second pressure chamber that is configured to block a second pressure chamber outlet (139) that communicates with the first pressure chamber when the main valve spool is in the closed position, and a second piston (144) positioned in the first pressure chamber that seals the outlet port when the main valve spool is in the closed position, and when the main valve spool is in the open position, fluid is permitted to flow from the second pressure chamber through the second pressure chamber outlet to the first pressure chamber and exit the main valve body through the outlet port.
4. The pulse valve assembly according to claim 3, wherein when fluid communication is permitted between the pilot valve inlet passage and the normally closed pilot valve outlet passage to move the main valve spool to the open position to permit fluid flow from the inlet ports to the outlet ports, the main valve spool is moved in a direction toward the pilot valve to open second pressure chamber outlet.
5. The pulse valve assembly according to claim 3, wherein when the main valve spool is in the open position, fluid in the first pressure chamber that is received from the plurality of inlet ports and fluid received from the second pressure chamber outlet port is permitted to exit the outlet.
6. The pulse valve assembly according to claim 3, further comprising a spring positioned about the main valve spool that biases the main valve spool to the closed position.
7. The pulse valve assembly according to claim 2, wherein the pilot valve inlet passage communicates with the plurality of inlet ports.
8. The pulse valve assembly according to claim 2, wherein the normally open pilot valve outlet passage communicates with the first pressure chamber to maintain the main valve spool in the closed position.
9. The pulse valve assembly according to claim 8, wherein the normally open pilot valve outlet passage is in communication with a cavity (137) formed in the main valve body, which communicates with the second pressure chamber via an aperture that separates the cavity and the second pressure chamber.

10. The pulse valve assembly according to claim 2, wherein the pilot valve includes a pilot valve body (160) defining a pilot valve bore (166) having a pilot valve member (164) located therein, the pilot valve member being actuated by a solenoid (168) that moves the pilot valve member between a first position where fluid communication between the pilot valve inlet passage and the normally open pilot valve outlet passage is permitted, and a second position where fluid communication between the pilot valve inlet passage and the normally closed pilot valve outlet passage is permitted.

## 15 Patentansprüche

1. Eine Impulsventilanordnung (10), die Folgendes beinhaltet:
- ein Hauptventil (12), das einen zylindrischen Hauptventilkörper (16), eine Hauptventilbohrung (18), die sich innerhalb des Hauptventilkörpers erstreckt, und eine Hauptventilspule (20), die zur Bewegung zwischen einer geschlossenen Stellung und einer offenen Stellung gleitbar in der Hauptventilbohrung eingerichtet ist, umfasst; und
- ein Pilotventil (14), das konfiguriert ist, um die Hauptventilspule zwischen der geschlossenen Stellung und der offenen Stellung selektiv zu bewegen,
- wobei der Hauptventilkörper eine Vielzahl von sich axial erstreckenden und seitlich beabstandeten Einlassöffnungen (26), die sich um einen Umfang des zylindrischen Hauptventilkörpers befinden, eine Vielzahl von sich axial erstreckenden und seitlich beabstandeten Auslassöffnungen (28), die sich radial einwärts von der Vielzahl von Einlassöffnungen befinden, einen Pilotventileinlassdurchgang (30), einen normal geschlossenen Pilotventilauslassdurchgang (32) und einen normal offenen Pilotventilauslassdurchgang (34), die jeweils in Fluidkommunikation mit der Hauptventilbohrung eingerichtet sind, umfasst;
- der Hauptventilkörper eine erste Druckkammer (48) an einem Ende der Hauptventilbohrung in Fluidkommunikation mit dem normal geschlossenen Pilotventilauslassdurchgang und eine zweite Druckkammer (52) an einem gegenüberliegenden Ende der Hauptventilbohrung in Fluidkommunikation mit dem normal offenen Pilotventilauslassdurchgang aufweist;
- die Hauptventilspule ein Hauptventilelement (46) umfasst, das konfiguriert ist, um Fluidfluss zwischen den Einlassöffnungen und den Auslassöffnungen zu blockieren, wenn die Hauptventilspule in der geschlossenen Stellung ist,

und Fluidfluss von den Einlassöffnungen zu den Auslassöffnungen zu gestatten, wenn die Hauptventilspule in der offenen Stellung ist; das Pilotventil so konfiguriert ist, dass in einer geschlossenen Stellung des Pilotventils Fluidkommunikation zwischen dem Pilotventileinlassdurchgang und dem normal offenen Pilotventilauslassdurchgang gestattet wird, was Druck auf die zweite Druckkammer ausübt, um die Hauptventilspule in der geschlossenen Stellung zu halten, um Fluidfluss von der Einlassöffnung zu der Auslassöffnung zu verhindern; und das Pilotventil so konfiguriert ist, dass in einer offenen Stellung des Pilotventils Fluidkommunikation zwischen dem Pilotventileinlassdurchgang und dem normal offenen Pilotventilauslassdurchgang nicht gestattet wird und zwischen dem Pilotventileinlassdurchgang und dem normal geschlossenen Pilotventilauslassdurchgang gestattet wird, was Druck auf die erste Druckkammer ausübt und Druck aus der zweiten Druckkammer ablässt, um die Hauptventilspule in die offene Stellung zu bewegen, um Fluidfluss von den Einlassöffnungen zu den Auslassöffnungen zu gestatten.

2. Eine Impulsventilanordnung (100), die Folgendes beinhaltet:

ein Hauptventil (112), das einen zylindrischen Hauptventilkörper (116), eine Hauptventilbohrung (118), die sich innerhalb des Hauptventilkörpers erstreckt, und eine Hauptventilspule (120), die zur Bewegung zwischen einer geschlossenen Stellung und einer offenen Stellung gleitbar in der Hauptventilbohrung eingerichtet ist, umfasst; und ein Pilotventil (114), das konfiguriert ist, um die Hauptventilspule zwischen der geschlossenen Stellung und der offenen Stellung selektiv zu bewegen, wobei der Hauptventilkörper eine Vielzahl von sich axial erstreckenden und seitlich beabstandeten Einlassöffnungen (126), die sich um einen Umfang des zylindrischen Hauptventilkörpers befinden, eine Auslassöffnung (128), die sich radial einwärts von der Vielzahl von Einlassöffnungen befindet, einen Pilotventileinlassdurchgang (130), einen normal geschlossenen Pilotventilauslassdurchgang (132) und einen normal offenen Pilotventilauslassdurchgang (134), die jeweils in Fluidkommunikation mit der Hauptventilbohrung eingerichtet sind, umfasst; der Hauptventilkörper eine erste Druckkammer (131) an einem Ende der Hauptventilbohrung in Fluidkommunikation mit den Einlassöffnungen

und der Auslassöffnung und eine zweite Druckkammer (135) an einem gegenüberliegenden Ende der Hauptventilbohrung in Fluidkommunikation mit dem normal offenen Pilotventilauslassdurchgang aufweist; die Hauptventilspule ein Hauptventilelement umfasst, das konfiguriert ist, um Fluidfluss zwischen den Einlassöffnungen und der Auslassöffnung zu blockieren, wenn die Hauptventilspule in der geschlossenen Stellung ist, und Fluidfluss von den Einlassöffnungen zu der Auslassöffnung zu gestatten, wenn die Hauptventilspule in der offenen Stellung ist; das Pilotventil so konfiguriert ist, dass in einer geschlossenen Stellung des Pilotventils Fluidkommunikation zwischen dem Pilotventileinlassdurchgang und dem normal offenen Pilotventilauslassdurchgang gestattet wird, was Druck auf die zweite Druckkammer ausübt, um die Hauptventilspule in der geschlossenen Stellung zu halten, um Fluidfluss von der Einlassöffnung zu der Auslassöffnung zu verhindern; und das Pilotventil so konfiguriert ist, dass in einer offenen Stellung des Pilotventils Fluidkommunikation zwischen dem Pilotventileinlassdurchgang und dem normal offenen Pilotventilauslassdurchgang nicht gestattet wird und zwischen dem Pilotventileinlassdurchgang und dem normal geschlossenen Pilotventilauslassdurchgang gestattet wird, um die Hauptventilspule in die offene Stellung zu bewegen, um Fluidfluss von den Einlassöffnungen zu den Auslassöffnungen zu gestatten.

3. Impulsventilanordnung gemäß Anspruch 2, wobei die Hauptventilspule einen ersten Kolben (142), der in der zweiten Druckkammer positioniert ist und konfiguriert ist, um einen zweiten Druckkammerauslass (139) zu blockieren, der mit der ersten Druckkammer kommuniziert, wenn die Hauptventilspule in der geschlossenen Stellung ist, und einen zweiten Kolben (144), der in der ersten Druckkammer positioniert ist und die Auslassöffnung abdichtet, wenn die Hauptventilspule in der geschlossenen Stellung ist, umfasst, und wenn die Hauptventilspule in der offenen Stellung ist, Fluid gestattet wird, von der zweiten Druckkammer durch den zweiten Druckkammerauslass in die erste Druckkammer zu fließen und den Hauptventilkörper durch die Auslassöffnung zu verlassen.
4. Impulsventilanordnung gemäß Anspruch 3, wobei, wenn Fluidkommunikation zwischen dem Pilotventileinlassdurchgang und dem normal geschlossenen Pilotventilauslassdurchgang gestattet wird, um die Hauptventilspule in die offene Stellung zu bewegen, um Fluidfluss von den Einlassöffnungen zu den Aus-

lassöffnungen zu gestatten, die Hauptventilschule in eine Richtung auf das Pilotventil zu bewegt wird, um den zweiten Druckkammerauslass zu öffnen.

5. Impulsventilanordnung gemäß Anspruch 3, wobei, wenn die Hauptventilschule in der offenen Stellung ist, Fluid in der ersten Druckkammer, das von der Vielzahl von Einlassöffnungen empfangen wird, und Fluid, das von der zweiten Druckkammerauslassöffnung empfangen wird, gestattet wird, den Auslass zu verlassen. 5 10
6. Impulsventilanordnung gemäß Anspruch 3, die ferner eine Feder beinhaltet, die um die Hauptventilschule positioniert ist und die Hauptventilschule in die geschlossene Stellung vorspannt. 15
7. Impulsventilanordnung gemäß Anspruch 2, wobei der Pilotventileinlassdurchgang mit der Vielzahl von Einlassöffnungen kommuniziert. 20
8. Impulsventilanordnung gemäß Anspruch 2, wobei der normal offene Pilotventilauslassdurchgang mit der ersten Druckkammer kommuniziert, um die Hauptventilschule in der geschlossenen Stellung zu halten. 25
9. Impulsventilanordnung gemäß Anspruch 8, wobei der normal offene Pilotventilauslassdurchgang in Kommunikation mit einem Hohlraum (137) ist, der in dem Hauptventilkörper gebildet ist und mit der zweiten Druckkammer über eine Öffnung kommuniziert, die den Hohlraum und die zweite Druckkammer trennt. 30
10. Impulsventilanordnung gemäß Anspruch 2, wobei das Pilotventil einen Pilotventilkörper (160) umfasst, der eine Pilotventilbohrung (166) definiert, die ein Pilotventilelement (164) aufweist, das sich darin befindet, wobei das Pilotventilelement durch ein Solenoid (168) betätigt wird, das das Pilotventilelement zwischen einer ersten Stellung, wo Fluidkommunikation zwischen dem Pilotventileinlassdurchgang und dem normal offenen Pilotventilauslassdurchgang gestattet wird, und einer zweiten Stellung, wo Fluidkommunikation zwischen dem Pilotventileinlassdurchgang und dem normal geschlossenen Pilotventilauslassdurchgang gestattet wird, bewegt. 35 40 45

## Revendications

1. Un ensemble soupape à impulsions (10) comprenant : 50 55
  - une soupape principale (12) incluant un corps cylindrique (16) de soupape principale,
  - un alésage (18) de soupape principale s'éten-

dant à l'intérieur du corps de soupape principale, et un tiroir (20) de soupape principale disposé de façon coulissante dans l'alésage de soupape principale pour un déplacement entre une position fermée et une position ouverte ; et une soupape pilote (14) configurée pour déplacer de façon sélective le tiroir de soupape principale entre la position fermée et la position ouverte,

où le corps de soupape principale inclut une pluralité d'orifices d'admission (26) s'étendant axialement et espacés latéralement les uns des autres situés autour d'une circonférence du corps cylindrique de soupape principale, une pluralité d'orifices d'évacuation (28) s'étendant axialement et espacés latéralement les uns des autres situés radialement vers l'intérieur à partir de la pluralité d'orifices d'admission, un passage d'admission (30) de soupape pilote, un passage d'évacuation (32) de soupape pilote normalement fermé, et un passage d'évacuation (34) de soupape pilote normalement ouvert disposés chacun en communication fluïdique avec l'alésage de soupape principale ;

le corps de soupape principale a une première chambre de pression (48) à une extrémité de l'alésage de soupape principale en communication fluïdique avec le passage d'évacuation de soupape pilote normalement fermé, et une deuxième chambre de pression (52) à une extrémité opposée de l'alésage de soupape principale en communication fluïdique avec le passage d'évacuation de soupape pilote normalement ouvert ;

le tiroir de soupape principale inclut un élément (46) de soupape principale configuré pour bloquer un écoulement de fluïde entre les orifices d'admission et les orifices d'évacuation lorsque le tiroir de soupape principale est dans la position fermée et permettre un écoulement de fluïde depuis les orifices d'admission vers les orifices d'évacuation lorsque le tiroir de soupape principale est dans la position ouverte ;

la soupape pilote est configurée de telle sorte que dans une position fermée de la soupape pilote, une communication fluïdique soit permise entre le passage d'admission de soupape pilote et le passage d'évacuation de soupape pilote normalement ouvert,

ce qui met sous pression la deuxième chambre de pression afin de maintenir le tiroir de soupape principale dans la position fermée afin d'empêcher un écoulement de fluïde depuis l'orifice d'admission vers l'orifice d'évacuation ; et

la soupape pilote est configurée de telle sorte que dans une position ouverte de la soupape pilote, une communication fluïdique ne soit pas permise entre le passage d'admission de sou-

pape pilote et le passage d'évacuation de soupape pilote normalement ouvert, et soit permise entre le passage d'admission de soupape pilote et le passage d'évacuation de soupape pilote normalement fermé, ce qui met sous pression la première chambre de pression et relâche la pression dans la deuxième chambre de pression afin de déplacer le tiroir de soupape principale vers la position ouverte afin de permettre un écoulement de fluide depuis les orifices d'admission vers les orifices d'évacuation.

2. Un ensemble soupape à impulsions (100) comprenant :

une soupape principale (112) incluant un corps cylindrique (116) de soupape principale, un alésage (118) de soupape principale s'étendant à l'intérieur du corps de soupape principale, et un tiroir (120) de soupape principale disposé de façon coulissante dans l'alésage de soupape principale pour un déplacement entre une position fermée et une position ouverte ; et une soupape pilote (114) configurée pour déplacer de façon sélective le tiroir de soupape principale entre la position fermée et la position ouverte,

où le corps de soupape principale inclut une pluralité d'orifices d'admission (126) s'étendant axialement et espacés latéralement les uns des autres situés autour d'une circonférence du corps cylindrique de soupape principale, un orifice d'évacuation (128) situé radialement vers l'intérieur à partir de la pluralité d'orifices d'admission, un passage d'admission (130) de soupape pilote, un passage d'évacuation (132) de soupape pilote normalement fermé, et un passage d'évacuation (134) de soupape pilote normalement ouvert disposés chacun en communication fluïdique avec l'alésage de soupape principale ;

le corps de soupape principale a une première chambre de pression (131) à une extrémité de l'alésage de soupape principale en communication fluïdique avec les orifices d'admission et l'orifice d'évacuation, et une deuxième chambre de pression (135) à une extrémité opposée de l'alésage de soupape principale en communication fluïdique avec le passage d'évacuation de soupape pilote normalement ouvert ;

le tiroir de soupape principale inclut un élément de soupape principale configuré pour bloquer un écoulement de fluide entre les orifices d'admission et l'orifice d'évacuation lorsque le tiroir de soupape principale est dans la position fermée et permettre un écoulement de fluide depuis les orifices d'admission vers l'orifice d'évacuation lorsque le tiroir de soupape principale

est dans la position ouverte ;

la soupape pilote est configurée de telle sorte que dans une position fermée de la soupape pilote, une communication fluïdique soit permise entre le passage d'admission de soupape pilote et le passage d'évacuation de soupape pilote normalement ouvert, ce qui met sous pression la deuxième chambre de pression afin de maintenir le tiroir de soupape principale dans la position fermée afin d'empêcher un écoulement de fluide depuis l'orifice d'admission vers l'orifice d'évacuation ; et

la soupape pilote est configurée de telle sorte que dans une position ouverte de la soupape pilote, une communication fluïdique ne soit pas permise entre le passage d'admission de soupape pilote et le passage d'évacuation de soupape pilote normalement ouvert, et soit permise entre le passage d'admission de soupape pilote et le passage d'évacuation de soupape pilote normalement fermé afin de déplacer le tiroir de soupape principale vers la position ouverte afin de permettre un écoulement de fluide depuis les orifices d'admission vers les orifices d'évacuation.

3. L'ensemble soupape à impulsions selon la revendication 2, où le tiroir de soupape principale inclut un premier piston (142) positionné dans la deuxième chambre de pression qui est configuré pour bloquer une évacuation (139) de deuxième chambre de pression qui communique avec la première chambre de pression lorsque le tiroir de soupape principale est dans la position fermée, et un deuxième piston (144) positionné dans la première chambre de pression qui scelle l'orifice d'évacuation lorsque le tiroir de soupape principale est dans la position ouverte, il est permis à du fluide de s'écouler depuis la deuxième chambre de pression à travers l'évacuation de deuxième chambre de pression vers la première chambre de pression et de sortir du corps de soupape principale à travers l'orifice d'évacuation.

4. L'ensemble soupape à impulsions selon la revendication 3, où lorsqu'une communication fluïdique est permise entre le passage d'admission de soupape pilote et le passage d'évacuation de soupape pilote normalement fermé afin de déplacer le tiroir de soupape principale vers la position ouverte afin de permettre un écoulement de fluide depuis les orifices d'admission vers les orifices d'évacuation, le tiroir de soupape principale est déplacé dans un sens en direction de la soupape pilote afin d'ouvrir l'évacuation de deuxième chambre de pression.

5. L'ensemble soupape à impulsions selon la revendication

- cation 3, où lorsque le tiroir de soupape principale est dans la position ouverte, il est permis à du fluide dans la première chambre de pression qui est reçu en provenance de la pluralité d'orifices d'admission et à du fluide reçu en provenance de l'orifice d'évacuation de deuxième chambre de pression de sortir de l'évacuation. 5
6. L'ensemble soupape à impulsions selon la revendication 3, comprenant en outre un ressort positionné autour du tiroir de soupape principale qui sollicite le tiroir de soupape principale vers la position fermée. 10
7. L'ensemble soupape à impulsions selon la revendication 2, où le passage d'admission de soupape pilote communique avec la pluralité d'orifices d'admission. 15
8. L'ensemble soupape à impulsions selon la revendication 2, où le passage d'évacuation de soupape pilote normalement ouvert communique avec la première chambre de pression afin de maintenir le tiroir de soupape principale dans la position fermée. 20
9. L'ensemble soupape à impulsions selon la revendication 8, où le passage d'évacuation de soupape pilote normalement ouvert est en communication avec une cavité (137) formée dans le corps de soupape principale, qui communique avec la deuxième chambre de pression par l'intermédiaire d'une ouverture qui sépare la cavité et la deuxième chambre de pression. 25  
30
10. L'ensemble soupape à impulsions selon la revendication 2, où la soupape pilote inclut un corps (160) de soupape pilote définissant un alésage (166) de soupape pilote ayant un élément (164) de soupape pilote situé en son sein, l'élément de soupape pilote étant actionné par un solénoïde (168) qui déplace l'élément de soupape pilote entre une première position dans laquelle une communication fluidique entre le passage d'admission de soupape pilote et le passage d'évacuation de soupape pilote normalement ouvert est permise, et une deuxième position dans laquelle une communication fluidique entre le passage d'admission de soupape pilote et le passage d'évacuation de soupape pilote normalement fermé est permise. 35  
40  
45

50

55

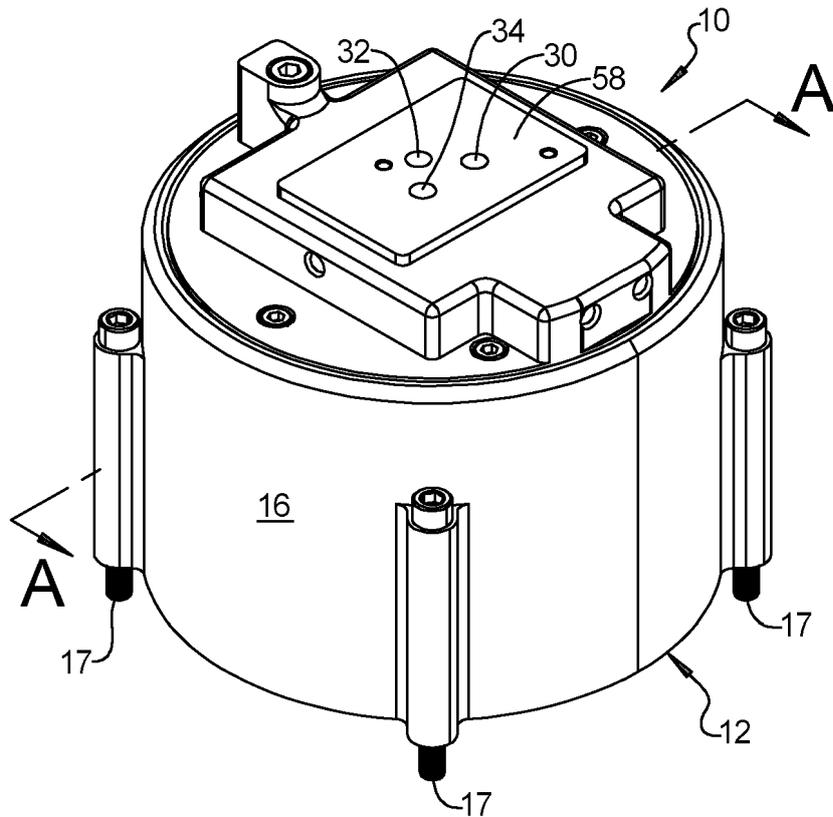


FIG. 1

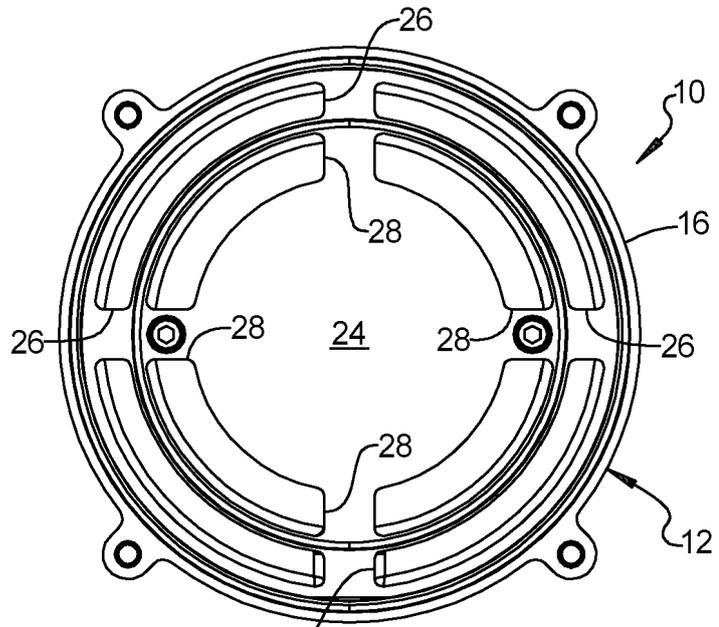


FIG. 2



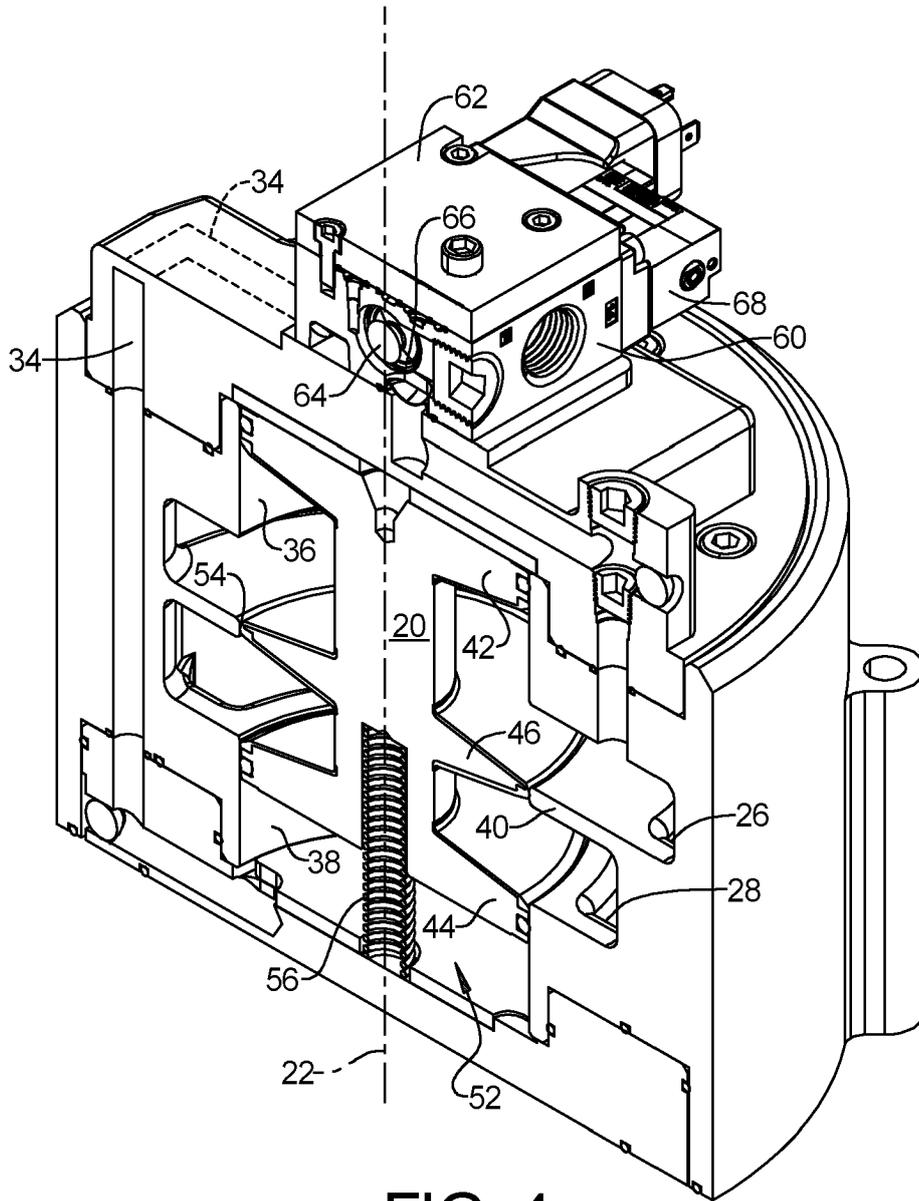


FIG. 4

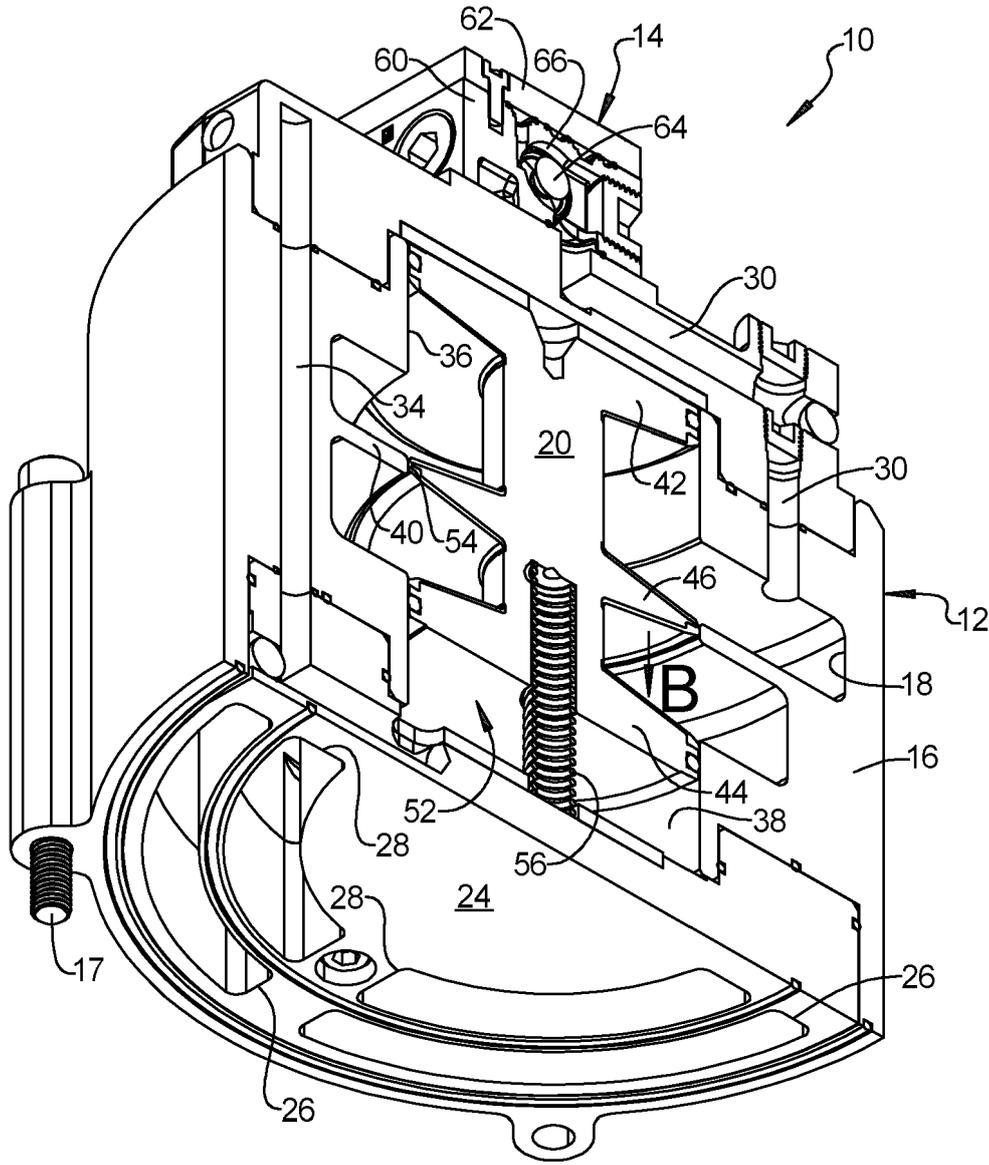


FIG. 5

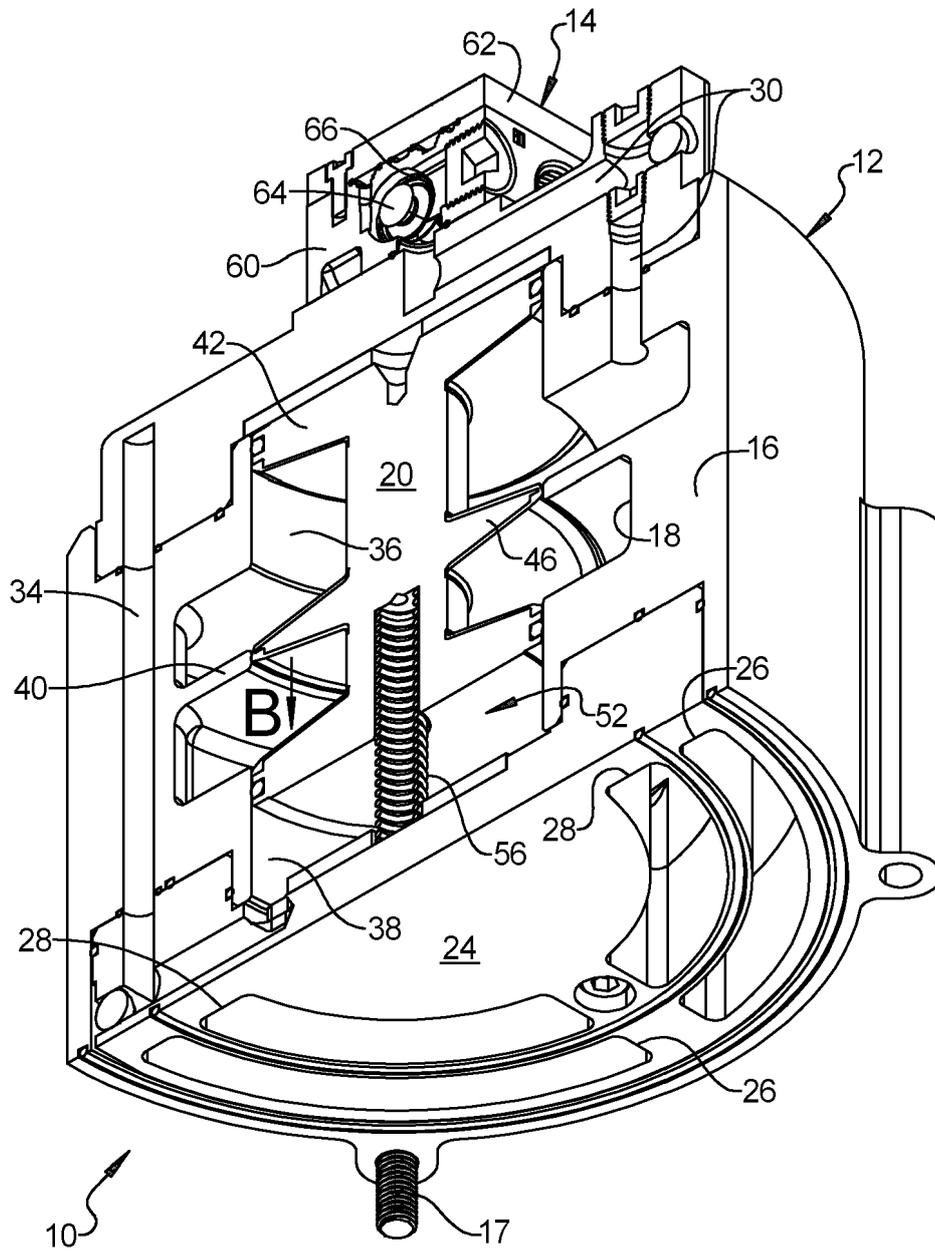


FIG. 6

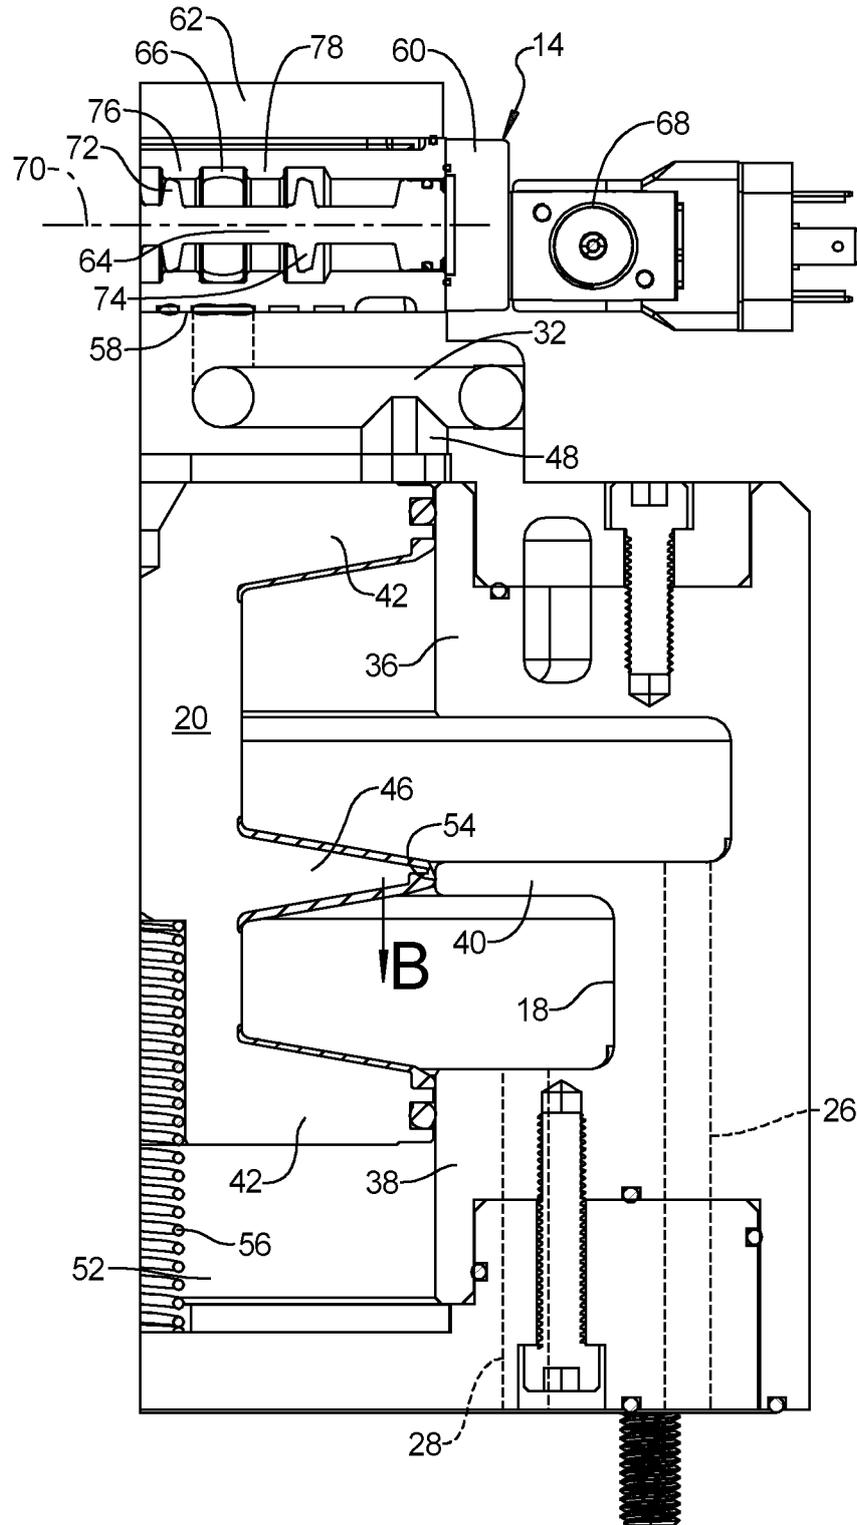


FIG. 7

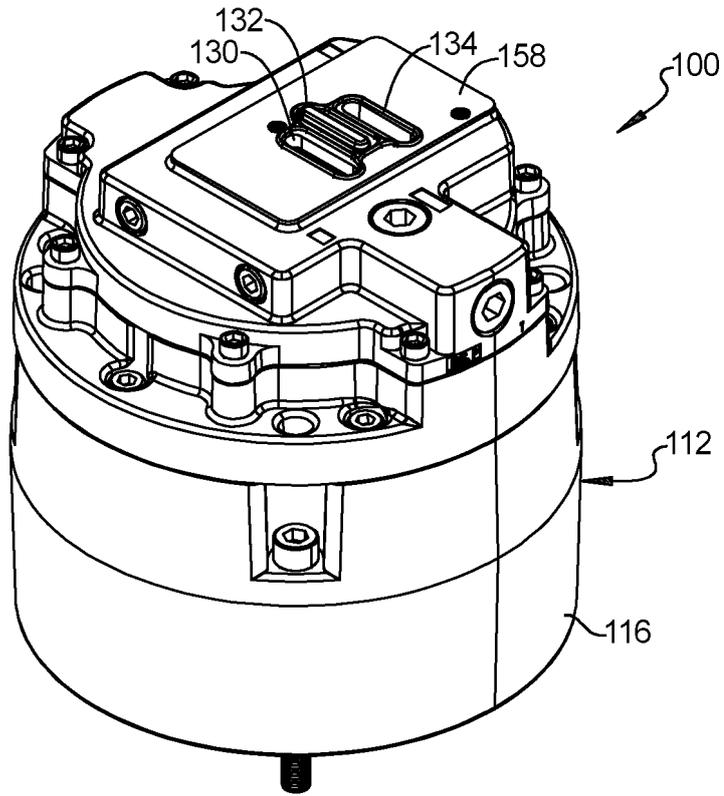


FIG. 8

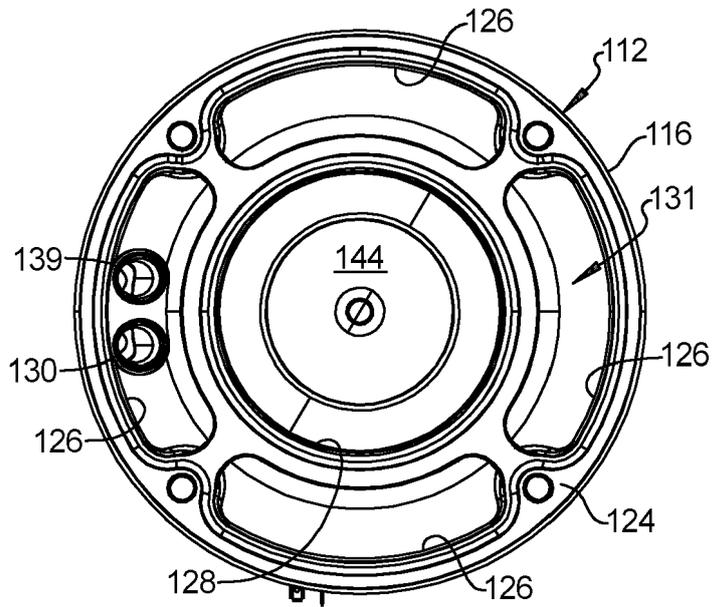


FIG. 9

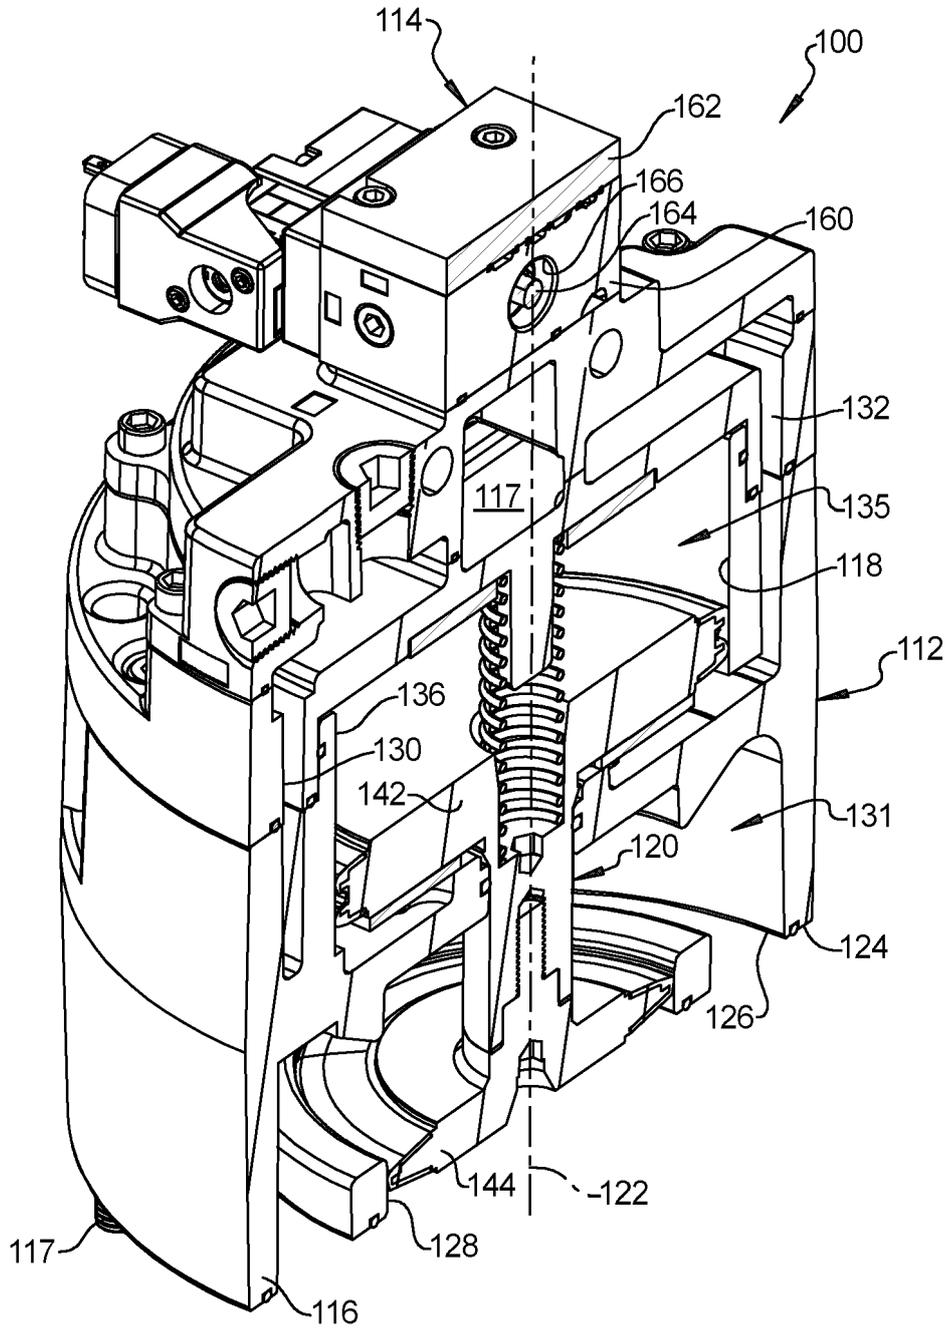


FIG. 10

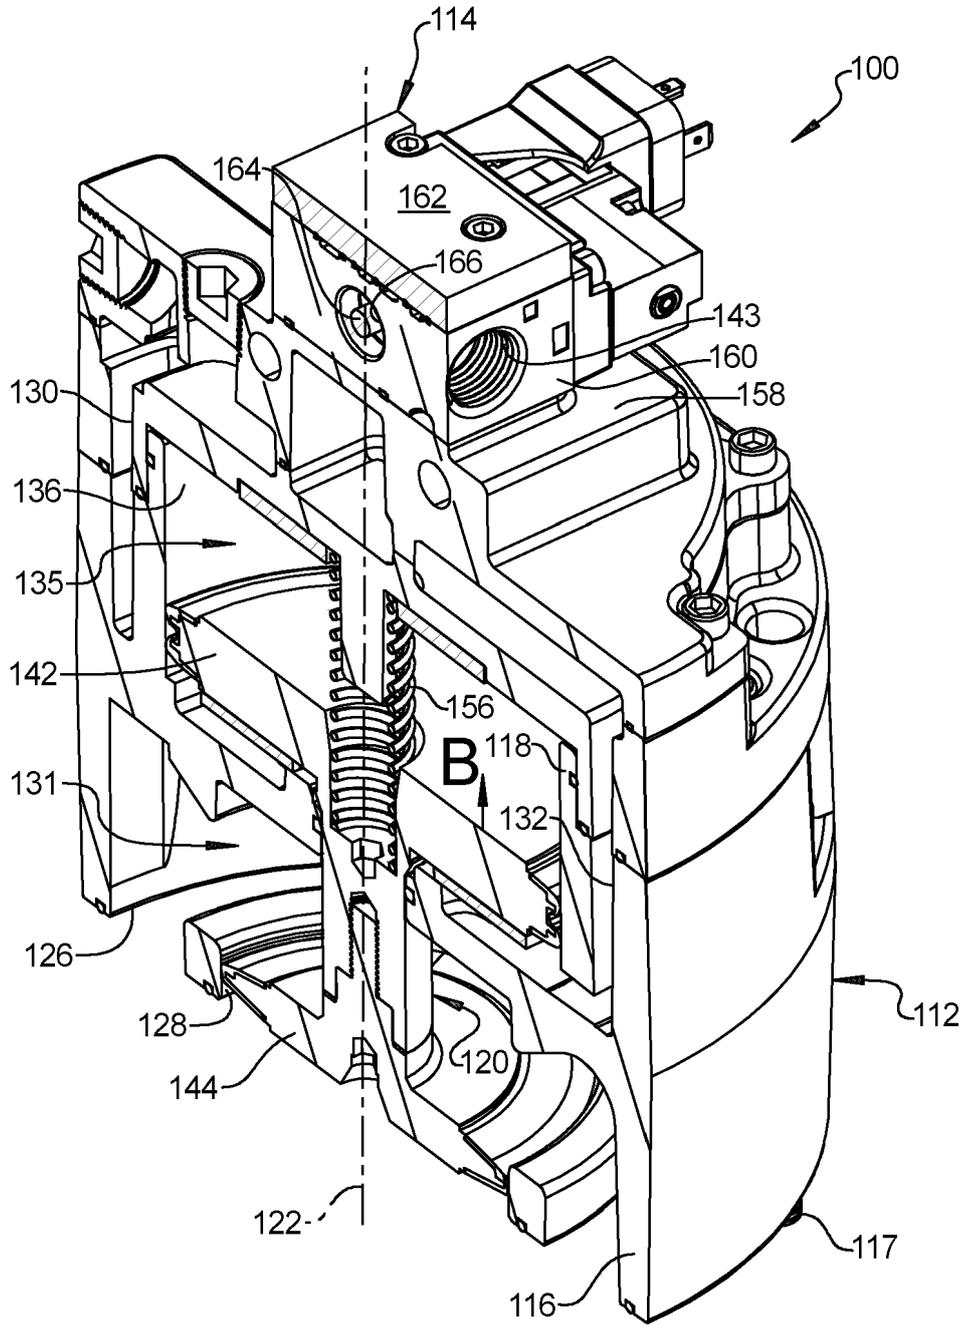


FIG. 11

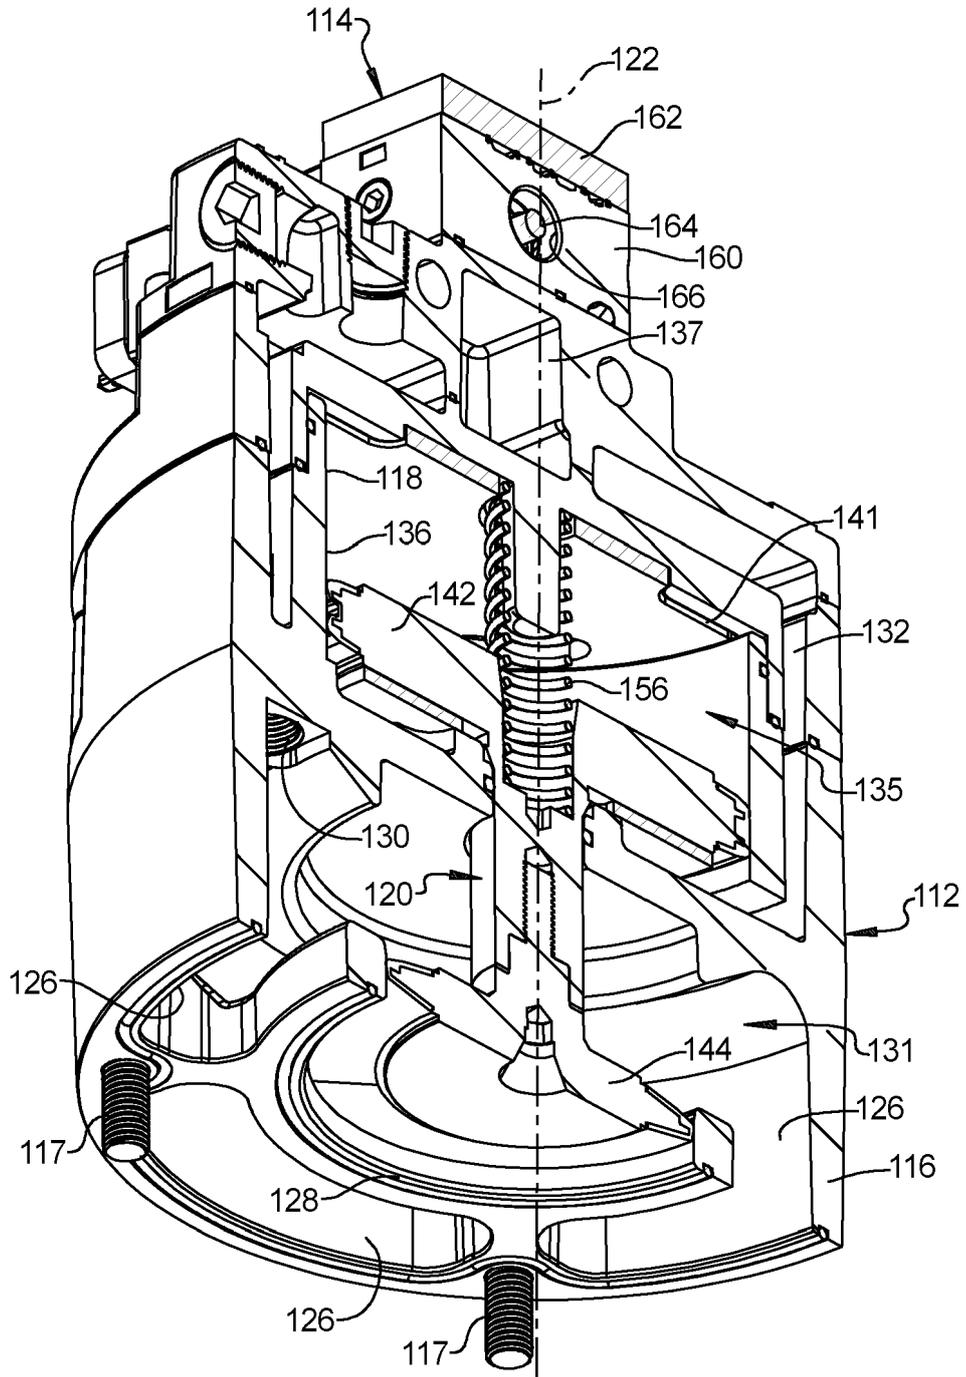


FIG. 12

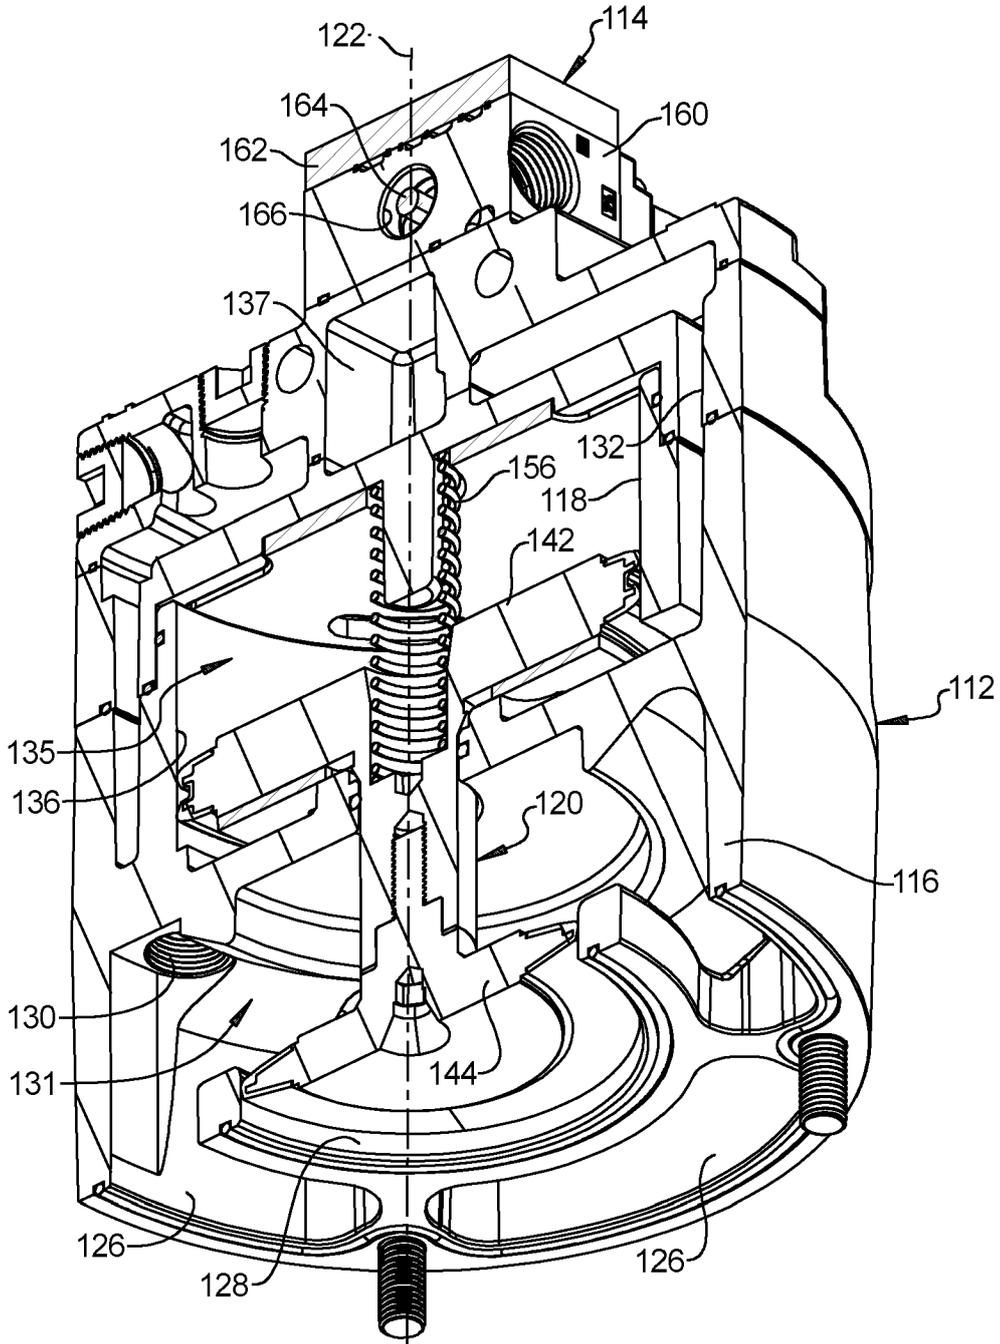


FIG. 13

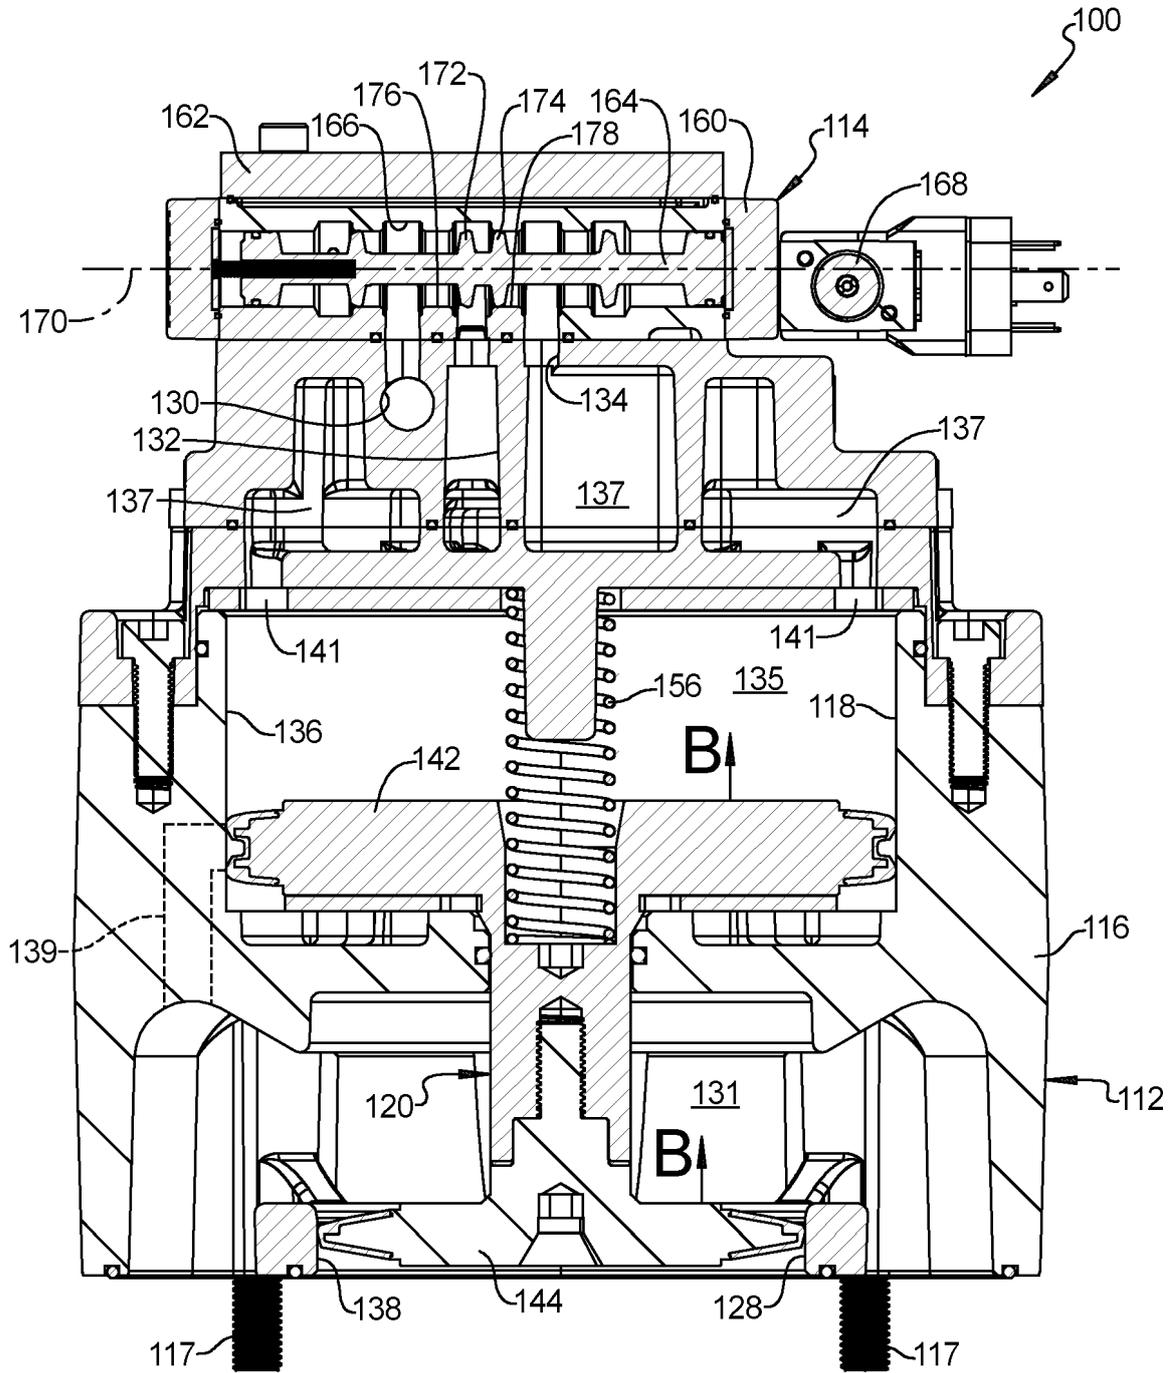


FIG. 14

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- US 02128320 [0001]
- US 62902129 [0001]
- WO 2018202670 A [0004]
- US 196318 [0029] [0040]