




(86) **Date de dépôt PCT/PCT Filing Date:** 2008/02/18
(87) **Date publication PCT/PCT Publication Date:** 2008/10/30
(45) **Date de délivrance/Issue Date:** 2016/08/16
(85) **Entrée phase nationale/National Entry:** 2009/08/21
(86) **N° demande PCT/PCT Application No.:** FR 2008/000211
(87) **N° publication PCT/PCT Publication No.:** 2008/129155
(30) **Priorité/Priority:** 2007/02/22 (FR0753433)

(51) **Cl.Int./Int.Cl. H05K 1/02** (2006.01)
(72) **Inventeurs/Inventors:**
ORTET, STEPHANE, FR;
REBEYROTTE, VINCENT, FR;
ROUSSET, DAVID, FR
(73) **Propriétaire/Owner:**
AIRBUS OPERATIONS SAS, FR
(74) **Agent:** RICHES, MCKENZIE & HERBERT LLP

(54) **Titre : CARTE ELECTRONIQUE ET AERONEF LA COMPORTANT**
(54) **Title: ELECTRONIC CARD AND AIRCRAFT INCLUDING SAME**

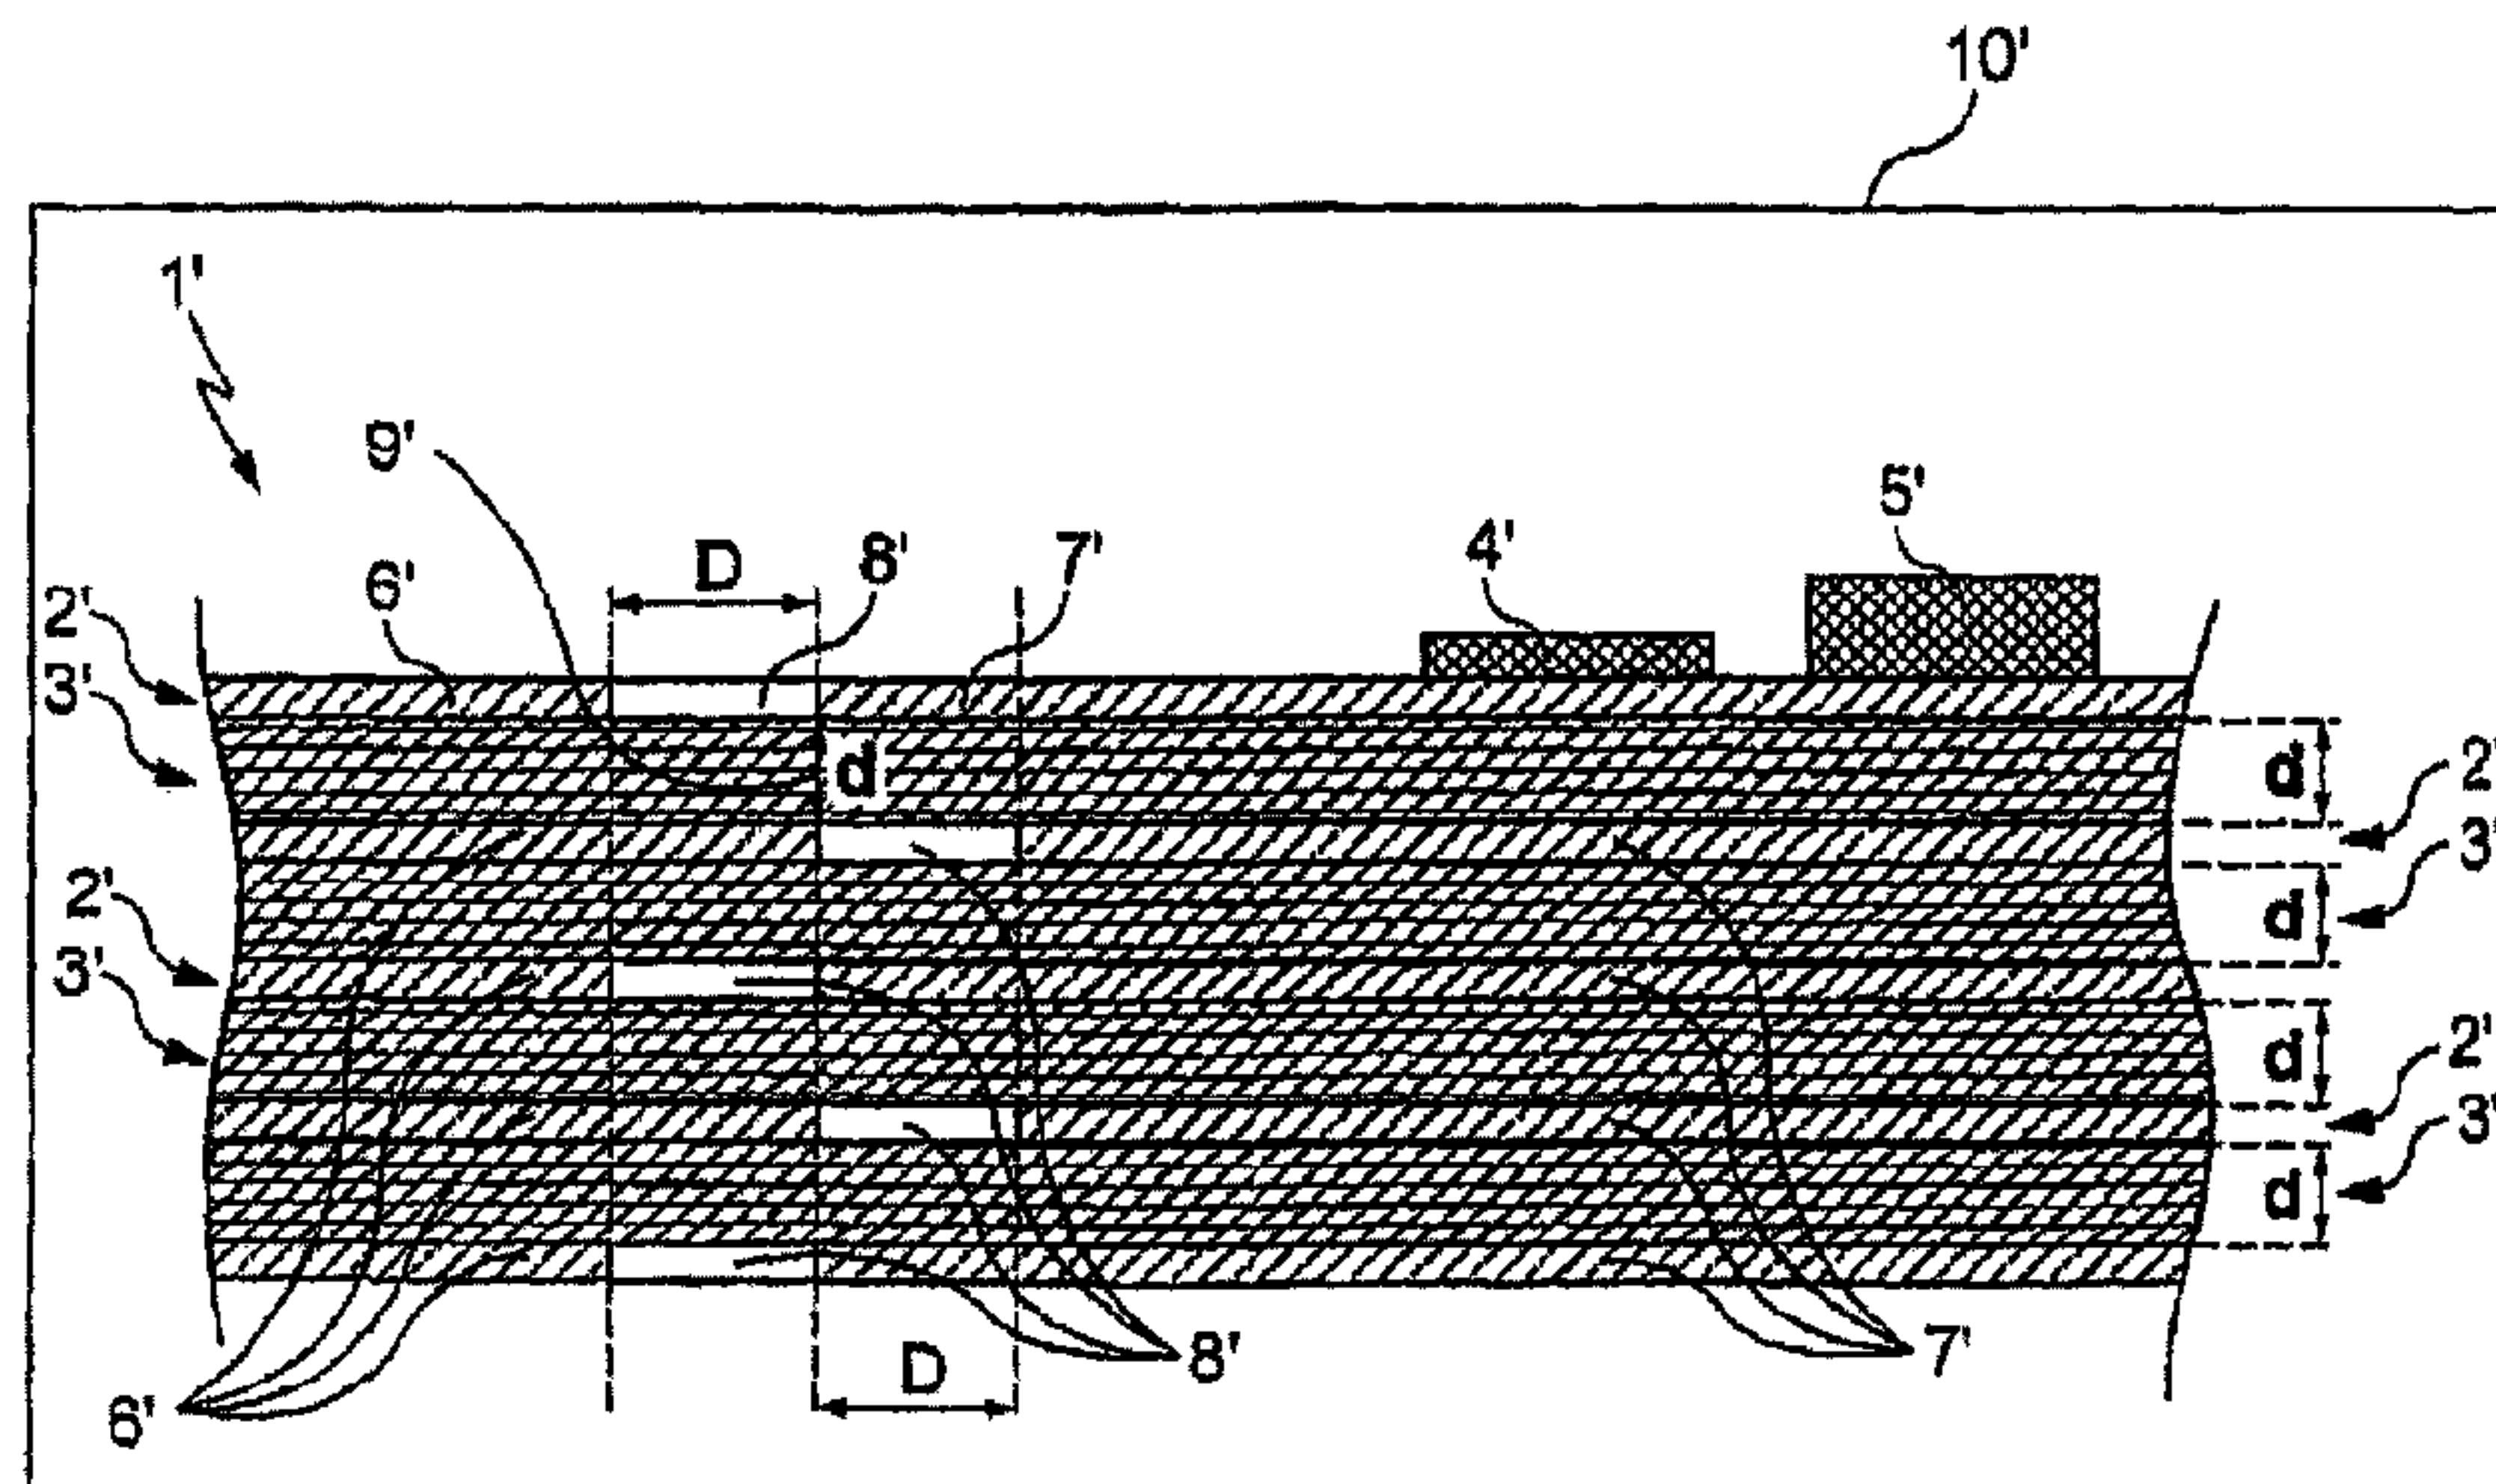

(57) **Abrégé/Abstract:**

The invention relates to an electronic card that comprises at least two superimposed conducting layers (2') with an insulation layer (3') between said two conducting layers (2'), said two conducting layers each having a utility conducting portion (7') and a conducting portion (6') at the periphery of said utility conducting portion (7') with an insulating portion (8') between said conducting portions (6', 7'), said insulating portion (8') of a first of said two layers (2') being offset relative to the insulating portion (8') of the second of said layers (2'). The aircraft includes a housing (10') in which at least one such card is provided.



(12) DEMANDE INTERNATIONALE PUBLIÉE EN VERTU DU TRAITÉ DE COOPÉRATION
EN MATIÈRE DE BREVETS (PCT)(19) Organisation Mondiale de la Propriété
Intellectuelle
Bureau international

PCT

(43) Date de la publication internationale
30 octobre 2008 (30.10.2008)(10) Numéro de publication internationale
WO 2008/129155 A3(51) Classification internationale des brevets :
H05K 1/02 (2006.01)(21) Numéro de la demande internationale :
PCT/FR2008/000211(22) Date de dépôt international :
18 février 2008 (18.02.2008)

(25) Langue de dépôt : français

(26) Langue de publication : français

(30) Données relatives à la priorité :
0753433 22 février 2007 (22.02.2007) FR(71) Déposant (*pour tous les États désignés sauf US*) : **AIR-BUS FRANCE** [FR/FR]; 316, route de Bayonne, F-31060 Toulouse (FR).

(72) Inventeurs; et

(75) Inventeurs/Déposants (*pour US seulement*) : **ORTET, Stéphane** [FR/FR]; 12 rue Pitous, F-31700 Mondonville (FR). **REBEYROTTE, Vincent** [FR/FR]; 14 allée RenéDescartes, F-31770 Colomiers (FR). **ROUSSET, David** [FR/FR]; 10, rue Henri Ziegler, F-31300 Toulouse (FR).(74) Mandataire : **SANTARELLI**; 14, Avenue de la Grande-Armée, B.P. 237, F-75822 Paris_Cedex 17 (FR).(81) États désignés (*sauf indication contraire, pour tout titre de protection nationale disponible*) : AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.(84) États désignés (*sauf indication contraire, pour tout titre de protection régionale disponible*) : ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), eurasien (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Suite sur la page suivante]

(54) Title: ELECTRONIC CARD AND AIRCRAFT INCLUDING SAME

(54) Titre : CARTE ELECTRONIQUE ET AERONEF LA COMPORTANT

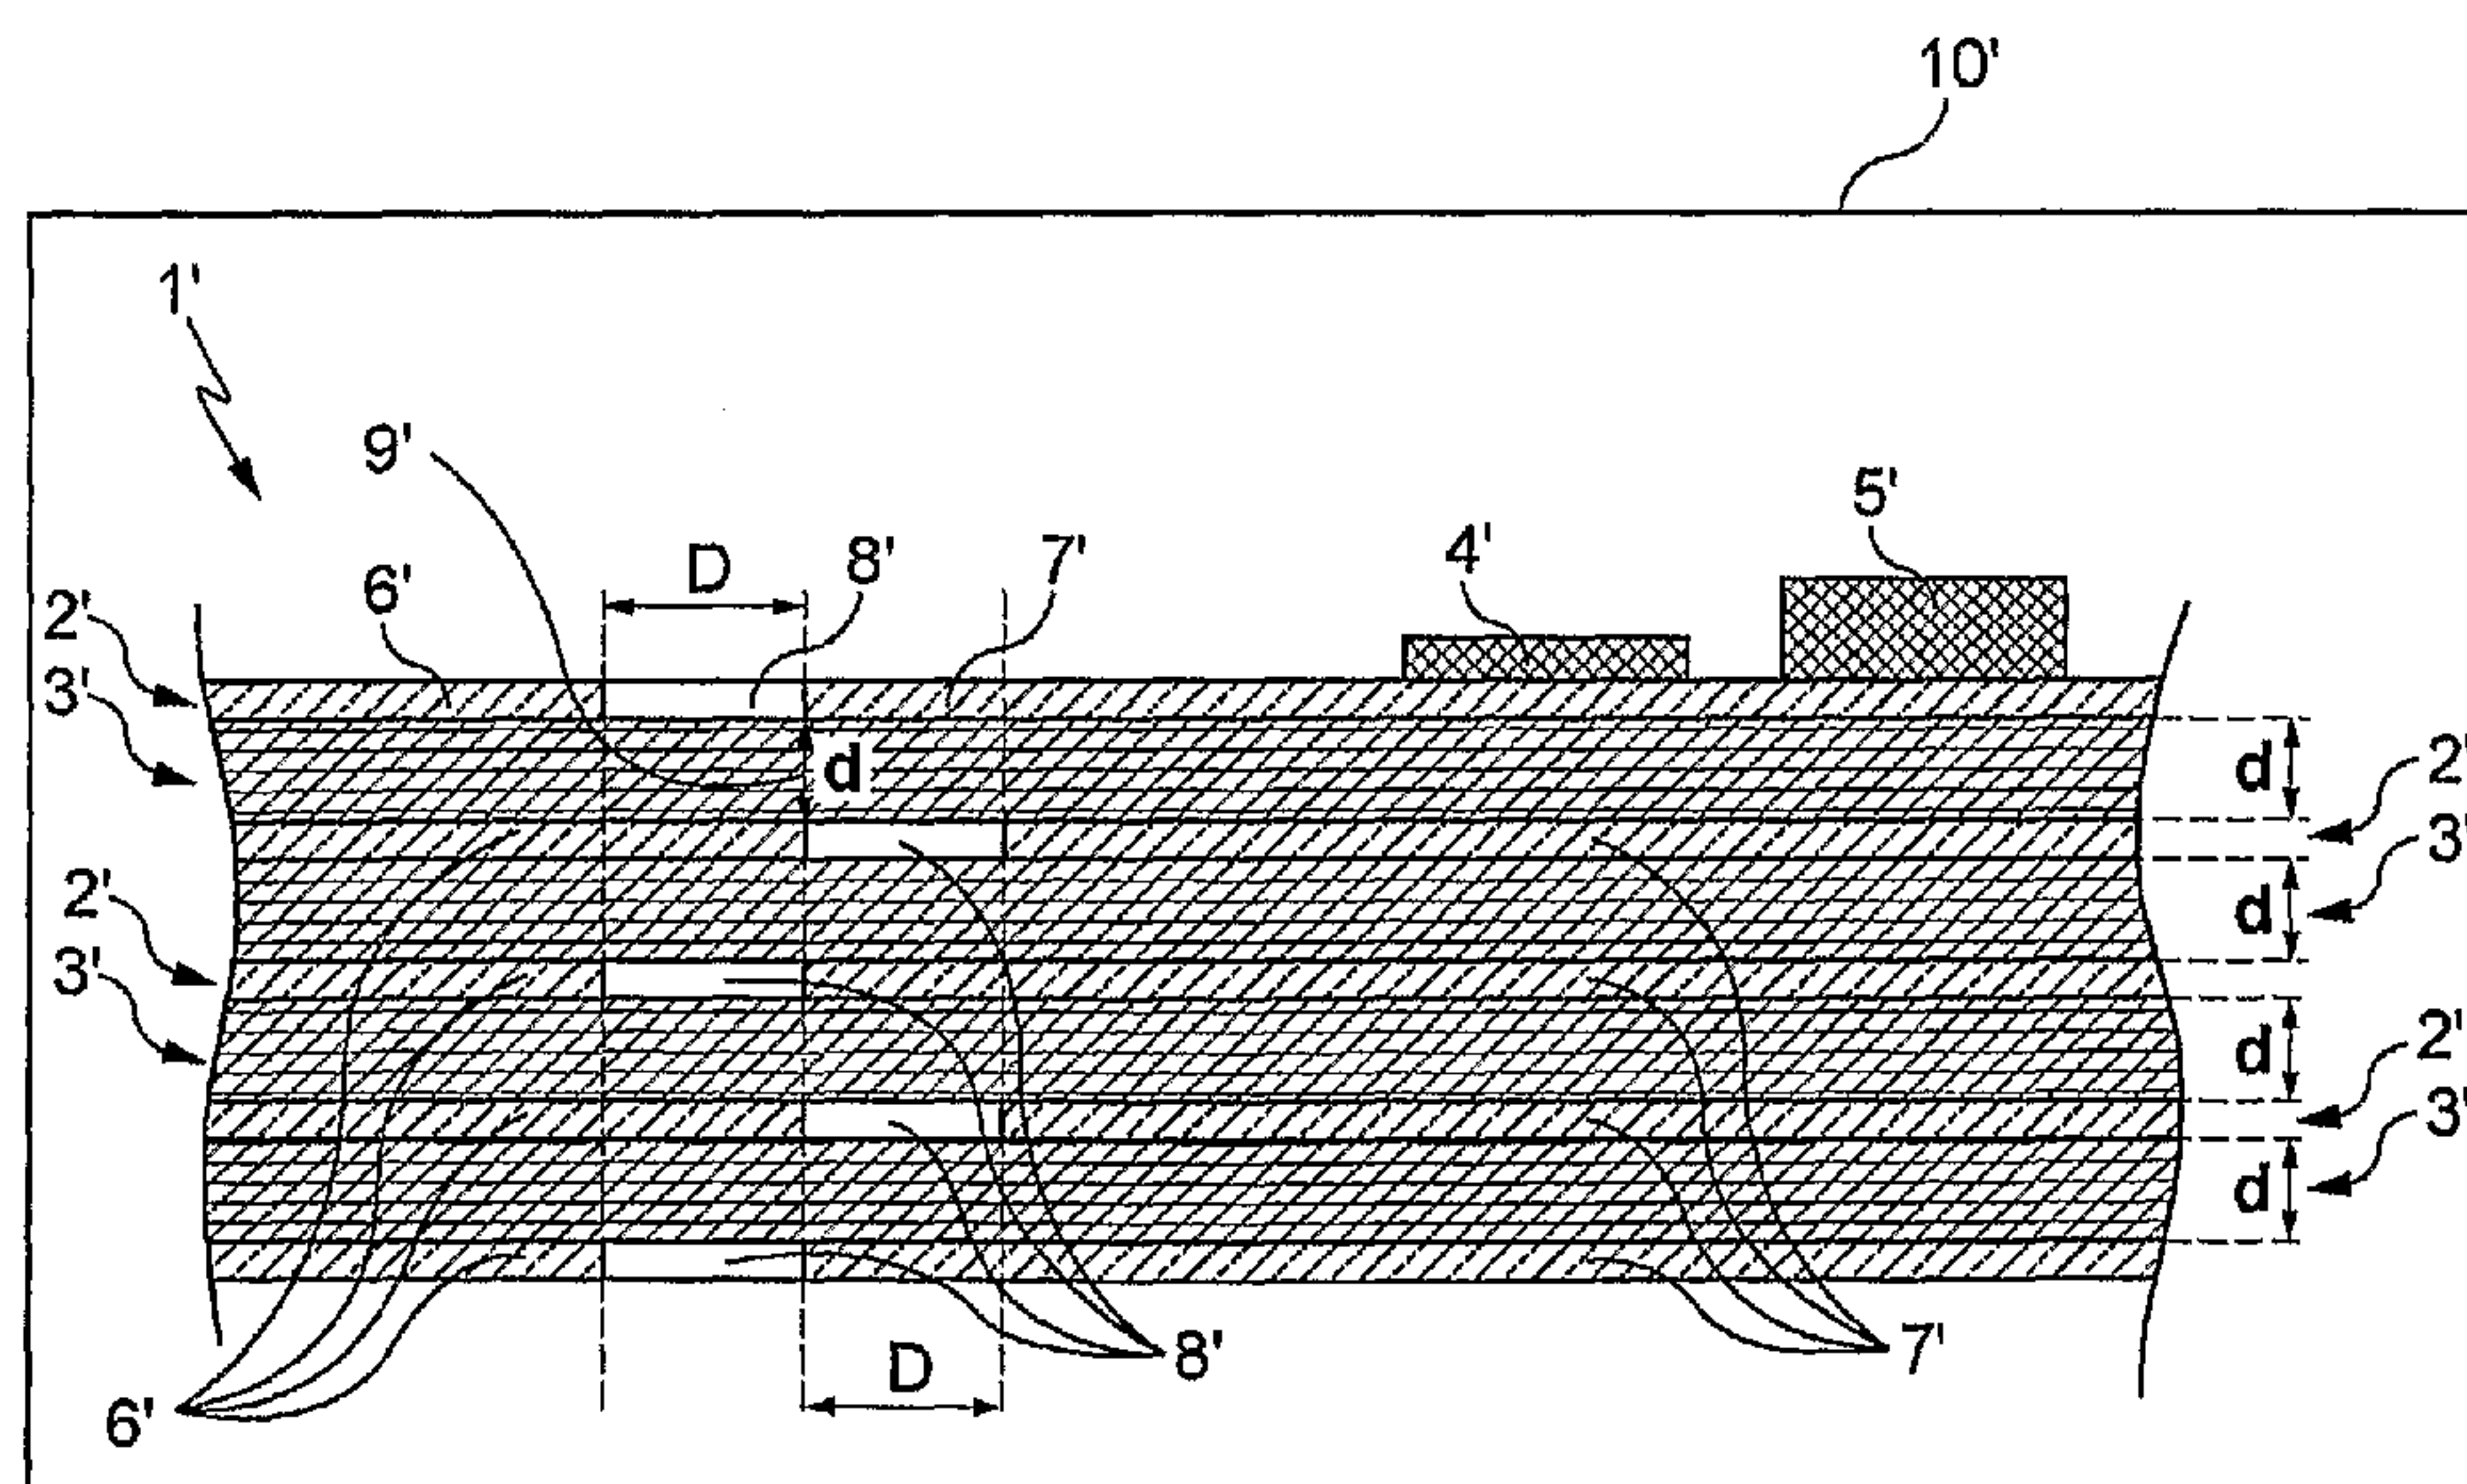


Fig. 2

(57) Abstract: The invention relates to an electronic card that comprises at least two superimposed conducting layers (2') with an insulation layer (3') between said two conducting layers (2'), said two conducting layers each having a utility conducting portion (7') and a conducting portion (6') at the periphery of said utility conducting portion (7') with an insulating portion (8') between said conducting portions (6', 7'), said insulating portion (8') of a first of said two layers (2') being offset relative to the insulating portion (8') of the second of said layers (2'). The aircraft includes a housing (10') in which at least one such card is provided.

[Suite sur la page suivante]

WO 2008/129155 A3

européen (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Publiée :

- avec rapport de recherche internationale
- avant l'expiration du délai prévu pour la modification des revendications, sera republiée si des modifications sont reçues

Déclaration en vertu de la règle 4.17 :

- relative à la qualité d'inventeur (règle 4.17.iv))

(88) Date de publication du rapport de recherche**internationale:**

5 février 2009

(57) Abrégé : La carte électronique comporte au moins deux couches conductrices superposées (2'), avec entre lesdites deux couches conductrices (2') une couche isolante (3'), lesdites deux couches conductrices (2') présentant chacune une portion conductrice utile (7') et une portion conductrice (6') située à la périphérie de ladite portion conductrice utile (71) avec entre lesdites portions conductrices (6', 7') une portion isolante (8'), ladite portion isolante (8') d'une première desdites deux couches (2') étant décalée par rapport à la portion isolante (8') de la deuxième desdites deux couches (2'). L'aéronef comporte une enceinte (10') dans laquelle est disposée au moins une telle carte.

Electronic Card and Aircraft Including Same

The present invention relates to an electronic card intended, for example, to be integrated into on-board equipment for aircraft.

There are already known electronic cards, such as represented schematically in Fig. 1, provided with at least two superposed conductive layers 2 separated from one another by electrically insulating layers 3.

Each conductive layer 2 has at least one peripheral conductive portion 6 and one useful central conductive portion 7 suitable for being connected electrically to electronic elements 4, 5 and separated from portion 6 by an insulating portion 8, whose dimensions and material are chosen to ensure sufficient electrical insulation between portions 6 and 7.

The material and the dimensions of layers 3 are also chosen to ensure sufficient electrical insulation between layers 2.

On these cards, insulating portions 8 are superposed on one another, with a portion 11 of an intermediate insulating layer 3 interposed between two adjacent portions 8.

The objective of the invention is to provide an electronic card of the same type that is just as reliable but that exhibits improved performances in terms of heat dissipation.

To this end it proposes an electronic card provided with at least two superposed conductive layers, having an electrically insulating layer between the said two conductive layers, the said two conductive layers each having a useful conductive portion and a conductive portion situated at the periphery of the said useful conductive portion with an electrically insulating portion between the said conductive portions, characterized in that the said insulating portion of a first of the said two layers is offset

relative to the insulating portion of the second of the said two layers, in such a way that part of the useful conductive portion of the first of the said two layers is situated in vertical alignment with part of the insulating portion of the second of the said two layers, and in that part of the peripheral portion of the second of the said two layers is situated in vertical alignment with part of the insulating portion of the first of the said two layers.

In a further aspect, the present invention proposes an electronic card comprising: at least first and second superposed conductive layers with an electrically insulating layer between the first and second conductive layers, the first and second conductive layers each including a useful conductive portion and a conductive portion situated at the periphery of the useful conductive portion, and an electrically insulating portion between the conductive portions, wherein the insulating portion of the first conductive layer is offset relative to the insulating portion of the second conductive layer, such that part of the useful conductive portion of the first conductive layer is situated in vertical alignment with part of the insulating portion of the second conductive layer, and wherein part of the peripheral portion of the second conductive layer is situated in vertical alignment with part of the insulating portion of the first conductive layer.

The offset of the insulating portions from one layer to the other therefore makes it possible to "bring closer together" the useful conductive portion of one of the two layers (to which there are electrically connected electronic components that are heat sources when they are in operation) and the peripheral portion of the other layer. Since the insulating portions (poor heat conductors) are no longer superposed, the heat-barrier effect associated with stacking of these insulating portions over the same zone, as in the aforesaid prior art cards, is therefore considerably reduced, since the offset of these portions from one layer to the other makes it possible to reduce the distance separating two electrically conductive portions (also good heat conductors) situated on two different layers and opposite from one another relative to the insulating portions, in such a way that heat transfer by conduction therefore can take place between these portions from one layer to the other.

2a

The heat to be dissipated, originating from the electronic components and conveyed by the useful conductive portions, can therefore be evacuated more effectively in the direction of the adjacent layers.

The card according to the invention therefore makes it possible to meet two needs, albeit antagonistic, namely to achieve good galvanic insulation while retaining sufficient heat dissipation power.

This arrangement therefore guarantees improved heat dissipation avoiding the risks of overheating, which contributes to increasing the reliability of operation of the electronic equipment, especially in the case where this is disposed in an impermeable compartment, in which case heat dissipation takes place substantially by conduction.

According to preferred characteristics, for reasons of simplicity and convenience

both in manufacture and in use, the said insulating portions of the said two layers have the same dimensions.

According to other characteristics preferred for the same reasons as those explained hereinabove, the said offset is substantially equal to the distance separating the said conductive portions of the same layer.

In this way the card according to the invention is therefore optimized to facilitate heat dissipation by reducing the distance between two conductive portions of two adjacent layers opposite from one another relative to the insulating portions, while ensuring sufficient galvanic insulation, these layers being closer to one another but nevertheless without being superposed, in order to avoid any risk of capacitive coupling between conductive layers which could degrade the galvanic insulation.

According to still other preferred characteristics:

- the said card is provided with at least three conductive layers, whose insulating portions are offset alternatively in one direction then in the opposite direction from one layer to the other;
- the said insulating portions are made of epoxy;
- the said insulating layers are made of insulating material based on glass fibers;
- the width of an insulating portion is greater than the thickness of an insulating layer;
- the ratio between the width of an insulating portion and the thickness of an insulating layer is greater than five; and/or
- for each said layer, the said useful portion is adapted to be connected electrically to electronic components.

According to a second aspect, another objective of the invention is an aircraft equipped with a compartment in which there is disposed at least one card such as explained hereinabove.

According to other characteristics preferred for the same reasons as those explained hereinabove:

- the said compartment is an impermeable compartment; and/or
- at least one peripheral portion of each said electronic card disposed in the compartment is connected electrically to the frame of the aircraft.

The explanation of the invention will now be continued by the detailed description of an exemplary embodiment, given hereinafter by way of illustration but in no way limitative, with reference to the attached drawings, wherein:

- Fig. 1 is a schematic representation in section of a prior art electronic card; and
- Fig. 2 is a schematic representation in section of an electronic card according to the invention.

Electronic card 1' according to the invention and illustrated in Fig. 2 is provided with a card support (not represented) on which there is deposited a plurality of conductive layers 2' (of copper), between which there are interposed layers 3' of thickness d made of insulating material based on woven glass fibers (for example material known under the designation "FR4").

In the illustrated example, this card 1' is disposed together with other cards of the same type in an impermeable compartment 10', which is mounted in the electronic cabinet of an aircraft.

Each conductive layer 2' has a peripheral conductive portion 6' and a useful central conductive portion 7', portion 7' being separated from portion 6' by an insulating portion 8' made of epoxy.

On portion 7' of the upper conductive layer there are fixed electronic components 4' and 5', which are electrically connected to this portion or to lower portions 7' by means of vias (not represented).

Peripheral portion 6' is connected electrically to the frame of the equipment or of the aircraft, portion 7' in turn is insulated from the frame by virtue of portion 8', in such a way that this electronic card forms a floating equipment, the part supporting active elements 4' and 5' being insulated from the frame.

Insulating portions 8' have a width D designed to guarantee sufficient galvanic

insulation between portions 6' and 7' of the same layer 2', especially in the case in which this device is conveyed to high altitudes, as is the case of on-board equipment in the aeronautics field.

In the illustrated example, and in order to ensure an insulation rating of 1600 V between portions 6' and 7' of the same layer 2', the width D is equal to 800 μm .

The distance d in turn is chosen to ensure sufficient insulation between two adjacent layers 2' while maintaining a minimum space requirement. This distance is shorter than the distance D, because the FR4 material used here has an insulating power greater than that of the epoxy. In the illustrated example, the distance d is equal to 80 μm and the ratio D/d is then equal to 10.

The plane-to-frame insulation rating achieved here is equal to 500 V.

This arrangement therefore makes it possible to achieve good galvanic insulation and also good performances from the viewpoint of electromagnetic compatibility.

In the electronic card according to the invention, insulating portions 8' are offset relative to one another by a distance equal to their width D in a direction that is alternating on shifting from one conductive layer to the other, in such a way that this card has a comb-like structure, as illustrated in Fig. 2.

Part of useful conductive portion 7' of upper layer 2' is therefore situated in vertical alignment with insulating portion 8' of the layer 2' directly below it, part of peripheral portion 6' of this layer itself being situated in vertical alignment with insulating portion 8' of the upper layer.

This offset from layer to layer therefore ensures that each insulating portion 8' is situated in vertical alignment with part of a conductive portion 6' or 7' of the layers 2' that are directly adjacent thereto, these parts of conductive portions themselves being situated in vertical alignment with insulating portion 8' of the opposite next adjacent layer 2' and so on.

Portion 6' of a layer 2' is therefore closer to portions 7' of adjacent layers 2', the minimum distance separating this portion 6' from portions 7' of the adjacent layers being

equal to thickness d of layer 3', as represented by the double arrow denoted by reference 9' in Fig. 2.

The offset of portions 8' between layers is therefore equal to the distance separating portions 6' and 7' of the same layer, in such a way that two portions 6' and 7' are as close as possible to one another but without being superposed, in order to favor heat dissipation while avoiding the phenomena of capacitive coupling between portions 6' and 7' of different layers (harmful to galvanic insulation).

Since the distance d is very much smaller than the distance D , the heat conduction is greatly improved. In fact, from one layer to the other and in passing from a portion 7' of one layer to portion 6' of adjacent layers, the heat will be easily evacuated, since the minimal distance to be traveled through insulation (poor heat conductor) is reduced in this case to d (reference 9'), compared with a distance equal to D in the prior art (or in other words, the distance separating two portions 6, 7 of the same layer).

Thus, in the prior art card, the evacuation of heat takes place mainly in the plane of the layers (horizontally in Fig. 1) by virtue of the large thermal insulation due to the stacking of portions 8, whereas in the card according to the invention the offset of portions 8' permits evacuation of heat in a direction transverse to the plane of the layers (or in other words vertically in Fig. 2).

The evacuation of heat can therefore be achieved much more easily from one layer to the other, in order to maintain this card under acceptable temperature conditions to guarantee nominal operation of electronic components.

Such cards are used in particular in emergency computers of aircraft, in which it has been possible to observe that for equal galvanic insulation, the thermal resistance of the surroundings of the card was two times smaller in the case of a comb-like architecture (Fig. 2) than in the case of an architecture insulated in traditional manner (Fig. 1).

It will be additionally noted that this comb-like arrangement does not lead to any extra manufacturing cost for the printed circuit board. Thus it remains particularly

economical and practical to use.

In one variant not illustrated, the offset between two insulating portions 8' of two adjacent layers is smaller than the width D, in such a way that only part of the insulating portions is situated in vertical alignment with part of the corresponding conductive portions.

In yet another variant not illustrated, the offset of the insulating portions is implemented not in alternating direction from one layer to the other but always in the same direction, and/or the offset between two insulating portions of two adjacent layers is greater than the width D.

In yet another variant not illustrated, the insulating portions have variable dimensions from one layer to the other.

Numerous other variants are possible according to the circumstances, and it is recalled in this regard that the invention is not limited to the examples described and represented.

The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:

1. An electronic card comprising:

at least first and second superposed conductive layers with an electrically insulating layer between the first and second conductive layers, the first and second conductive layers each including a useful conductive portion and a conductive portion situated at the periphery of the useful conductive portion, and an electrically insulating portion between the conductive portions,

wherein the insulating portion of the first conductive layer is offset relative to the insulating portion of the second conductive layer, such that part of the useful conductive portion of the first conductive layer is situated in vertical alignment with part of the insulating portion of the second conductive layer, and

wherein part of the peripheral portion of the second conductive layer is situated in vertical alignment with part of the insulating portion of the first conductive layer.

2. A card according to claim 1, wherein the insulating portions of the first and second conductive layer have the same dimensions.

3. A card according to claim 1 or 2, wherein the offset is substantially equal to the distance separating the conductive portions of the same layer.

4. A card according to any one of claims 1 to 3, comprising at least three conductive layers, whose insulating portions are offset alternatively in one direction then in the opposite direction from one layer to the other.

5. A card according to any one of claims 1 to 4, wherein the insulating portions are made of epoxy.

6. A card according to any one of claims 1 to 5, wherein the insulating layers are made of insulating material based on glass fibers.

7. A card according to any one of claims 1 to 6, wherein the width of an insulating portion is greater than the thickness of an insulating layer.
8. A card according to claim 7, wherein the ratio between the width of an insulating portion and the thickness of an insulating layer is greater than five.
9. A card according to any one of claims 1 to 8, wherein, for each conductive layer, the useful portion is adapted to be connected electrically to electronic components.
10. An aircraft comprising a compartment including at least one card according to any one of claims 1 to 9.
11. An aircraft according to claim 10, wherein the compartment is an impermeable compartment.
12. An aircraft according to claim 10 or 11, wherein at least one peripheral portion of each electronic card in the compartment is connected electrically to the frame of the aircraft.

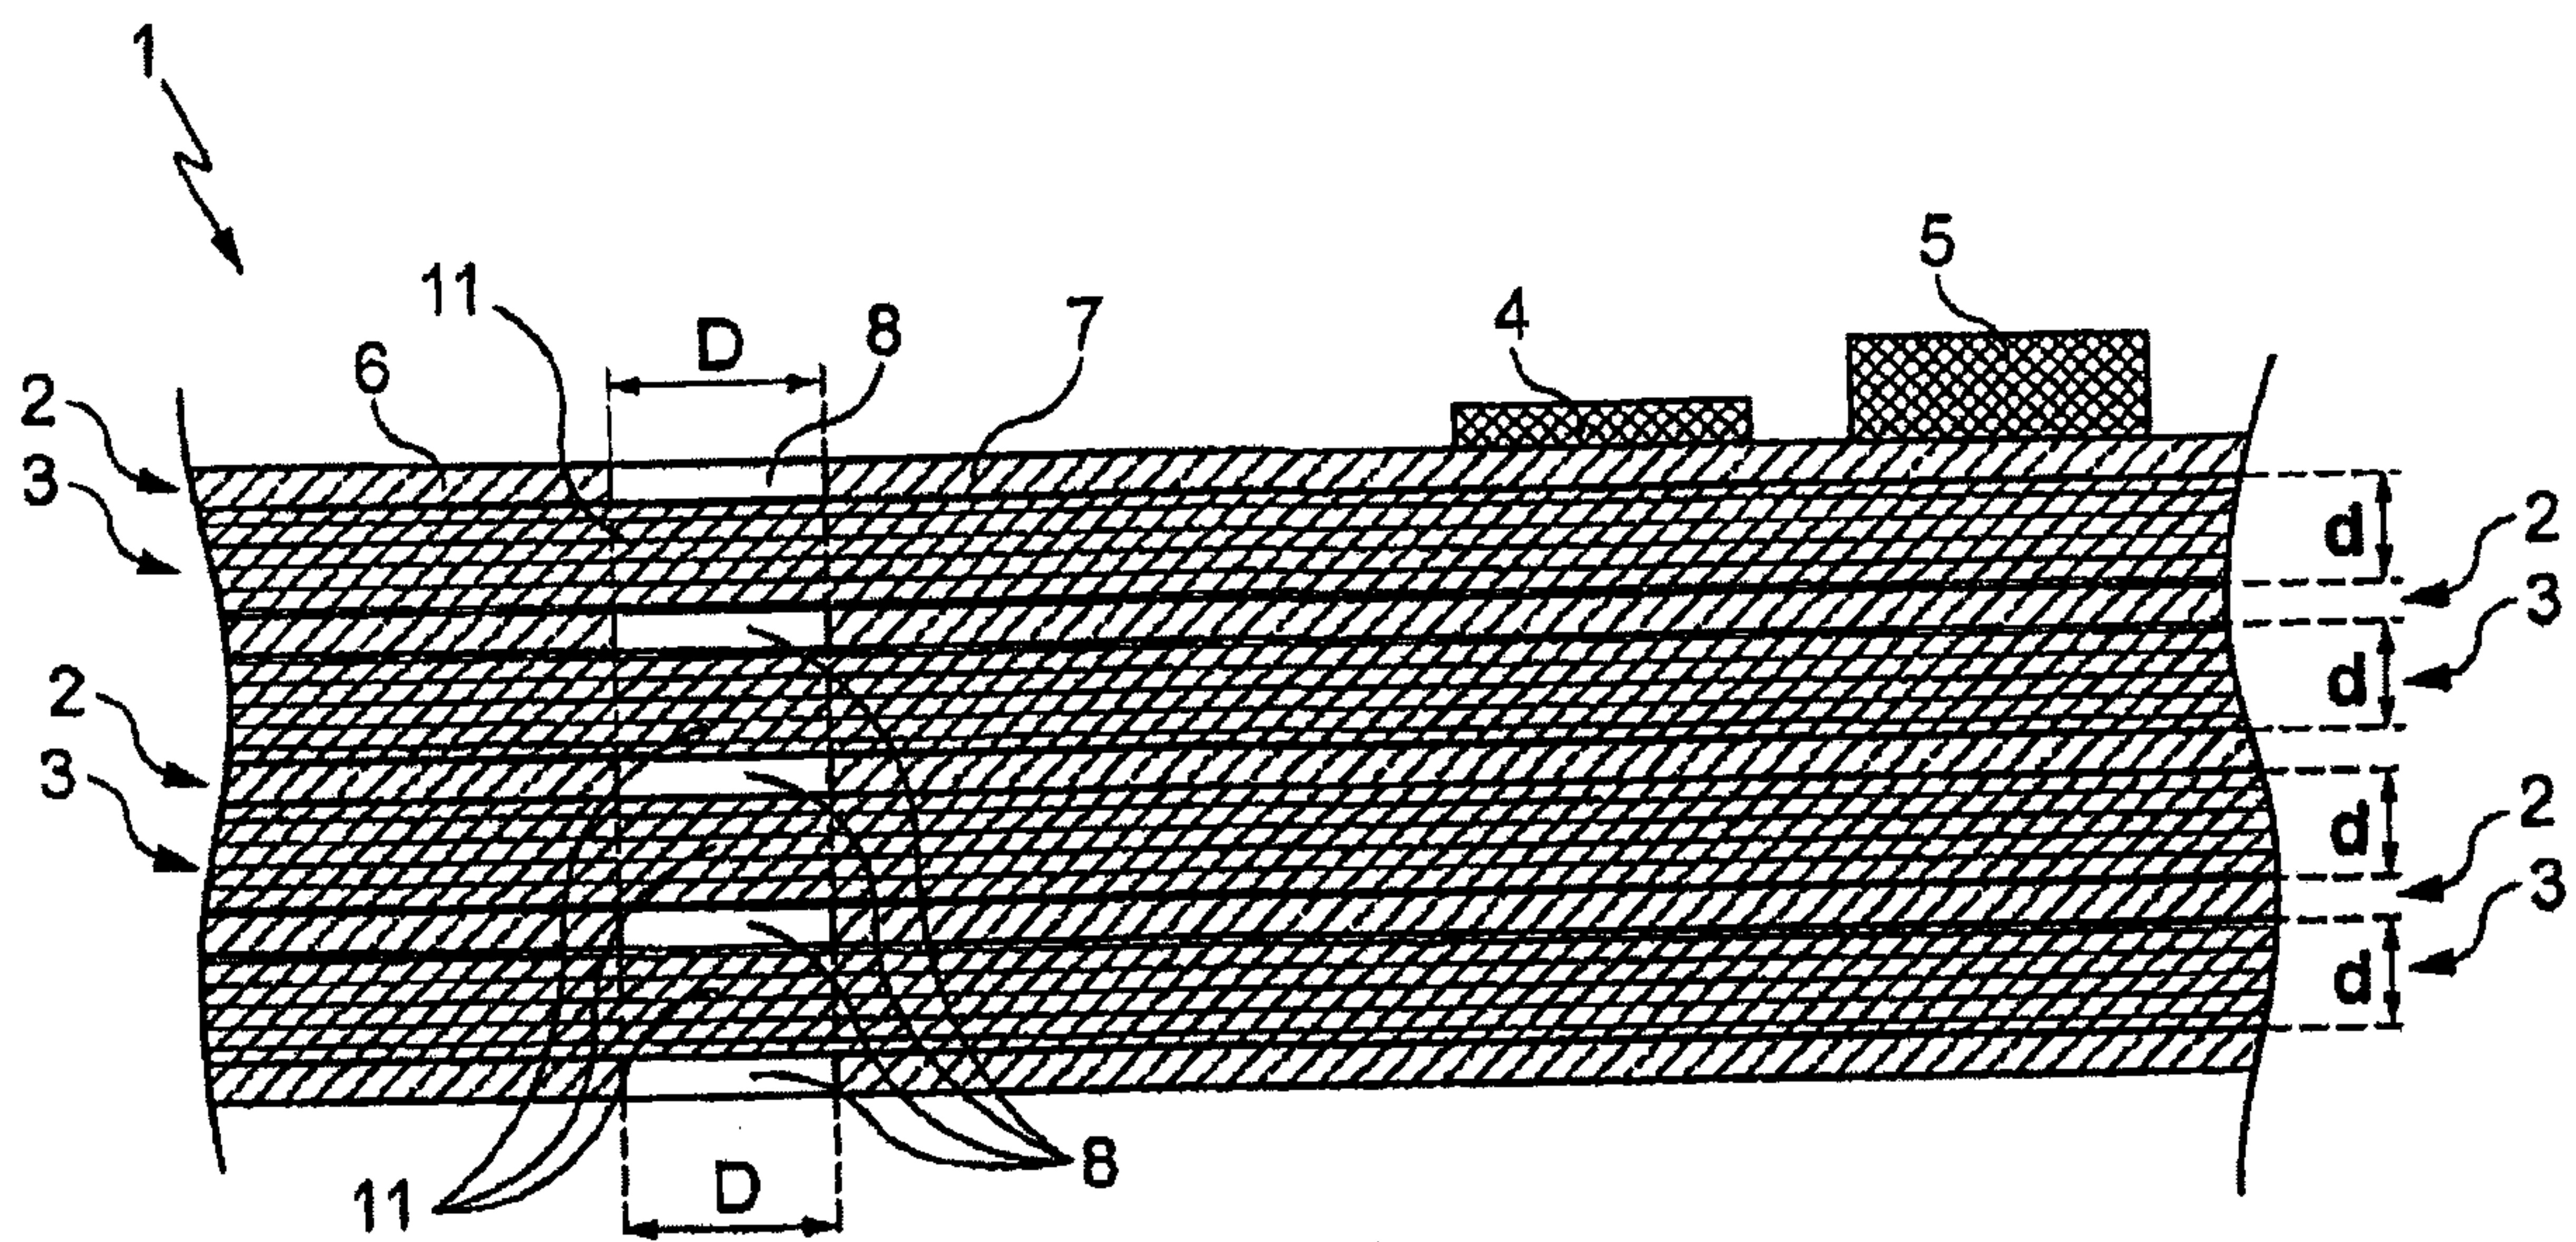


Fig. 1
PRIOR ART

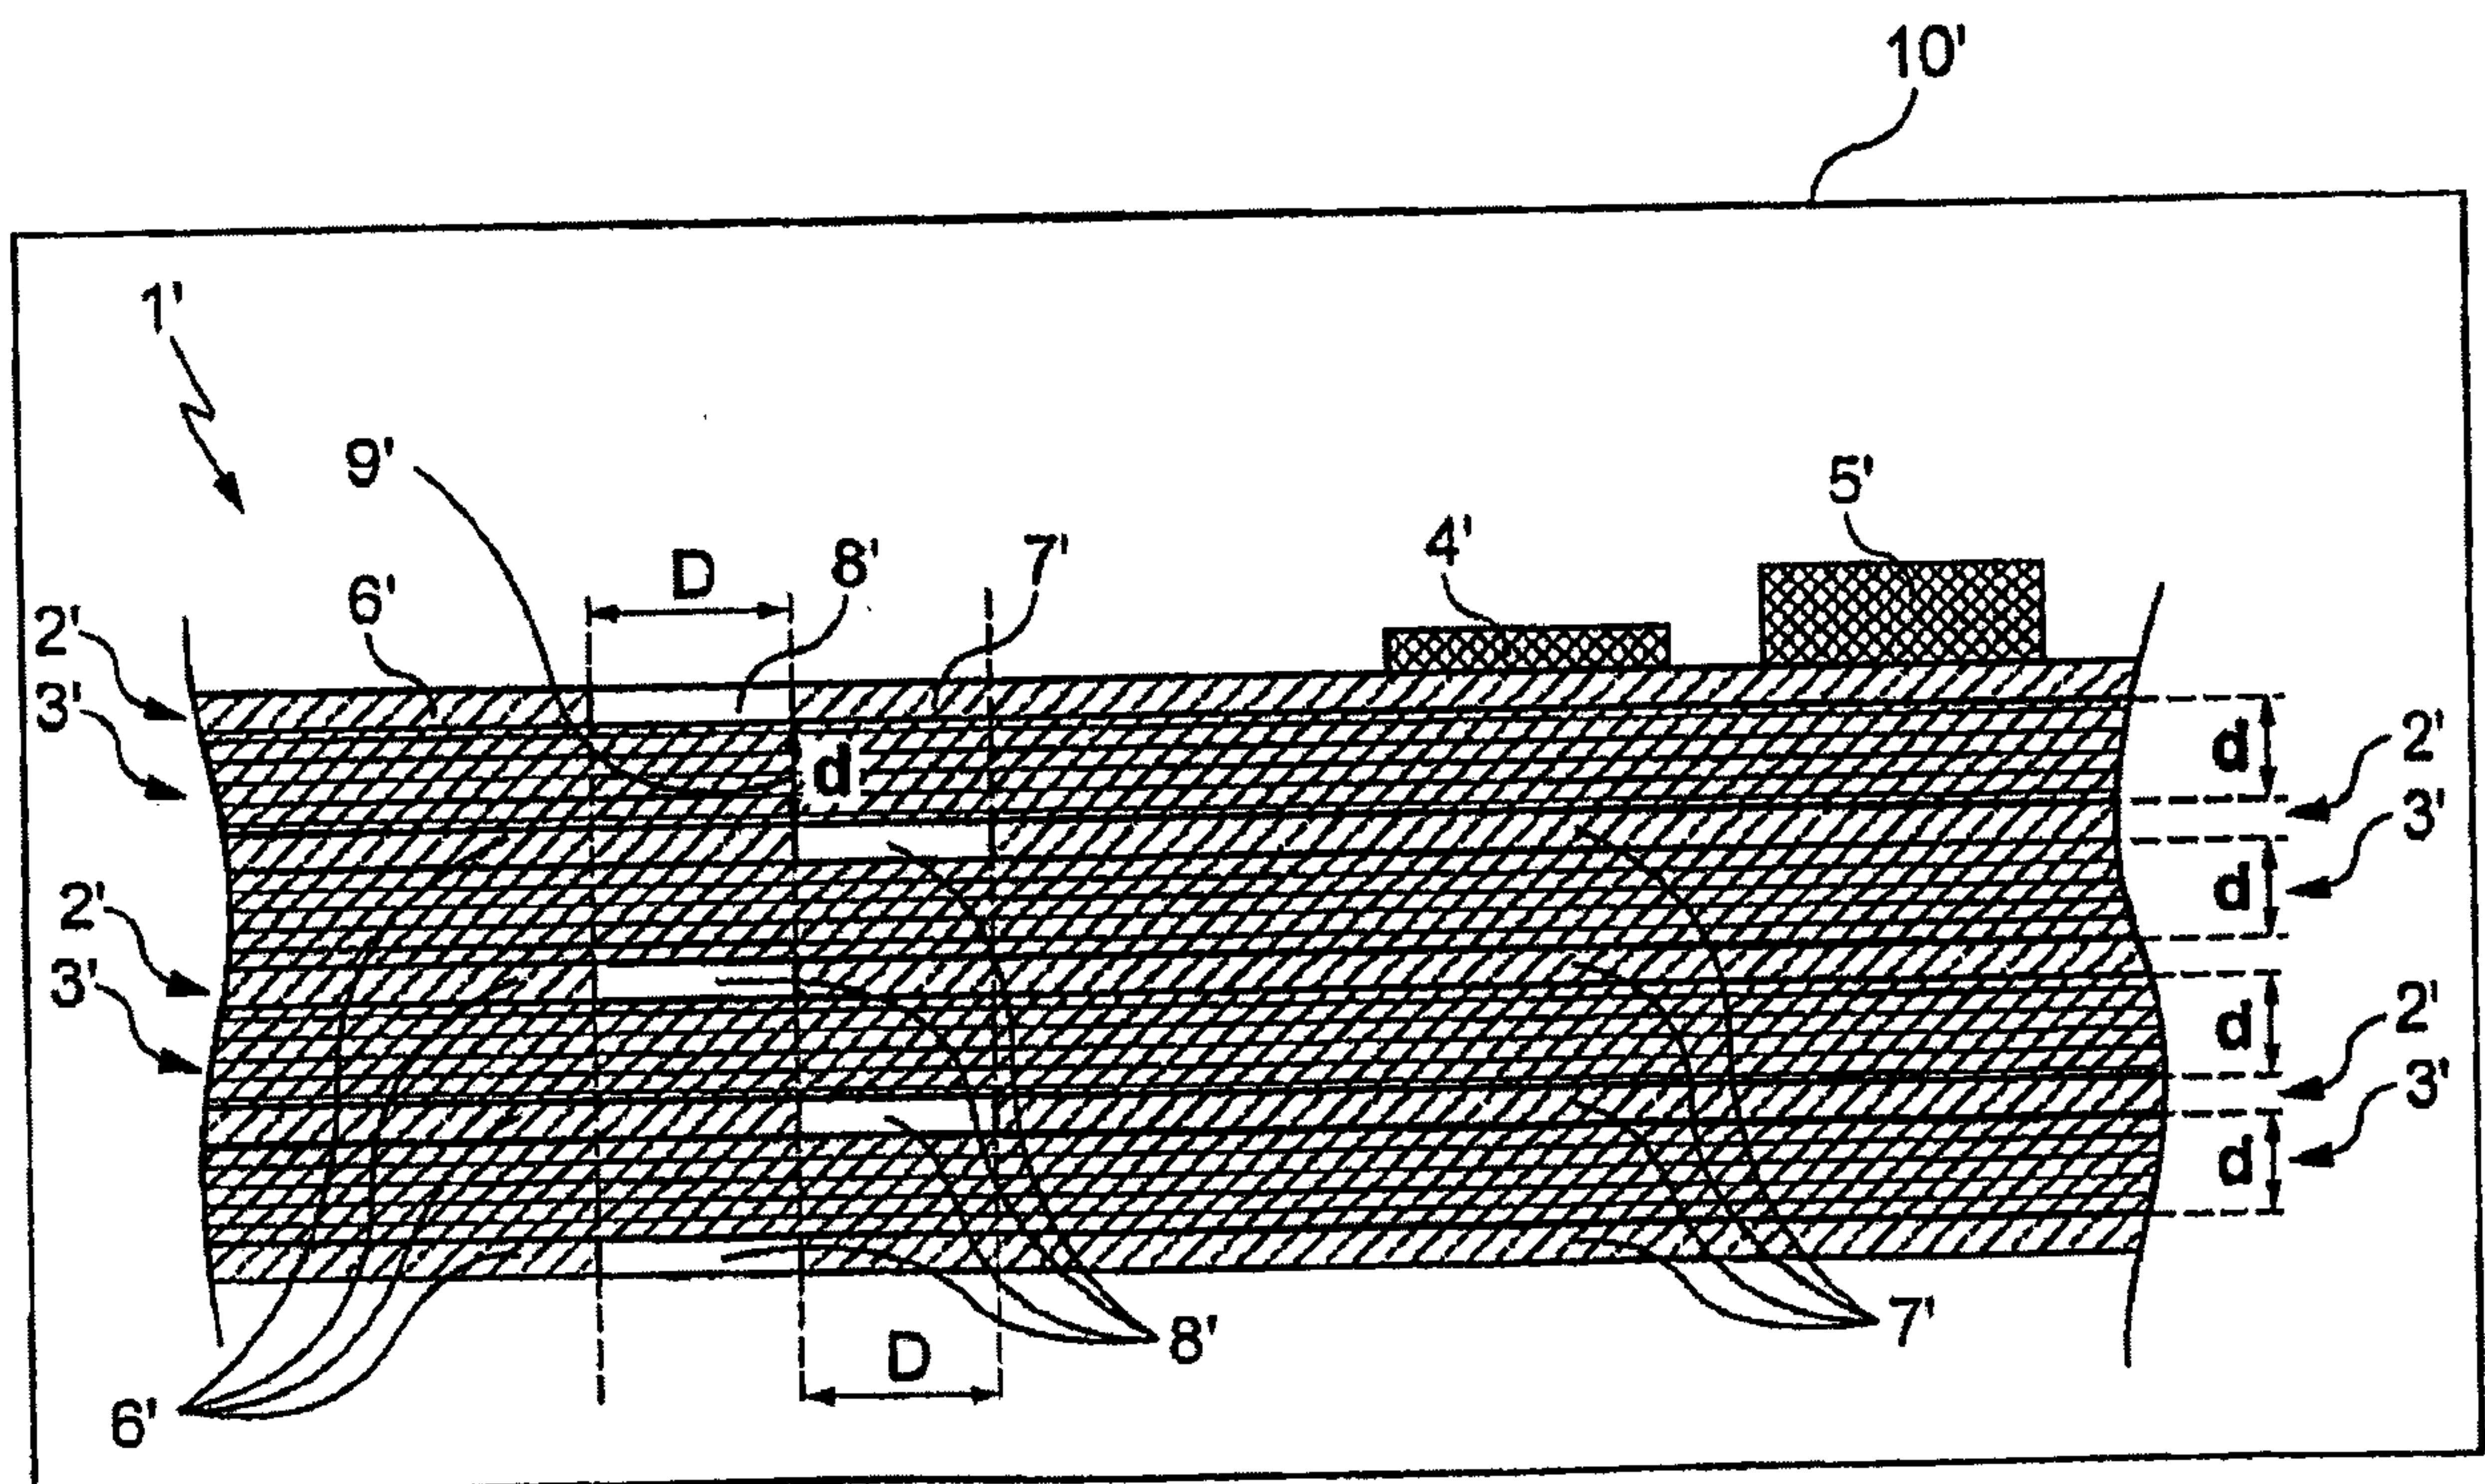


Fig. 2

