

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(10) International Publication Number

WO 2014/131858 A1

(43) International Publication Date  
4 September 2014 (04.09.2014)

WIPO | PCT

(51) International Patent Classification:  
*A61M 5/20* (2006.01)

(72) Inventors: **COWE, Toby**; Owen Mumford Limited, Brook Hill, Woodstock, Oxford Oxfordshire OX20 1TU (GB). **WEBB, Colin Marc**; 32 Church Road, Lymm Cheshire WA13 0QQ (GB). **EVANS, Timothy Simon**; 7 Pococks Close, Bampton Oxfordshire OX18 2JY (GB). **ANDERSON, Oliver**; Owen Mumford Limited, Brook Hill, Woodstock, Oxford Oxfordshire OX20 1TU (GB).

(21) International Application Number:  
PCT/EP2014/053882

(74) Agent: **LIND, Robert**; Marks & Clerk LLP, Fletcher House (2nd Floor), Heatley Road, The Oxford Science Park, Oxford Oxfordshire OX4 4GE (GB).

(22) International Filing Date:  
27 February 2014 (27.02.2014)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,

(30) Priority Data:  
1303472.3 27 February 2013 (27.02.2013) GB

(71) Applicant: **OWEN MUMFORD LIMITED** [GB/GB];  
Brook Hill, Woodstock Oxfordshire OX20 1TU (GB).

*[Continued on next page]*

(54) Title: AUTOMATIC INJECTION DEVICE

(57) **Abstract:** An automatic injection device (101) for delivering a dose from a medicine containing syringe (103). The automatic injection device comprises a housing (107) for containing the syringe, a force applicator for applying a force to eject medicine from the syringe, a trigger (105) coupled to the force applicator for releasing the force applicator to cause an injection, a boot (111) covering a needle (102) attached to the syringe to protect and maintain sterility of the needle, and a mechanical interlock (104). The mechanical interlock prevents actuation of the trigger prior to removal of the boot. When the boot is removed, the mechanical interlock allows for actuation of the trigger.

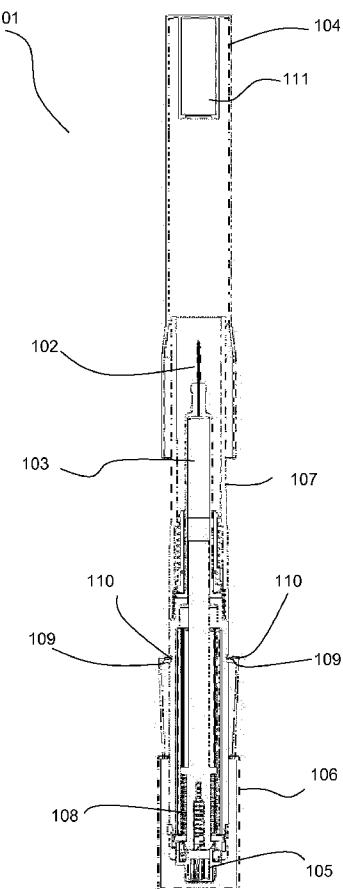


Figure 2



DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

**Published:**

— *with international search report (Art. 21(3))*

## AUTOMATIC INJECTION DEVICE

TECHNICAL FIELD

5 The present invention relates to an automatic injection device for delivering a dose of medicine to a user from a medicine containing syringe.

BACKGROUND

10 Automatic injection devices are routinely used in the medical field to deliver a measured dose of medicine to a user. Due to their user friendly design, they can be safely used by patients for self-administration, although in some circumstances they may be used by trained personnel.

15 A typical automatic injection device comprises several parts which may include; a syringe containing medicine, a needle fixed to the end of the syringe, a firing mechanism including a spring (or possibly other drive means such as an electric motor or gas drive means), and a trigger. The spring may be preloaded, or may be set using a dose setting mechanism such as a dial. The firing mechanism is activated by the  
20 trigger and forces the medicine through the needle and into the user. A mechanical lock may be provided to prevent the trigger from being accidentally pressed. This could be, for example, simply a catch that must be moved out of the way in order to access the trigger.

25 Single use, disposable automatic injection devices are delivered to end users in an assembled state, with a medicine syringe contained within the device housing and a needle fixed to the end of the syringe. In order to ensure sterility of the needle, the projecting end of the needle is contained within an rubber or elastomer "boot". Typically, the boot forms an interference fit around the narrowed end portion of the  
30 syringe body. The tip of the needle may penetrate the end of the boot. In the case of re-useable automatic injection devices, an end user must typically open the housing and press a new single-use syringe into position. The single-use syringe will have a needle and boot already in place.

The injection device may also comprise a boot remover to allow the end user to easily and safely remove the boot and thereby expose the needle. Typically, the boot remover is fitted around or inside the proximal end of the device prior to insertion of the syringe into the housing. When the syringe is pressed into the housing, the boot 5 protecting the needle is captured by the boot remover, i.e. snaps into place within the boot remover. A needle shield may be further provided around the needle, such that the needle remains protected even after the boot has been removed. This is relevant to so-called "auto-injectors" which, in addition to driving the medicine through the needle, perform an initial step of inserting the needle through the skin using the force 10 provided by the injection spring (or possibly a secondary spring).

When a single use automatic injection device is to be used, a user should first remove the boot remover and boot to expose the needle. NB. the needle remains surrounded by the needle shield at least in the case of an auto-injector. The user will then release 15 the mechanical lock, such that the trigger can be pressed. The user can then place the auto-injector against the surface of the skin and press the trigger to push the needle through the skin and force the medicine through the needle. In the case of an auto-injector, a carriage and carriage-return spring may cause the needle to be returned to a position within the needle shield.

20 A problem with single use automatic injection devices occurs when a user forgets to first remove the boot, and, instead, operates the trigger with the boot still in place. This is particularly likely in the case of an auto-injector, where the needle and boot are not readily visible. If the boot is not removed before firing, no drug is delivered to the user. 25 Furthermore, since the medicine will now be under pressure, there is a risk that the user may inadvertently empty the syringe contents into the air if, when realising their error, they subsequently remove the boot.

30 A user may not have an abundance of medicine and so waste may be a serious issue. Waste may also be undesirable due to cost implications: some medicines can be extremely expensive. Therefore, there exists a need to provide an automatic injection device that overcomes the problem of a device being fired prior to removal of a boot.

## SUMMARY

It is an object of the present invention to provide an automatic injection device that cannot be fired prior to removal of a boot.

According to an aspect of the present invention there is provided an automatic injection device for delivering a dose from a medicine containing syringe. The automatic injection device comprises a housing for containing the syringe, a force applicator for applying a force to eject medicine from the syringe, a trigger coupled to the force applicator for releasing the force applicator to cause an injection, a boot covering a needle attached to the syringe to protect and maintain sterility of the needle, and a mechanical interlock. The mechanical interlock prevents actuation of the trigger prior to removal of the boot. When the boot is removed, the mechanical interlock allows for actuation of the trigger or commencement of an actuation sequence.

The present invention overcomes problems associated with current automatic injection devices, where a user can accidentally fire the automatic injection device with the boot still in place. This can result in wasted medicine, which may be expensive to replace. The present invention overcomes this by providing a mechanical interlock, such that an automatic injection device cannot be fired prior to removal of the boot.

As an option the automatic injection device comprises a boot remover for removing the boot. The boot remover may be formed integrally with the boot. Alternatively the boot and boot remover are formed as separate discrete components, and configured such that the boot is locked into the boot remover upon insertion of the syringe into the housing.

In a first embodiment of the present invention, the mechanical interlock comprises a boot remover, wherein the boot remover is configured such that removal of the boot remover from the housing both removes the boot from the needle and facilitates access to the trigger. As an option the mechanical interlock comprises a cover attached to a distal end of the housing. The cover is locked in place when the boot remover is attached to the housing, and is removable from the housing to expose the trigger only after removal of the boot remover and boot. As another option the cover is coupled to the distal end of the housing by one or more flexible latches. When the boot remover has been removed, the latches may be disengaged and the cover removed. The boot

remover may extend to cover the flexible latches when the boot remover is attached to the housing.

In a second embodiment of the present invention, the housing comprises a first part for containing the syringe and a second part for attachment to the first part by a user. The mechanical interlock is configured to remove the boot upon coupling together of the first and second parts. As an option the trigger is provided on the second part. The first and second parts may be coupled together by relative axial motion of the parts, for example, by engaging complimentary screw threads formed on the first and second parts. The mechanical interlock may comprise a rod coupled to the first part of the housing and slideable relative thereto in an axial direction. The rod has a distal end that engages with the second part in order to axially displace the rod upon coupling together of the first and second parts. The rod has a proximal end that is coupled to the boot in order to remove the boot. As an option, the rod is coupled to the boot by way of the boot remover. As an option, the first part of the housing defines a channel within which the rod is slideably mounted. As an option the boot remover may comprise a peg that protrudes into the channel for engaging with the rod upon coupling together of the first and second parts in order to push the boot remover off of the housing. Alternatively, the housing comprises a spring coupled to the rod in order to return the proximal end of the rod into the channel upon disconnection of the first and second parts.

In a third embodiment of the present invention, the mechanical interlock comprises a rod coupled to the boot remover and a trigger lock engaging with the trigger and with said rod. The mechanical interlock is configured such that removal of the boot results in rotation of the rod thereby releasing the trigger lock. The rod may have a helical track extending axially therealong and a peg is provided on the boot remover to engage with said track such that the rotation of the rod is caused by the axial motion of the peg as the boot remover is removed. As an option the boot remover may comprise a key and the housing may comprise an axially extending track. The key and axially extending track are arranged such that the key engages with the axially extending track to prevent rotation of the boot remover prior to removal of the boot remover.

In a fourth embodiment of the present invention, the mechanical interlock comprises a rod coupled to the boot remover and a trigger lock engaging with the trigger and with

said rod. The mechanical interlock is configured such that removal of the boot results in rotation of the rod thereby releasing the trigger lock. A torsion spring is coupled between the rod and the hosing to provide a rotational bias to the rod. A latch is provided on the boot remover to prevent rotation of the rod until the boot remover has 5 been removed. As an option the rod comprises a pin for engaging with the latch. As an option the boot remover may comprise a key and the housing may comprise an axially extending track. The key and axially extending track are arranged such that the key engages with the axially extending track to prevent rotation of the boot remover prior to removal of the boot remover.

10

In a fifth embodiment of the present invention, the housing comprises a first part for containing the syringe and a second part for attachment to the first part by the user. The mechanical interlock is provided by the boot remover such that, when attached to the first and second parts, the boot remover holds the first and second parts in a non-useable configuration and removal of the boot remover allows the first and second parts to be brought together into a useable configuration. As an option, there is provided a hinge that rotatably couples the first and second parts together. The mechanical interlock may further comprise a trigger lock for preventing actuation of the trigger when the device is in the non-useable configuration whilst allowing actuation of 15 the trigger when the device is in the useable configuration. The trigger lock may comprise an elongate plate mounted to the first part by a pivot axle. There may be a biasing mechanism acting on the plate such that, when in the non-useable configuration, the plate prevents actuation of the trigger. When the device is brought together into a useable configuration, the plate is rotated about said axle to free the trigger.

20

Further aspects of the present invention are set out in the accompanying claims.

#### BRIEF DESCRIPTION OF DRAWINGS

30 Figure 1 shows a cross-section through an auto-injector according to a first embodiment;  
Figure 2 shows a cross-section through the auto-injector of Figure 1 with a boot remover partially removed;  
Figure 3 shows a cross-section through the auto-injector of Figure 1 with a trigger 35 cover partially removed;

Figure 4 shows a perspective view of an auto-injector according to a second embodiment;

Figure 5 shows a perspective view of the auto-injector of Figure 4 with a boot remover partially removed;

5 Figure 6 shows a close up perspective view of a proximal end of the auto-injector of Figure 4;

Figure 7 shows a further close up perspective view of a proximal end of the auto-injector of Figure 4 with boot remover removed;

10 Figure 8 shows a cross-section through an auto-injector according to a third embodiment;

Figure 9 shows a perspective view of a boot remover according to an option of the third embodiment;

Figure 10 shows a side view of the boot remover of the third embodiment engaging with a rod;

15 Figure 11 shows a close up perspective view of the distal end of the auto-injector of Figure 8;

Figure 12 shows a further close up perspective view of the distal end of the auto-injector of Figure 8;

20 Figure 13 shows a further close up perspective view of the distal end of the auto-injector of Figure 8;

Figure 14 shows a cross-section through an auto-injector according to a fourth embodiment;

Figure 15 shows a perspective view of a boot remover engaging with a rod according an example of the fourth embodiment;

25 Figure 16 shows up perspective view of the distal end of the auto-injector of Figure 14;

Figure 17 shows a side view of the distal end of the auto-injector of Figure 14;

Figure 18 shows a cross-section through an auto-injector according to a fifth embodiment;

30 Figure 19 shows a cross-section through the auto-injector of Figure 18, with a boot remover removed;

Figure 20 shows a cross-section through the auto-injector of Figure 18, and a side view of said auto-injector;

Figure 21 shows a perspective view of a latch according to an option of the fifth embodiment;

Figure 22 shows a cross-section view of a trigger lock according to an option of the fifth embodiment;

Figure 23 shows a cross-section view of a trigger lock according to an option of the fifth embodiment in a different configuration;

5 Figure 24 shows a perspective view of a trigger lock according to an option of the fifth embodiment;

Figure 25 shows a close up perspective view of the auto-injector of Figure 18;

Figure 26 shows a perspective view of the auto-injector of Figure 18;

10 Figure 27 shows a cross-section view of an auto-injector according to a sixth embodiment;

Figure 28 shows a cross-section view of the auto-injector of figure 27 with a boot remover removed;

Figure 29 shows a cross-section view of the auto-injector of figure 27 when the trigger is pressed and the device is not pressed against the skin;

15 Figure 30 shows a cross-section view of the auto-injector of figure 27 being activated;

Figure 31 shows a cross-section view of an auto-injector according to a seventh embodiment;

Figure 32 shows a cross-section view of the auto-injector of figure 31 with a boot remover removed;

20 Figure 33 shows a cross-section view of the auto-injector of figure 31 when pressed against the skin;

Figure 34 shows a cross-section view of the auto-injector of figure 31 being activated;

Figure 35 shows a cross-section view of an auto-injector according to an eighth embodiment;

25 Figure 36 shows a cross-section view of the auto-injector of figure 35 following removal of a boot remover;

Figure 37 shows a cross-section view of the auto-injector of figure 35 when pressed against the skin;

30 Figure 38 shows a cross-section view of the auto-injector of figure 35 with the trigger depressed;

Figure 39 shows alternative views of a locking mechanism;

Figure 40 shows a cross-section view of an auto-injector according to a ninth embodiment;

Figure 41 shows a cross-section view of the auto-injector of figure 40 following removal 35 of a boot remover;

Figure 42 shows a cross-section view of the auto-injector of figure 40 following removal of a boot remover;

Figure 43 shows a cross-section view of the auto-injector of figure 40 when pressed against the skin;

5 Figure 44 shows a cross-section view of the auto-injector of figure 40 being activated;

Figure 45 shows a cross-section view of the auto-injector of figure 40 after activation;

Figure 46 shows a cross-section view of an auto-injector according to a tenth embodiment;

10 Figure 47 shows a cross-section view of the auto-injector of figure 46 with the boot remover removed;

Figure 48 shows a cross-section view of the auto-injector of figure 46 when pressed against the skin;

Figure 49 shows a further cross-section view of the auto-injector of figure 46 when pressed against the skin;

15 Figure 50 shows a further cross-section view of the auto-injector of figure 46;

Figure 51 shows a cross-section view of a locking mechanism according to an eleventh embodiment;

Figure 52 shows a cross-section view of the locking mechanism after disengagement;

20 Figure 53 shows a cross-section view of the locking mechanism with the trigger depressed;

Figure 54 shows a perspective view of a release element according to a twelve embodiment of the present invention;

Figure 55 shows a perspective view of a trigger according to a twelfth embodiment of the present invention;

25 Figure 56 shows a cross section of the twelfth embodiment;

Figure 57 shows a cross section of the twelfth embodiment;

Figure 58 shows a cross section of the twelfth embodiment;

Figure 59 shows a boot remover of the twelfth embodiment;

30 Figure 60 shows a top cross sectional view and side view of an auto-injector according to thirteenth embodiment of the present invention;

Figure 61 shows a top cross sectional view and side view of the auto-injector of figure 60 with the boot remover removed;

Figure 62 shows a top cross sectional view and side view of the auto-injector of figure 60 when pressed against the skin;

Figure 63 shows a top cross sectional view and side view of the auto-injector of figure 60 when activated;

Figure 64 shows a cross sectional view of an auto-injector according to fourteenth embodiment of the present invention;

5 Figure 65 shows a cross sectional view of the auto-injector of figure 64 with the boot remover removed and the button depressed;

Figure 66 shows a cross sectional view of the auto-injector of figure 64 when pressed against the skin;

10 Figure 67 shows a cross sectional view of the auto-injector of figure 64 when the button is depressed and the device is pressed against the skin; and

Figure 68 shows a cross sectional view of the auto-injector of figure 64 once activated.

#### DETAILED DESCRIPTION

15 Embodiments to be described aim to provide an automatic injection device that cannot be fired until a boot protecting the syringe needle has been removed. The aim is to prevent the problem of wasted medicine and user frustration that may otherwise occur. Embodiments are described in the context of an auto-injector, that is an automatic injection device that has a spring or springs that not only drives the injection of 20 medicine, but also pushes the needle into the patient's skin. Such a device is referred to as an auto-injector. However, the skilled person will appreciate that the approach may also be applied to automatic injection devices that only drive medicine delivery and do not push the needle into the skin.

25 With reference to Figures 1 to 3, there will now be described a first embodiment, referred to here as the "enclosed button auto-injector". To assist with an understanding of this and further embodiments described below it is helpful to define a "proximal" end of the auto-injector as being the end that is closest to the patient's skin when in use, and a "distal" end as being the end furthest from the patient's skin.

30 Figure 1 shows a cross-sectional view of an enclosed button auto-injector 101 comprising a needle 102, syringe 103, boot remover 104, boot 111, trigger 105, trigger cover 106, and housing 107. The auto-injector has a proximal end 112 and a distal end 113. The housing 107 houses the needle 102 for piercing a user's skin, and the 35 syringe 103 for containing medicine. Activation of the trigger 105 actuates a firing

mechanism 108. The firing mechanism 108 drives the needle into the skin, and forces the medicine through the needle and into the user. Although not described in detail, the device also includes a carriage 114 and carriage return spring 115 within which the syringe 103 is mounted.

5

To prevent the user from accidentally activating the trigger 105, the trigger cover 106 is removably attached to the housing 107 such that it covers the trigger 105. This provides a physical barrier that prevents the user from accidentally activating the trigger 105. Any suitable mechanical interlock for preventing activation of the trigger 105, such as a trigger lock, may be used instead of the trigger cover 106. When the user wishes to use the enclosed button auto-injector 101, he or she must first remove the trigger cover 106 in order to access the trigger 105.

10 The trigger cover 106 may be secured to the housing 107 by any suitable connection type. For example, in Figures 1 and 2 the trigger cover 106 has ridges 109 for slotting into shoulders 110 formed in the housing 107.

15 The boot 111 is arranged to prevent contamination of the needle 102. The boot remover 104 is connected to the boot, and facilitates removal of the boot. The boot remover 104 extends over the outer surface of the housing 107 and over the ridges 109 of the trigger cover 106. By doing so, the boot remover 104 prevents any lateral displacement of ridges 109, and therefore prevents the ridges 109 from being moved out of the shoulders 110, preventing removal of the trigger cover 106. The boot remover 104 may provide support to the ridges 109, holding them in place within the shoulders 110.

20 Figure 2 shows the boot remover 104 partially removed from the housing 107, no longer preventing the ridges 109 from lateral movement. The ridges 109 are pre-stressed and splay outwardly upon removal of the boot remover 104 to disengage from the shoulders 110. In an alternative configuration, the ridges may be displaced outwardly by a separate biasing mechanism, e.g. a spring. Figure 3 shows the boot remover 104 totally removed from the device 101, and the trigger cover 106 partially removed. As a result, the trigger 105 is now exposed.

This arrangement forces a user to perform the step of removing the boot 111 using the boot remover 104 before pressing the trigger 105. By doing so, accidentally activating the enclosed button auto-injector 101 while the boot 111 is still in place is not possible.

- 5 This example is but one of many ways in which the boot remover 104 can prevent removal of the trigger cover 106. For example, the boot remover 104 may act as an interlock to a button, where the button may be used to facilitate removal of the trigger cover 106.
- 10 With reference to Figures 4 to 7, there will now be described a second embodiment, referred to here as the “embedded rod auto-injector”.

Figure 4 illustrates an embedded pin or rod auto-injector 201, comprising a firing mechanism housing 202, a syringe housing 203 containing a syringe, needle and boot (not shown), and a boot remover 204. Initially, the firing mechanism housing 202 is separate from the syringe housing 203, and therefore actuation of the firing mechanism within the firing mechanism housing 202 will not actuate the injection. On assembly of the embedded rod auto-injector 201, a lip 205 on the firing mechanism housing 202 displaces a rod 207 residing in a channel 206 in the syringe housing 203. Assembly 15 may be achieved by screwing the firing mechanism housing 202 into the syringe housing 203.

Figure 5 shows the firing mechanism housing 202 fully engaged with the syringe housing 203. The lip 205 has displaced the rod 207, which has in turn displaced the boot remover 204, removing it from the syringe housing 203. As a result, the boot will 25 be removed before the auto-injector 201 can be actuated. Figure 6 shows a close up view of the rod 207 displacing the boot remover 204.

The boot remover 204 may have a peg 208 that protrudes into the channel 206 for 30 engaging with the rod, shown in Figure 7. This arrangement ensures that the boot remover 204 can be displaced and ejected without subsequent protrusion of the rod 207, which may otherwise lead to an obstruction when administering an injection. Figure 7 also shows a track 209 running along the inner surface of the syringe housing 203, for receiving a ridge (not shown) formed on the boot remover 204, ensuring proper 35 alignment of the boot remover 204.

The embedded rod auto-injector 201 may comprise a spring located within the syringe housing 203 that acts to push the rod 207 backwards (toward firing mechanism housing 202) in order to ensure that the rod 207 returns from the protruding position 5 upon disassembly. This is relevant in particular to a re-useable device.

With reference to Figures 8 to 13, there will now be described a third embodiment, referred to here as the "helical linkage auto-injector".

10 Figure 8 shows a cross-section of a helical linkage auto-injector 301, comprising a boot remover 302, boot 312, housing 303, trigger 304 and trigger lock 305.

15 The boot remover 302 has a radially projecting peg 306 and a key 307. The housing 303 has an axial track (not shown) for receiving the key 307, and is arranged to prevent rotation of the boot remover 302 while the key 307 is engaged with the axial track. Any 20 number of ways can be used to prevent rotation of the boot remover 302 while it is attached to the helical linkage auto-injector 301. The use of a key 307 and axial track is just one of many possible alternatives.

25 The housing 303 contains a rod 308 with a helical track 310 (not shown in Figure 8) running around its circumference. The helical track 310 is arranged to receive the peg 306. Note that when the peg 306 is engaged with the helical track 310, the connection between the peg 306 and helical track 310 may be sufficient to prevent rotational movement of the boot remover 302. The key 307 and axial track may then not be required. At one end of the rod 308 there is a trigger lock 305 for preventing actuation 30 of the trigger 304. The trigger lock 305 features is shaped such that, in one orientation of the rod 308 and trigger lock 305, the trigger 304 cannot be activated, but, when the rod and trigger lock are rotated 180 degrees, the trigger 304 can be activated. The shape may be a stepped shape for example. Figure 9 shows a perspective view of the boot remover 302, showing the peg 306 and a key 307, whilst Figure 10 shows the peg 306 engaging with the helical track 310 on the rod 308.

35 Figure 11 shows a close up view of the trigger 304 and trigger lock 305. The trigger 304 has a lip 311 that abuts the trigger lock 305, and prevents downward motion of the trigger 304. When the boot 312 is removed using the boot remover 302, the axial

motion of the peg 306 causes the rod 308 to rotate due to the interaction between the peg 306 and helical track 310. The trigger lock 305, being connected to the rod 308, also rotates.

- 5 Figure 12 shows a close up view of the trigger 304 and trigger lock 305 after the boot remover 302 has been removed. The trigger lock 305 no longer blocks the path of the lip 311, allowing the trigger 304 to be freely pushed downwards, activating the auto-injector. Figure 13 shows the trigger 304 following actuation.
- 10 The helical linkage auto-injector 301 cannot be fired while the boot remover 302 is still in place. As the boot remover 302, along with the boot 312, is removed, the trigger lock 305 is disengaged. A user can then press the trigger 304 and activate the auto-injector 301.
- 15 With reference to Figures 14 to 17, there will now be described a fourth embodiment, referred to here as the “spring loaded lock auto-injector”.

Figure 14 shows a cross sectional view of a spring loaded lock auto-injector 401, comprising a boot remover 402, boot 412, housing 403, trigger 404 and trigger lock 405. The boot remover 402 has a latch 406 and one or more keys 407 (not shown). The housing has one or more a linear, axially extending tracks (not shown) for engaging with the keys 405. This arrangement restricts rotation of the boot remover 402 prior to removal. Any number of ways can be used to prevent rotation of the boot remover 402 while attached to the spring loaded lock auto-injector 401.

25 The housing 403 contains a rod 408 with a pin 409 for engaging with the latch 406. The housing 403 also contains a torsion spring 410 that connects to the rod 408, providing a torque to the rod 408 when the rod is rotationally displaced from a given orientation. At one end of the rod 408 there is a trigger lock 405 for preventing actuation of the trigger 404. The trigger lock 405 is shaped such that, in one orientation, the trigger 404 cannot be activated, but, when the trigger lock 405 is rotated by 180 degrees, the trigger 404 can be activated. This may be facilitated by a stepped feature formed in the trigger lock 405. In the auto-injector’s unarmed state, the rod is rotationally displaced such that a torque is applied to the rod 408 by the torsion spring 410, the rod

408 being held in place by the pin 409 being engaged with the latch 406. A perspective view of the latch and pin is shown in Figure 15.

5 Figure 16 shows close up view of the trigger 404 and trigger lock 405 in an unarmed position. The trigger 404 has a lip 411 that abuts the trigger lock 405, preventing downward motion of the trigger 404.

10 When the boot remover 402 is removed, the pin 409 disengages with the latch 406, allowing the rod 408 and trigger lock 405 to rotate due to the torque applied by the torque spring 410. When the rod 408 and trigger lock 405 reach their final position, the trigger lock 405 no longer prevents the trigger 404 from being pressed.

15 Figure 17 shows a close up of the trigger 404 and trigger lock 405 in an armed position. It will be apparent that rotation of the rod 408 has caused the trigger lock 405 to be rotated such that it no longer blocks the path of the lip 411, allowing the trigger 404 to be freely pushed downwards, activating the auto-injector 401.

20 The trigger lock in the helical linkage auto-injector and the spring loaded lock auto-injector have been described as having a trigger lock (305; 405) that is arranged to abut the trigger, preventing axial motion of the trigger (304; 404). It is noted that other trigger prevention mechanisms may be used instead. For example, the trigger lock may be a cover that prevents access to the trigger, wherein rotation of the rod causes the cover to move to into a position such that it does not prevent access to the trigger.

25 With reference to Figures 18 to 26, there will now be described a fifth embodiment, referred to here as the "hinged auto-injector". Figure 18 shows a cross sectional view of such a hinged auto-injector 501, comprising a boot remover 502, boot 514, syringe housing 503, trigger 504, firing mechanism housing 505, hinge 506 and needle 507. When folded, the hinged auto-injector 501 is in an unarmed position, with the boot remover 502 covering both the trigger 504 and the needle 507. In order to use the hinged auto-injector 501, the boot remover 502 must first be removed. The hinged auto-injector 501 can then be unfolded into a firing position.

30 Figure 19 shows the hinged auto-injector 501 with the boot remover 502 and boot 513 removed, but still in the folded configuration. Figure 20 shows the hinged auto-injector

501 unfolded, as both a cross-section and in plan. A latch 508 may be used to lock the hinged auto-injector 501 in the unfolded position.

5 Figure 21 shows a close up view of the latch 508. Note that the latch 508 may reside on either the firing mechanism 505 or the housing 503. Other suitable mechanisms for locking the hinged auto-injector 501 in position will be readily apparent.

10 The hinged auto-injector 501 may further comprise a mechanism that prevents actuation of the trigger 504 before the hinged auto-injector 501 has been fully unfolded. An example of such a mechanical interlock comprises a trigger lock comprising an elongate plate 509, shown in Figure 22. The elongate plate 509 features a boss 510 for preventing downward motion of the trigger 504: Figure 22 illustrates the "locked" position. The elongate plate 509, upon unfolding of the auto-injector, is caused to pivot about a central pivot axis from a position in which downward motion of the trigger 504 15 is prevented into one in which downward motion of the trigger is possible. Figure 23 shows the elongate plate 509 in an unlocked position after unfolding of the device.

20 The elongate plate 509 is shown in more detail in Figure 24. A front end of the trigger lock features an angled face 511 that acts as a spring and holds the elongate plate 509 in a locked position. The elongate plate 509 is mounted on a central pivot axle 512. As shown in Figure 25, interaction with a second latch 513 on the housing 503 causes the angled face 511 to be pressed into the firing mechanism housing 505. This action causes the elongate plate 509 to pivot about the pivot axle 506, causing the boss 510 to move clear of the path of the trigger 504. Figure 26 shows the hinged auto-injector 25 501 in a locked position, with the elongate plate 509 disengaged, and the latch 508 engaged.

30 With reference to Figures 27 to 30, there will now be described a sixth embodiment, referred to here as the "floating auto-injector". Figure 27 shows a cross sectional view of such a floating auto-injector 601, comprising a boot remover 602, housing 603, and trigger 604 attached to the housing 603. The housing 603 houses a syringe, needle 609, and firing mechanism, which are not shown Figure 27. The floating auto-injector 601 also comprises an outer casing 605, within which the housing 603 sits. The housing 603 is axially movable with respect to the outer casing 605.

The outer casing 605 has a first opening located at a proximal end and a second opening located at a distal end. The first opening is of sufficient size to allow the proximal end of the housing to pass through. The second opening is of sufficient size to allow the trigger to pass through. A spring 606 acts between the housing 603 and the outer casing 605 to bias the housing 603 in a distal direction.

5 The boot remover 602 is arranged to remove the boot (not shown) and further arranged such that when it is attached to the housing 603, the boot remover 602 holds the housing 603 forward in a first proximal position. While the housing 602 is held forward 10 in the first position, the trigger 604 is held within the outer casing 605, and access to the trigger 604 is restricted. The floating auto-injector 601 may also comprise an elastic membrane 607 which covers the distal opening, preventing access to the inside of outer casing 605.

15 Figure 28 shows the floating auto-injector 601 once the boot remover 602 has been removed. With the boot remover 602 no longer holding the housing 603 in place, the spring 606 pushes the housing 603 distally to a second position, such that the trigger 604 extends through distal opening, stretching the elastic membrane 607, and making the trigger 604 accessible to a user.

20 When the floating auto-injector 601 is not pressed against the user's skin, pressing the trigger 604 pushes the housing into the outer casing 605 such that the proximal end of the housing 604 exits the proximal end of the outer casing 605. The housing 604 is moved towards its first position, until the trigger 604 is no longer accessible. The force 25 required to move the trigger 604 relative to the housing 603 is greater than the force required to move the housing 603 relative to the outer casing 605. Therefore, pushing the trigger 604 moves the housing 603 through the outer casing 605, and does not activate the floating auto-injector 601. This is shown in Figure 29.

30 Figure 30 shows the floating auto-injector 601 when the outer casing 605 is pressed against the skin 608. By applying pressure to the trigger 604 in a proximal direction, the proximal end of the housing 603 is pressed against the skin 608. With both the housing 35 and outer casing 605 pressed against the skin, the two cannot move relative to one another, and so the force applied to the trigger 604 axially moves the trigger 604 relative to the housing 603, activating the floating auto-injector 601.

Figures 31 to 34 show a seventh embodiment, the seventh embodiment being an alternative arrangement of the floating auto-injector embodiment. The alternative floating auto-injector 701 is structurally similar to the floating auto-injector 601, but 5 whereas the floating auto-injector 601 has a spring 601 that urges the housing 603 distally with respect to the outer casing 605, the alternative floating auto-injector 701 has a spring 706 which urges the housing 703 proximally with respect to the outer casing 705. When urged forward by the spring 706, access to the trigger 704 is restricted, as shown in Figures 31 and 32. In order to access the trigger 704, a 10 proximal ending of the housing 703 must be pressed against a user's skin in order for the housing to move rearward relative to the outer casing 705, as in sixth embodiment. When the boot remover 702 is attached, the boot remover 702 covers a proximal end of the outer casing 705, such that the housing 703 cannot be pressed against the user's skin. Therefore, in order to activate the device 701, the user must first remove 15 the boot remover 702, exposing the proximal end of the housing 703, and then press the proximal end of the housing 703 against the skin, such that the trigger 704 becomes accessible. The device can then be activated by pressing the trigger.

With reference to Figures 35 to 39, there will now be described a eighth embodiment, 20 referred to here as the "toothed wheel auto-injector". Figure 35 shows a cross sectional view of such a toothed wheel auto-injector 801, comprising a boot remover 802, housing 803, trigger 804 and skin sensor 805. The housing is arranged to house a syringe carrying needle and force applicator (not shown). When the boot remover 802 is attached to the device 801, the boot remover 802 abuts the trigger 804, preventing 25 the trigger 804 from being displaced relative to the housing 803. Figure 36 shows the toothed wheel auto-injector 801 following removal of the boot remover 802.

The toothed wheel auto-injector 801 further comprises a rotatable shaft 806 which is coupled to a plunger 807. The plunger 807 is coupled to the trigger 804 such that by 30 pressing the trigger 804, the plunger is pushed into a bung of a syringe. The plunger 807 may be driven via a drive spring (not shown), or any other means.

The rotatable shaft 806 is connected to the plunger 807 by a flexible member 808, such 35 as string. The rotatable shaft 806 has two toothed portions 809, 810 which extend circumferentially around the outer surface of the rotatable shaft 806. The toothed

portions 809, 810 are arranged to engage with locking levers 811, 812, which prevent rotation of the shaft 806. When the shaft 806 is rotationally fixed, the plunger 807 is restricted from axially movement due to the connection via the flexible member 809. Alternatively, the flexible member 808 may be attached directly to the trigger 804, 5 preventing axial movement of the trigger 804 when the locking levers 811, 812 are engaged.

The skin sensor 805 is arranged to extend beyond a proximal end of the housing 803, and further arranged such that when the skin sensor 805 is pressed against the skin, 10 the skin sensor 805 is pushed into the housing 803. When pushed into the housing 803, the skin sensor 805 acts on the locking levers 811, 812 via legs 813, 814, disengaging the locking levers 811, 812 from the toothed portions 809, 810 of the shaft 806, allowing rotation of the shaft 806.

15 The locking levers 811, 812 are pivotally attached to the housing 803 via pivot points 814, 815. The pivot points 815, 816 are located between a part of the levers where the legs 813, 814 of the skin sensor 805 act, and a part of the levers that engage with the toothed portions 809, 810. Therefore, when pressed against the skin, the skin sensor 805 causes the locking levers 811, 812 to pivot, disengaging them from the toothed 20 portions 809, 810, and allowing the device 801 to be actuated. Figure 37 shows the skin sensor having been pushed into the housing, such that the locking levers 811, 812 have pivoted about the pivot points 815, 816, disengaging from the shaft 806. Figure 38 shows the trigger 804 being pushed into the housing. Figure 39 shows alternative views of the plunger 807, and shaft 806.

25 With reference to Figures 40 to 45, there will now be described a ninth embodiment, referred to here as the "toothed element auto-injector". Figure 40 shows a cross sectional view of such a toothed element auto-injector 901, comprising a boot remover 902, housing 903, trigger 904 and outer casing 905.

30 The boot remover 902 abuts the trigger 904, prior to removal of the boot remover 902. This prevents the trigger 904 from being displaced relative to the outer casing 905 and/or the outer casing 905 to activate the device 901. Figure 41 shows the boot remover 902 removed.

The housing 903 is located within the outer casing 905 and a part of the housing 903 protrudes from a proximal end of the outer casing 905, such that it can be pressed against the skin. The outer casing 905 comprises a drive spring 906 and plunger 907, for acting on a bung or plunger of a syringe 908 contained in the housing 903.

5 Pressing the trigger 904 activates the drive spring 906, which drives the plunger 907.

The device 901 further comprises two locking elements 909, 910 axially fixed within the outer casing 905. The locking elements 909, 910 have interlocking teeth which engage with interlocking teeth on the plunger 907, preventing axial movement of the plunger 10 907. When the locking elements 909, 910 are engaged, the device 901 cannot be activated (Figure 42).

The housing 903 is axially moveable relative to the outer casing 905, and when 15 pressed against the user's skin, the housing 903 is pushed into the outer casing 905 (Figure 43).

The outer casing 905 comprises biasing springs 911 which bias the locking elements 909, 910 against the plunger 907 such that the teeth interlock. While teeth have been 20 described, it will be understood by the skilled person that any interlocking feature may be used.

The housing 903 has two angled surfaces 912, 913 which interact with two angled surfaces 914, 915 on the locking elements 909, 910, when the housing 903 is pressed into the outer casing 905. These angled surfaces cause the locking elements to be 25 radial displaced, disengaging them from the plunger 907 (Figure 43 – 45).

Therefore, the boot remover must first be removed and then the device 901 pressed against the skin before pressing the trigger 904 activates the device 901, driving a needle 916 into a user and dispensing medicine contained in the syringe 908.

30

With reference to Figures 46 to 50, there will now be described a tenth embodiment. Figure 46 shows a cross sectional view of an auto-injector 1001 according to the tenth embodiment. The auto-injector 10001 comprises a boot remover 1002 for removing a boot 1002a, housing 1003, trigger 1004 and skin sensor 1005. The housing 1003

houses a syringe carrying medicine, a needle, and drive mechanism (not shown) for driving the needle into a user's skin, and dispensing the medicine.

5 The skin sensor 1005 extends proximally from the housing 1002, and is arranged to be pressed against the user's skin. The boot remover 1002 covers the skin sensor 1005 such that the skin sensor 1005 cannot be pressed against the skin. With the boot remover 1002 removed (Figure 47), the skin sensor 1005 can be pressed against the skin. The skin sensor 1005 has an elongated leg 1006 which abuts a corresponding elongated leg 1007 on the trigger 1004. The abutment prevents the trigger 1004 from 10 being axially displaced.

15 The skin sensor 1005 further comprises a helical keyway 1008 which engages with a boss 1009 on an inner surface of the housing 1003. When the skin sensor 1005 is pressed against the skin, the skin sensor rotates into the housing due to the boss 1009 following the helical keyway 1008 (Figure 48 and 49). This allows the elongated leg 1006 of the skin sensor 1005 to disengage from the elongated leg 1007 of the trigger 1004, thereby allowing displacement of the trigger.

20 With reference to Figures 51 to 53, there will now be described an eleventh embodiment. Figure 51 shows a cross sectional view of a distal end of an auto-injector 1101 according to the eleventh embodiment. The auto-injector 11001 comprises a boot remover (not shown) for removing a boot, housing 1102, trigger 1103 and skin sensor 1104. As with the eighth embodiment, the skin sensor 1104 is arranged to be pressed against the skin, such that it enters the housing 1102. The boot remover is 25 arranged such that, prior to removal, it covers a proximal end of the skin sensor 1104, preventing it from being pressed against the skin and into the housing 1102. The trigger 1103 is prevented from axial movement in the proximal direction due to an abutment between the trigger 1103 and two flexible legs 1105, 1106 fixed on the inside of the housing 1102.

30 When the boot remover is removed, the skin sensor 1104 is pressed against the skin, such that it moves axially into the housing 1102. The a distal end of the skin sensor 1104 pushes against the flexible legs 1105, 1106, causing them to deform (Figure 52). Once deformed, the flexible legs 1105, 1106 no longer abut the trigger 1103, allowing 35 activation of the device 1101 (Figure 53).

With reference to Figures 54 to 59, there will now be described a twelve embodiment. Figure 55 shows a trigger 1201 for activating an automatic injection device (not shown). The trigger 1201 has three latches 1202 which extend from the trigger 1201, and are 5 arranged to project through slots 1203 of a housing 1204 of the auto-injector (Figure 56). This engagement prevents actuation of the trigger 1201.

The auto injector has three release elements 1205 (a release element is shown in Figure 54 from a side view and front view). The release elements 1205 have a de-latching portion 1206, which feature a raised, angled surface 1207 for engaging with the latch 1202 of the trigger 1201. The release elements extend beyond a proximal end of the housing 1204 and are arranged such that, when the auto-injector is pressed against the skin, the release elements 1205 are pushed into the housing 1204 and the de-latching portions 1206 engage with, and slide past, the latches 1205 so as to press 15 the latches back through the slots 1203 and allow the trigger 1201 to be actuated (Figure 57 and 58).

The release elements 1205 are fixed to the housing 1204, and have integral spring elements 1207 between the attachment to the housing and the de-latching portion 20 1206. The spring elements 1207 are arranged to compress when the release elements 1205 are pressed against the skin. Any number of release elements may be used. The release elements 1205 are distributed evenly around a circumference having its centre along an axial direction of the housing 1204. This can be seen from Figure 55, where the three latches 1202, which engage with the release elements 1205, are 25 distributed evenly.

Figure 59 shows a boot remover 1208 which removes the boot (not shown), and covers the release elements 1205. The boot remover 1208 must be removed before the release elements 1205 can be pressed against the skin.

30 With reference to Figures 60 to 63, there will now be described a thirteenth embodiment. Figures 60 to 63 show a top cross sectional view of an auto-injector of the thirteenth embodiment, and a partial cross sectional side view. The auto-injector 1301 of the thirteenth embodiment comprises a housing 1302 which houses a syringe 35 and needle, and drive mechanism (not shown) for activating the device 1301; a trigger

1303 coupled to the housing 1302, and arranged to activate the drive mechanism; a boot remover 1304 for removing the boot and covering the proximal end of the device 1301; a skin sensor 1305 protruding proximally beyond the housing 1302 and an outer casing 1306; and an elliptical flexible collar 1307 axially fixed to the housing 1302, and 5 located between the trigger 1303 and the housing 1302.

The elliptical flexible collar 1307 is arranged to sit around a part of the trigger 1303, and prevent the trigger 1303 from being fully depressed when in a first configuration, preventing activation of the device 1301. In the first configuration the collar 1307 has a 10 minor axis 1308 which is shorter than the diameter of an upper part of the trigger 1309. This prevents the trigger 1303 from being fully depressed into the housing 1302 (Figure 60 shows the device 1301 with the boot remover 1304 attached, and 61 shows the device with the boot remover removed). Note that while the trigger is described as having a diameter, and the collar is described as being elliptical, both may be any 15 suitable shape such that deformation of the collar allows the trigger to pass through.

The skin sensor 1305 has an angled surface 1310 at its distal end. When the skin sensor 1305 is pressed against the skin (figure 62), it is moved into the outer casing 1306, and the angled surface 1310 pushes against the vertices defining the major axis, 20 so as to deform the elliptical flexible collar 1307. The deformation causes the minor axis to increase in length, until the trigger 1303 is no longer blocked by the collar 1307. In this second configuration, the device can then be activated (figure 63). The boot remover 1304 covers the skin sensor 1305 prior to removal. Once removed, the skin sensor 1305 may be pressed against the skin.

25 With reference to Figures 64 to 68, there will now be described a fourteenth embodiment. Figures 64 to 68 show a cross section of an auto-injector of the thirteenth embodiment. The auto-injector 1401 comprises a housing 1402 housing a syringe, drive mechanism (not shown), and needle 1411; an outer casing 1403 within which the 30 housing 1402 is located; a boot remover 1404 for removing a boot and covering the proximal end of the device 1401; and a trigger 1405.

The housing 1402 is contained within the outer casing 1403 and arranged to be axially moveable within the outer casing 1403. The drive mechanism within the housing 1402

is prevented from being released and activating the device 1401 by being connected to flexible member 1406 which is clamped in two places.

5 The auto-injector 1401 further comprises a spring 1407 which acts between the outer casing 1403 and the housing 1402 and biases the housing 1402 towards a proximal end of the outer casing 1403 such that a part of the housing 1402 protrudes from an opening of the proximal end of the outer casing 1403. When held in this forward position by the spring 1407, a part of the flexible element 1406 is clamped in a first clamped position 1408 between an outer surface of the housing 1402 and an inner 10 surface of the outer casing 1403. When the housing 1402 is pressed against the skin, the housing 1402 moves into the outer casing 1403, which releases the clamp 1408 (Figure 66).

15 The boot remover 1404 prevents the housing 1402 from being pressed against the skin, prior to removal.

20 The flexible element 1406 is further clamped in a second position by a butterfly valve 1409 coupled to the housing 1402. The trigger 1405 has two release pegs 1410, which engage with the butterfly valve 1409 when the trigger 1405 is displaced. This engagement opens the valve 1409, unclamping the flexible element 1406 from the second clamp (Figure 67). The drive mechanism is no longer prevented from being released by the flexible member, and so the device 1401 is activated, driving the needle 1411 and medicine into the user's skin.

25 The device 1401 is a further arranged, such that when the housing 1402 is held in the forward position by the spring 1407, the butterfly valve 1409 is held in a position which is inaccessible to the release pegs 1410 of the trigger 1404. This is shown in Figure 65, where the trigger 1405 is pressed into the housing, but does not reach the valves 1410. While not shown, the trigger 1405 has limited axial movement due to a structural 30 stop, such as a ledge within the outer casing 1403.

It will be appreciated by the person of skill in the art that various modifications may be made to the above described embodiments without departing from the scope of the present invention. Furthermore, while several separate embodiments have been

24

described, the skilled person will recognise that some of these embodiments may be combined.

5

**CLAIMS:**

1. An automatic injection device for delivering a dose from a medicine containing syringe and comprising:
  - 5 a housing for containing the syringe;
  - a force applicator for applying a force to eject medicine from the syringe;
  - a trigger coupled to the force applicator for releasing the force applicator to cause an injection;
  - a boot covering a needle attached to the syringe to protect and maintain sterility of the needle; and
  - 10 a mechanical interlock for preventing actuation of the trigger prior to removal of the boot and for allowing actuation or commencement of an actuation sequence following removal of the boot.
- 15 2. An automatic injection device according to claim 1 and comprising a boot remover for removing the boot.
3. An automatic injection device according to claim 2, wherein the boot remover is formed integrally with the boot.
- 20 4. An automatic injection device according to claim 2, wherein the boot and boot remover are formed as separate discrete components, and configured such that the boot is locked into the boot remover upon insertion of the syringe into the housing.
- 25 5. An automatic injection device according to any one of claims 2 to 4, wherein said mechanical interlock comprises said boot remover, the boot remover being configured such that removal of the boot remover from the housing both removes the boot from the needle and facilitates access to the trigger.
- 30 6. An automatic injection device according to claim 5, the mechanical interlock comprising a cover attached to a distal end of the housing, the cover being locked in place when the boot remover is attached to the housing, and being removable from the housing to expose the trigger only after removal of the boot remover and boot.

7. An automatic injection device according to claim 6, wherein the cover is coupled to the distal end of the housing by one or more flexible latches, removal of said boot remover allowing disengagement of the latches and removal of the cover.

5 8. An automatic injection device according to claim 7, wherein said boot remover extends to cover said flexible latches when the boot remover is attached to the housing.

10 9. An automatic injection device according to any one of claims 1 to 4, the housing comprising a first part for containing said syringe and a second part for attachment to the first part by a user, said mechanical interlock being configured to remove the boot upon coupling together of the first and second parts.

15 10. An automatic injection device according to claim 9, wherein the trigger is provided on said second part.

11. An automatic injection device according to claim 9 or 10, wherein the first and second parts are coupled together by relative axial motion of the parts, e.g. by engaging complimentary screw threads formed on the first and second parts.

20 12. An automatic injection device according to claim 11, the mechanical interlock comprising:  
a rod coupled to the first part of the housing and slideable relative thereto in an axial direction, a distal end of the rod being engagable by said second part in order to axially displace the rod upon coupling together of the first and second parts, and a proximal end of the rod being coupled to the boot in order to remove the boot.

25 13. An automatic injection device according to claim 12 when appended to claim 2, wherein the rod is coupled to the boot by way of the boot remover.

30 14. An automatic injection device according to claims 12 or 13, wherein the first part of the housing defines a channel within which the rod is slideably mounted.

15. An automatic injection device according to claim 14 when appended to claim 2, 35 wherein the boot remover comprising a peg that protrudes into the channel for

engaging with the rod upon coupling together of the first and second parts in order to push the boot remover off of the housing.

16. An automatic injection device according to any one of claims 12 to 14, the  
5 housing comprises a spring coupled to the rod in order to return the proximal end of the  
rod into the channel upon disconnection of the first and second parts.

17. An automatic injection device according to any one of claims 2 to 4, the  
10 mechanical interlock comprising a rod coupled to the boot remover and a trigger lock  
engaging with the trigger and with said rod, the mechanical interlock being configured  
such that removal of the boot results in rotation of the rod thereby releasing the trigger  
lock.

18. An automatic injection device according to claim 17, wherein the rod has a  
15 helical track extending axially therealong and a peg is provided on the boot remover to  
engage with said track such that the rotation of the rod is caused by the axial motion of  
the peg as the boot remover is removed.

19. An automatic injection device according to claim 17 or 18, wherein the boot  
20 remover comprises a key and the housing comprises an axially extending track, and  
the key and axially extending track being arranged such that the key engages with the  
axially extending track to prevent rotation of the boot remover prior to removal of the  
boot remover.

25 20. An automatic injection device according to claim 17 and comprising a torsion  
spring coupled between the rod and the hosing to provide a rotational bias to the rod,  
and a latch provided on the boot remover to prevent rotation of the rod until the boot  
remover has been removed.

30 21 An automatic injection device according to claim 20, wherein the rod comprises  
a pin for engaging with the latch.

22. An automatic injection device according to claim 20 or 21, wherein the boot  
remover comprises a key and the housing comprises an axially extending track, the  
35 key and axially extending track being arranged such the key engages with the axially

extending track to prevent rotation of the boot remover prior to removal of the boot remover.

23. An automatic injection device according to any one of claims 1 to 4, the housing 5 comprising a first part for containing said syringe and a second part for attachment to the first part by the user, the mechanical interlock being provided by said boot remover such that, when attached to the first and second parts, the boot remover holds the first and second parts in a non-useable configuration and removal of the boot remover allows the first and second parts to be brought together into a useable configuration.

10

24. An automatic injection device according to claim 23, comprising a hinge rotatably coupling the first and second parts together.

15

25. An automatic injection device according to claim 23 or 24, wherein the mechanical interlock comprises a trigger lock for preventing actuation of the trigger when the device is in the non-useable configuration whilst allowing actuation of the trigger when the device is in the useable configuration.

20

26. An automatic injection device according to claim 25, wherein said trigger lock comprises an elongate plate mounted to said first part by a pivot axle and a biasing mechanism acting on the plate such that, when in the non-useable configuration, the plate prevents actuation of the trigger and, when the device is brought together into a useable configuration, the plate is rotated about said axle to free the trigger.

25

27. An automatic injection device according to any one of claims 1 to 4, wherein the trigger is attached to the housing and is arranged to release the force applicator when the trigger is moved axially in a proximal direction relative to the housing, the automatic injection device further comprising an outer casing, wherein the housing is located within the outer casing, and is axially moveable within the outer casing.

30

28. The automatic injection device according to claim 27, wherein the outer casing comprises a first opening located at a proximal end and a second opening located at a distal end, wherein the housing is further arranged such that a proximal part of the housing can pass through the proximal opening of the outer casing, and the trigger can pass through the distal opening of the outer casing.

35

29. The automatic injection device according to claim 28 when appended to claim 2, wherein the boot remover provides said mechanical interlock, the boot remover being arranged at the proximal end of the outer casing, and being further arranged, 5 prior to removal, to hold the housing in a first position towards the proximal end of the outer casing such that the trigger is located within the outer casing, restricting access to the trigger.

10 30. An automatic injection device according to claim 29, further comprising a biasing device acting between the outer casing and the housing, and arranged such that when the boot remover is removed, the biasing device moves the housing in a distal direction relative to the outer casing to a second position, such that at least a part of the trigger protrudes from the distal opening of the outer casing, allowing access to the trigger.

15 31. An automatic injection device according to claim 30, further arranged such that, following removal of the boot remover and boot, when the proximal end of the outer casing is placed against the skin, applying force to the trigger in a proximal direction causes the proximal end of the housing to be pressed against the skin, and the trigger 20 to be displaced axially relative to the housing, activating the device.

25 32. An automatic injection device according to any one of claims 1 to 4, the device further comprising a second mechanical interlock for detecting pressure applied to the device by the user's skin following removal of the boot, and configured to prevent actuation of the trigger in the absence of pressure and to allow actuation when sufficient pressure is detected.

30 33. An automatic injection device according to claim 32 when appended to claim 28, the second mechanical interlock being provided by a biasing device acting between the outer casing and the housing and arranged to bias the housing in a proximal direction relative to the outer casing and thereby tend to push an end of the housing through a proximal end of the casing and restrict access to the trigger.

34. An automatic injection device according to claim 33 when appended to claim 2, wherein the boot remover provides said first mentioned mechanical interlock, the boot remover being arranged at the proximal end of the outer casing and being further arranged, prior to removal, to prevent the housing from being pressed against the skin, 5 thereby restricting access to the trigger.

35. An automatic injection device according to claim 32 when appended to claim 2, wherein said first mentioned mechanical interlock is provided by the boot remover abutting a part of the trigger and thereby preventing the trigger from being displaced 10 relative to the housing to activate the device, said first mentioned mechanical interlock being disengaged when the boot remover is removed.

36. An automatic injection device according to claim 35 and comprising a rotatable shaft for coupling to a plunger which acts on a bung of the syringe such that axial 15 movement of the plunger into the syringe causes the shaft to rotate, the shaft having a toothed portion which is arranged to interlock with a locking lever which, when engaged, prevents rotation of the shaft and axial movement of the plunger, said second mechanical interlock being provided by a skin sensor coupled to the locking lever, the skin sensor being arranged such that when pressure is applied to the skin, the skin 20 sensor disengages the lever from the toothed portion of the shaft, allowing rotation of the shaft.

37. An automatic injection device according to claim 36, wherein the rotatable shaft is coupled to the plunger by a flexible element fixed between the plunger and the shaft. 25

38. An automatic injection device according to any one of claims 36 and 37, wherein the skin sensor is axially moveable relative to the housing and extends proximally beyond the housing, and is arranged such that, when the user pushes the skin sensor against the skin, the skin sensor is pushed axially within the housing such 30 that a part of the skin sensor engages with the locking lever, disengaging the lever from the shaft.

39. An automatic injection device according to claim 32 when appended to claim 2, wherein said mechanical interlock is provided by the boot remover abutting the trigger 35 to prevent the trigger from being displaced relative to the housing to activate the

device, said first mentioned mechanical interlock being disengaged when the boot remover is removed.

40. An automatic injection device according to claim 39, further comprising an outer casing, wherein the housing is located within the outer casing and arranged such that a part of the housing protrudes from a proximal end of the outer housing to be pressed against the skin.

41. An automatic injection device according to claim 40, wherein the outer casing comprises the force applicator.

42. An automatic injection device according to claim 41, further comprising a locking element located within the outer casing, the locking element having features arranged to engage with features on a plunger connected to the force applicator, the engagement preventing axial movement of the plunger.

43. An automatic injection device according to claim 42, wherein the housing is axially moveable relative to the outer casing, and wherein the second mechanical interlock is provided by the housing being arranged such that, when the user presses the housing against the skin, the housing moves into the outer casing and a part of the housing displaces the locking element such that it disengages with the plunger.

44. An automatic injection device according to claim 43, wherein the outer casing further comprises a biasing device arranged to bias the locking element against the plunger such that the features interlock.

45. An automatic injection device according to claim 44, wherein the housing further comprises a first angled surface and the locking element comprises a second angled surface, the surfaces being arranged such that, when the housing is pushed into the outer casing, the first angled surface engages with the second angled surface causing the locking element to move in a radial direction and disengage the locking element from the plunger.

46. An automatic injection device according to claim 32, wherein the second mechanical interlock is provided by a skin sensor which is coupled to the trigger, the

coupling being arranged such that a part of the skin sensor prevents the trigger from being displaced so as to activate the device, and further arranged such that when pressed against the skin, the skin sensor is displaced relative to the trigger and no longer prevents displacement of the trigger.

5

47. An automatic injection device according to claim 46 when appended to claim 2, wherein the first mentioned mechanical interlock is provided by the boot remover covering a part of the skin sensor such that skin sensor cannot be pressed against the skin and displaced relative to the trigger, and wherein, when the boot remover is 10 removed, the skin sensor can be pressed against the skin and displaced relative to the trigger.

15

48. An automatic injection device according to claim 47, wherein the coupling between the skin sensor and the trigger is provided by a first elongated leg on the trigger which abuts a second elongated leg of the skin sensor.

20

49. An automatic injection device according to claim 48, wherein the skin sensor comprises a helical keyway which engages with a boss on an inner surface of the housing, the boss and helical keyway being arranged such that when the skin sensor is pressed against the skin, the skin sensor rotates into the housing causing the second elongated leg to disengage from the first elongated leg, thereby allowing displacement of the trigger.

25

50. An automatic injection device according to claim 32, wherein the housing comprises one or more flexible legs which abuts the trigger and prevent it from being displaced relative to the housing to activate the device.

30

51. An automatic injection device according to claim 50, further comprising a skin sensor, the skin sensor and flexible leg(s) providing the second mechanical interlock and arranged such that when pressed against the skin, the skin sensor is axially displaced relative to the housing to deform the flexible leg(s) and thereby allow displacement of the trigger.

35

52. An automatic injection device according to claim 51, wherein the first mentioned mechanical interlock is provided by the boot remover covering a part of the skin sensor

such that the skin sensor cannot be pressed against the skin and displaced relative to the housing.

53. An automatic injection device according to claim 32, wherein the second mechanical interlock is provided by a latch arranged on the trigger and which projects through a slot of the housing to prevent actuation of the trigger when the latch is engaged with the slot, and a release element having a de-latching portion, a part of the release element extending beyond a proximal end of the housing and arranged such that, when the device is pressed against the skin, said part of the release element is pushed into the housing and the de-latching portion engages with the latch so as to press the latch back through the slot and allow the trigger to be actuated.

54. An automatic injection device according to claim 53, wherein the de-latching portion comprises a raised angled surface.

15 55. An automatic injection device according to claim 54, wherein the angled surface is arranged such that, as the angled surface slides past the latch, the angled surface presses the latch out of the slot.

20 56. An automatic injection device according to any one of claims 53 to 55, wherein the release element is attached to the housing and has a spring element between the attachment to the housing and the de-latching portion, wherein the spring element is arranged to compress when the release element is pressed against the skin.

25 57. An automatic injection device according to any one of claims 53 to 56, further comprising a plurality of release elements, and wherein the trigger further comprises a plurality corresponding latches which are arranged to latch onto a plurality of corresponding slots coupled to the housing.

30 58. An automatic injection device according to claim 57, wherein the plurality of release elements are distributed evenly around a circumference having its centre along an axial direction of the housing.

35 61. An automatic injection device according to claim 32, further comprising a flexible collar axially fixed relative to the housing and being deformable from a first

configuration to a second configuration, the flexible collar when in said first configuration preventing axial movement of the trigger relative to the housing and when in the second configuration allowing said axial movement of the trigger.

5 62. An automatic injection device according to claim 61, wherein the flexible collar is arranged around a part of the trigger.

10 63. An automatic injection device according to claim 62, further comprising a skin sensor which is axially moveable relative to the housing and extends proximally from the housing, and provides said second mechanical interlock by being arranged such that when the skin sensor is pressed against the skin, the skin sensor moves into the housing and presses against the flexible collar so as to deform it from the first configuration to the second configuration.

15 64. An automatic injection device according to claim 63 wherein the first mentioned mechanical interlock is provided by the boot remover covering a part of the skin sensor such that the skin sensor cannot be pressed against the skin and displaced relative to the housing.

20 65. An automatic injection device according to claim 32, further comprising an outer casing, the housing being contained within the outer casing and arranged to be axially moveable within the outer casing.

25 66. An automatic injection device according to claim 65, further comprising a flexible member connected to the force applicator and arranged such that when the flexible member is clamped relative to the housing, the force applicator is prevented from being released.

30 67. An automatic injection device according to claim 66, further comprising a biasing device acting between the outer casing and the housing and arranged to bias the housing towards a proximal end of the outer casing such that a part of the housing protrudes from an opening of the proximal end of the outer casing; and,

35 wherein the second mechanical interlock is provided by a part of the flexible element being clamped in a first clamped position between an outer surface of the housing and an inner surface of the outer casing, and arranged such that when the

housing is pressed against the skin, the housing moves into the outer housing from a first position, to a second position, wherein when in the second position the first clamp is released.

5 68. An automatic injection device according to claim 67, wherein the boot remover provides said mechanical interlock, the boot remover being located at a proximal end of the outer casing and arranged to prevent the housing from being pressed against the skin.

10 69. An automatic injection device according to claim 68, wherein the flexible element is clamped in a second position by a butterfly valve coupled to the housing and wherein the trigger comprises a release peg which is arranged such that, when the trigger is displaced, the release peg engages with the butterfly valve to open the valve and unclamp the flexible element from the second clamp.

15 70. An automatic injection device according to claim 69, wherein the trigger is coupled to the outer casing, the device being further arranged such that, when the housing is in the first position, the butterfly valve is held in a position which is inaccessible to the release peg when the trigger is pressed and, when the housing is in 20 the second position, the butterfly valve is accessible to the release peg when the trigger is pressed.

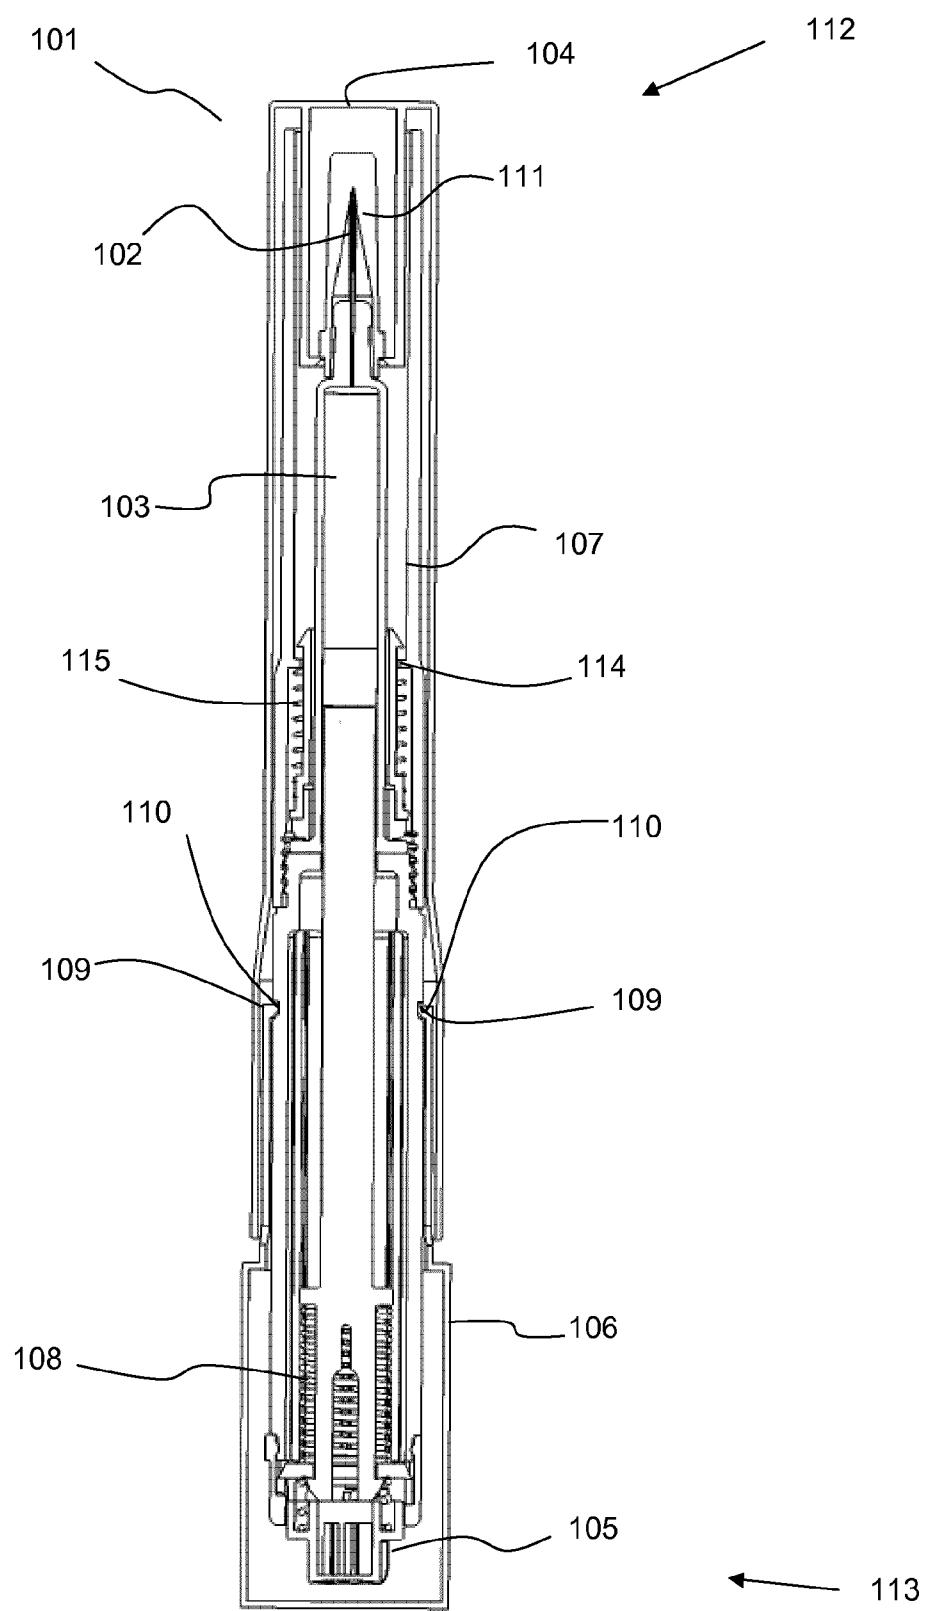


Figure 1

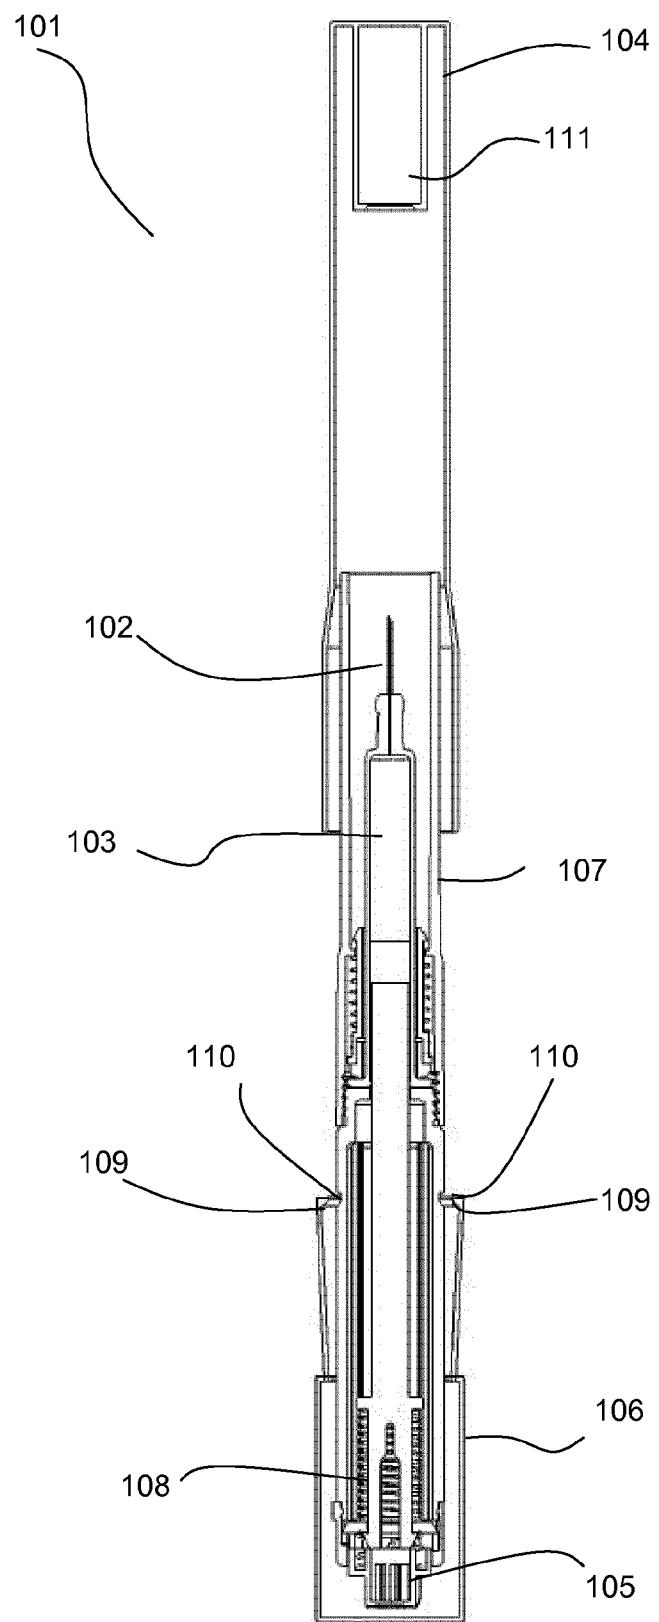


Figure 2

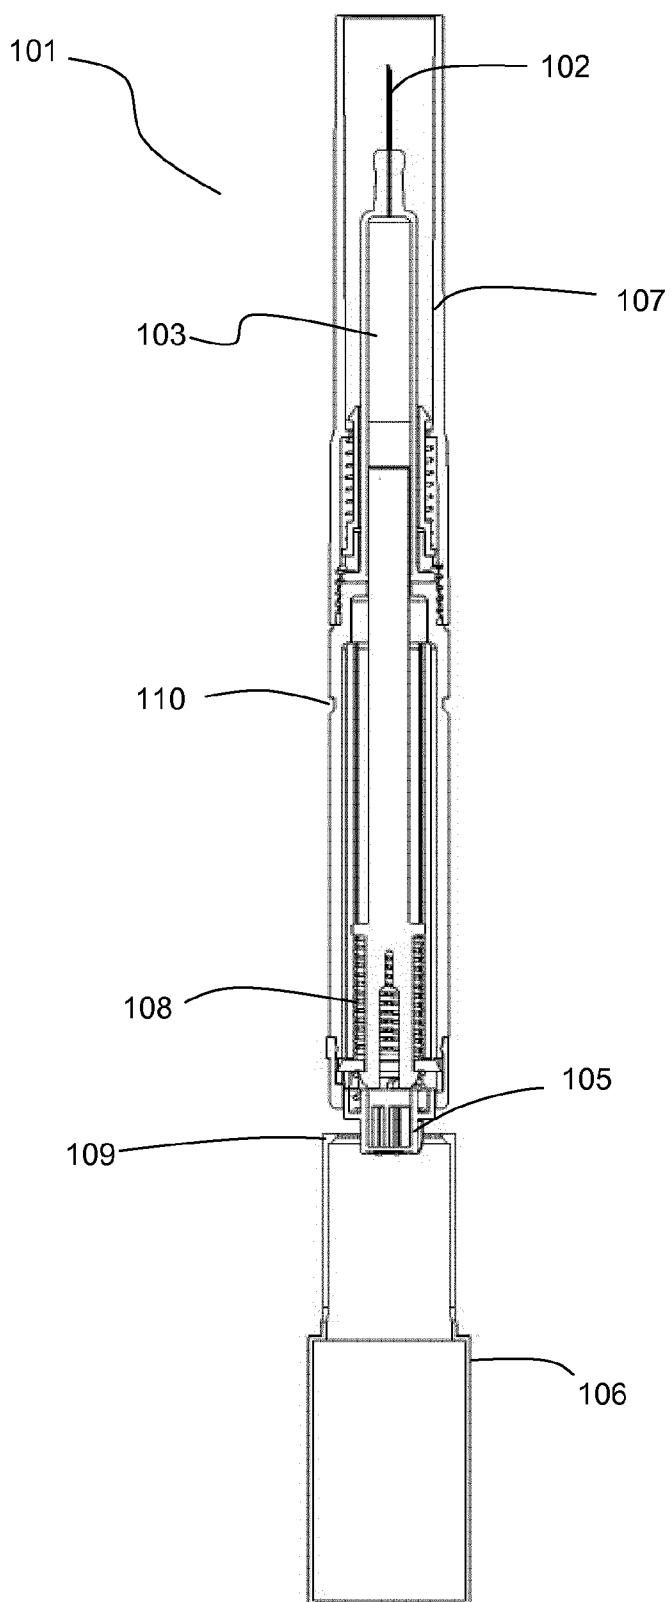


Figure 3

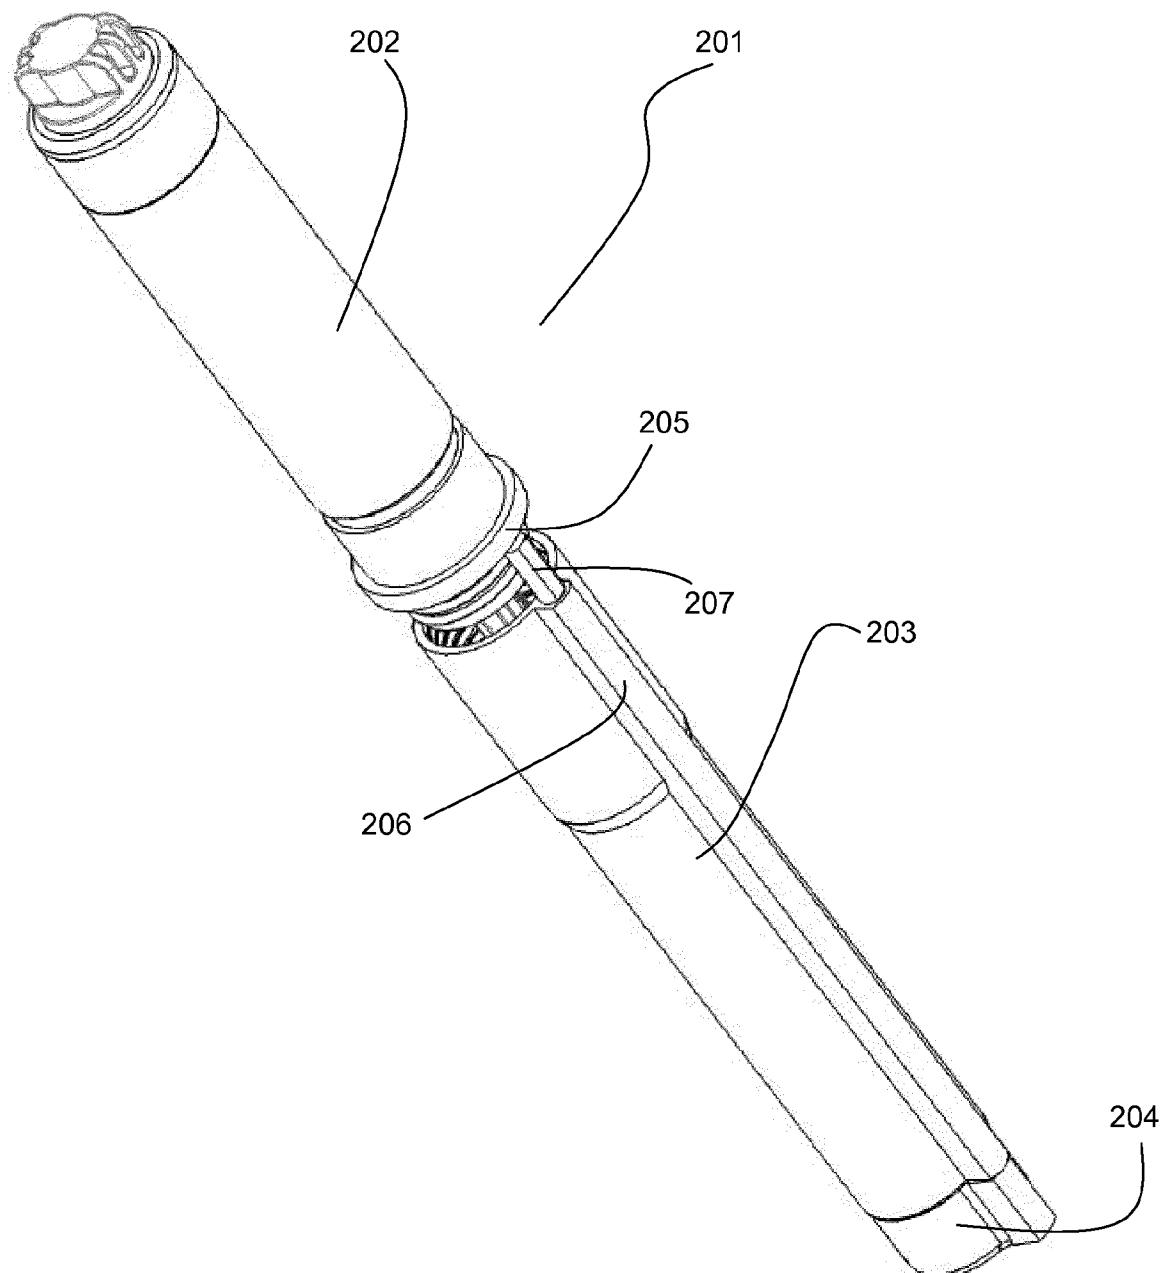


Figure 4

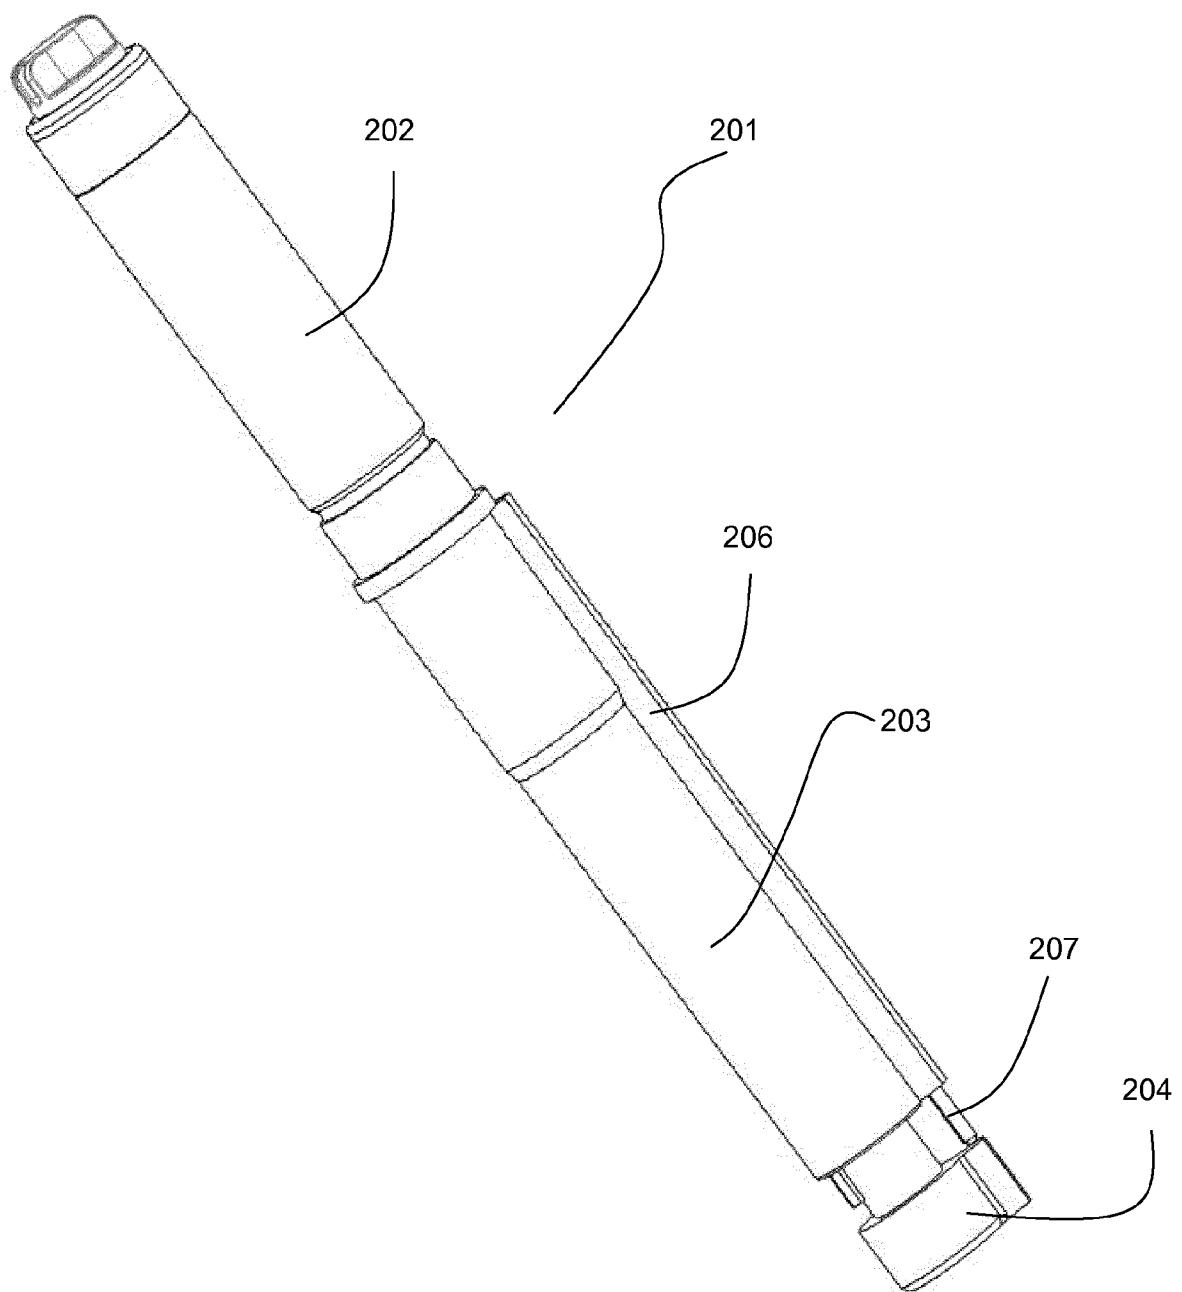


Figure 5

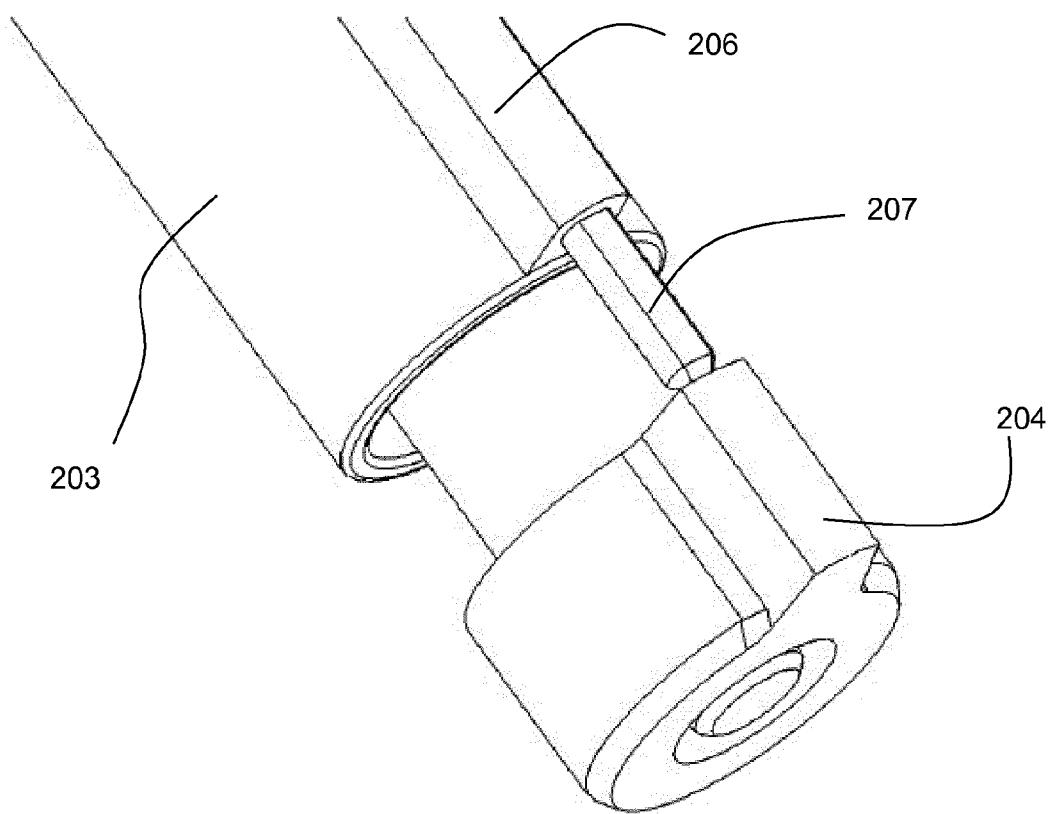


Figure 6

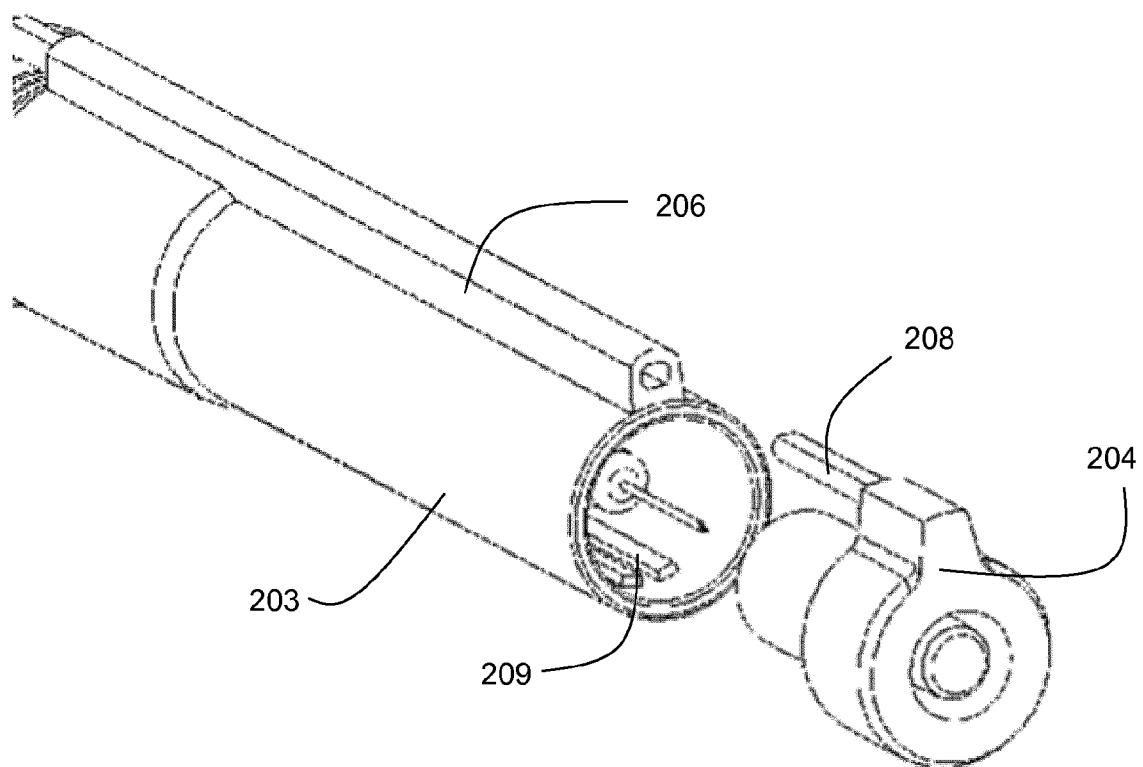


Figure 7

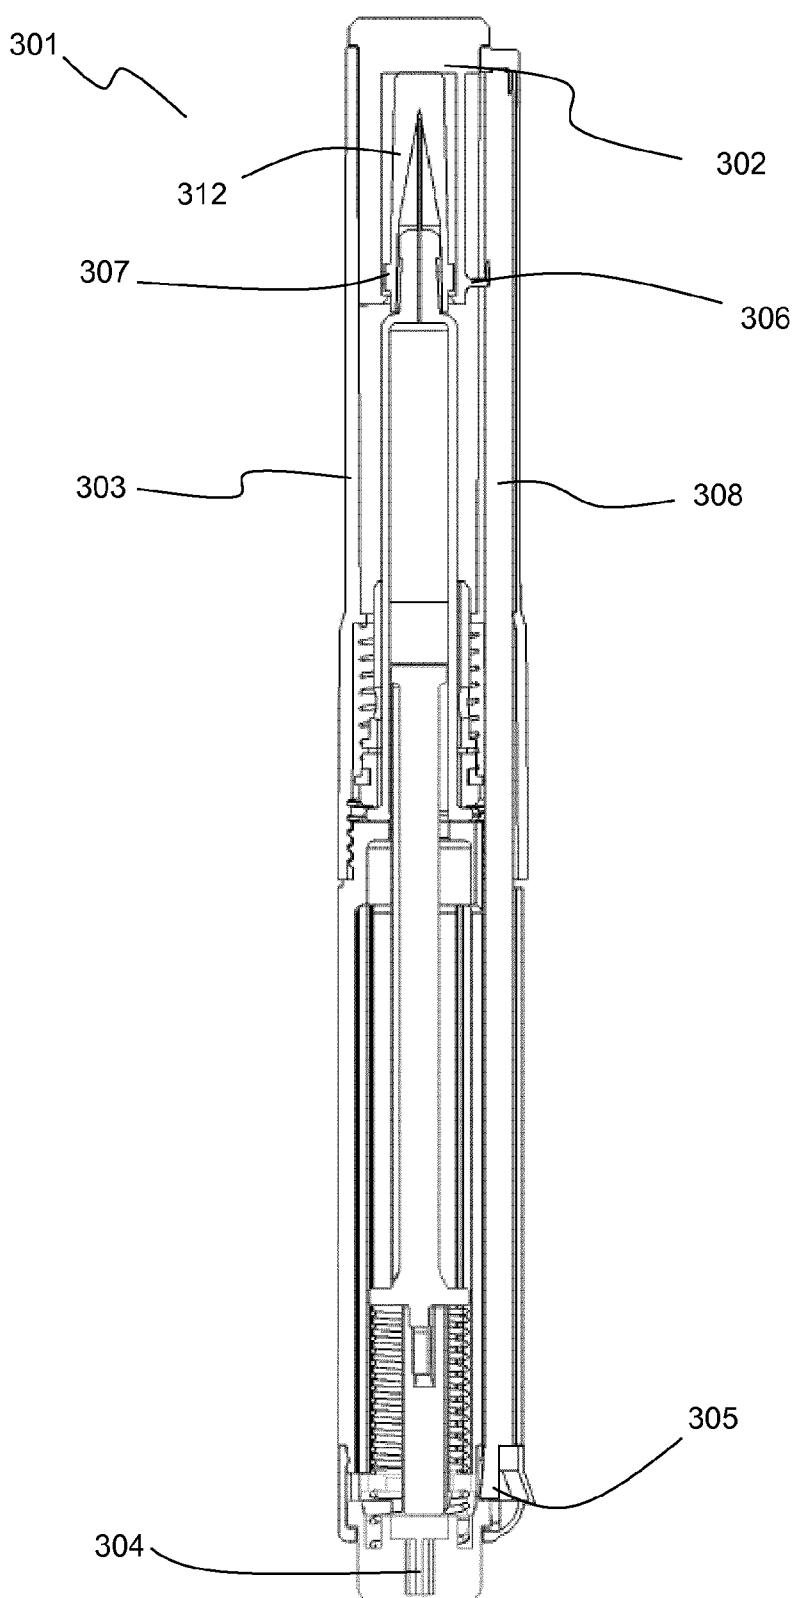


Figure 8

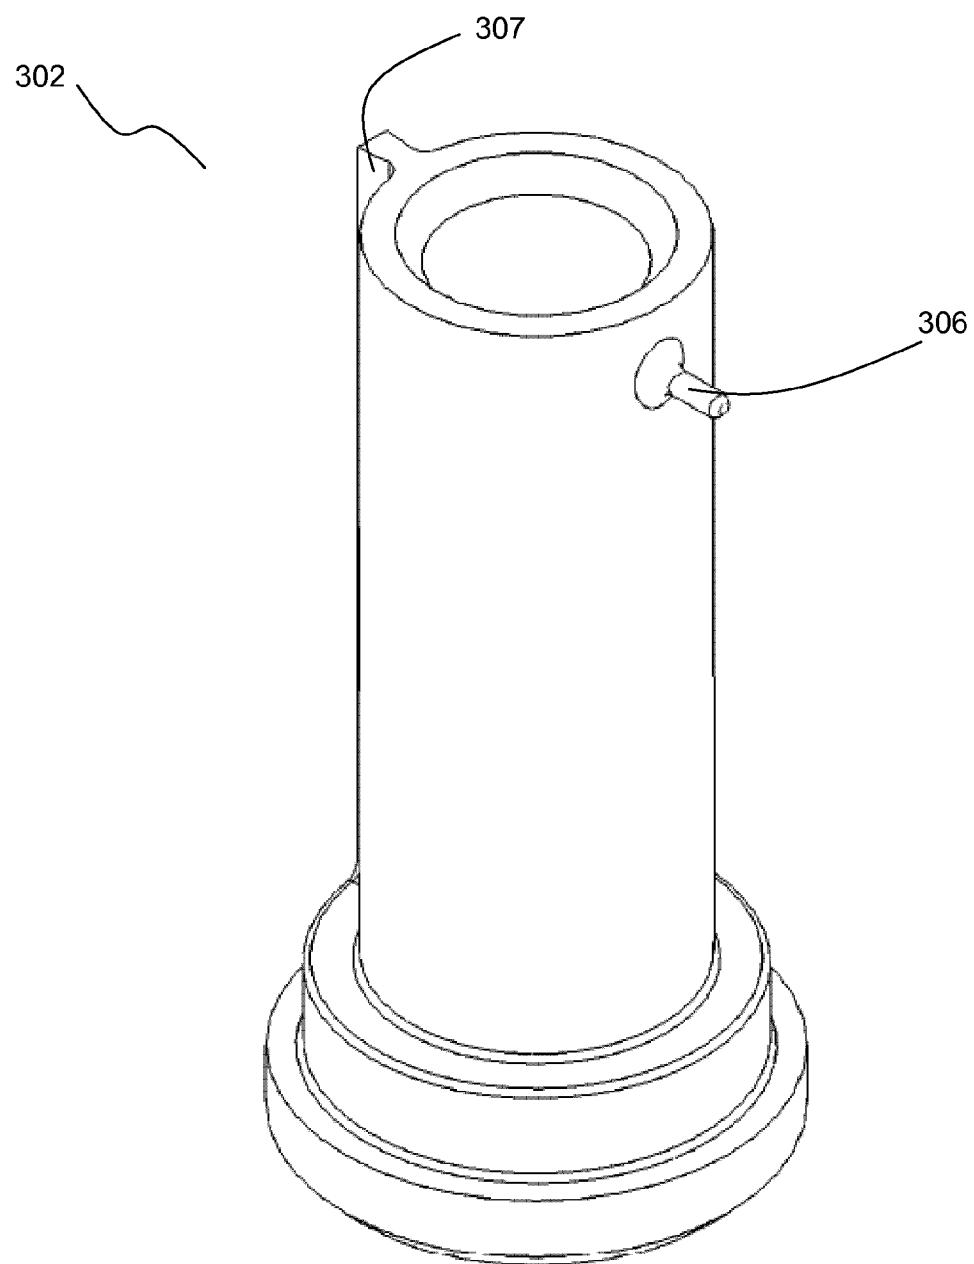


Figure 9

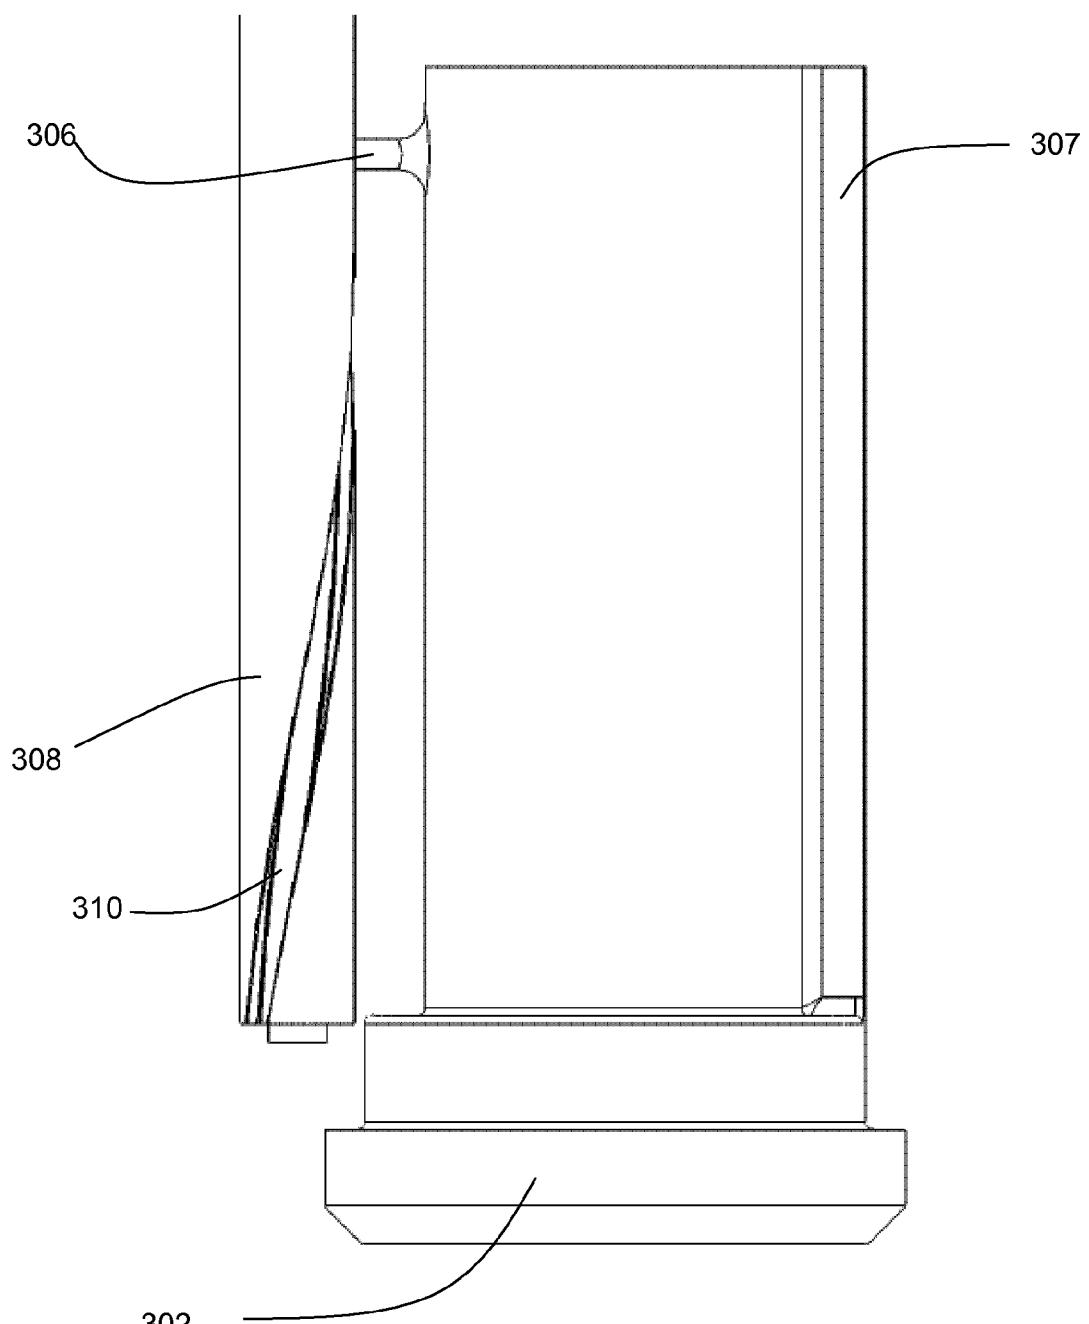


Figure 10

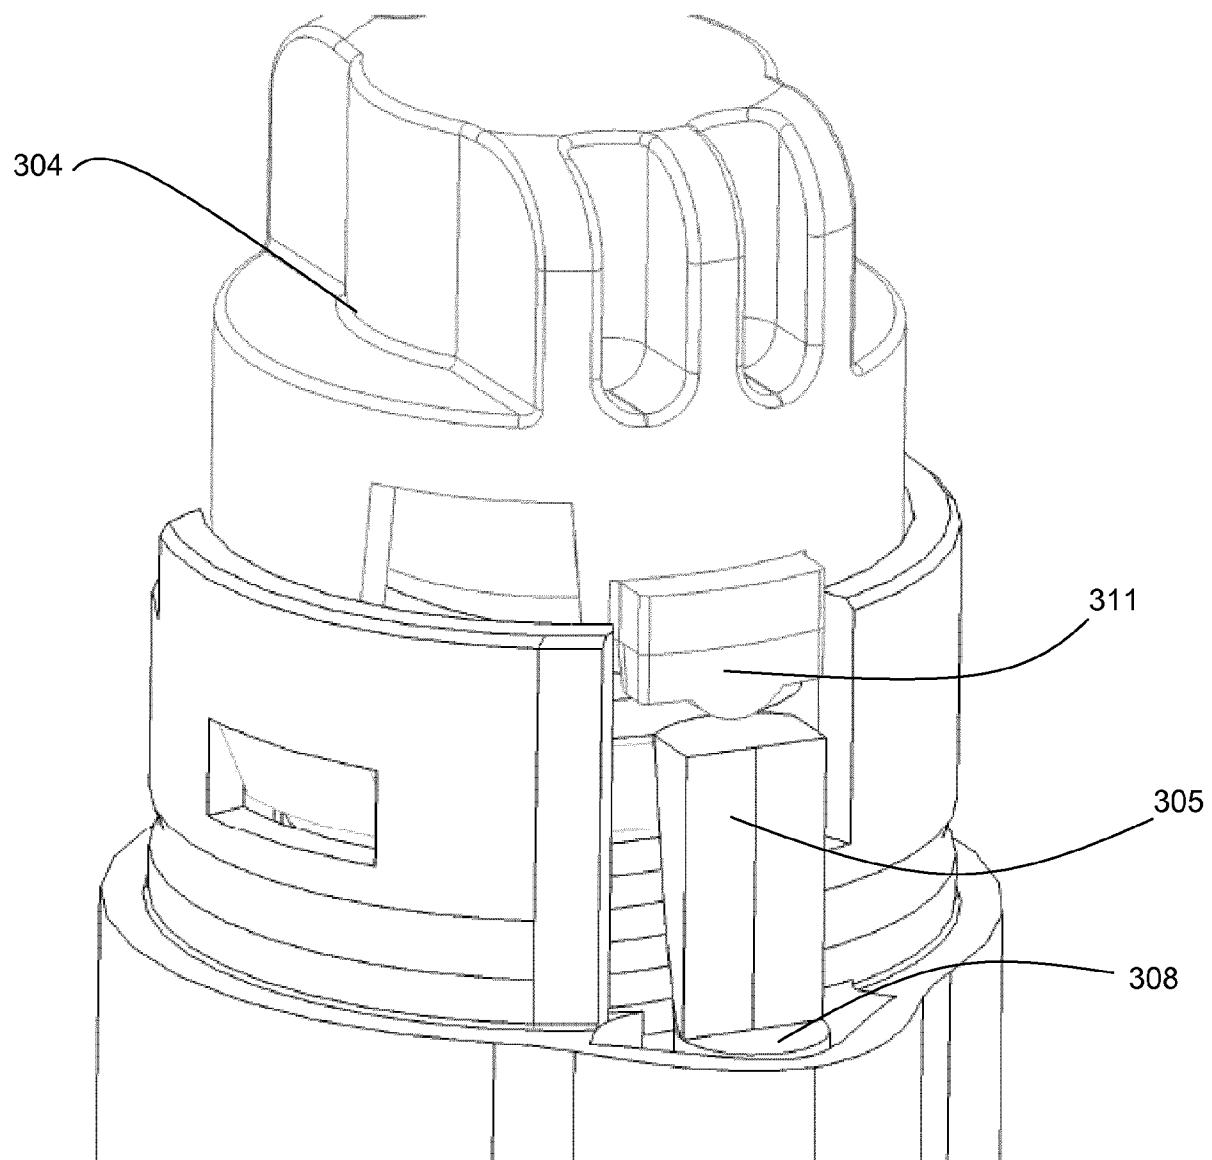


Figure 11

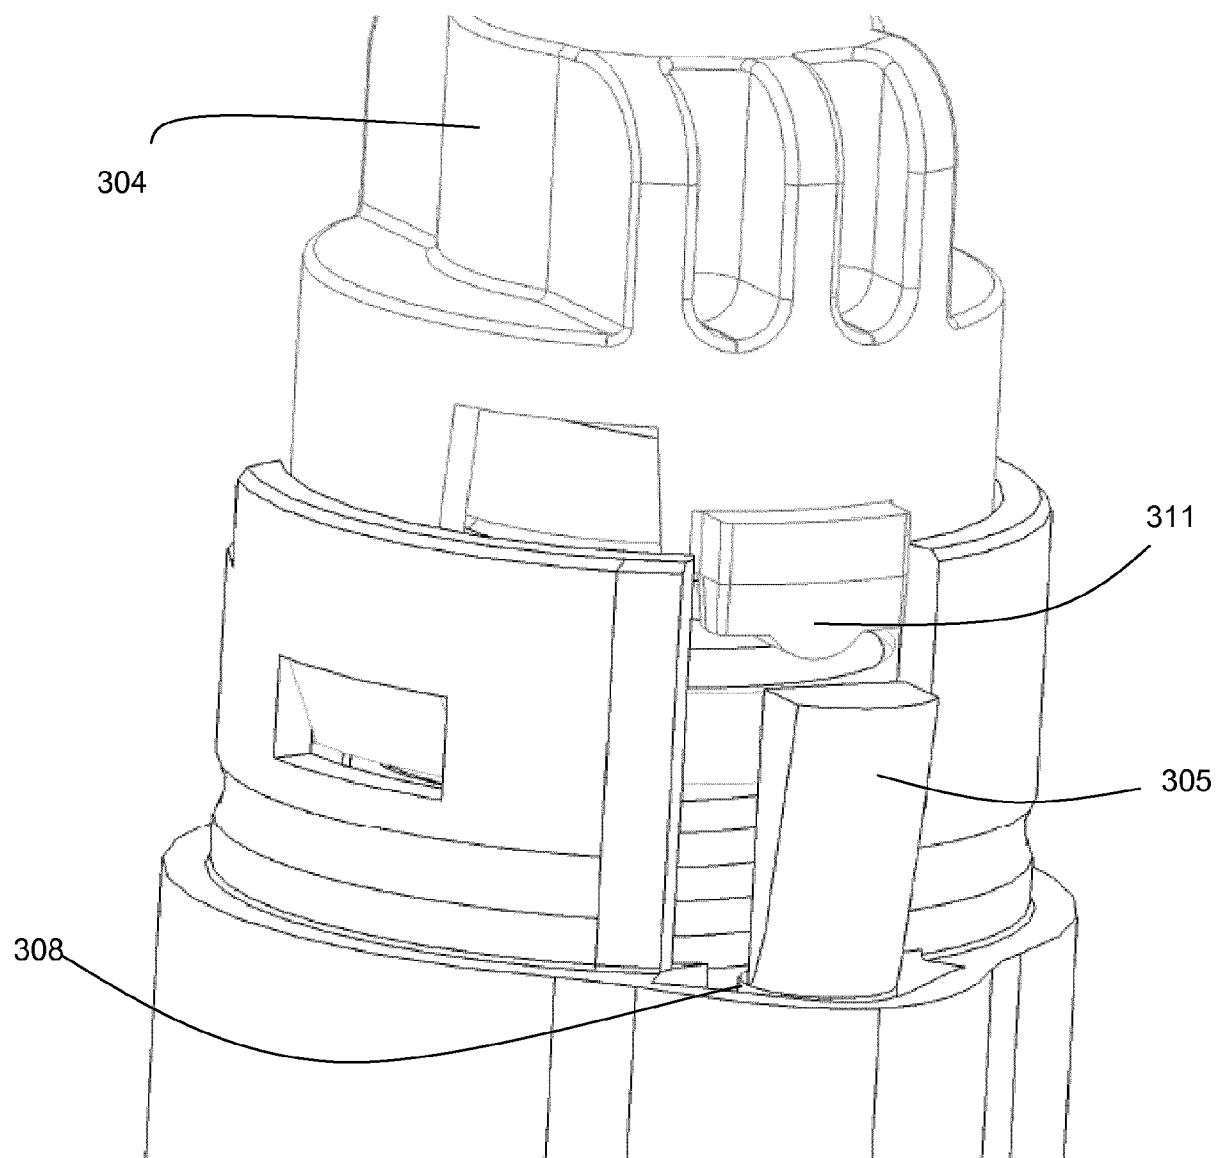


Figure 12

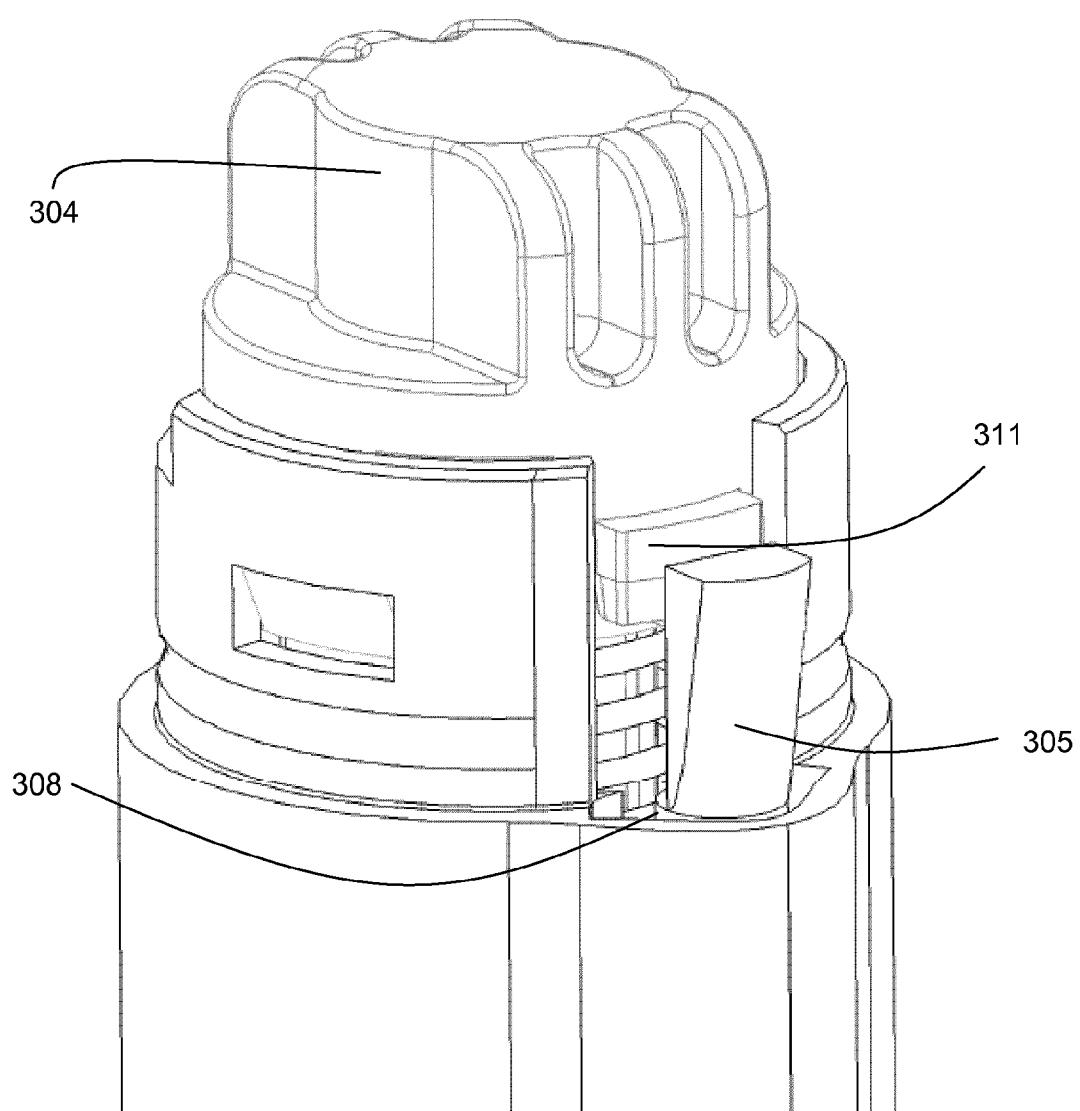


Figure 13

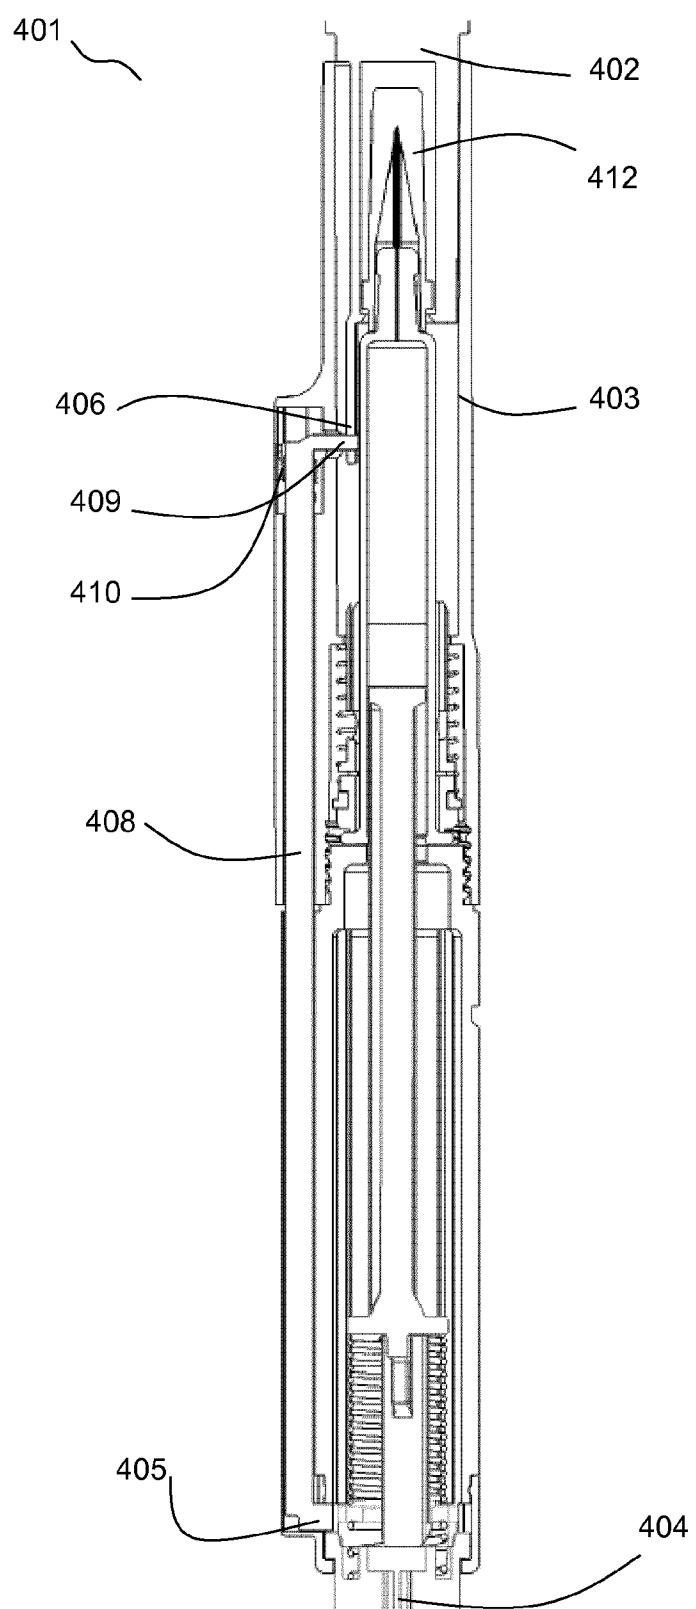


Figure 14

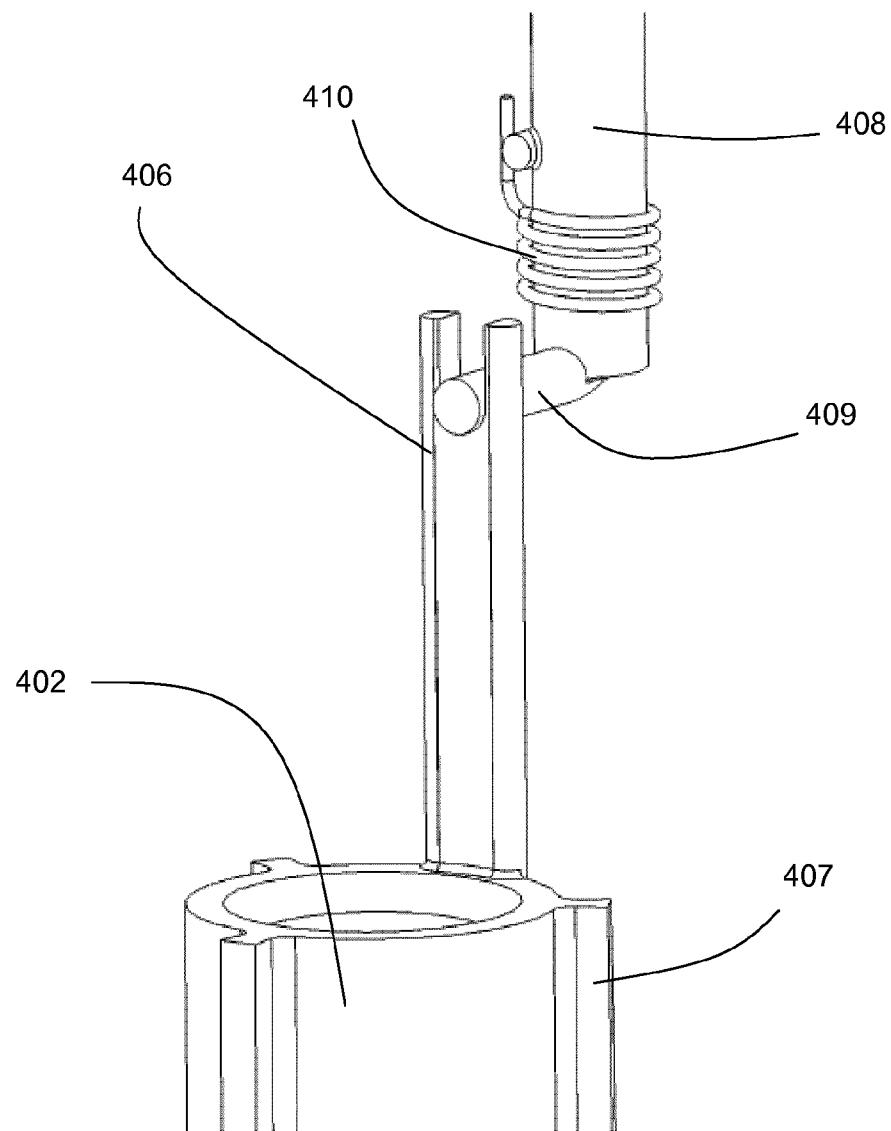


Figure 15

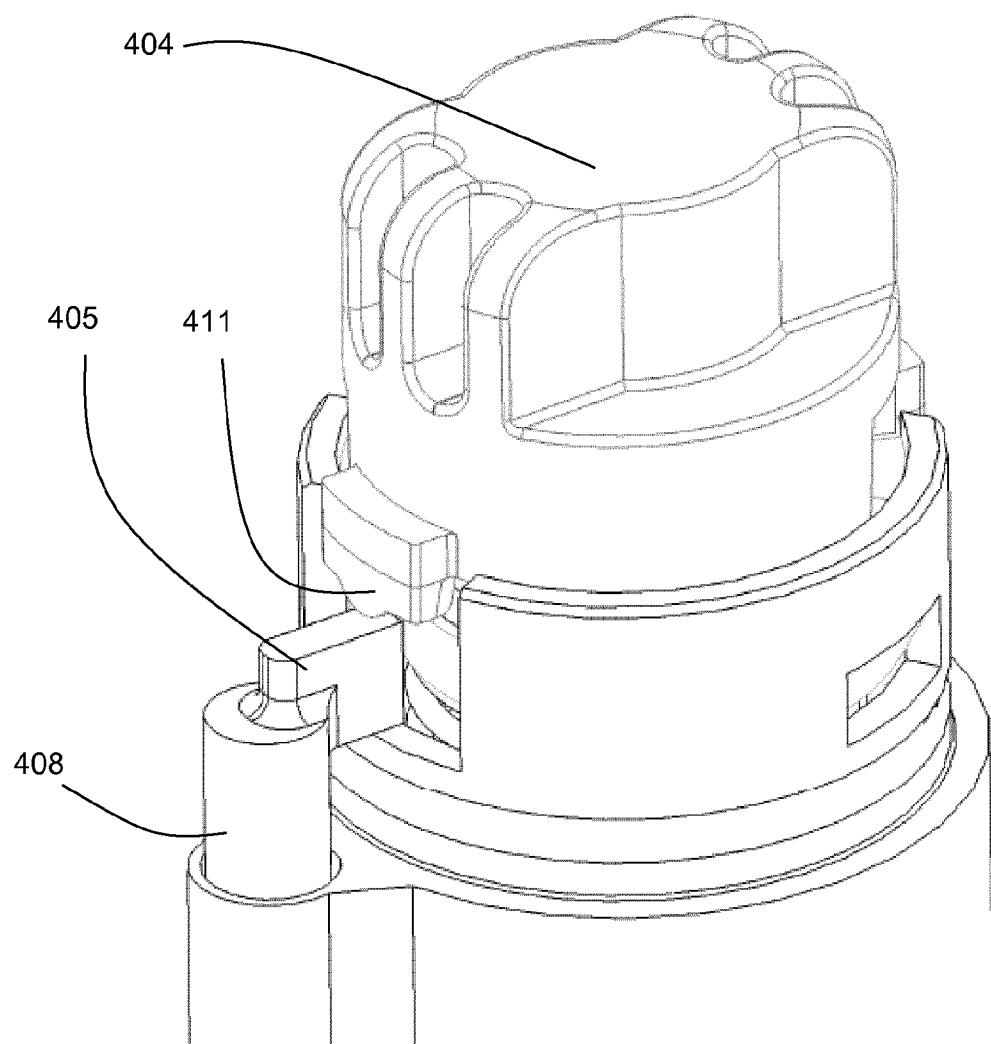


Figure 16

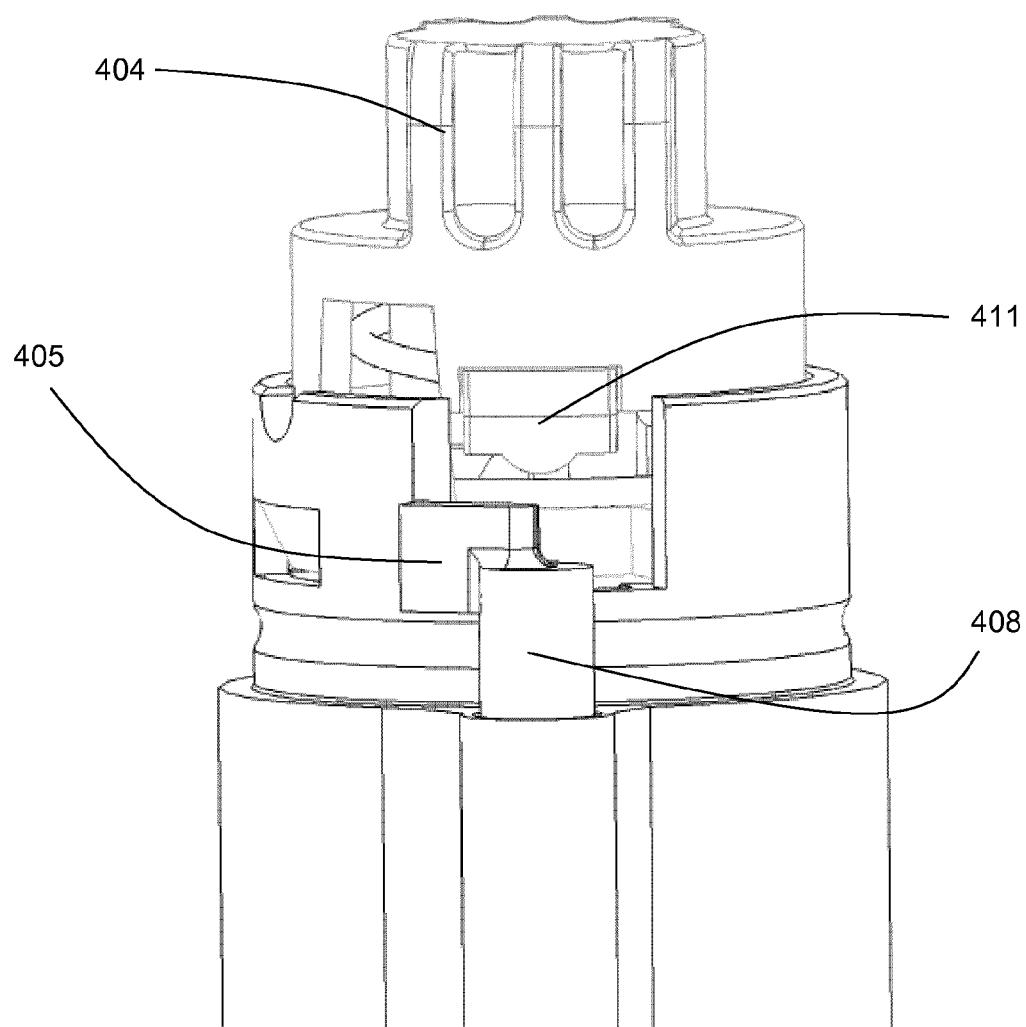


Figure 17

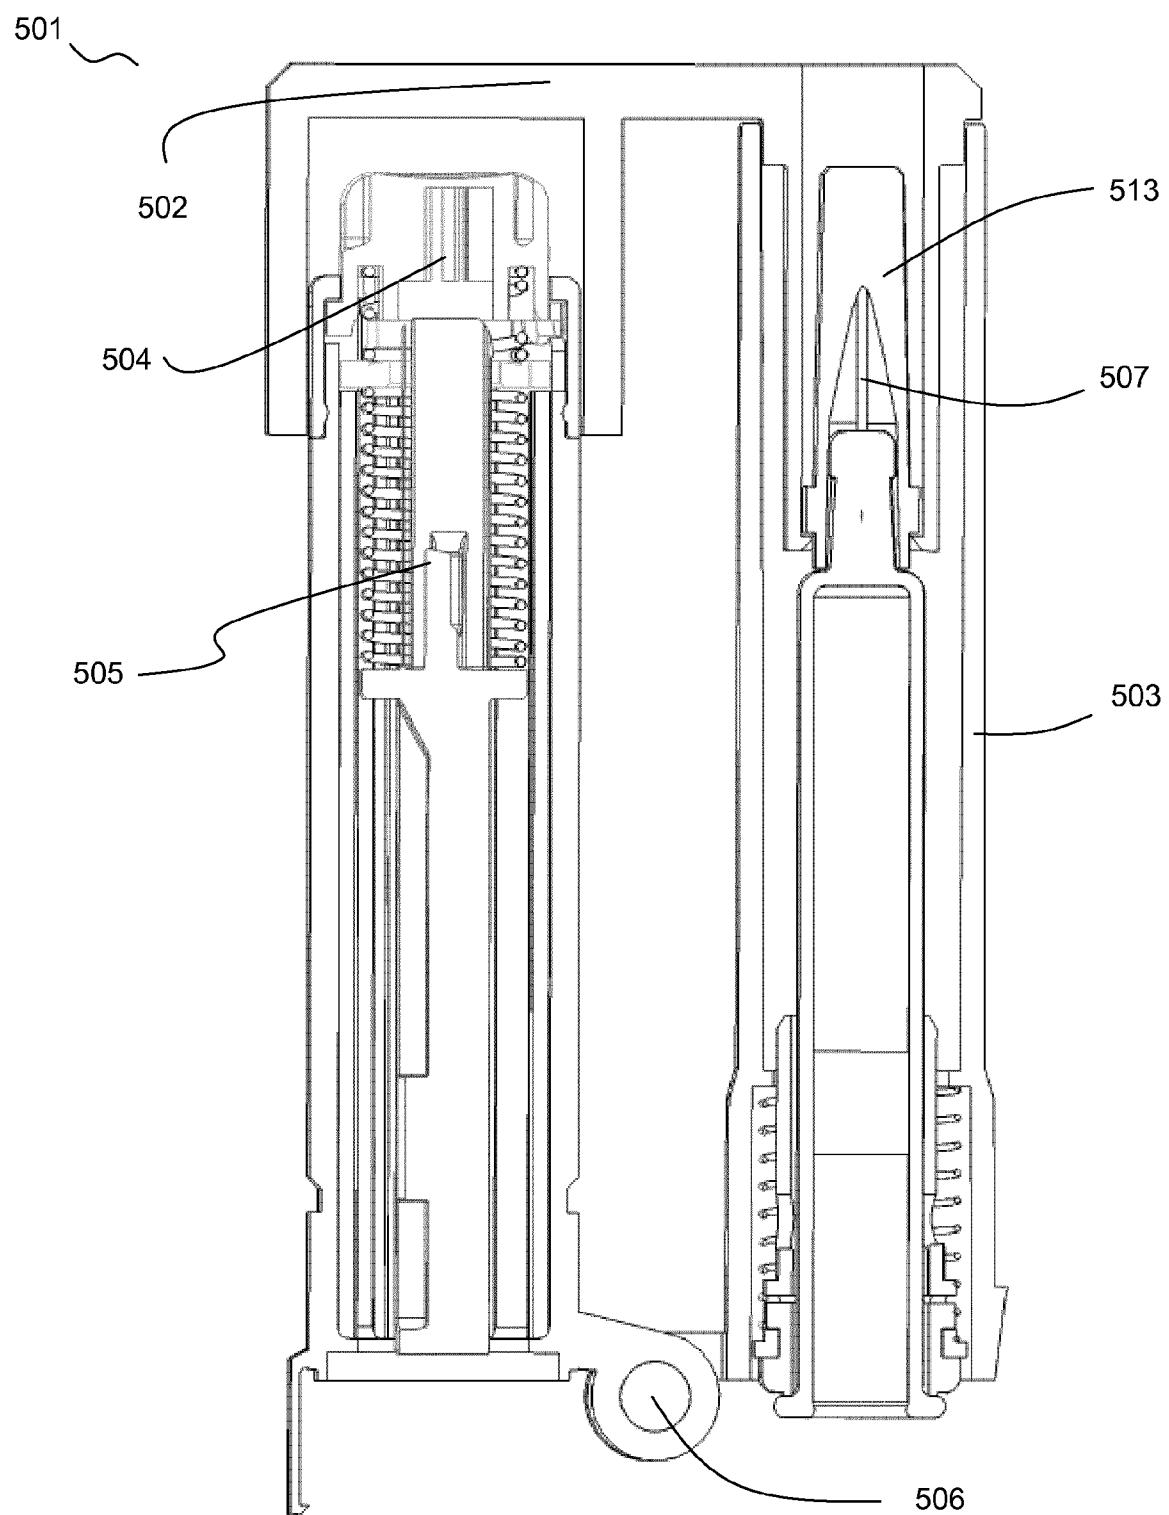


Figure 18

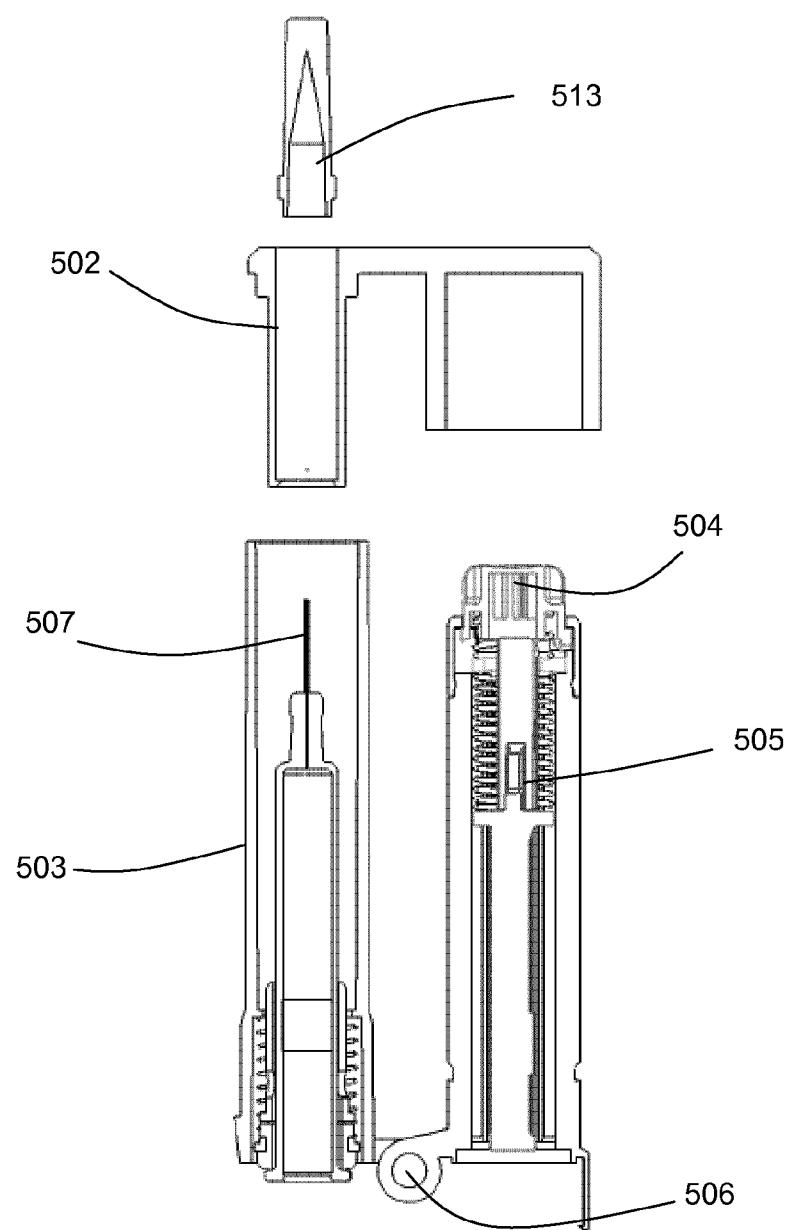


Figure 19

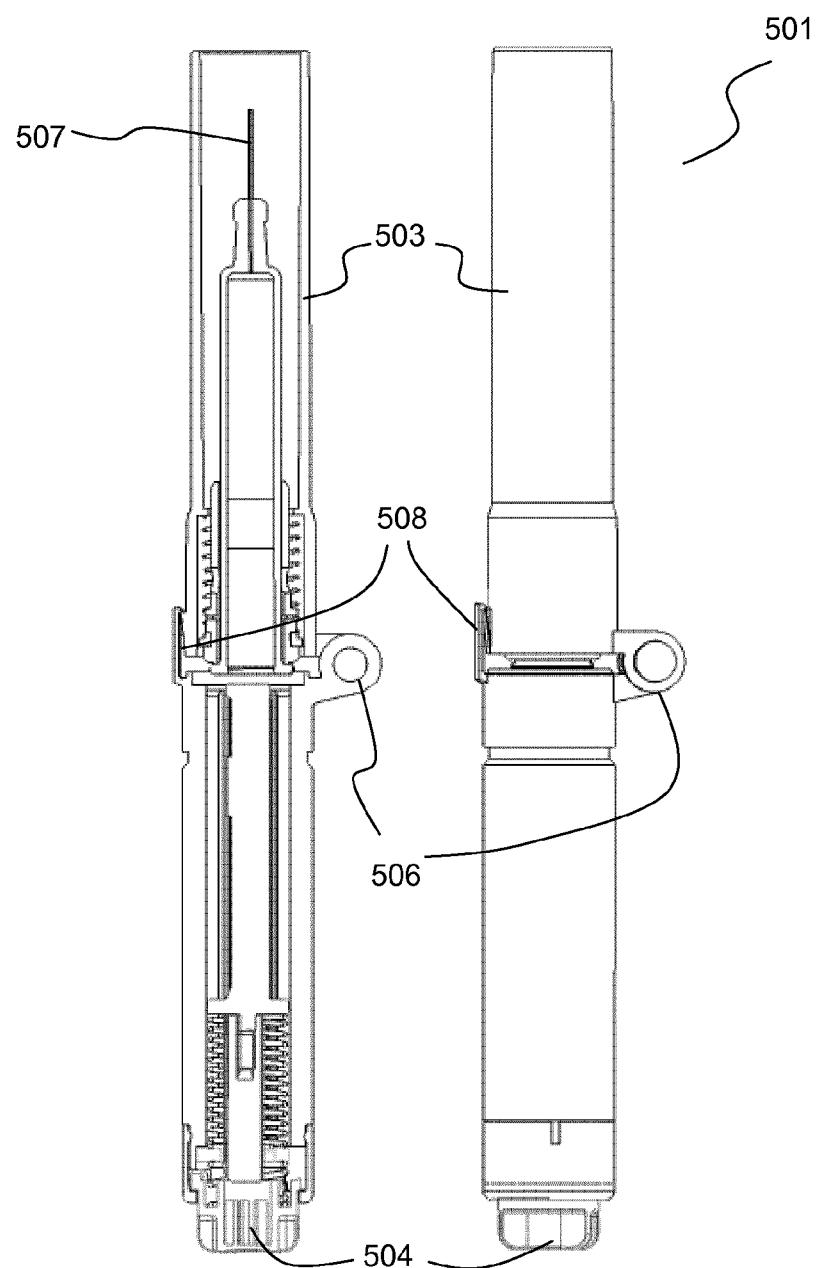


Figure 20

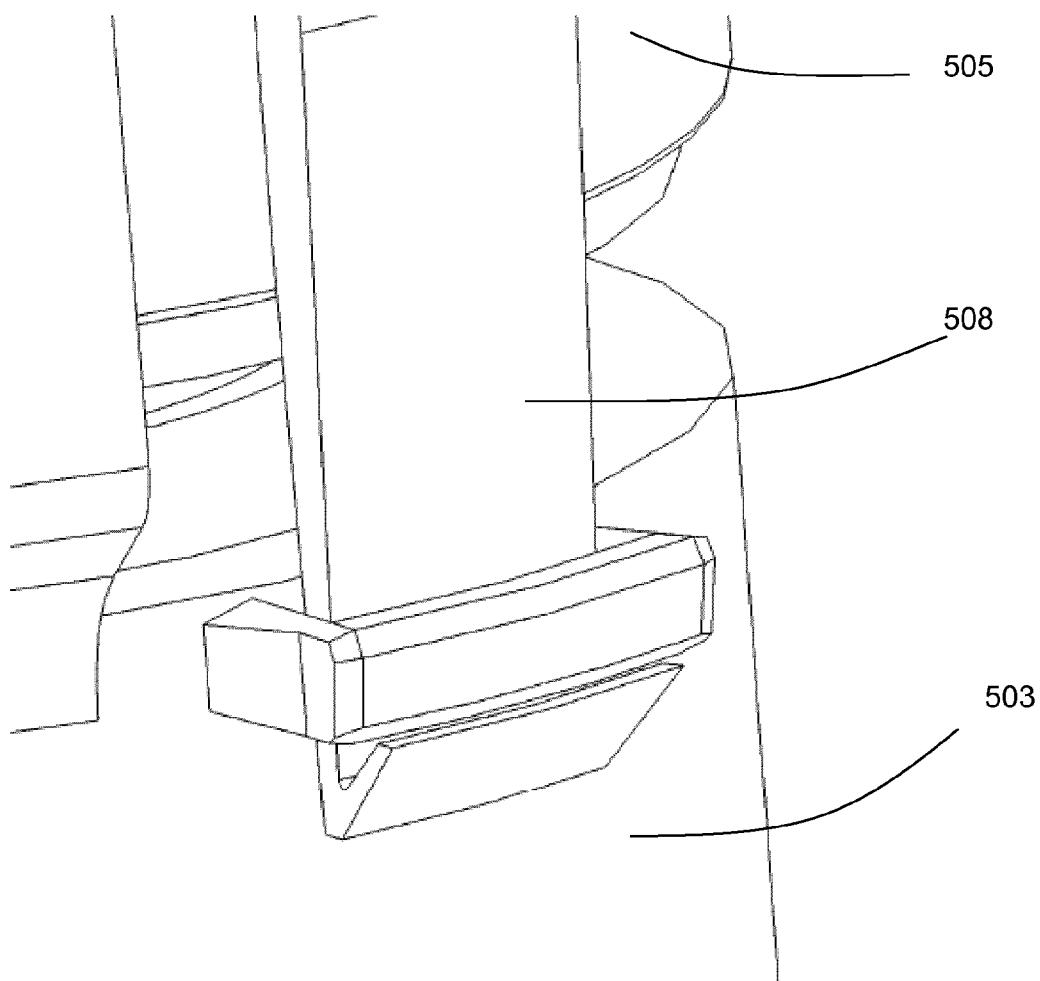


Figure 21

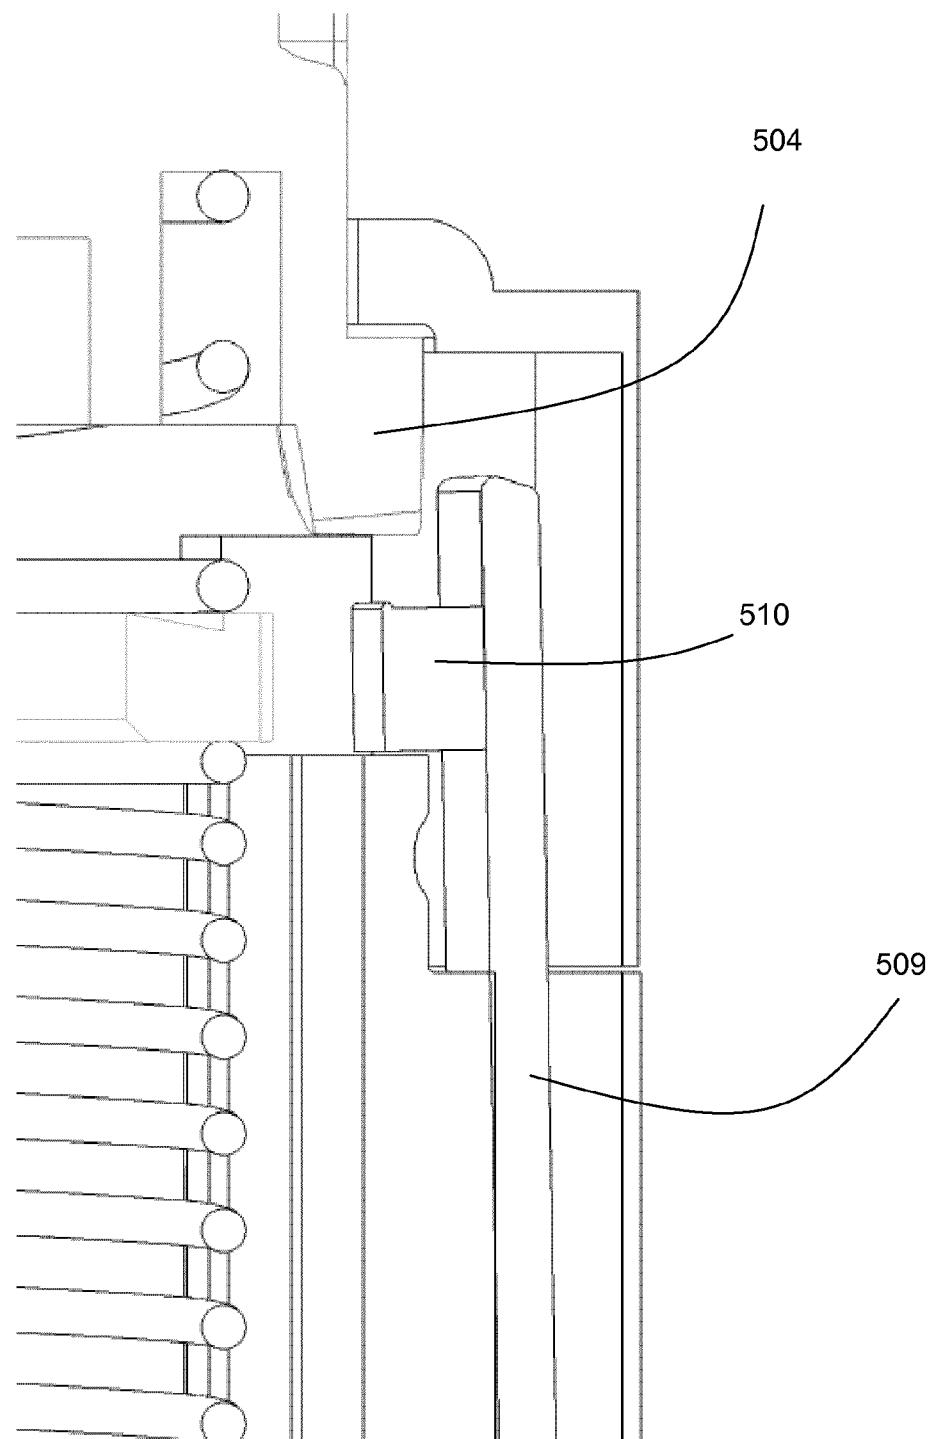


Figure 22

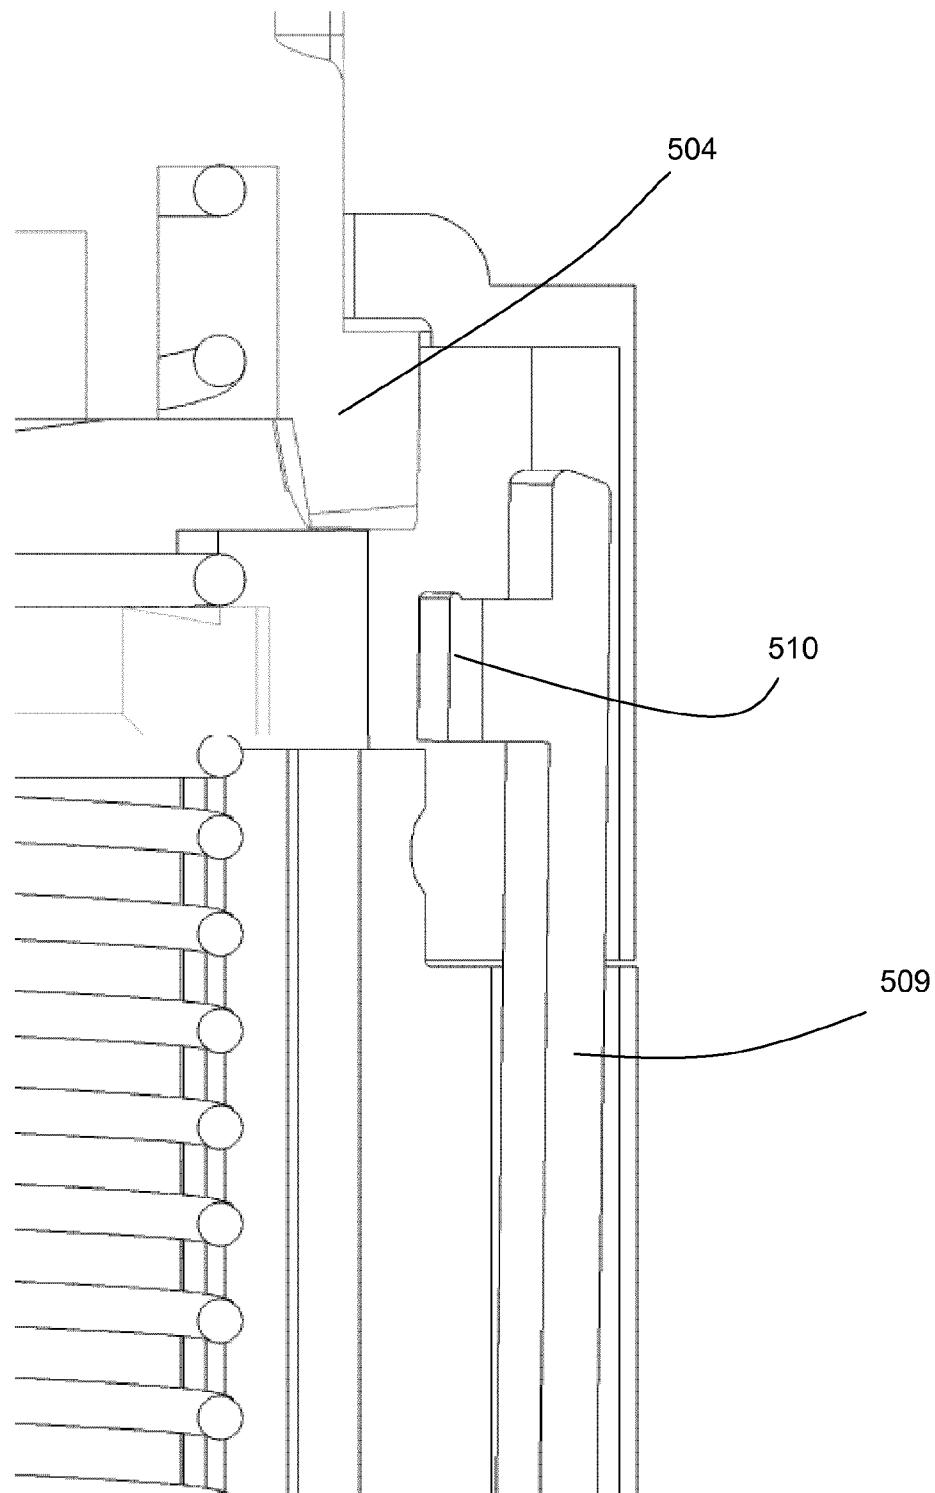


Figure 23

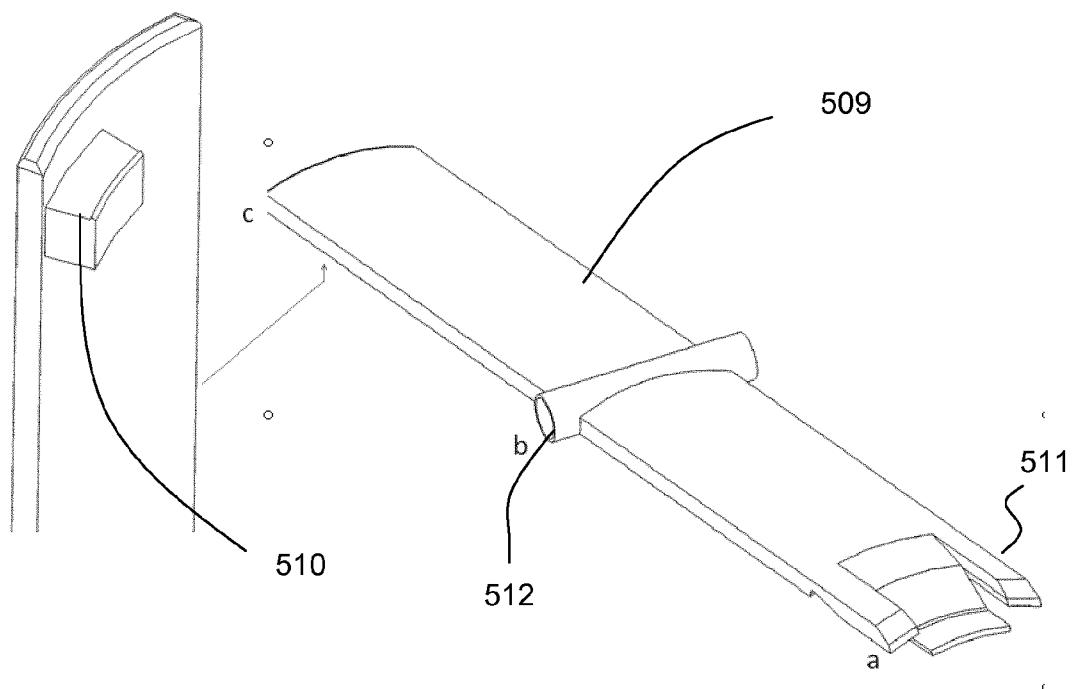


Figure 24

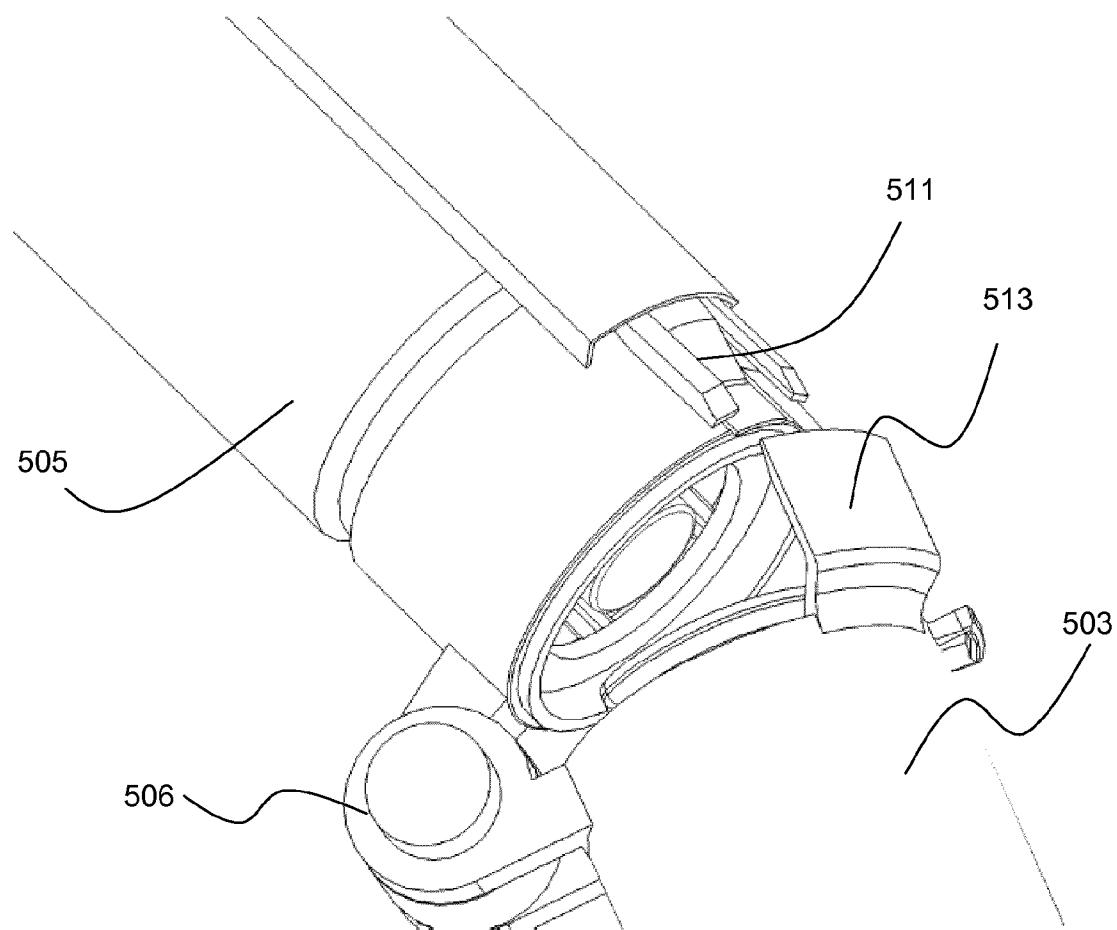


Figure 25

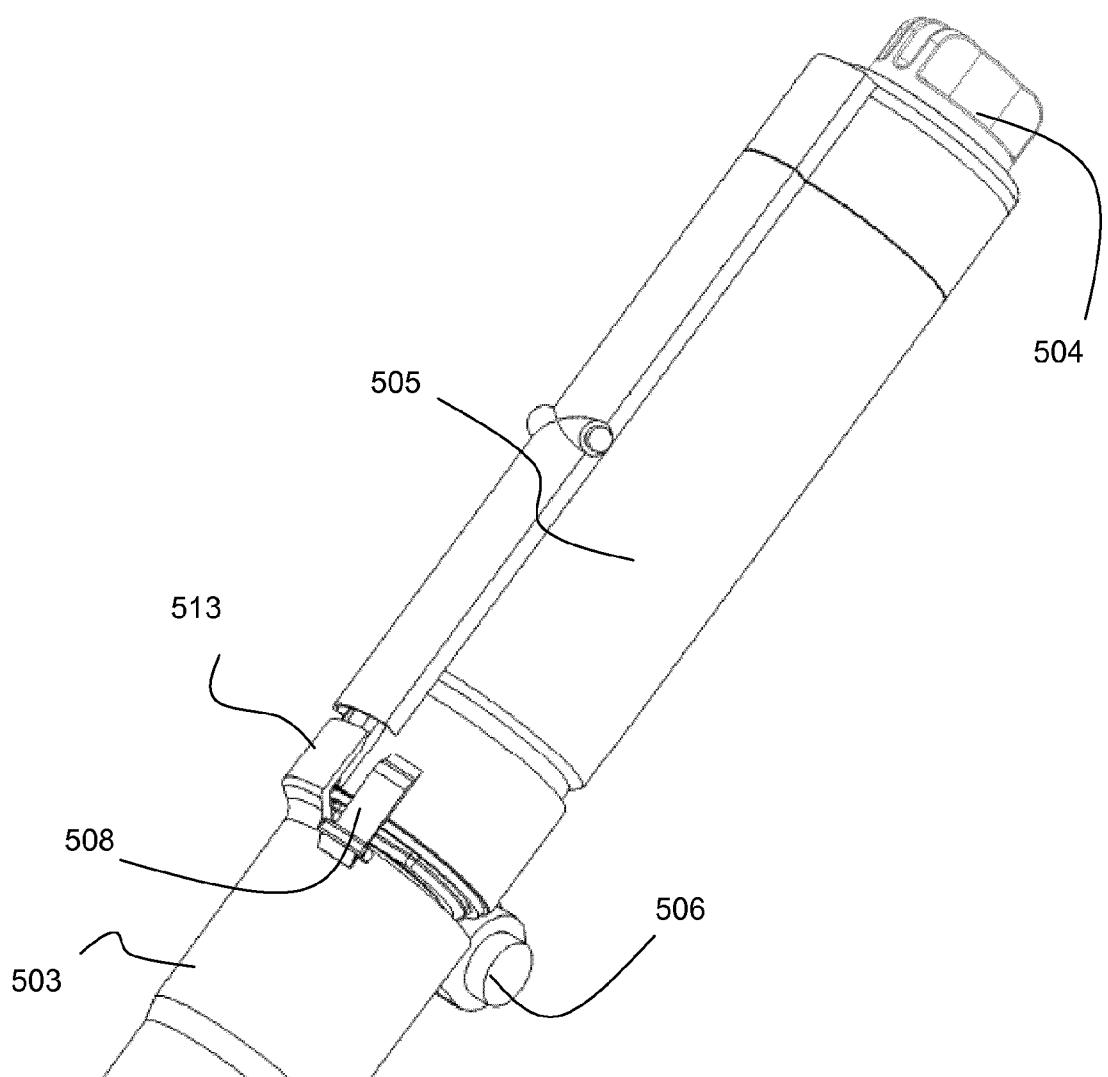
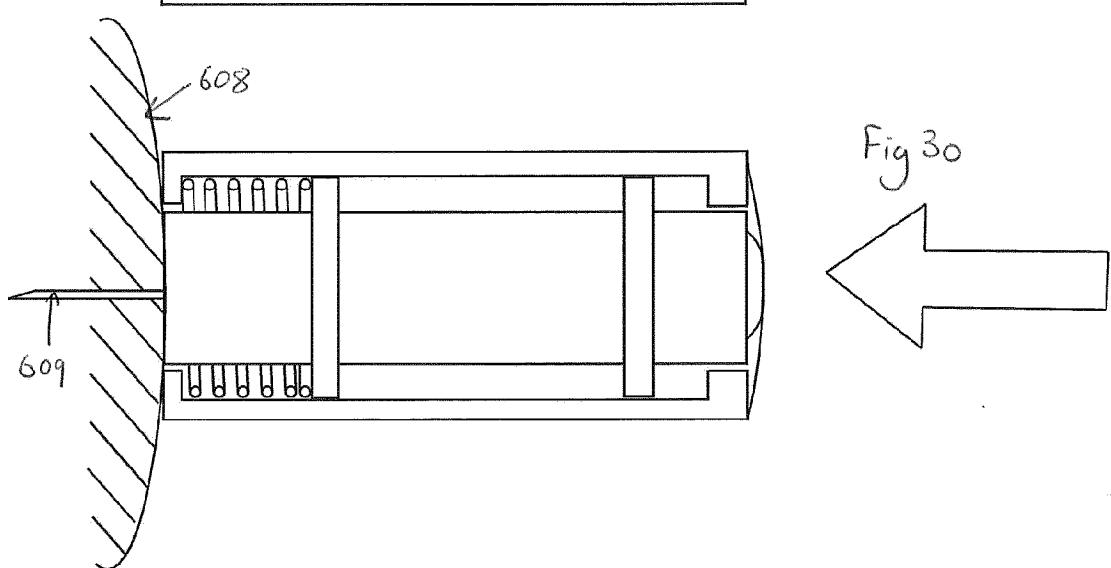
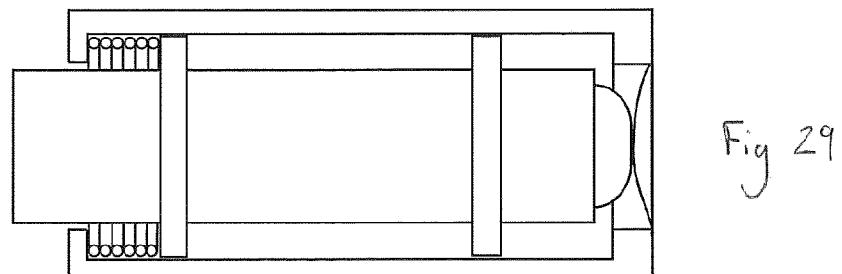
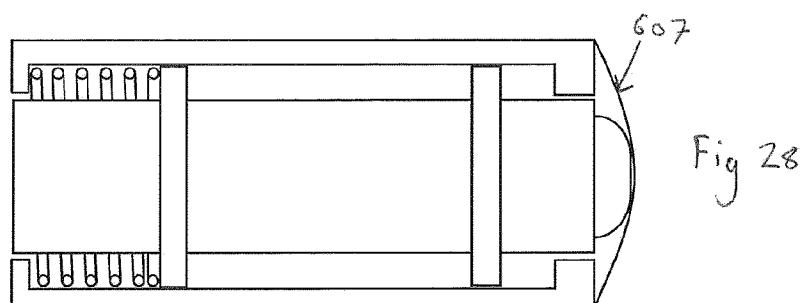
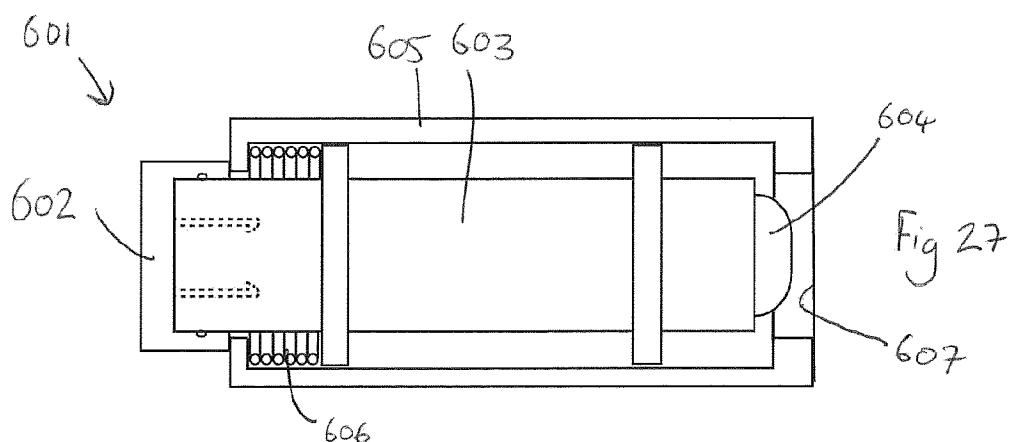


Figure 26



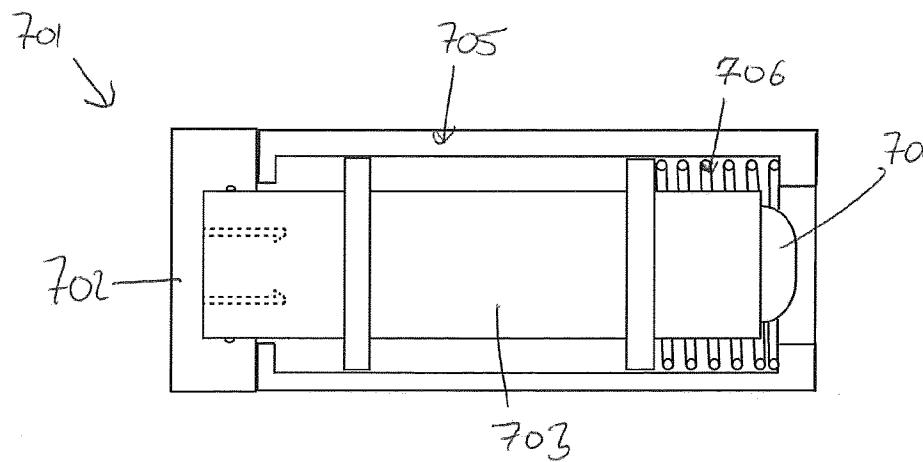


Fig 31

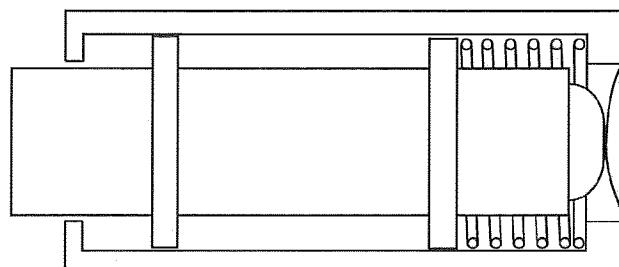


Fig 32

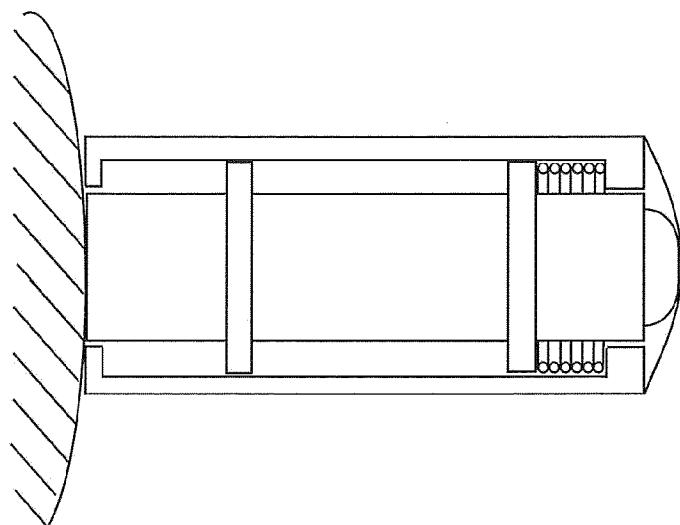


Fig 33

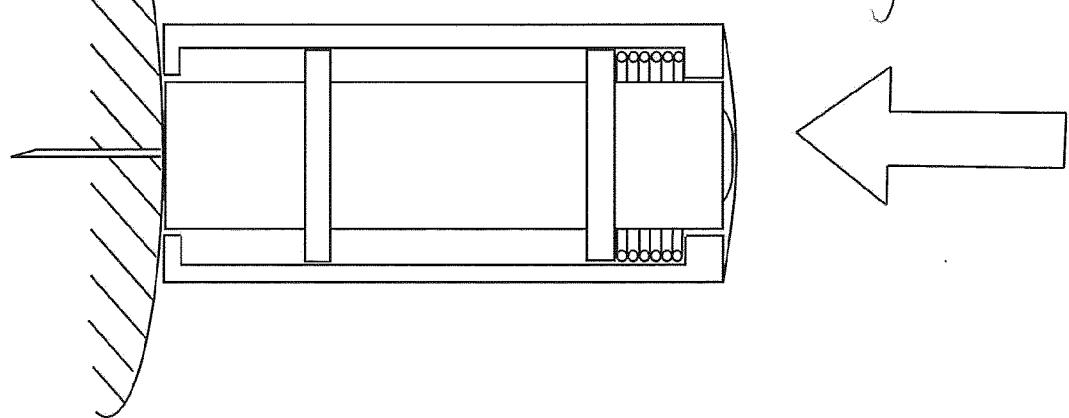


Fig 34

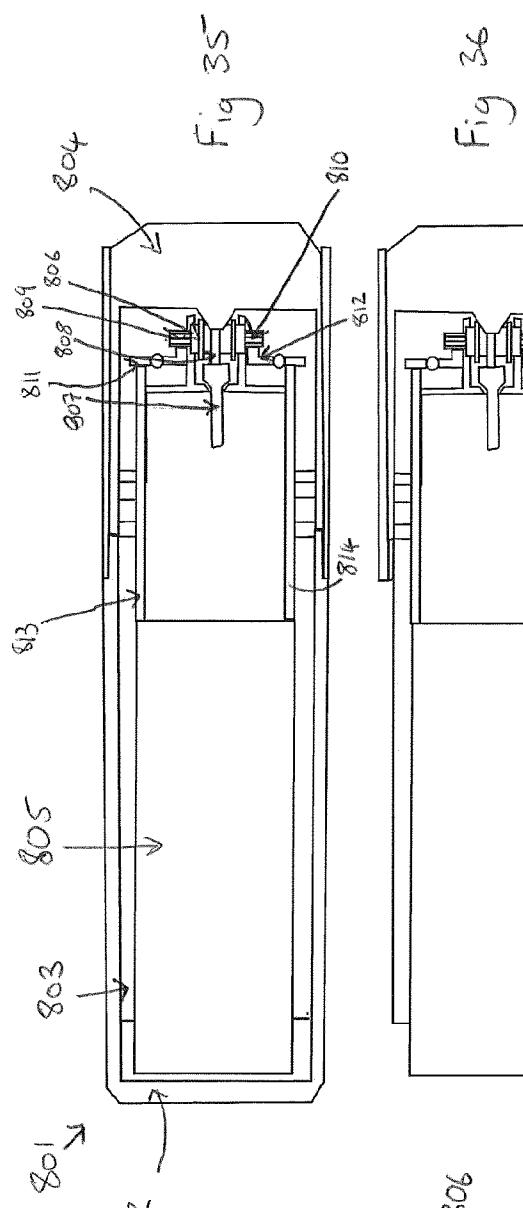


Fig 36

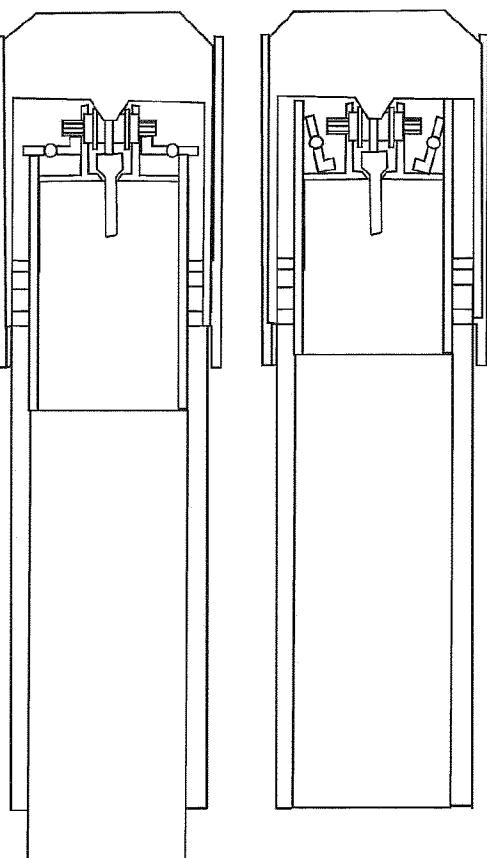


Fig 37

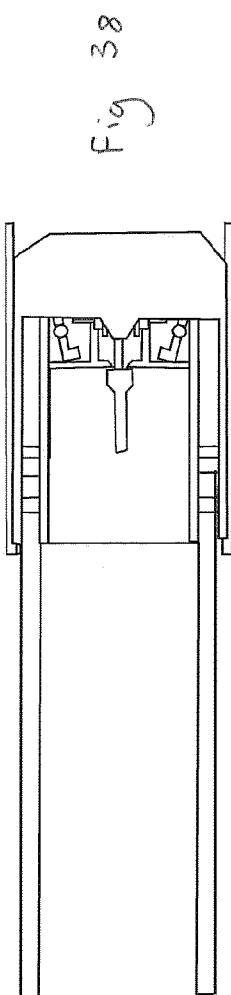
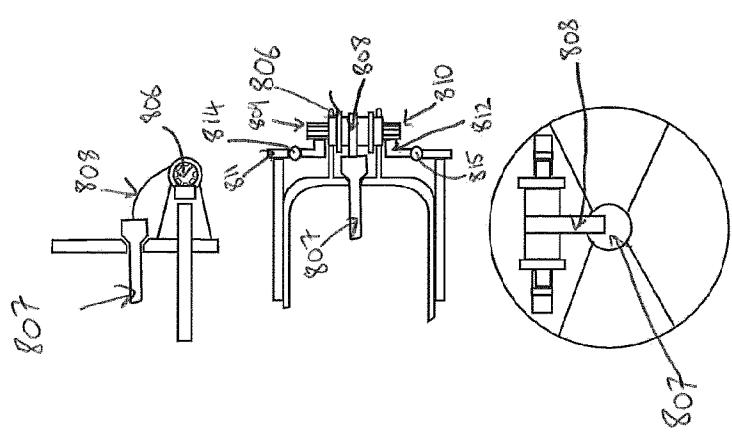


Fig 38



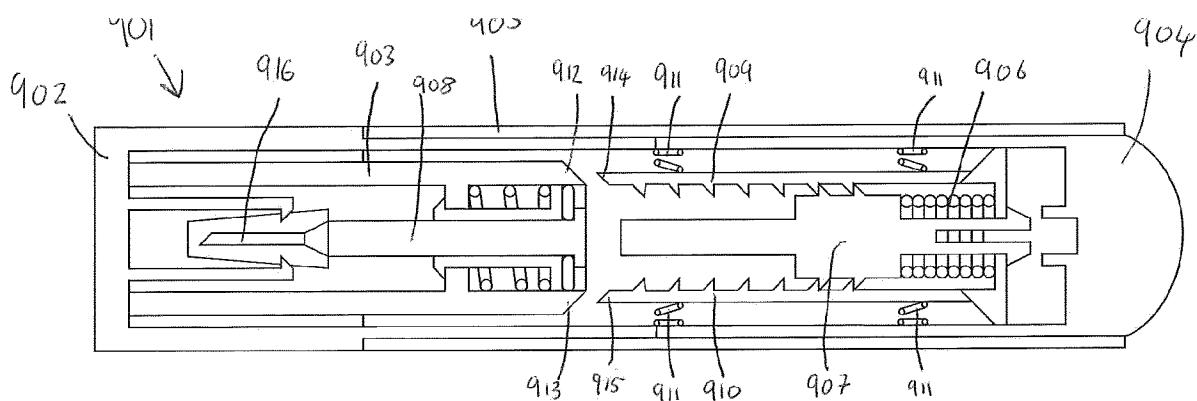


Fig. 40

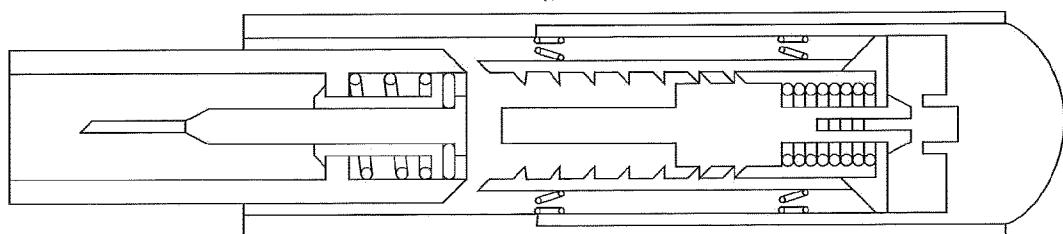


Fig. 41

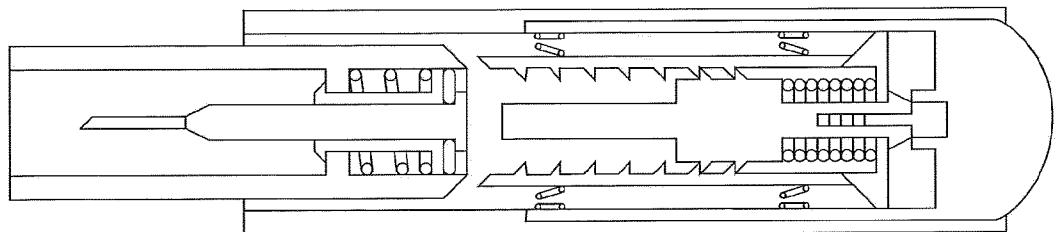


Fig. 4

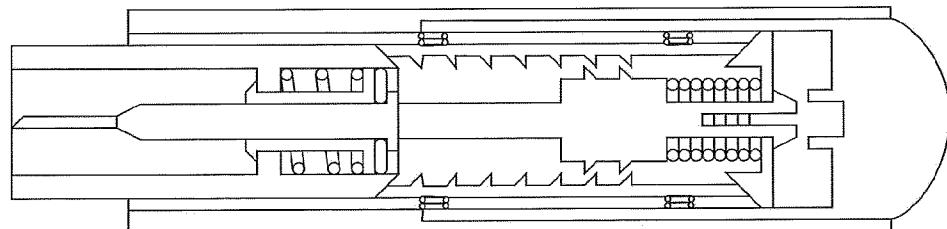


Fig. 43

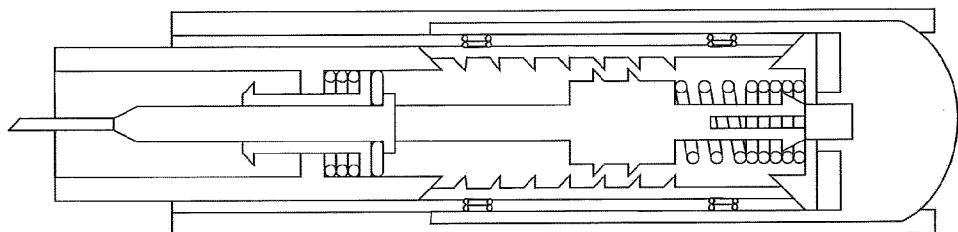


Fig. 44

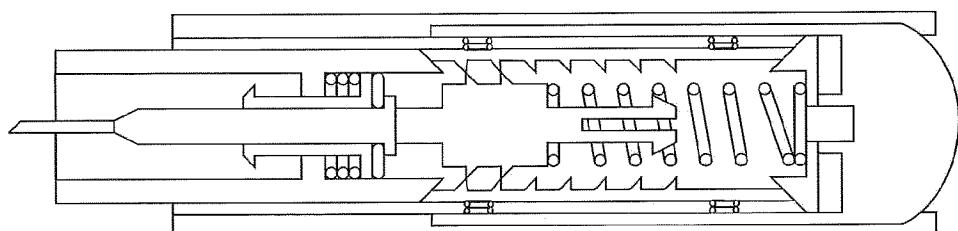


Fig. 45

Fig 50

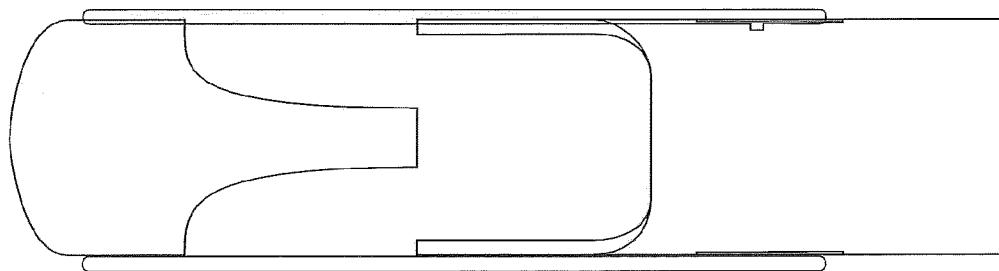


Fig 49

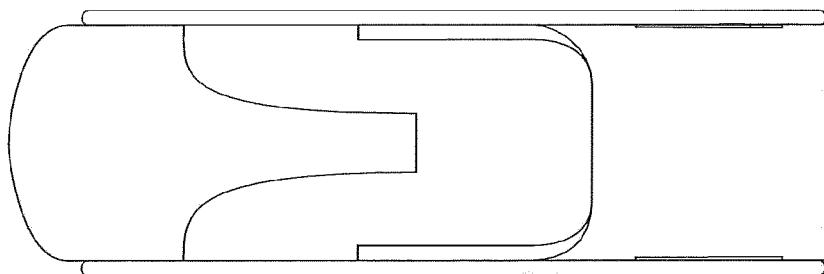


Fig 48

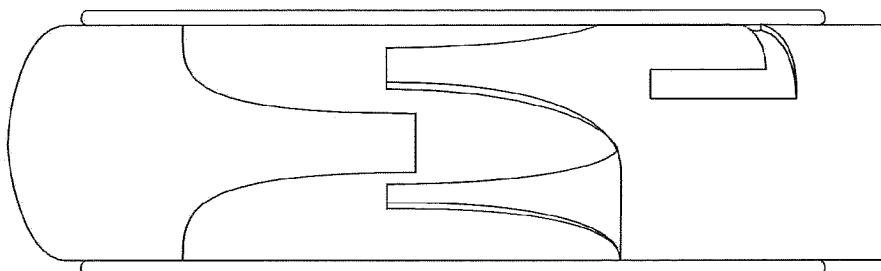


Fig 47

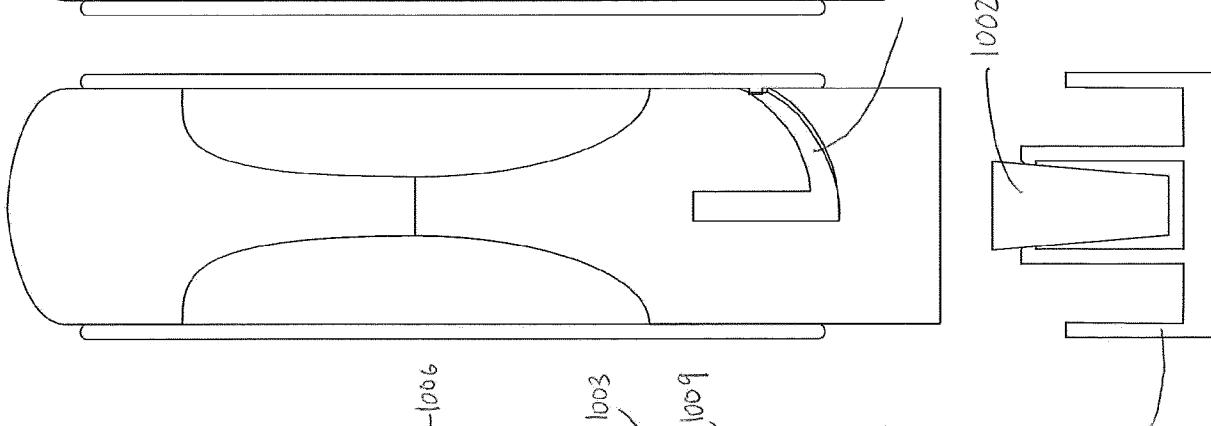


Fig 46

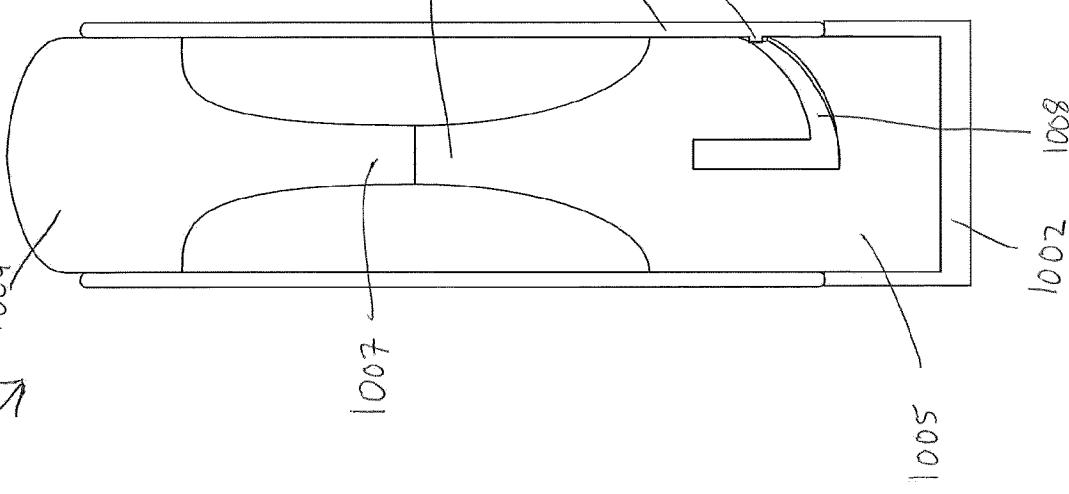


Fig S3

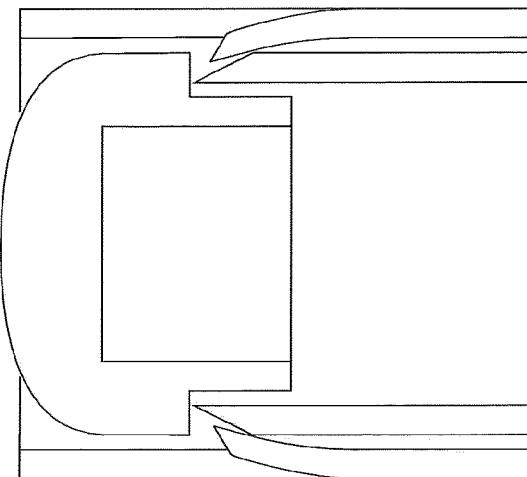


Fig S2

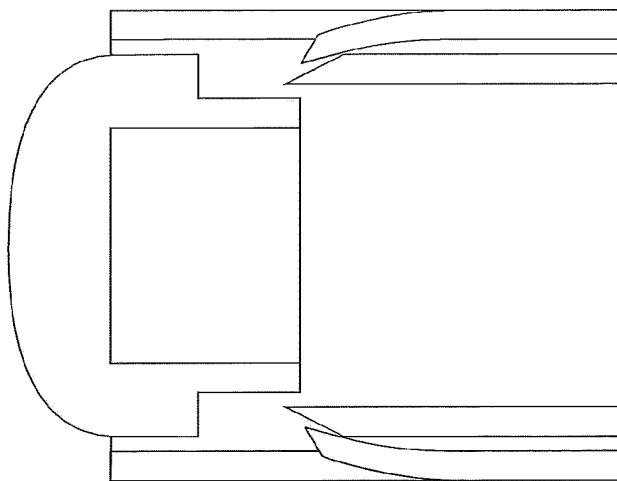


Fig S1

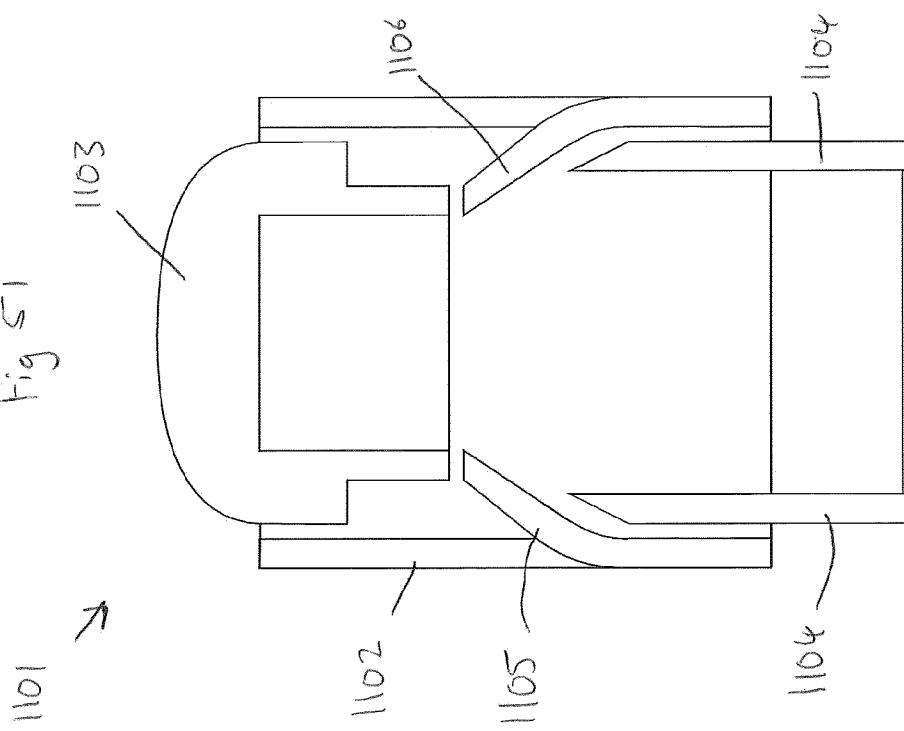


Fig 59

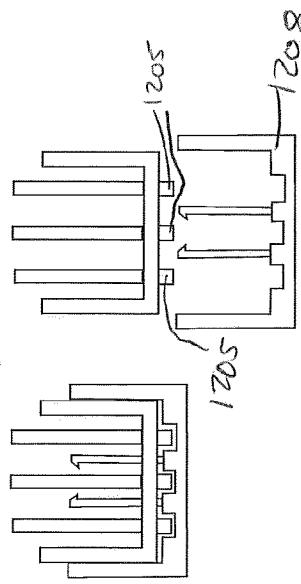


Fig 55

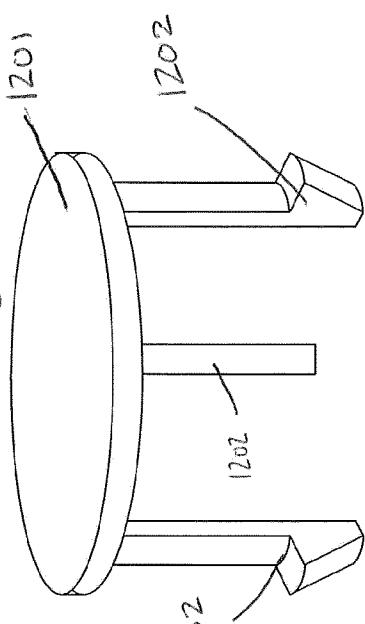


Fig 54

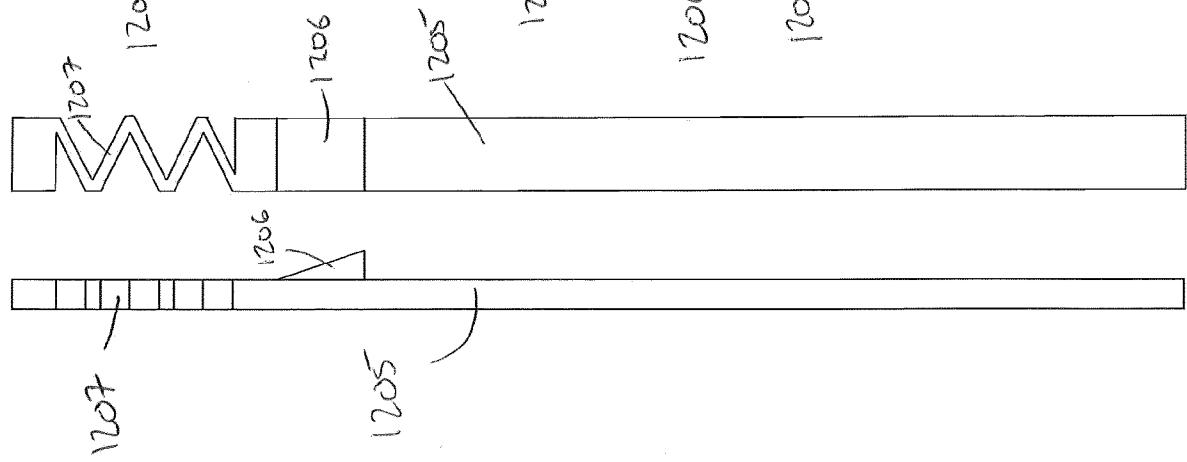


Fig 57

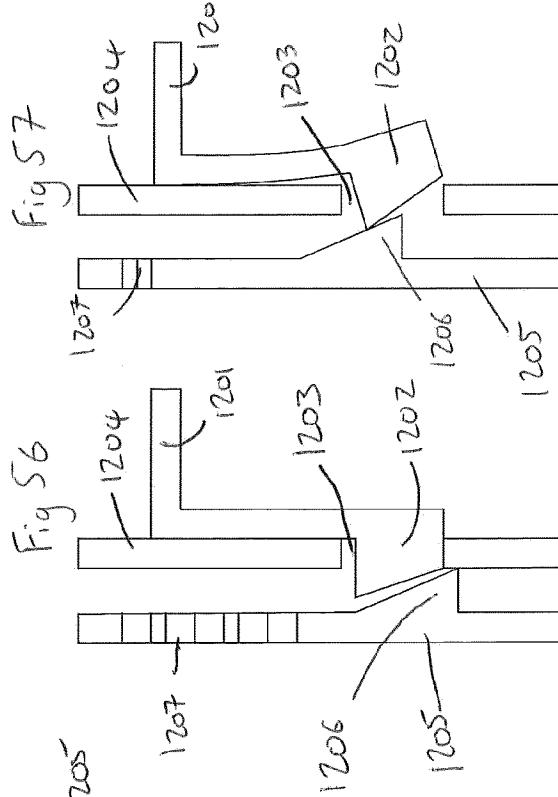


Fig 56

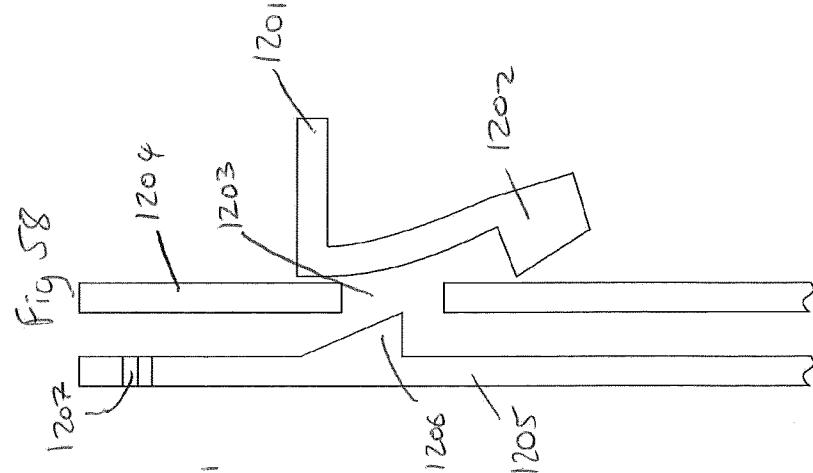


Fig 58

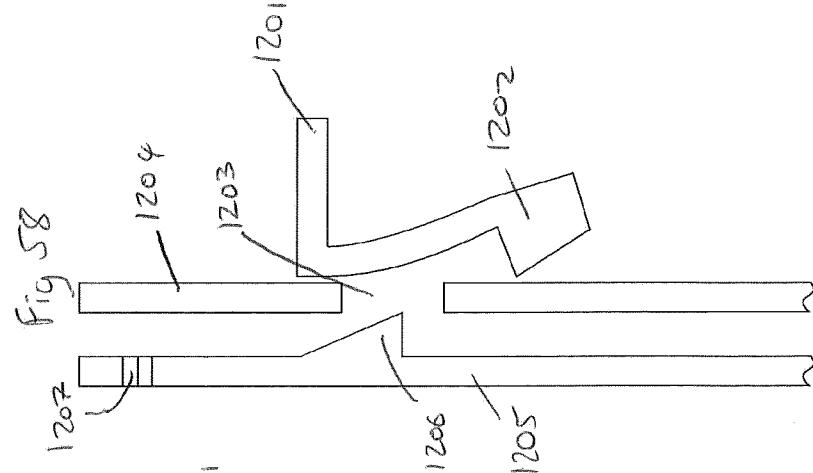


Fig 59

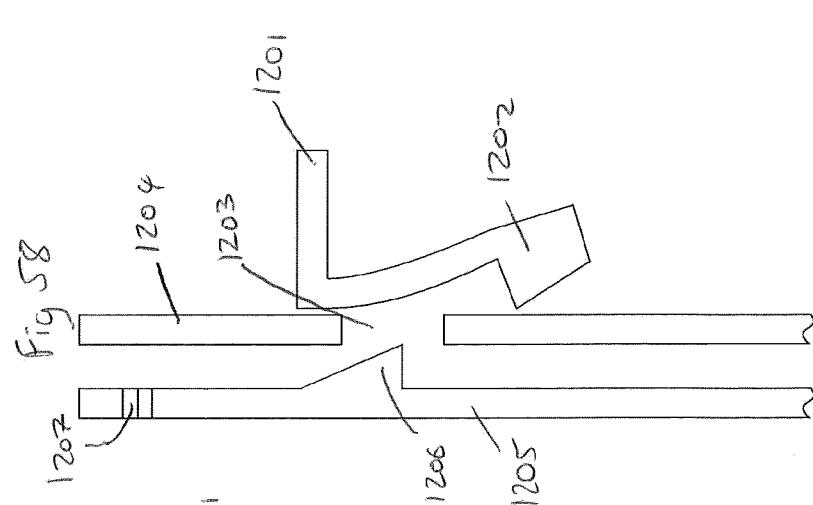


Fig 60

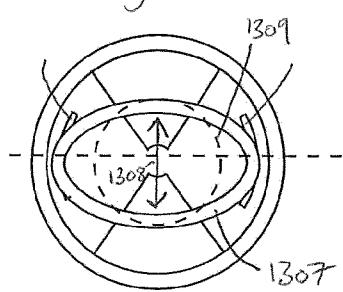


Fig 61

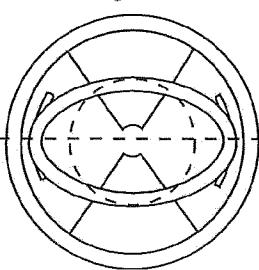


Fig 62








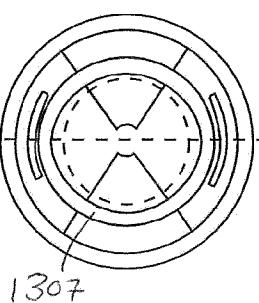


Fig 63

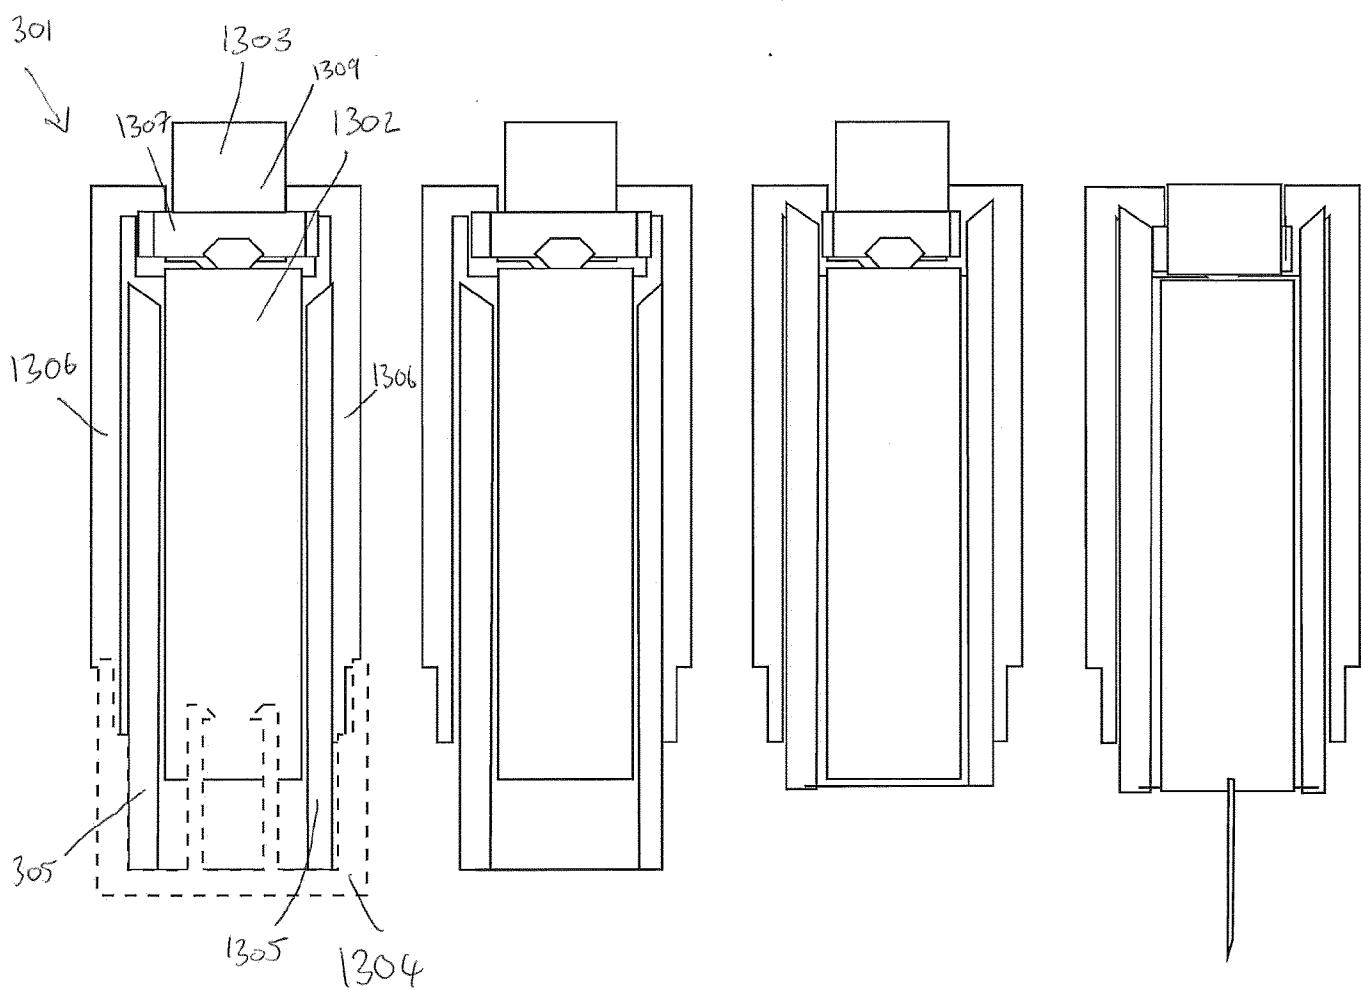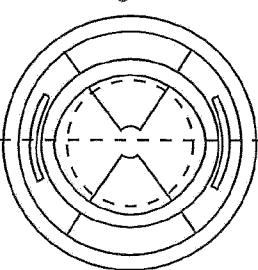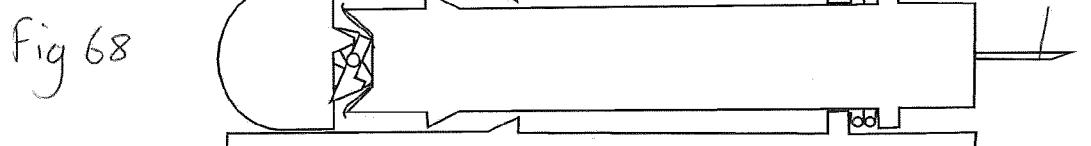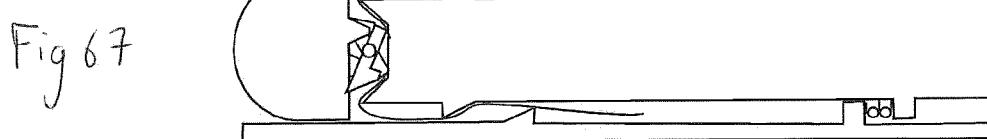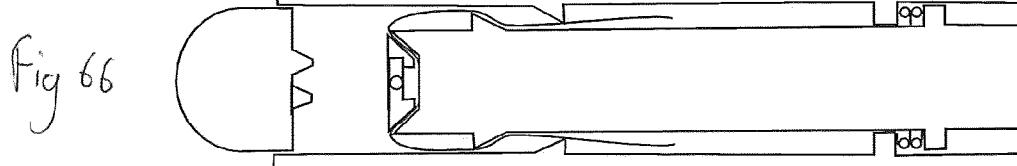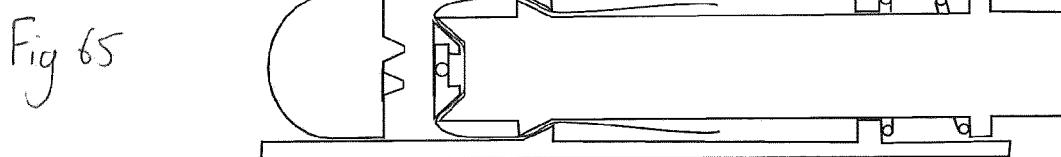

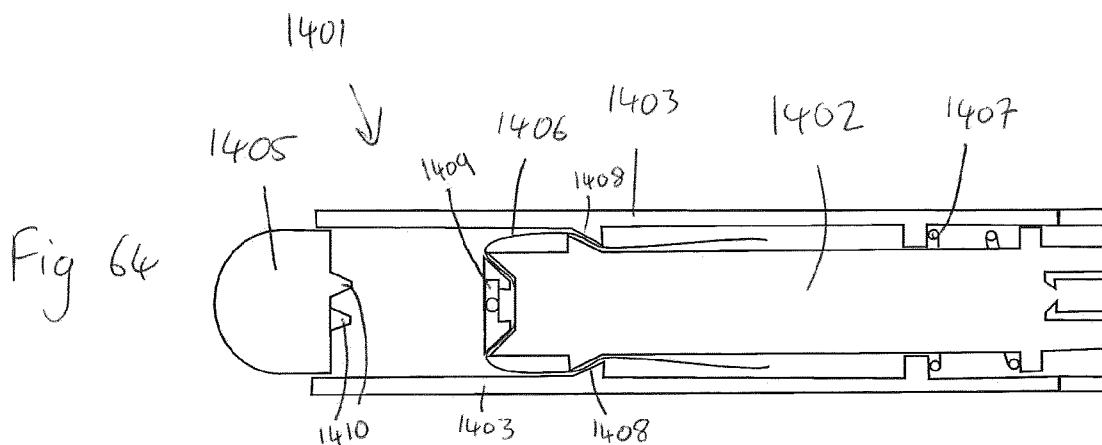

# INTERNATIONAL SEARCH REPORT

International application No  
PCT/EP2014/053882

**A. CLASSIFICATION OF SUBJECT MATTER**  
INV. A61M5/20  
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
A61M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2012/095408 A1 (EATON MARK [GB] ET AL) 19 April 2012 (2012-04-19)	1-31
A	abstract claims 12,18 paragraph [0049] figures 1-4	32-70
X	-----	
A	WO 2011/003979 A1 (NOVO NORDISK AS [DK]; BOM LARS MORTEN [DK]; ENGGAARD CHRISTIAN PETER []) 13 January 2011 (2011-01-13) claims 1-15 figures 1-22	1-31 32-70
X	-----	
A	GB 2 467 637 A (MEDICAL HOUSE PLC [GB]; MEDICAL HOUSE LTD [GB] MEDICAL HOUSE LTD [GB]) 11 August 2010 (2010-08-11) abstract figures 2-6	1-31 32-70
	-----	
	-/-	



Further documents are listed in the continuation of Box C.



See patent family annex.

\* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
30 April 2014	09/05/2014
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer  Türkavci, Levent

**INTERNATIONAL SEARCH REPORT**

International application No PCT/EP2014/053882
---

## C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2003/212370 A1 (BARRELLE LAURENT [FR]) 13 November 2003 (2003-11-13) abstract figures -----	1-70

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2014/053882

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
US 2012095408	A1 19-04-2012	CN EP JP US WO	102427841 A 2429614 A2 2012525185 A 2012095408 A1 2010125400 A2	25-04-2012 21-03-2012 22-10-2012 19-04-2012 04-11-2010
WO 2011003979	A1 13-01-2011	CN DK EP ES JP US WO	102481415 A 2451508 T3 2451508 A1 2443951 T3 2012532635 A 2012184917 A1 2011003979 A1	30-05-2012 10-02-2014 16-05-2012 21-02-2014 20-12-2012 19-07-2012 13-01-2011
GB 2467637	A 11-08-2010	CA EP GB US WO	2751153 A1 2393530 A1 2467637 A 2012130342 A1 2010089589 A1	12-08-2010 14-12-2011 11-08-2010 24-05-2012 12-08-2010
US 2003212370	A1 13-11-2003	NONE		