



(19) **United States**
(12) **Patent Application Publication**
Vail, III

(10) **Pub. No.: US 2009/0194338 A1**
(43) **Pub. Date: Aug. 6, 2009**

(54) **METHOD AND APPARATUS FOR CEMENTING DRILL STRINGS IN PLACE FOR ONE PASS DRILLING AND COMPLETION OF OIL AND GAS WELLS**

(76) Inventor: **William Banning Vail, III**, Bothell, WA (US)

Correspondence Address:
PATTERSON & SHERIDAN, L.L.P.
3040 POST OAK BOULEVARD, SUITE 1500
HOUSTON, TX 77056 (US)

(21) Appl. No.: **12/330,157**

(22) Filed: **Dec. 8, 2008**

Related U.S. Application Data

(63) Continuation of application No. 11/761,270, filed on Jun. 11, 2007, now abandoned, which is a continuation of application No. 11/292,331, filed on Dec. 1, 2005, now Pat. No. 7,228,901, which is a continuation of application No. 10/678,731, filed on Oct. 2, 2003, now Pat. No. 7,048,050, which is a continuation of application No. 10/162,302, filed on Jun. 4, 2002, now Pat. No. 6,868,906, which is a continuation-in-part of application No. 09/487,197, filed on Jan. 19, 2000, now Pat. No. 6,397,946, which is a continuation-in-part of application No. 09/295,808, filed on Apr. 20, 1999, now Pat. No. 6,263,987, which is a continuation-in-part of application No. 08/708,396, filed on Sep. 3, 1996, now Pat. No. 5,894,897, which is a continuation-


in-part of application No. 08/323,152, filed on Oct. 14, 1994, now Pat. No. 5,551,521.

(60) Provisional application No. 60/313,654, filed on Aug. 19, 2001, provisional application No. 60/353,457, filed on Jan. 31, 2002, provisional application No. 60/367,638, filed on Mar. 26, 2002, provisional application No. 60/384,964, filed on Jun. 3, 2002.

Publication Classification

(51) **Int. Cl.**
E21B 7/00 (2006.01)
(52) **U.S. Cl.** **175/327**
(57) **ABSTRACT**

The steel drill string attached to a drilling bit during typical rotary drilling operations used to drill oil and gas wells is used for a second purpose as the casing that is cemented in place during typical oil and gas well completions. Methods of operation are described that provide for the efficient installation a cemented steel cased well wherein the drill string and the drill bit are cemented into place during one single drilling pass down into the earth. The normal mud passages or water-courses present in the rotary drill bit are used for the second independent purpose of passing cement into the annulus between the casing and the well while cementing the drill string into place during one single pass into the earth. A one-way cement valve is installed near the drill bit of the drill string that allows the cement to set up efficiently under ambiently hydrostatic conditions while the drill string and drill bit are cemented into place during one single drilling pass into the earth.

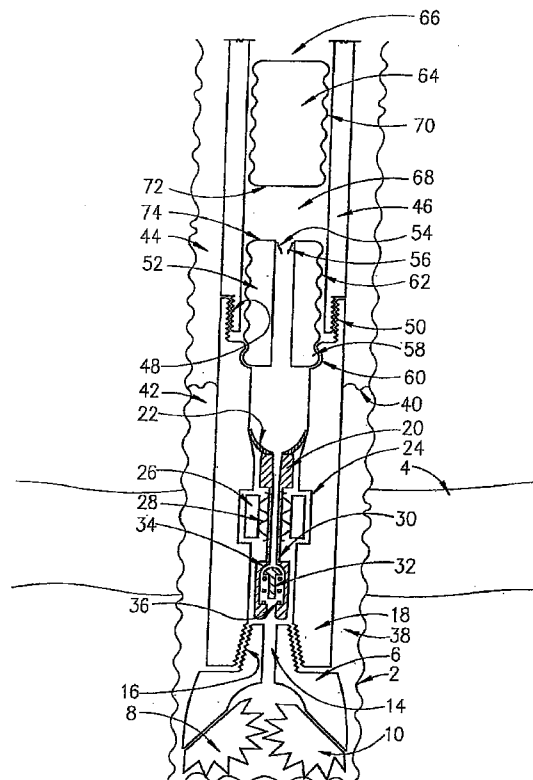

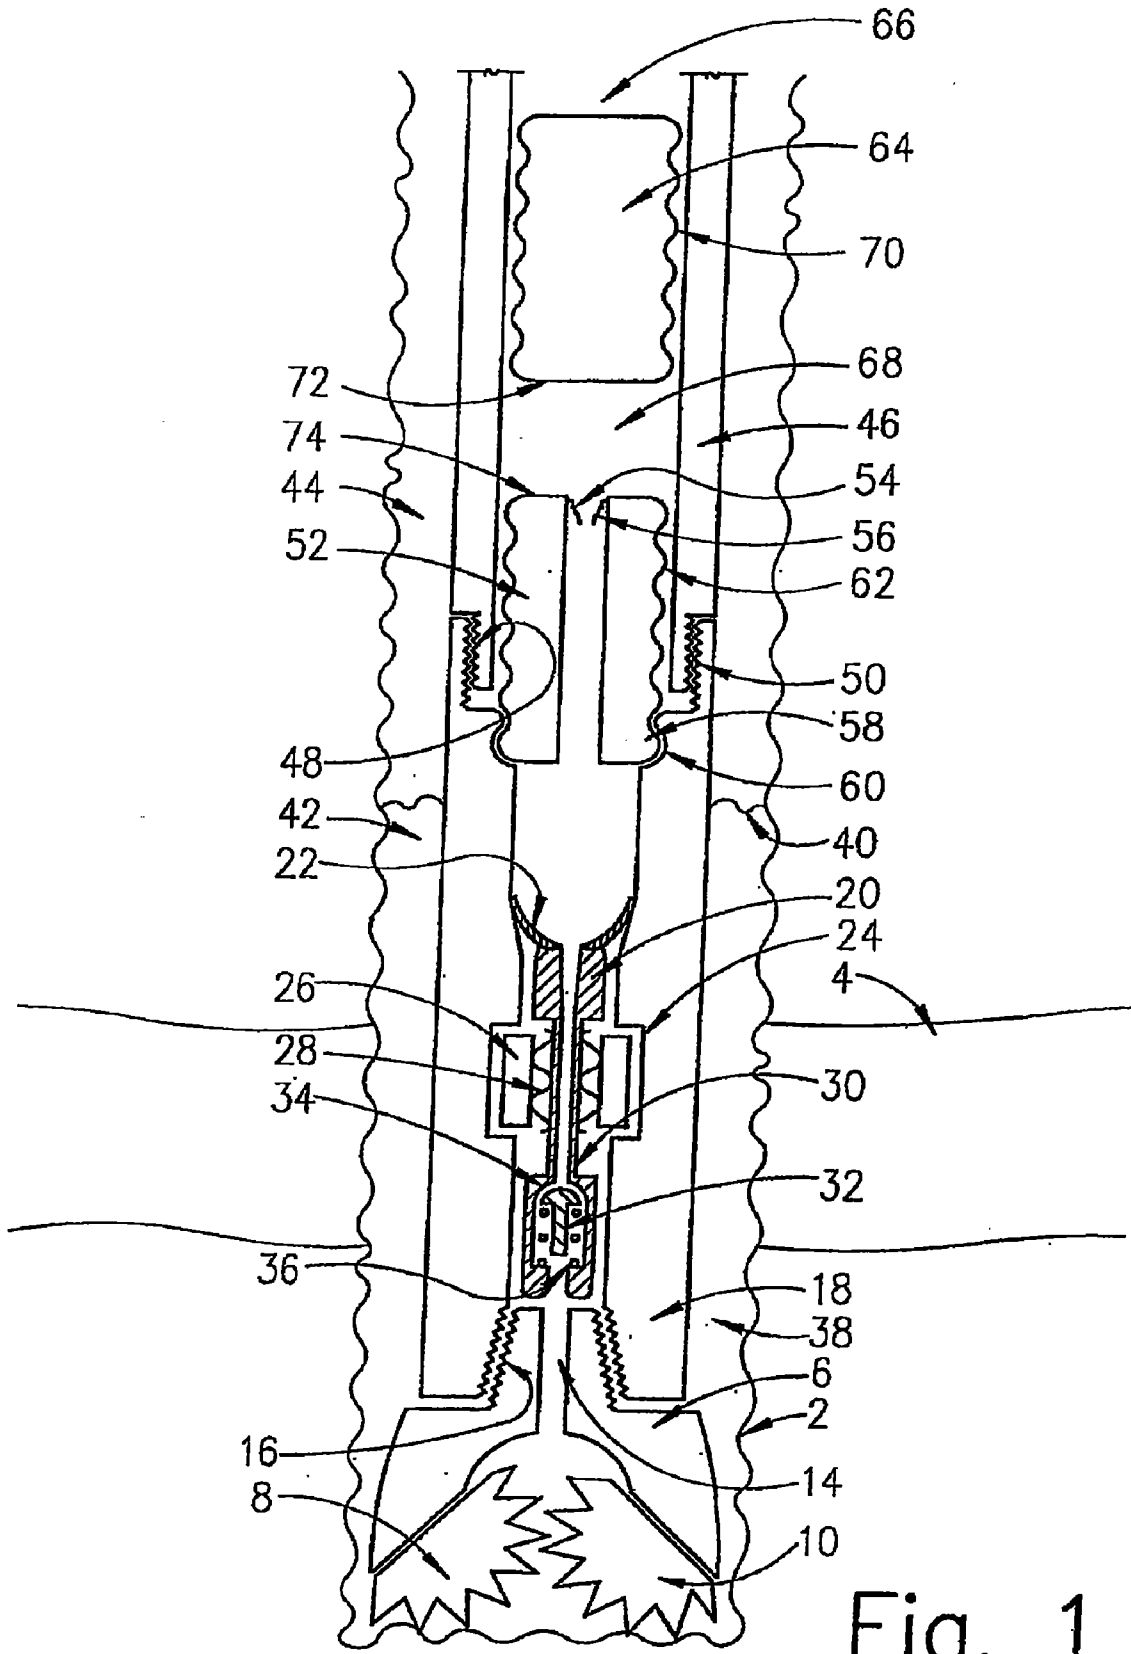


Fig. 1

METHOD AND APPARATUS FOR CEMENTING DRILL STRINGS IN PLACE FOR ONE PASS DRILLING AND COMPLETION OF OIL AND GAS WELLS

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application is a continuation of co-pending U.S. patent application Ser. No. 11/761,270, which is a continuation of co-pending U.S. patent application Ser. No. 11/292,331, filed on Dec. 1, 2005, now U.S. Pat. No. 7,228,901, which is a continuation of U.S. patent application Ser. No. 10/678,731, filed on Oct. 2, 2003, now U.S. Pat. No. 7,048,050, which is a continuation of U.S. patent application Ser. No. 10/162,302, filed on Jun. 4, 2002, now U.S. Pat. No. 6,868,906, which applications and patent are herein incorporated by reference in their entirety. U.S. patent application Ser. No. 10/162,302 is a continuation-in-part of U.S. patent application Ser. No. 09/487,197 filed on Jan. 19, 2000, now U.S. Pat. No. 6,397,946, which is herein incorporated by reference in its entirety. U.S. Pat. No. 6,397,946 is a continuation-in-part of U.S. patent application Ser. No. 09/295,808 filed on Apr. 20, 1999, now U.S. Pat. No. 6,263,987, which is herein incorporated by reference in its entirety. U.S. Pat. No. 6,263,987 is a continuation-in-part of U.S. patent application Ser. No. 08/708,396 filed on Sep. 3, 1996, now U.S. Pat. No. 5,894,897, which is incorporated herein by reference in its entirety. U.S. Pat. No. 5,894,897 is a continuation-in-part of U.S. patent application Ser. No. 08/323,152 filed on Oct. 14, 1994, now U.S. Pat. No. 5,551,521, which is herein incorporated by reference in its entirety.

[0002] This application further claims benefit of U.S. Provisional Patent Application Ser. No. 60/313,654 filed on Aug. 19, 2001, U.S. Provisional Patent Application Ser. No. 60/353,457 filed on Jan. 31, 2002, U.S. Provisional Patent Application Ser. No. 60/367,638 filed on Mar. 26, 2002, and U.S. Provisional Patent Application Ser. No. 60/384,964 filed on Jun. 3, 2002. All of the above United States Provisional Patent Applications are herein incorporated by reference in their entirety.

[0003] Portions of this application were disclosed in U.S. Disclosure Document No. 362582 filed on Sep. 30, 1994, which is incorporated herein by reference.

BACKGROUND OF THE INVENTION

[0004] 1. Field of Invention

[0005] The field of invention relates to apparatus that uses the steel drill string attached to a drilling bit during drilling operations used to drill oil and gas wells for a second purpose as the casing that is cemented in place during typical oil and gas well completions. The field of invention further relates to methods of operation of said apparatus that provides for the efficient installation of a cemented steel cased well during one single pass down into the earth of the steel drill string. The field of invention further relates to methods of operation of the apparatus that uses the typical mud passages already present in a typical drill bit, including any watercourses in a "regular bit", or mud jets in a "jet bit", that allow mud to circulate during typical drilling operations for the second independent, and the distinctly separate, purpose of passing cement into the annulus between the casing and the well while cementing the drill string into place during one single drilling pass into the earth. The field of invention further relates to apparatus and

methods of operation that provides the pumping of cement down the drill string, through the mud passages in the drill bit, and into the annulus between the formation and the drill string for the purpose of cementing the drill string and the drill bit into place during one single drilling pass into the formation. The field of invention further relates to a one-way cement valve and related devices installed near the drill bit of the drill string that allows the cement to set up efficiently while the drill string and drill bit are cemented into place during one single drilling pass into the formation.

[0006] 2. Description of the Prior Art

[0007] From an historical perspective, completing oil and gas wells using rotary drilling techniques has in recent times comprised the following typical steps. With a pile driver or rotary rig, install any necessary conductor pipe on the surface for attachment of the blowout preventer and for mechanical support at the wellhead. Install and cement into place any surface casing necessary to prevent washouts and cave-ins near the surface, and to prevent the contamination of freshwater sands as directed by state and federal regulations. Choose the dimensions of the drill bit to result in the desired sized production well. Begin rotary drilling of the production well with a first drill bit. Simultaneously circulate drilling mud into the well while drilling. Drilling mud is circulated downhole to carry rock chips to the surface, to prevent blowouts, to prevent excessive mud loss into formation, to cool the bit, and to clean the bit. After the first bit wears out, pull the drill string out, change bits, lower the drill string into the well and continue drilling. It should be noted here that each "trip" of the drill bit typically requires many hours of rig time to accomplish the disassembly and reassembly of the drill string, pipe segment by pipe segment.

[0008] Drill the production well using a succession of rotary drill bits attached to the drill string until the hole is drilled to its final depth. After the final depth is reached, pull out the drill string and its attached drill bit. Assemble and lower the production casing into the well while back filling each section of casing with mud as it enters the well to overcome the buoyancy effects of the air filled casing (caused by the presence of the float collar valve), to help avoid sticking problems with the casing, and to prevent the possible collapse of the casing due to accumulated build-up of hydrostatic pressure.

[0009] To "cure the cement under ambient hydrostatic conditions", typically execute a two-plug cementing procedure involving a first Bottom Wiper Plug before and a second Top Wiper Plug behind the cement that also minimizes cement contamination problems comprised of the following individual steps. Introduce the Bottom Wiper Plug into the interior of the steel casing assembled in the well and pump down with cement that cleans the mud off the walls and separates the mud and cement. Introduce the Top Wiper Plug into the interior of the steel casing assembled into the well and pump down with water under pump pressure thereby forcing the cement through the float collar valve and any other one-way valves present. Allow the cement to cure.

SUMMARY OF THE INVENTION

[0010] Apparatus and methods of operation of that apparatus are disclosed that allow for cementation of a drill string with attached drill bit into place during one single drilling pass into a geological formation. The process of drilling the well and installing the casing becomes one single process that saves installation time and reduces costs during oil and gas

well completion procedures. Apparatus and methods of operation of the apparatus are disclosed that use the typical mud passages already present in a typical rotary drill bit, including any watercourses in a “regular bit”, or mud jets in a “jet bit”, for the second independent purpose of passing cement into the annulus between the casing and the well while cementing the drill string in place. This is a crucial step that allows a “Typical Drilling Process” involving some 14 steps to be compressed into the “New Drilling Process” that involves only 7 separate steps as described in the Description of the Preferred Embodiments below. The New Drilling Process is now possible because of “Several Recent Changes in the Industry” also described in the Description of the Preferred Embodiments below. In addition, the New Drilling Process also requires new apparatus to properly allow the cement to cure under ambient hydrostatic conditions. That new apparatus includes a Latching Subassembly, a Latching Float Collar Valve Assembly, the Bottom Wiper Plug, and the Top Wiper Plug. Suitable methods of operation are disclosed for the use of the new apparatus.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] FIG. 1 shows a section view of a drill string in the process of being cemented in place during one drilling pass into formation with a preferred embodiment of the invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0012] Apparatus and methods of operation of that apparatus are disclosed herein in the preferred embodiments of the invention that allow for cementation of a drill string with attached drill bit into place during one single drilling pass into a geological formation. The drill bit is the cutting or boring element used in drilling oil and gas wells. The method of drilling the well and installing the casing becomes one single process that saves installation time and reduces costs during oil and gas well completion procedures as documented in the following description of the preferred embodiments of the invention. Apparatus and methods of operation of the apparatus are disclosed herein that use the typical mud passages already present in a typical rotary drill bit, including any watercourses in a “regular bit”, or mud jets in a “jet bit”, for the second independent purpose of passing cement into the annulus between the casing and the well while cementing the drill string in place.

[0013] FIG. 1 shows a section view of a drill string in the process of being cemented in place during one drilling pass into formation. Often, the drill string is the term loosely applied to both drill pipe and drill collars. Drill collars provide weight on the bit to keep it in firm contact with the bottom of the hole. Drill collars are primarily used to supply weight to the bit for drilling and to maintain weight to keep the drill string from bending or buckling. They also prevent doglegs by supporting and stabilizing the bit. A borehole 2 is drilled though the earth including geological formation 4. The borehole is the wellbore, or the hole made by drilling or boring. Drilling is boring a hole in the earth, usually to find and remove subsurface formation fluids such as oil and gas. The borehole 2 is drilled with a milled tooth rotary drill bit 6 having milled steel roller cones 8, 10, and 12 (not shown for simplicity). A standard water passage 14 is shown through the rotary cone drill bit. This rotary bit could equally be a tungsten carbide insert roller cone bit having jets for waterpas-

sages, the principle of operation and the related apparatus being the same for either case for the preferred embodiment herein.

[0014] Where formations are relatively soft, a jet deflection bit may be employed in directional drilling to deviate the hole. Directional drilling is the intentional deviation of a wellbore from the vertical. Controlled directional drilling makes it possible to reach subsurface areas laterally remote from the point where the bit enters the earth. For a jet deflection bit, a conventional roller cone bit is modified by equipping it with one oversize nozzle and closing off or reducing others, or by replacing a roller cone with a large nozzle. The drill pipe and special bit are lowered into the hole, and the large jet is pointed so that, when pump pressure is applied, the jet washes out the side of the hole in a specific direction. The large nozzle erodes away one side of the hole so that the hole is deflected off vertical. The large amount of mud emitted from the enlarged jet washes away the formation in front of the bit, and the bit follows the path of least resistance. The path of the wellbore is the trajectory.

[0015] A basic requirement in drilling a directional well is some means of changing the course of the hole. Generally, a driller either uses a specially-designed deflection tool or modifies the bottomhole assembly he is using to drill ahead. A bottomhole assembly is a combination of drill collars, stabilizers, and associated equipment made up just above the bit. Ideally, altering the bottomhole assembly in a particular way enables the driller to control the amount and direction of bending and thereby to increase, decrease, or maintain drift angle as desired.

[0016] Deflection tools cause the bit to drill in a preferred direction because of the way the tool is designed or made up in the drill string. A stabilizer may be used to change the deviation angle in a well by controlling the location of the contact point between the hole and drill collars. The stabilizer is a tool placed near the bit, and often above it, in the drilling assembly. Conversely, stabilizers are used to maintain correct hole angle. To maintain hole angle, the driller may use a combination of large, heavy drill collars and stabilizers to minimize or eliminate bending. Any increase in stabilization of the bottomhole assembly increases the drift diameter of the hole being drilled. Stabilizers must be adequately supported by the wall of the hole if they are to effectively stabilize the bit and centralize the drill collars.

[0017] The threads 16 on rotary drill bit 6 are screwed into the Latching Subassembly 18. The Latching Subassembly 18 is also called the Latching Sub for simplicity herein. The Latching Sub 18 is a relatively thick-walled steel pipe having some functions similar to a standard drill collar.

[0018] The Latching Float Collar Valve Assembly 20 is pumped downhole with drilling mud after the depth of the well is reached. The Latching Float Collar Valve Assembly 20 is pumped downhole with mud pressure pushing against the Upper Seal 22 of the Latching Float Collar Valve Assembly 20. The Latching Float Collar Valve Assembly 20 latches into place into Latch Recession 24. The Latch 26 of the Latching Float Collar Valve Assembly 20 is shown latched into place with Latching Spring 28 pushing against Latching Mandrel 30.

[0019] The Float 32 of the Latching Float Collar Valve Assembly 20 seats against the Float Seating Surface 34 under the force from Float Collar Spring 36 that makes a one-way cement valve. However, the pressure applied to the mud or cement from the surface may force open the Float to allow

mud or cement to be forced into the annulus generally designated as **38** in FIG. 1. This one-way cement valve is a particular example of “a one-way cement valve means installed near the drill bit” which is a term defined herein. The one-way cement valve means may be installed at any distance from the drill bit but is preferentially installed “near” the drill bit.

[0020] FIG. 1 corresponds to the situation where cement is in the process of being forced from the surface through the Latching Float Collar Valve Assembly **20**. In fact, the top level of cement in the well is designated as element **40**. Below **40**, cement fills the annulus of the borehole **2**. Above **40**, mud fills the annulus of the borehole **2**. For example, cement is present at position **42** and drilling mud is present at position **44** in FIG. 1.

[0021] Relatively thin-wall casing, or drill pipe, designated as element **46** in FIG. 1, is attached to the Latching Sub **18**. The bottom male threads of the drill pipe **48** are screwed into the female threads **50** of the Latching Sub **18**.

[0022] The drilling mud was wiped off the walls of the drill pipe **48** in the well with Bottom Wiper Plug **52**. The Bottom Wiper Plug **52** is fabricated from rubber in the shape shown. Portions **54** and **56** of the Upper Seal of the Bottom Wiper Plug **52** are shown in a ruptured condition in FIG. 1. Initially, they sealed the upper portion of the Bottom Wiper Plug **52**. Under pressure from cement, the Bottom Wiper Plug **52** is pumped down into the well until the Lower Lobe **58** of the Bottom Wiper Plug **52** latches into place into Latching Sub Recession **60** in the Latching Sub **18**. After the Bottom Wiper Plug **52** latches into place, the pressure of the cement ruptures the Upper Seal of the Bottom Wiper Plug **52**. A Bottom Wiper Plug Lobe **62** is shown in FIG. 1. Such lobes provide an efficient means to wipe the mud off the walls of the drill pipe **48** while the Bottom Wiper Plug **52** is pumped downhole with cement.

[0023] Top Wiper Plug **64** is being pumped downhole by water **66** under pressure in the drill pipe. As the Top Wiper Plug **64** is pumped down under water pressure, the cement remaining in region **68** is forced downward through the Bottom Wiper Plug **52**, through the Latching Float Collar Valve Assembly **20**, through the water passages of the drill bit and into the annulus in the well. A Top Wiper Plug Lobe **70** is shown in FIG. 1. Such lobes provide an efficient means to wipe the cement off the walls of the drill pipe while the Top Wiper Plug **64** is pumped downhole with water.

[0024] After the Bottom Surface **72** of the Top Wiper Plug **64** is forced into the Top Surface **74** of the Bottom Wiper Plug **52**, almost the entire “cement charge” has been forced into the annulus between the drill pipe and the hole. As pressure is reduced on the water, the Float of the Latching Float Collar Valve Assembly **20** seals against the Float Seating Surface. As the water pressure is reduced on the inside of the drill pipe, then the cement in the annulus between the drill pipe and the hole can cure under ambient hydrostatic conditions. This procedure herein provides an example of the proper operation of a “one-way cement valve means”.

[0025] Therefore, the preferred embodiment in FIG. 1 provides apparatus that uses the steel drill string attached to a drilling bit during drilling operations used to drill oil and gas wells for a second purpose as the casing that is cemented in place during typical oil and gas well completions.

[0026] The preferred embodiment in FIG. 1 provides apparatus and methods of operation of said apparatus that results in the efficient installation of a cemented steel cased well

during one single pass down into the earth of the steel drill string thereby making a steel cased borehole or cased well.

[0027] The steps described herein in relation to the preferred embodiment in FIG. 1 provides a method of operation that uses the typical mud passages already present in a typical rotary drill bit, including any watercourses in a “regular bit”, or mud jets in a “jet bit”, that allow mud to circulate during typical drilling operations for the second independent, and the distinctly separate, purpose of passing cement into the annulus between the casing and the well while cementing the drill string into place during one single pass into the earth.

[0028] The preferred embodiment of the invention further provides apparatus and methods of operation that result in the pumping of cement down the drill string, through the mud passages in the drill bit, and into the annulus between the formation and the drill string for the purpose of cementing the drill string and the drill bit into place during one single drilling pass into the formation.

[0029] The apparatus described in the preferred embodiment in FIG. 1 also provide a one-way cement valve and related devices installed near the drill bit of the drill string that allows the cement to set up efficiently while the drill string and drill bit are cemented into place during one single drilling pass into the formation.

[0030] Methods of operation of apparatus disclosed in FIG. 1 have been disclosed that use the typical mud passages already present in a typical rotary drill bit, including any watercourses in a “regular bit”, or mud jets in a “jet bit”, for the second independent purpose of passing cement into the annulus between the casing and the well while cementing the drill string in place. This is a crucial step that allows a “Typical Drilling Process” involving some 14 steps to be compressed into the “New Drilling Process” that involves only 7 separate steps as described in detail below. The New Drilling Process is now possible because of “Several Recent Changes in the Industry” also described in detail below.

[0031] Typical procedures used in the oil and gas industries to drill and complete wells are well documented. For example, such procedures are documented in the entire “Rotary Drilling Series” published by the Petroleum Extension Service of the University of Texas at Austin, Austin, Tex. that is included herein by reference in its entirety comprised of the following: Unit I—“The Rig and Its Maintenance” (12 Lessons); Unit II—“Normal Drilling Operations” (5 Lessons); Unit III—Nonroutine Rig Operations (4 Lessons); Unit IV—Man Management and Rig Management (1 Lesson); and Unit V—Offshore Technology (9 Lessons). All of the individual Glossaries of all of the above Lessons are explicitly included in the specification herein and any and all definitions in those Glossaries shall be considered explicitly referenced herein.

[0032] Additional procedures used in the oil and gas industries to drill and complete wells are well documented in the series entitled “Lessons in Well Servicing and Workover” published by the Petroleum Extension Service of the University of Texas at Austin, Austin, Tex. that is included herein by reference in its entirety comprised of all 12 Lessons. All of the individual Glossaries of all of the above Lessons are explicitly included in the specification herein and any and all definitions in those Glossaries shall be considered explicitly referenced herein.

[0033] With reference to typical practices in the oil and gas industries, a typical drilling process may therefore be described in the following.

Typical Drilling Process

[0034] From an historical perspective, completing oil and gas wells using rotary drilling techniques has in recent times comprised the following typical steps:

Step 1

[0035] With a pile driver or rotary rig, install any necessary conductor pipe on the surface for attachment of the blowout preventer and for mechanical support at the wellhead.

Step 2

[0036] Install and cement into place any surface casing necessary to prevent washouts and cave-ins near the surface, and to prevent the contamination of freshwater sands as directed by state and federal regulations.

Step 3

[0037] Choose the dimensions of the drill bit to result in the desired sized production well. Begin rotary drilling of the production well with a first drill bit. Simultaneously circulate drilling mud into the well while drilling. Drilling mud is circulated downhole to carry rock chips to the surface, to prevent blowouts, to prevent excessive mud loss into formation, to cool the bit, and to clean the bit. After the first bit wears out, pull the drill string out, change bits, lower the drill string into the well and continue drilling. It should be noted here that each "trip" of the drill bit typically requires many hours of rig time to accomplish the disassembly and reassembly of the drill string, pipe segment by pipe segment.

Step 4

[0038] Drill the production well using a succession of rotary drill bits attached to the drill string until the hole is drilled to its final depth.

Step 5

[0039] After the final depth is reached, pull out the drill string and its attached drill bit.

Step 6

[0040] Perform open-hole logging of the geological formations to determine the amount of oil and gas present. This typically involves measurements of the porosity of the rock, the electrical resistivity of the water present, the electrical resistivity of the rock, certain neutron measurements from within the open-hole, and the use of Archie's Equations. If no oil and gas is present from the analysis of such open-hole logs, an option can be chosen to cement the well shut. If commercial amounts of oil and gas are present, continue the following steps.

Step 7

[0041] Typically reassemble drill bit and drill string into the well to clean the well after open-hole logging.

Step 8

[0042] Pull out the drill string and its attached drill bit.

Step 9

[0043] Attach the casing shoe into the bottom male pipe threads of the first length of casing to be installed into the

well. This casing shoe may or may not have a one-way valve ("casing shoe valve") installed in its interior to prevent fluids from back-flowing from the well into the casing string.

Step 10

[0044] Typically install the float collar onto the top female threads of the first length of casing to be installed into the well which has a one-way valve ("float collar valve") that allows the mud and cement to pass only one way down into the hole thereby preventing any fluids from back-flowing from the well into the casing string. Therefore, a typical installation has a casing shoe attached to the bottom and the float collar valve attached to the top portion of the first length of casing to be lowered into the well. Please refer to pages 28-31 of the book entitled "Casing and Cementing" Unit II Lesson 4, Second Edition, of the Rotary Drilling Series, Petroleum Extension Service, The University of Texas at Austin, Tex., 1982 (hereinafter defined as "Ref. 1"). All of the individual definitions of words and phrases in the Glossary of Ref. 1 are explicitly included herein in their entirety.

Step 11

[0045] Assemble and lower the production casing into the well while back filling each section of casing with mud as it enters the well to overcome the buoyancy effects of the air filled casing (caused by the presence of the float collar valve), to help avoid sticking problems with the casing, and to prevent the possible collapse of the casing due to accumulated build-up of hydrostatic pressure.

Step 12

[0046] To "cure the cement under ambient hydrostatic conditions", typically execute a two-plug cementing procedure involving a first Bottom Wiper Plug before and a second Top Wiper Plug behind the cement that also minimizes cement contamination problems comprised of the following individual steps:

[0047] A. Introduce the Bottom Wiper Plug into the interior of the steel casing assembled in the well and pump down with cement that cleans the mud off the walls and separates the mud and cement (Ref. 1, pages 28-31).

[0048] B. Introduce the Top Wiper Plug into the interior of the steel casing assembled into the well and pump down with water under pump pressure thereby forcing the cement through the float collar valve and any other one-way valves present (Ref. 1, pages 28-31).

[0049] C. After the Bottom Wiper Plug and the Top Wiper Plug have seated in the float collar, release the pump pressure on the water column in the casing that results in the closing of the float collar valve which in turn prevents cement from backing up into the interior of the casing. The resulting interior pressure release on the inside of the casing upon closure of the float collar valve prevents distortions of the casing that might prevent a good cement seal (Ref. 1, page 30). In such circumstances, "the cement is cured under ambient hydrostatic conditions".

Step 13

[0050] Allow the cement to cure.

Step 14

[0051] Follow normal "final completion operations" that include installing the tubing with packers and perforating the

casing near the producing zones. For a description of such normal final completion operations, please refer to the book entitled "Well Completion Methods", Well Servicing and Workover, Lesson 4, from the series entitled "Lessons in Well Servicing and Workover", Petroleum Extension Service, The University of Texas at Austin, Tex., 1971 (hereinafter defined as "Ref. 2"). All of the individual definitions of words and phrases in the Glossary of Ref. 2 are explicitly included herein in their entirety. Other methods of completing the well are described therein that shall, for the purposes of this application herein, also be called "final completion operations".

Several Recent Changes in the Industry

[0052] Several recent concurrent changes in the industry have made it possible to reduce the number of steps defined above. These changes include the following:

[0053] a. Until recently, drill bits typically wore out during drilling operations before the desired depth was reached by the production well. However, certain drill bits have recently been able to drill a hole without having to be changed. For example, please refer to the book entitled "The Bit", Unit I, Lesson 2, Third Edition, of the Rotary Drilling Series, The University of Texas at Austin, Tex., 1981 (hereinafter defined as "Ref. 3"). All of the individual definitions of words and phrases in the Glossary of Ref. 3 are explicitly included herein in their entirety. On page 1 of Ref. 3 it states: "For example, often only one bit is needed to make a hole in which the casing will be set." On page 12 of Ref. 3 it states in relation to tungsten carbide insert roller cone bits: "Bit runs as long as 300 hours have been achieved; in some instances, only one or two bits have been needed to drill a well to total depth." This is particularly so since the advent of the sealed bearing tri-cone bit designs appeared in 1959 (Ref. 3, page 7) having tungsten carbide inserts (Ref. 3, page 12). Therefore, it is now practical to talk about drill bits lasting long enough for drilling a well during one pass into the formation, or "one pass drilling".

[0054] b. Until recently, it has been impossible or impractical to obtain sufficient geophysical information to determine the presence or absence of oil and gas from inside steel pipes in wells. Heretofore, either standard open-hole logging tools or Measurement-While-Drilling ("MWD") tools were used in the open-hole to obtain such information. Therefore, the industry has historically used various open-hole tools to measure formation characteristics. However, it has recently become possible to measure the various geophysical quantities listed in Step 6 above from inside steel pipes such as drill strings and casing strings. For example, please refer to the book entitled "Cased Hole Log Interpretation Principles/Applications", Schlumberger Educational Services, Houston, Tex., 1989. Please also refer to the article entitled "Electrical Logging: State-of-the-Art", by Robert E. Maute, The Log Analyst, May-June 1992, pages 206-227.

[0055] Because drill bits typically wore out during drilling operations until recently, different types of metal pipes have historically evolved which are attached to drilling bits, which, when assembled, are called "drill strings". Those drill strings are different than typical "casing strings" run into the well. Because it was historically absolutely necessary to do open-hole logging to determine the presence or absence of oil and

gas, the fact that different types of pipes were used in "drill strings" and "casing strings" was of little consequence to the economics of completing wells. However, it is possible to choose the "drill string" to be acceptable for a second use, namely as the "casing string" that is to be installed after drilling has been completed.

New Drilling Process

[0056] Therefore, the preferred embodiments of the invention herein reduce and simplify the above 14 steps as follows: Repeat Steps 1-2 above.

Steps 3-5 (Revised)

[0057] Choose the drill bit so that the entire production well can be drilled to its final depth using only one single drill bit. Choose the dimensions of the drill bit for desired size of the production well. If the cement is to be cured under ambient hydrostatic conditions, attach the drill bit to the bottom female threads of the Latching Subassembly ("Latching Sub"). Choose the material of the drill string from pipe material that can also be used as the casing string. Attach the first section of drill pipe to the top female threads of the Latching Sub. Rotary drill the production well to its final depth during "one pass drilling" into the well. While drilling, simultaneously circulate drilling mud to carry the rock chips to the surface, to prevent blowouts, to prevent excessive mud loss into formation, to cool the bit, and to clean the bit. Open-hole logging can be done while the well is being drilled with measuring-while-drilling (MWD) or logging-while-drilling (LWD) techniques. LWD is obtaining logging measurements by MWD techniques as the well is being drilled. MWD is the acquisition of downhole information during the drilling process. One MWD system transmits data to the surface via wireline; the other, through drilling fluid. MWD systems are capable of transmitting well data to the surface without interrupting circulating and drilling.

[0058] MWD may be used to determine the angle and direction by which the wellbore deviates from the vertical by directional surveying during routine drilling operations. A steering tool is a directional survey instrument used in combination with a deflected downhole motor that shows, on a rig floor monitor, the inclination and direction of a downhole sensing unit. A gyroscopic surveying instrument may be used to determine direction and angle at which a wellbore is drifting off the vertical. The steering tool instrument enables the operator both to survey and to orient a downhole motor while actually using a deflection tool to make hole. Sensors in the downhole instrument transmit data continuously, via the wireline, to the surface monitor. The operator can compensate for reactive torque, maintain hole direction, and change course when necessary without tripping out the drill string or interrupting drilling. MWD systems furnish the directional supervisor with real-time directional data on the rig floor—that is, they show what is happening downhole during drilling. The readings are analyzed to provide accurate hole trajectory.

Step 6 (Revised)

[0059] After the final depth of the production well is reached, perform logging of the geological formations to determine the amount of oil and gas present from inside the drill pipe of the drill string. This typically involves measurements from inside the drill string of the necessary geophysical

quantities as summarized in Item "b." of "Several Recent Changes in the Industry". If such logs obtained from inside the drill string show that no oil or gas is present, then the drill string can be pulled out of the well and the well filled in with cement. If commercial amounts of oil and gas are present, continue the following steps.

Steps 7-11 (Revised)

[0060] If the cement is to be cured under ambient hydrostatic conditions, pump down a Latching Float Collar Valve Assembly with mud until it latches into place in the notches provided in the Latching Sub located above the drill bit.

Steps 12-13 (Revised)

[0061] To "cure the cement under ambient hydrostatic conditions", typically execute a two-plug cementing procedure involving a first Bottom Wiper Plug before and a second Top Wiper Plug behind the cement that also minimizes cement contamination comprised of the following individual steps:

[0062] A. Introduce the Bottom Wiper Plug into the interior of the drill string assembled in the well and pump down with cement that cleans the mud off the walls and separates the mud and cement.

[0063] B. Introduce the Top Wiper Plug into the interior of the drill string assembled into the well and pump down with water thereby forcing the cement through any Float Collar Valve Assembly present and through the watercourses in "a regular bit" or through the mud nozzles of a "jet bit" or through any other mud passages in, the drill bit into the annulus between the drill string and the formation.

[0064] C. After the Bottom Wiper Plug and Top Wiper Plug have seated in the Latching Float Collar Valve Assembly, release the pressure on the interior of the drill string that results in the closing of the float collar which in turn prevents cement from backing up in the drill string. The resulting pressure release upon closure of the float collar prevents distortions of the drill string that might prevent a good cement seal as described earlier. I.e., "the cement is cured under ambient hydrostatic conditions".

Repeat Step 14 above.

[0065] Centering the casing in the hole is necessary for cement to form a uniform sheath around the casing to effectively prevent migration of fluids from permeable zones. Various accessory devices assure better distribution of the cement slurry outside the casing.

[0066] Field reports show that that casing cementation is improved by the employment of centralizers. Centralizers are often used on casing for two main purposes in connection with cementing: (1) to ensure a reasonably uniform distribution of cement around the pipe, and (2) to obtain a complete seal between the casing and the formation. Centralizers allow proper cement distribution by holding casing away from the wall. Centralizers also lessen the effect of differential pressure to stick the liner and center the pipe in the hole. A casing centralizer is a device secured around the casing at regular intervals to center it in the hole. Hinged centralizers are usually clamped onto the casing after it is made up and as it is run into the hole.

[0067] Therefore, the "New Drilling Process" has only 7 distinct steps instead of the 14 steps in the "Typical Drilling Process". The "New Drilling Process", consequently has fewer steps, is easier to implement, and will be less expensive.

[0068] The preferred embodiment of the invention disclosed in FIG. 1 requires a Latching Subassembly and a Latching Float Collar Valve Assembly. The advantage of this approach is that the Float 32 of the Latching Float Collar Valve Assembly and the Float Seating Surface 34 in FIG. 1 are installed at the end of the drilling process and will not be worn due to mud passage during normal drilling operations.

[0069] Another preferred embodiment of the invention provides a float and float collar valve assembly permanently installed within the Latching Subassembly at the beginning of the drilling operations. However, such a preferred embodiment has the disadvantage that drilling mud passing by the float and the float collar valve assembly during normal drilling operations will tend to wear on the mutually sealing surfaces.

[0070] The drill bit described in FIG. 1 is a milled steel toothed roller cone bit. However, any rotary bit can be used with the invention. A tungsten carbide insert roller cone bit can be used. Any type of diamond bit or drag bit can be used. The invention may be used with any drill bit described in Ref. 3 above that possesses mud passages, water passages, or passages for gas. The bit consists of a cutting element and circulating element. The cutting element penetrates and gouges or scrapes the formation to remove it. The circulating element permits passage of drilling fluid and utilizes the hydraulic force of the fluid stream to improve drilling rates. Any type of rotary drill bit can be used possessing such passageways. Similarly, any type of bit whatsoever that utilizes any fluid or gas that passes through passageways in the bit can be used whether or not the bit rotates. A drag bit, for example, is any of a variety of drilling bits with no moving parts that drill by intrusion and drag.

[0071] A rock bit cone or other chunk of metal is sometimes left in an open hole and never touched again. A fish is an object that is left in the wellbore during drilling or workover operations and that must be recovered before work can proceed, which may be anything from a piece of scrap metal to a part of the drill stem. The drill stem includes all members in the assembly used for rotary drilling from the swivel to the bit. The fish may be part of the drill string which has been purposely disconnected, so that the part of the drill string may be recovered from the well by fishing.

[0072] While the above description contains many specificities, these should not be construed as limitations on the scope of the invention, but rather as exemplification of preferred embodiments thereto. As have been briefly described, there are many possible variations. Accordingly, the scope of the invention should be determined not only by the embodiments illustrated, but by the appended claims and their legal equivalents.

What is claimed is:

- 1. An apparatus for drilling a wellbore comprising: a drill string having a casing portion and a drill bit.

* * * * *