

(12) PATENT APPLICATION
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. AU 200110032 A1

(54) Title
A method and device for making a series of cuts at different angles in one or more panels using a panel sawing machine

(51)⁷ International Patent Classification(s)
B27B 005/06 B23D 047/04
B21D 043/10 B27B 005/29
B21D 043/14 B27B 031/04

(21) Application No: **200110032**

(22) Application Date: **2001.01.03**

(30) Priority Data

(31) Number	(32) Date	(33) Country
BO00A0176	2000.03.30	IT

(43) Publication Date : **2001.10.04**

(43) Publication Journal Date : **2001.10.04**

(71) Applicant(s)
Giben Impianti SpA

(72) Inventor(s)
Piergiorgio Benuzzi


(74) Agent/Attorney
SPRUSON and FERGUSON,GPO Box 3898,SYDNEY NSW 2001

A Method and Device for Making a Series of Cuts at Different Angles in One or More Panels Using a Panel Sawing Machine

Abstract

The invention relates to a method and device for making a series of cuts at different angles in one or more panels using a panel sawing machine. The method comprises the steps of: placing a stack (2)
5 of panels on a worktable (3); turning the stack (2) a first time in a first direction of rotation (5); making a first series of cuts in the stack (2); turning the stack (2) a second time in a direction (12) opposite to the first direction of rotation (5) and in such a way as to move the stack (2)
10 closer to the cutting line (4); and making a second series of cuts in the stack (2). The device comprises: a worktable (3) having a cutting line (4) for a panel sawing machine; a pickup element (6) that moves along a first guide (8) perpendicular to the cutting line (4); and a pusher
15 element (7) that moves along a second guide (9) parallel to the cutting line (4). [Figure 1]

FIG. 1

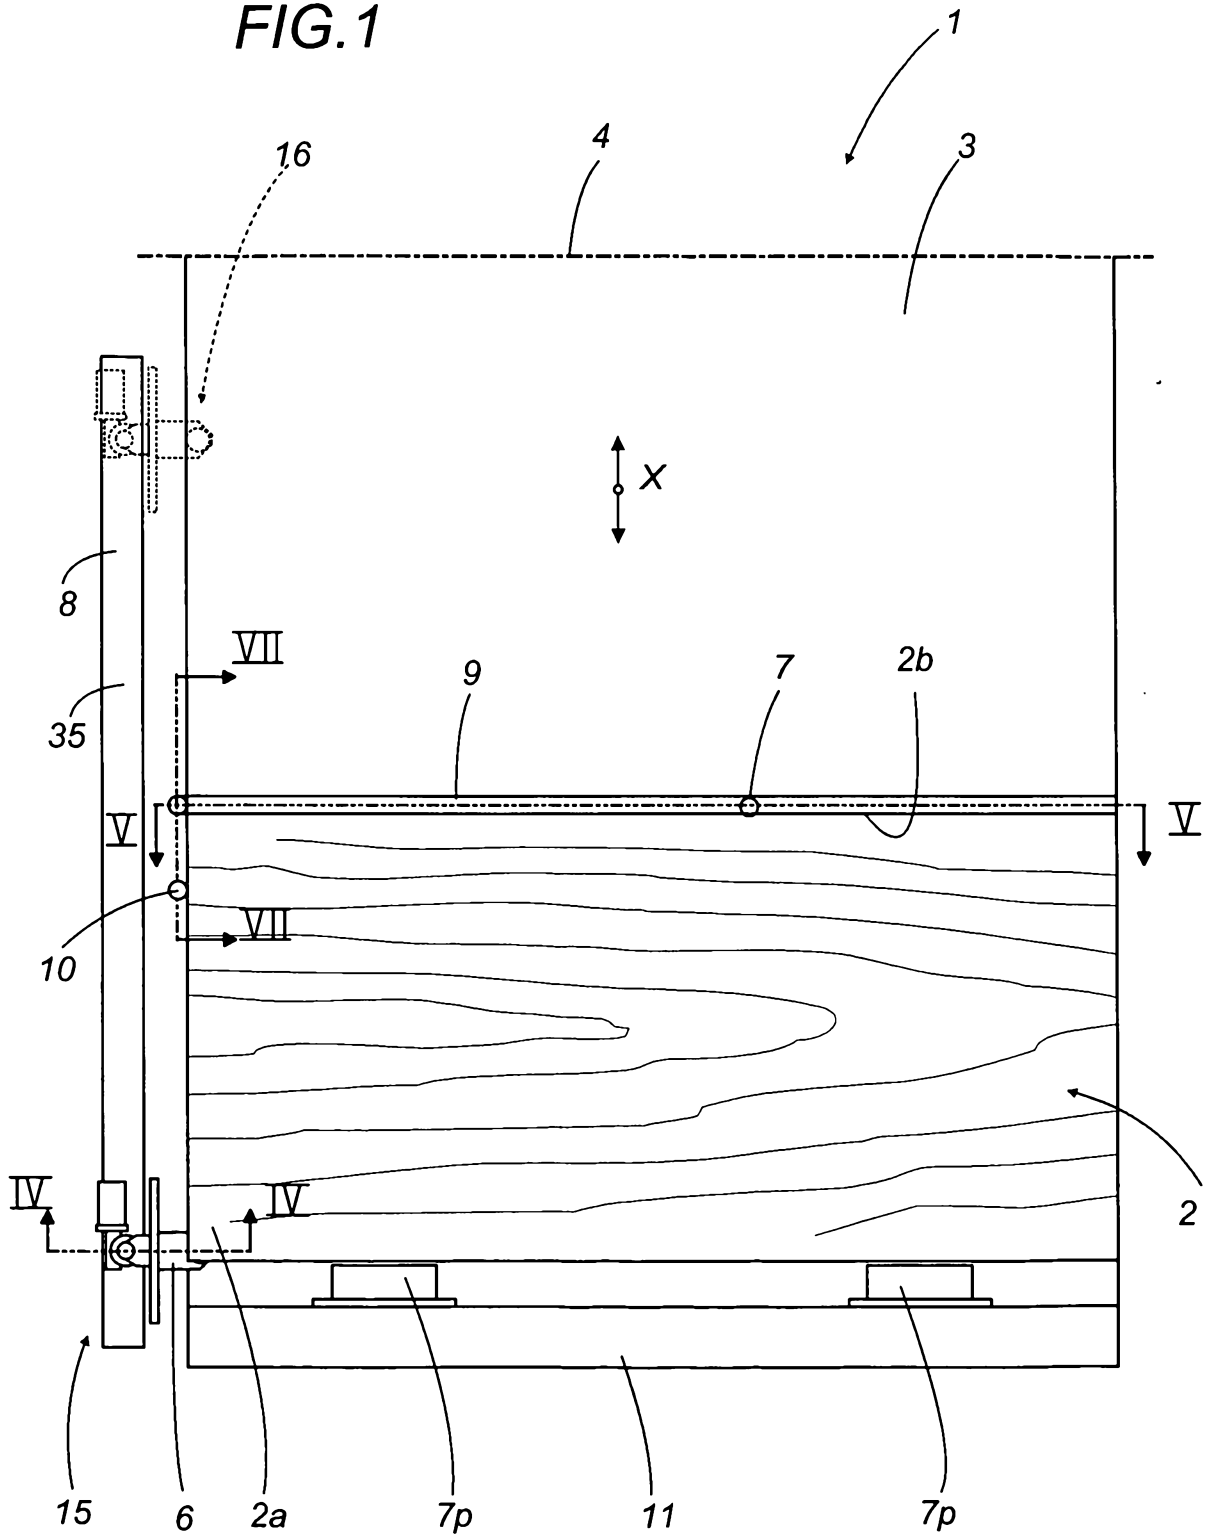

AUSTRALIA

PATENTS ACT 1990

COMPLETE SPECIFICATION

FOR A STANDARD PATENT

ORIGINAL

Name and Address of Applicant :	Giben Impianti S.p.A. Via Garganelli, 24 40065Pianoro (Bologna) Italy
---------------------------------------	--

Actual Inventor(s):	Piergiorgio Benuzzi
------------------------	---------------------

Address for Service:	Spruson & Ferguson St Martins Tower 31 Market Street Sydney NSW 2000
-------------------------	---

Invention Title:	A Method and Device for Making a Series of Cuts at Different Angles in One or More Panels Using a Panel Sawing Machine.
------------------	---

The following statement is a full description of this invention, including the best method of performing it known to me/us:-

A method and device for making a series of cuts at different angles in one or more panels using a panel sawing machine

The present invention relates to a method and device for making a series of cuts at different angles in one or more panels using a panel sawing machine.

5 As is known, panel sawing machines are used to cut large panels, slabs or sheets (or stacks of these), made mainly of wood base materials but also of plastic or composite materials, in order to make smaller panels.

10 Machines of this kind usually comprise a worktable on which one or more panels, placed over one another to form a substantially rectangular stack, are positioned, and a handling device that feeds the panel stack to one or more cutting stations positioned at different angles. In some cases, however, the panels have to be cut several times and only if they are rotated about the cutting line, cut a first time a then rotated and cut again.

20 In known methods and machines that normally carry

out these operations, a portion of the panel
worktable, normally the central portion of the
worktable, is made to rotate. Alternatively, the
entire stack is turned by mechanical arms which are
5 mounted along the sides of the worktable. These
mechanical arms grip the panel stack by one edge
and turn it by sliding it on the surface of the
worktable which may be made of low friction
material or which, more usually, consists of a set
10 of supporting elements which enable the panel to be
moved along the two Cartesian axes defining the
main plane in which the panel stack lies.

These methods have considerable disadvantages due
mainly to the slowness and cost of the machinery
15 required.

In a more advanced solution disclosed by the
Applicant (see US patent 5,257,900), a portion of
the panel stack close to the corner opposite the
cutting line is held by a gripper mounted on the
20 panel stack handling device. At the same time, a
push roller acts against the side of the stack
adjacent to the cutting line (see Figure 2 of the
drawings accompanying this United States patent).
The panels are then rotated a first time through 90
25 degrees by moving the gripper towards the cutting

line in a direction perpendicular to the cutting line while the push roller is driven towards the gripper's path in a direction parallel to the cutting line. Next, the gripper is disengaged from the panel stack and the handling device-crossbeam is moved in the opposite direction back to the end of the stack opposite the cutting line. The same device is then used to push the panels towards the cutting line so that the first series of cuts can be made.

Once this step has been completed, the gripper once again engages a portion of the panel stack close to the corner opposite the cutting line while the push roller acts against the side of the stack adjacent to the direction of movement of the gripper (see Figure 3 of the drawings accompanying this United States patent). The second rotation of the panels is carried out in the same direction as the first by moving the gripper towards the cutting line in a direction perpendicular to the latter and moving the push roller away from the gripper's path in a direction parallel to the cutting line. As in the step described above, the gripper is disengaged from the panel stack and the handling device is moved in the opposite direction back to the end of

the panel stack opposite the cutting line. The device is then used to push the panel stack towards the cutting line so that the second series of cuts can be made.

5 This method and the apparatus that implements it have considerable disadvantages.

First of all, the second rotation, unlike the first, moves the centre of gravity of the panels away from the cutting line. The handling device
10 must therefore push the stack along an additional path before it can be cut. Owing to the large size of the panels, this means lengthening the process considerably.

Another disadvantage is linked to the machine
15 architecture, that is to say, the use of a gripper mounted on the panel handling device. After each of the two rotations, the device must return to the starting position before the panel stack can be pushed towards the cutting line. This further slows
20 down the cutting process.

The aim of the present invention is to overcome the drawbacks of the prior art described above.

The invention has for a specific object to provide
a method and device capable of optimising the time
25 required to make a series of cuts at different

angles in one or more panels using a panel saw.

The above aim and object are achieved by a method and a device, as described in the claims, for making a series of cuts at different angles in one or more panels using a panel saw.

The method and device according to the present invention will now be described with reference to the accompanying drawings which illustrate a preferred embodiment without limiting the scope of the invention and in which:

- Figure 1 is a plan view of the device according to the invention;
- Figure 2 shows the different positions occupied by the panel stack during the first rotation;
- Figure 3 shows the different positions occupied by the panel stack during the second rotation;
- Figure 4 is a longitudinal section of the pickup element through line IV-IV in Figure 1;
- Figure 5 is a longitudinal section of the worktable through line V-V in Figure 1;
- Figure 6 is a longitudinal section of the fence in two working conditions;
- Figure 7 is a cross section of the worktable through line VII-VII in Figure 1;
- Figure 8 shows a cutting pattern for a panel

stack to be cut.

With reference to Figure 1, the numeral 1 indicates as a whole the device made according to the present invention.

5 The device 1 comprises a worktable 3 that has a cutting line 4 for a panel sawing machine that is not illustrated in the drawings since it is of a type well known to experts in the trade and fully illustrated in the document cited above as prior art.

10 The worktable 3 is designed to receive a stack 2 of one or more panels having a substantially rectangular shape. The numeral 11 indicates a device designed to pick up the panel stack and to move to and fro along direction X. In practice, this device consists of a crossbeam that mounts a plurality of pickup or gripping elements, illustrated schematically as 7p, which grip the front edge of the panel stack and move it towards and away from the cutting line 4.

15 Along the top of the worktable 3 there is a plurality of wheels 14, illustrated in Figures 4 and 5, which constitute the elements that support the weight of the panel stack and which are designed to limit the friction created by the

20

25

sliding of the stack 2 on the worktable.

First handling means 15 work in conjunction with the worktable 3 to turn the stack a first time about the cutting line 4 in a first rotation direction 5.

In the embodiment being described, the first handling means 15 comprise a first guide 8 extending crossways on the worktable 3, preferably perpendicularly to the cutting line 4, and a second guide 9 extending on the worktable 3 in a direction substantially perpendicular to the first guide 8.

Looking in more detail, the first guide 8 comprises a mounting beam 35 that supports two straight guides or rails 32, 33 and a rack 36.

The handling means 15 further comprise a pickup element 6 that moves along the first guide 8 and a push element 7 that moves along the second guide 9.

The pickup element 6 comprises a gripper 20, illustrated in Figure 4, with two jaws 17, 18, each of which has a supporting portion 17a, 18a and an active portion 17b, 18b designed to engage the stack 2. The active portions 17b, 18b are mounted on the supporting portions 17a, 18a in such a way that they can turn freely, for example on ball bearings 17c, 18c. A pneumatic system 19 opens and

closes the jaws so as to engage and release the stack 2.

The pneumatic system 19 comprises a piston 37 attached to the second jaw 18 and a cylinder attached to the first jaw 17.

The pickup element 6 is mounted on the guide 8 in such a way that it can move along the two rails 32, 33. The movement of the pickup element 6 along the guide 8 is accomplished by a toothed wheel 31 that meshes with the rack 36 and is driven by a motor 30. In Figure 1, for example, the numeral 16 indicates the forward position, close to the cutting line.

The push element 7 moves from a first, working position on the worktable 3 where it acts on the side of the stack 2 and a second, idle position where it is below the worktable 3. In the second position, the push element 7 can move along the guide 9 so that it passes under the worktable 3. The movement of the push element 7 from the first working position on the worktable to the second idle position is controlled by a cylinder and piston system labelled 50 in Figure 7.

The device 1 further comprises a fence 10, illustrated in detail in Figure 6 designed to

ensure that the panel stack 2 is correctly positioned relative to the cutting line 4. The fence 10 moves from an idle position 10' where it is under the worktable 3 and a working position 10'' where it is above the worktable 3.

Looking in more detail, the fence 10 comprises a first arm 41 and a second arm 42 perpendicular to the first, as shown in Figure 6. The first arm 41 is hinged, at a first end 41a, to a bed 45 over which the worktable 3 is positioned. Instead, the second arm 42 is rigidly connected to the second end 41b of the first arm 41.

When the fence 10 is in the working position 10'', the first arm 41 is aligned with the worktable 3, while the second arm 42 provides a stop surface against which the panel stack 2 abuts. Instead, when the fence moves to the idle position 10', the first arm 41 is rotated by 90 degrees relative to the worktable 3 so that the two arms 41, 42 are positioned below the worktable 3.

A lever 43 and a control piston 44 move the two arms 41, 42 from the working position 10'' to the idle position 10' and vice versa. The first end 43a of the lever 43 is hinged to the bed 45 and the second end 43b abuts against the first arm 41. The

control piston 44 acts between the bed 45 and the central portion 43c of the lever 43.

Lastly, the device 1 comprises the aforementioned push carriage 11 that pushes the panel stack 2 on the worktable 3 to the cutting line 4 when it has to be cut.

The present invention also relates to a method for making a series of cuts at different angles in one or more panels using a panel sawing machine.

In a preferred embodiment, the method comprises a step of placing a stack 2 of one or more panels on a worktable 3 having a cutting line 4 for a panel sawing machine.

In particular, the panel stack 2 has to be cut according to a defined cutting pattern, an example of which is illustrated in Figure 8.

The method according to the invention also comprises a step of turning the panel stack 2 a first time through 90 degrees, as per figure 2, in a first rotation direction indicated by the arrow 5.

This step is carried out after rotatably securing the pickup element 6 to the panel stack at a corner portion 2a opposite the cutting line 4 and after the push element 7 has abutted against the side 2b

of the panel stack opposite the corner portion 2a and located near the cutting line 4.

In particular, the step of rotatably securing the pickup element 6 to the corner portion 2a of the panel stack is carried out by activating the pneumatic system 19. In this way, the second jaw 18 of the gripper 20 is pushed by the piston 37 towards the panel stack 2. A stop element 39 stops the jaw 18 at a position where the active portion 18b abuts against the underside of the panel stack 2. At this point, since the piston 37 is stopped, the cylinder 37 moves downwards, dragging the first jaw 17, to which it is connected, along with it.

The first jaw 17 is stopped when it abuts against the top surface of the panel stack 2 and the drive pressure of the pneumatic system 19 is counterbalanced by the forces exerted by the jaws 17, 18 on the panel stack 2.

The panel stack 2 is now turned by moving the pickup element 6 towards the cutting line 4. Once the pickup element 6 has moved past the axis of the second guide 9, the fence 10 is activated and moves to the working position 10'', while the push element 7 moves along the second guide 9 to reach the working position 10''.


During this step, the pickup element 6 advantageously moves along the first guide 8 following a first, straight path, that is transversal, and preferably perpendicular, to the cutting line 4.

The push element 7, on the other hand, moves along the second guide 9 following a second path that is substantially perpendicular to the first path.

At the end of the step just described, the panel stack 2, which was initially positioned with its long sides parallel to the cutting line 4, is now located at the position labelled 2', and the pickup element 6 and the push element 7 are located at the positions labelled respectively 6' and 7' in Figure 2.

While the panel stack 2 is in this position, the panel saw can make a first series of one or more cuts. In the example cutting pattern shown in Figure 8, the first series will include the cuts labelled T1, T2 and T3, where T1 is usually a trimming cut.

The step of making the first series of cuts in the panel stack 2 in turn comprises the step of disengaging the pickup element 6 from the panel stack 2, together with the push element 7 and the



fence 10, which will move to its idle position 10'. The panel stack 2 is gripped by the gripping elements 7p, located on the push carriage 11, carried to the cutting line 4 and cut.

5 The cut portions of the panel stack 2, labelled A in Figure 8, will then be conveyed to other cutting stations where they can be cut further, for example along lines T5, T6 and T7 in Figure 8.

10 The portion of the panel stack 2 that remains on the worktable 3 can then be turned again, preferably by 90 degrees, as shown in Figure 3.

The second rotation of the panel stack 2 occurs in a direction, indicated by the arrow 12 in Figure 3, opposite to the first rotation direction and in such a manner as to move the panel stack 2 closer to the cutting line 4.

15 In this case, according to the invention, the pickup element 6 rotatably secures the panel stack at a corner portion 2c located close to the cutting line 4 and the push element 7 abuts against a portion 2d of the side of the panel stack located close to the first guide 8. Advantageously, the portion 2d is further away from the cutting line than the corner portion 2c.

25 The second rotation is carried out by moving the

push element 7 away from the first guide 8 along the second guide 9, and then moving the pickup element 6 away from the cutting line 4 along the first guide 8.

5 As for the first rotation, the pickup element 6 moves along the first, straight path, that is transversal, and preferably perpendicular, to the cutting line 4, while the push element 7 follows the second path that is substantially perpendicular to the first path.

10 At the end of the step just described, the panel stack 2, which was initially at the position labelled 2'' in Figure 3, is now at the position labelled 2''', the pickup element 6 has moved from position 6''' to position 6'', while the push element has moved from 7'' to 7'''.

15 At this point, the panel saw can make a second series of one or more cuts in the panel stack 2. In the example cutting pattern shown in Figure 8, the second series, labelled B, will include the cuts labelled T9, T10, T11 and T12 (where T9 is the usual trimming cut).

20 The panel stack 2 is carried by the push carriage 11 to the cutting line 4 and cut.

25 The invention has the following important

advantages.

Notice first of all that, in the method taught by the present invention, the step of turning the panel stack the second time enables the panel stack to be moved closer to the cutting line. Compared to solutions taught by prior art, this aspect of the present invention reduces the distance that has to be travelled by the panel stack to reach the cutting line, with evident advantages in terms of reduction of working time.

Another advantage is linked to the fact that the devices used to rotate the panel stack are not the same devices that move the panel stack towards and away from the cutting line. Rotation is carried out by the pickup element and the push element, while the other movements are carried out by the push carriage 11. This means that, unlike solutions taught by prior art, the push carriage 11 is ready at its working position and does not have to move when the panel stack stops turning. The absence of this movement further reduces working time.

Yet another advantage is that, thanks to the machine architecture with the pickup element 6 mobile along the guide 8, which is situated outside the worktable 3, the panel stack remains on a fixed

reference line (labelled F0 in Figures 2 and 3) whatever position it is in after being turned (as indicated by the reference numerals 2', 2'', and 2'''). This permits improved extraction of sawdust by the machine's upper dust extractor, which is not illustrated since it is of a type well known to experts in the trade.

The Claims defining the invention are as follows:

~~Claims~~

- 1) A method for making a series of cuts at different angles in one or more panels using a panel sawing machine comprising the following steps:
- placing a stack (2) of one or more panels on a worktable (3) having a cutting line (4) for a panel sawing machine;
 - turning the panel stack (2) a first time in a first rotation direction (5);
 - making a first series of cuts in the panel stack (2);
 - turning the panel stack (2) a second time; and
 - making a second series of cuts in the panel stack (2);
- characterised in that the second rotation occurs in a direction (12) opposite the first direction (5) and in that during the second rotation, the panel stack (2) is moved closer to the cutting line (4).
- 2) The method according to claim 1, characterised in that the step of turning the panel stack the second time in turn comprises the following steps:

- rotatably securing a pickup element (6) to the panel stack (2) at a corner portion (2c) located close to the cutting line (4), the panel stack (2) being substantially rectangular in shape; and
- moving the pickup element (6) away from the cutting line (4).

3) The method according to claim 2, characterised in that the step of moving the pickup element (6) away from the cutting line (4) is carried out by moving the pickup element (6) along a first guide (8) following a first, straight path that is transversal to the cutting line (4).

4) The method according to claim 3, characterised in that said straight path is substantially perpendicular to the cutting line (4).

5) The method according to claim 3 or 4, characterised in that the step of turning the panel stack (2) the second time in turn comprises the following steps:

- abutting a push element (7) against a portion (2d) of the side of the panel stack close to the first guide (8), the portion (2d) being located

further away from the cutting line (4) than the corner portion (2c); and

- moving the push element (7) away from the first guide (8).

- 6) The method according to claim 5, characterised in that the step of moving the push element (7) away from the first guide (8) is carried out by moving the push element (7) along a second guide (9) following a second path that is substantially perpendicular to the first path.

- 7) The method according to claim 5 or 6, characterised in that the steps of moving the push element (7) away from the first guide (8) and moving the pickup element (6) away from the cutting line (4) are simultaneous and/or sequential.

- 8) The method according to claim 1, characterised in that the step of turning the panel stack (2) for the second time causes it to turn by approximately 90 degrees.

9) A device for making a series of cuts at different angles in one or more panels using a panel sawing machine comprising:

- a worktable (3) for a stack (2) of one or more panels, said worktable (3) having at least one cutting line (4) for a panel sawing machine;

- first handling means (15) working in conjunction with the worktable (3) to turn the panel stack (2) about the cutting line (4) in a first rotation direction (5) and in a second rotation direction (12);

- a push carriage (11) operating on the worktable (3) to move the panel stack (2) to the cutting line (4) when the panel stack (2) has to be cut;

characterised in that the first handling means (15) comprise:

- a first guide (8) extending crossways on the worktable (3), preferably perpendicularly to the cutting line (4);

- a second guide (9) extending on the worktable (3) in a direction substantially perpendicular to the first guide (8);

- a pickup element (6) that moves along the first guide (8);

- a push element (7) that moves along the second guide (9).

- 10) The device according to claim 9, characterised in that the pickup element (6) comprises a gripper (20) with two jaws (17, 18) each jaw having a supporting portion (17a, 18a) and an active portion (17b, 18b) designed to engage the panel stack (2) on the support portion (17a, 18a).
- 11) The device according to the previous claim, characterised in that the active portions (17b, 18b) of the jaws (17, 18) are mounted on the supporting portions (17a, 18a) in such a way that they can turn freely.
- 12) The device according to claim 10 or 11, characterised in that the pickup element (6) comprises a pneumatic system (19) that operates between the first and second jaws (17, 18) so as to tighten the gripper (20) on the panel stack (2).
- 13) The device according to claim 12, characterised in that the pneumatic system (19) comprises a piston

(37) attached to the second jaw (18) and a cylinder attached to the first jaw (17).

14) The device according to any of the foregoing claims from 9 to 13, characterised in that the guide (8) comprises a mounting beam (35) extending crossways, in a direction preferably perpendicular to the cutting line (4), and a rack (36) connected to the mounting beam (35).

15) The device according to claim 14, characterised in that the pickup element (6) comprises a motor (30) and a toothed wheel (31), the toothed wheel (31) being meshed with the rack (36) and being driven by the motor (30).

16) The device according to any of the foregoing claims from 9 to 15, characterised in that it comprises a bed (45) over which the worktable (3) is positioned, and a fence (10) connected to the bed (45).

17) The device according to claim 16, characterised in that the fence (10) moves between an idle position

(10') under the worktable (3), and a working position 10'' above the worktable (3).

- 18) The device according to claim 17, characterised in that the fence (10) comprises a first arm (41) and a second arm (42) perpendicular to the first arm (41), the first arm (41) being hinged, at a first end (41a), to the bed 45, and the second arm (42) being rigidly connected to the second end (41b) of the first arm (41).
- 19) The device according to claim 17, characterised in that the fence (10) comprises a lever (43) having a first end (43a) hinged to the bed (45), a central portion (43c) and a second end (43b) that abuts against the first arm (41).
- 20) The device according to claim 19, characterised in that it comprises a control piston (44) that operates between the bed (45) and the central portion (43c) of the lever (43).

21. A method for making a series of cuts at different angles in one or more panels using a panel sawing machine, the method substantially as hereinbefore described with reference to the accompanying drawings.

22. A device for making a series of cuts at different angles in one or more
5 panels using a panel sawing machine, the device substantially as hereinbefore described with reference to the accompanying drawings.

Dated 3 January, 2001

Giben Impianti S.p.A.

Patent Attorneys for the Applicant/Nominated Person

SPRUSON & FERGUSON

[illegible]

FIG.2

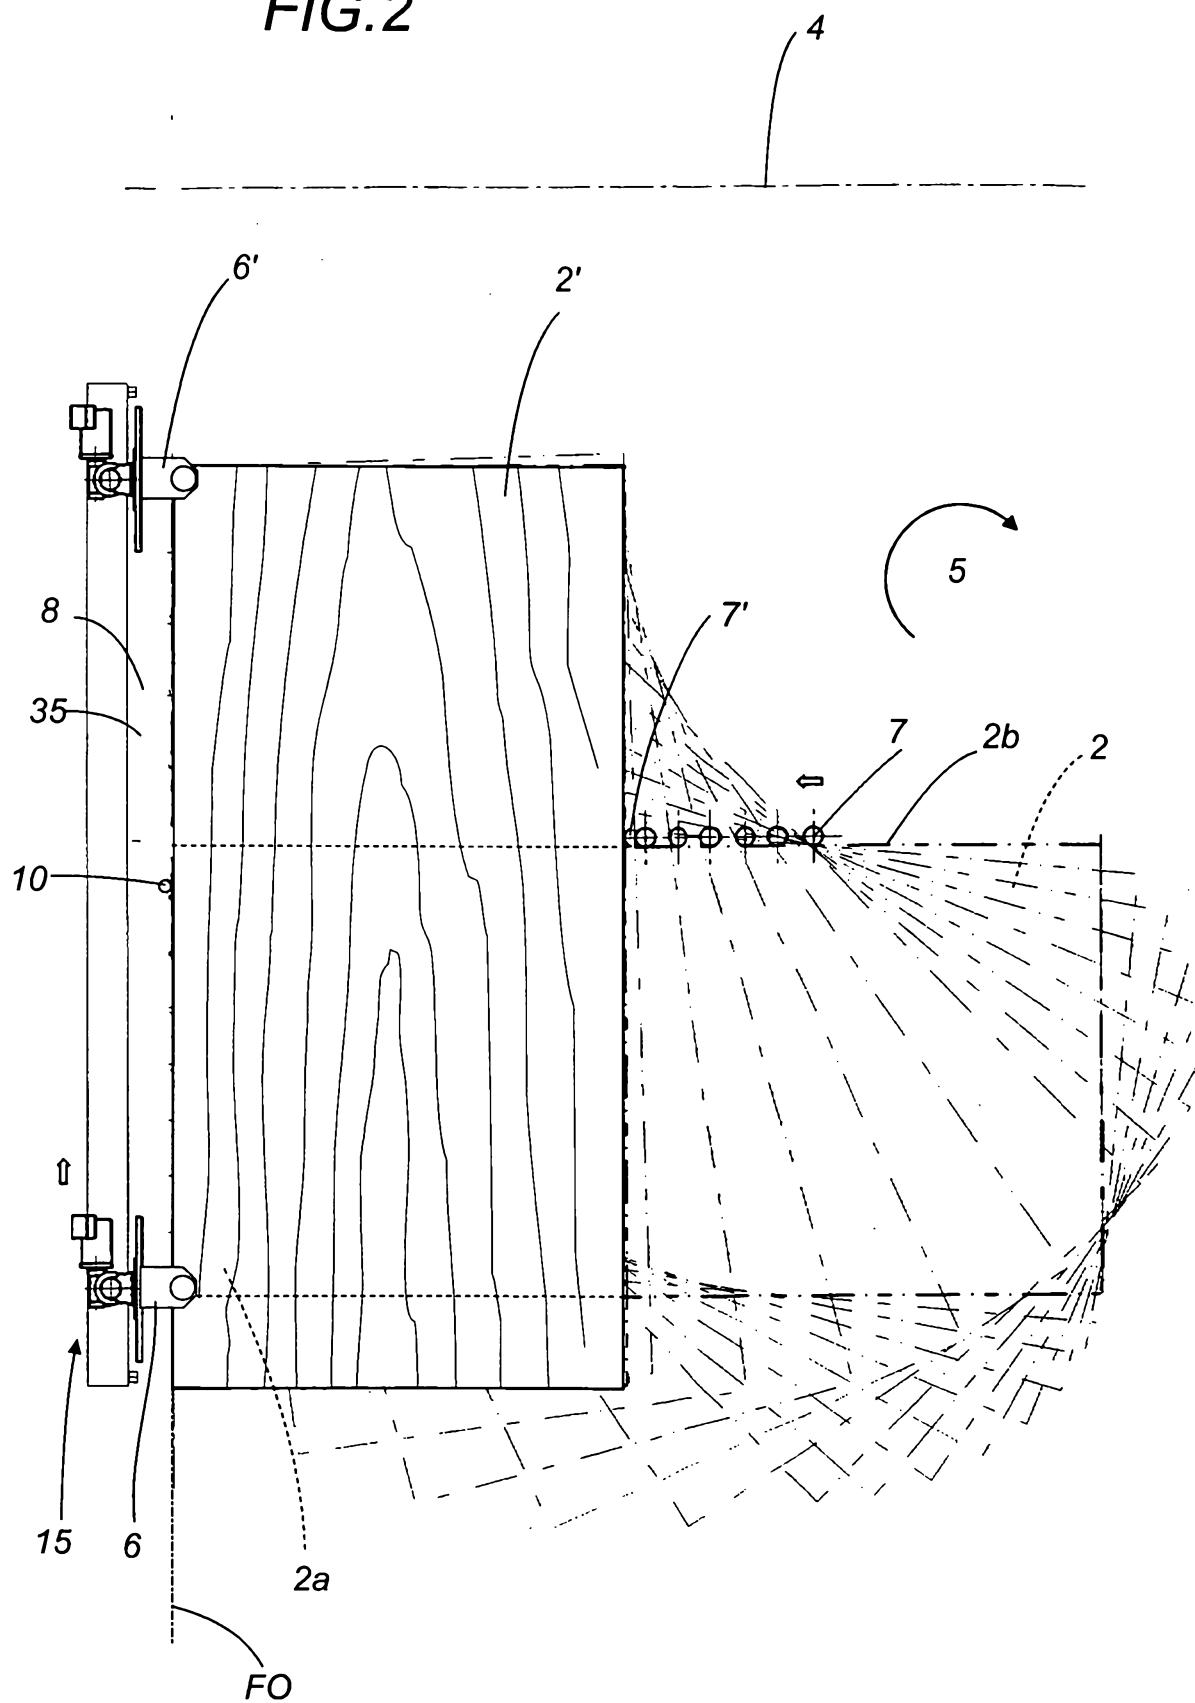


FIG.3


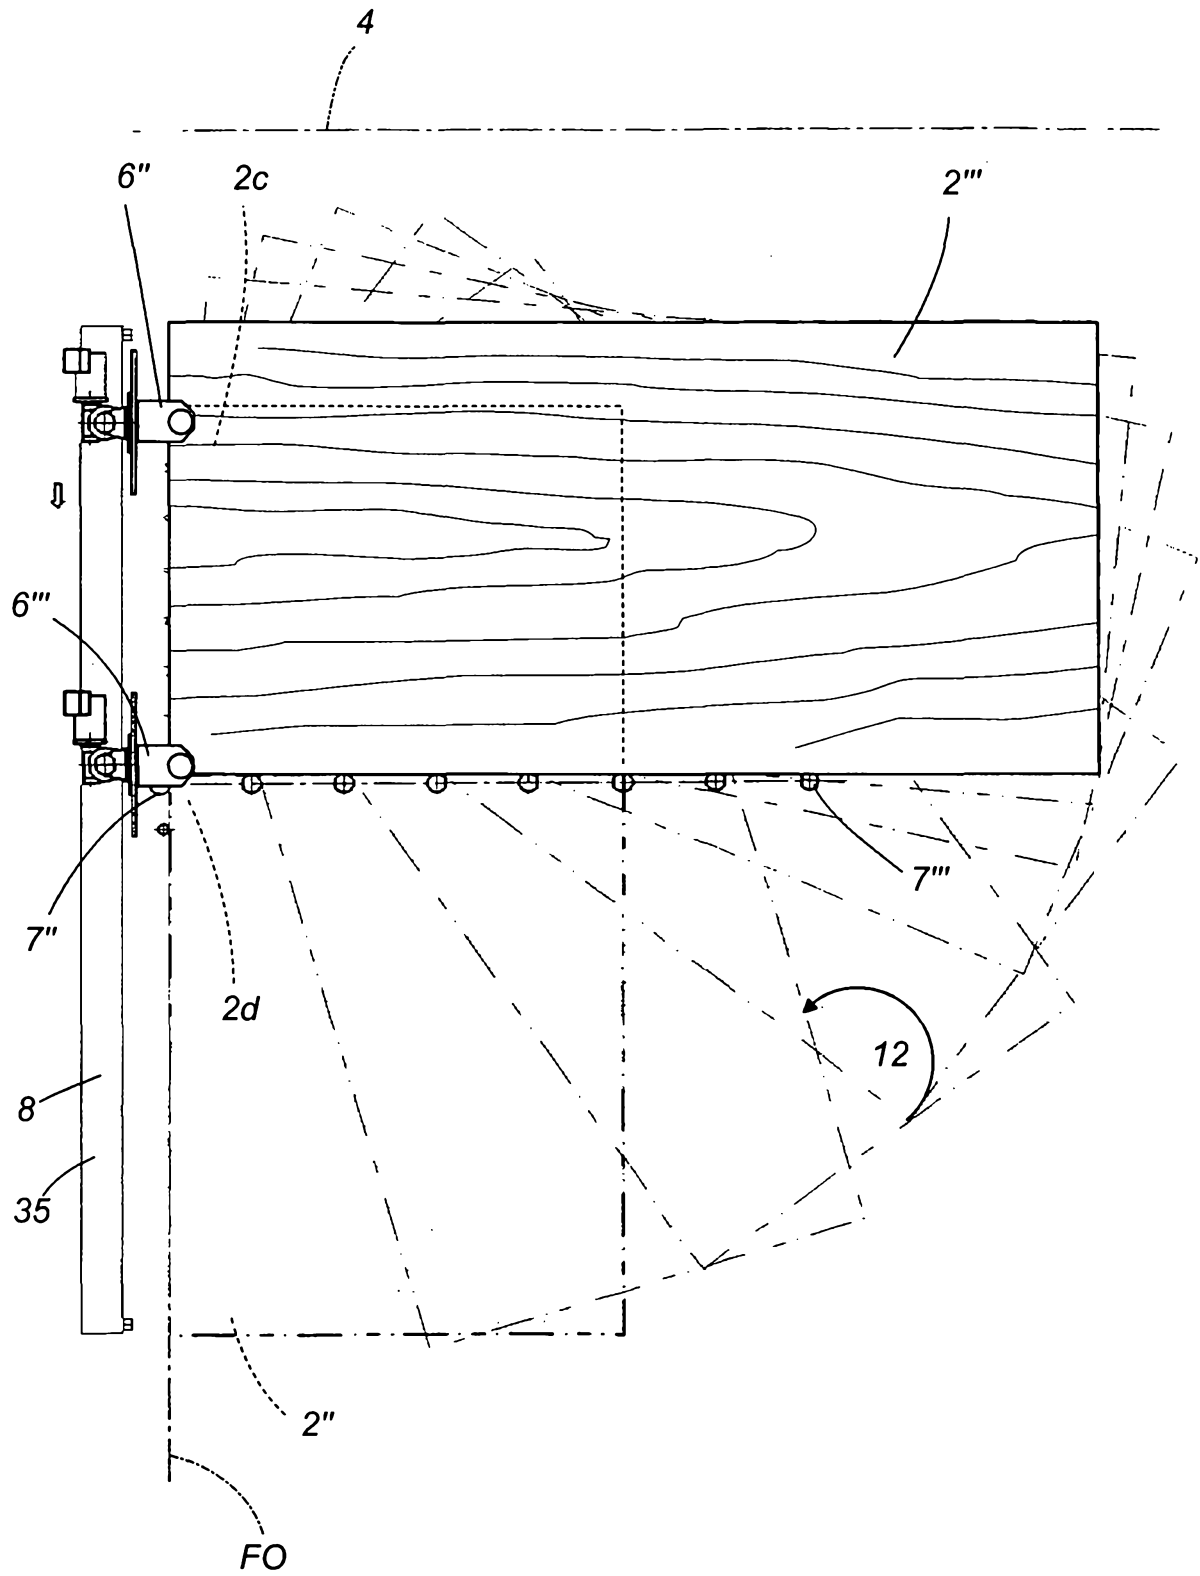


FIG.4

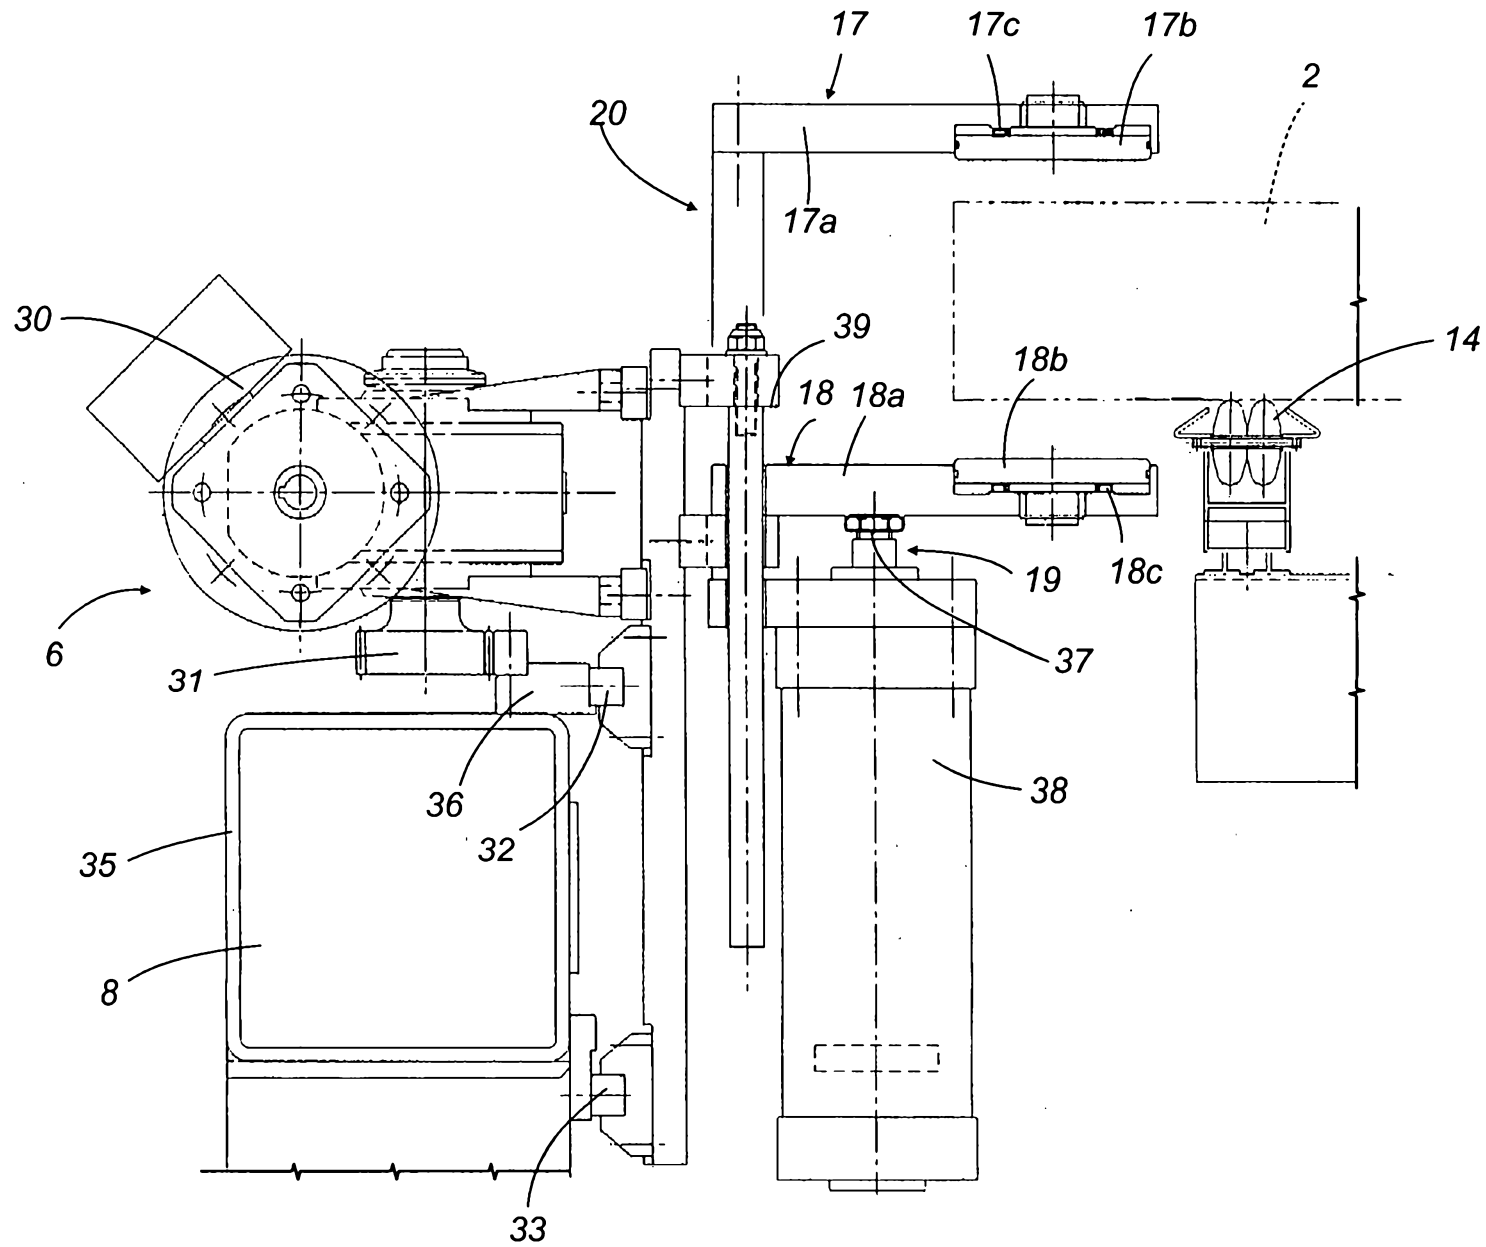

00 01 01 10032

FIG.5

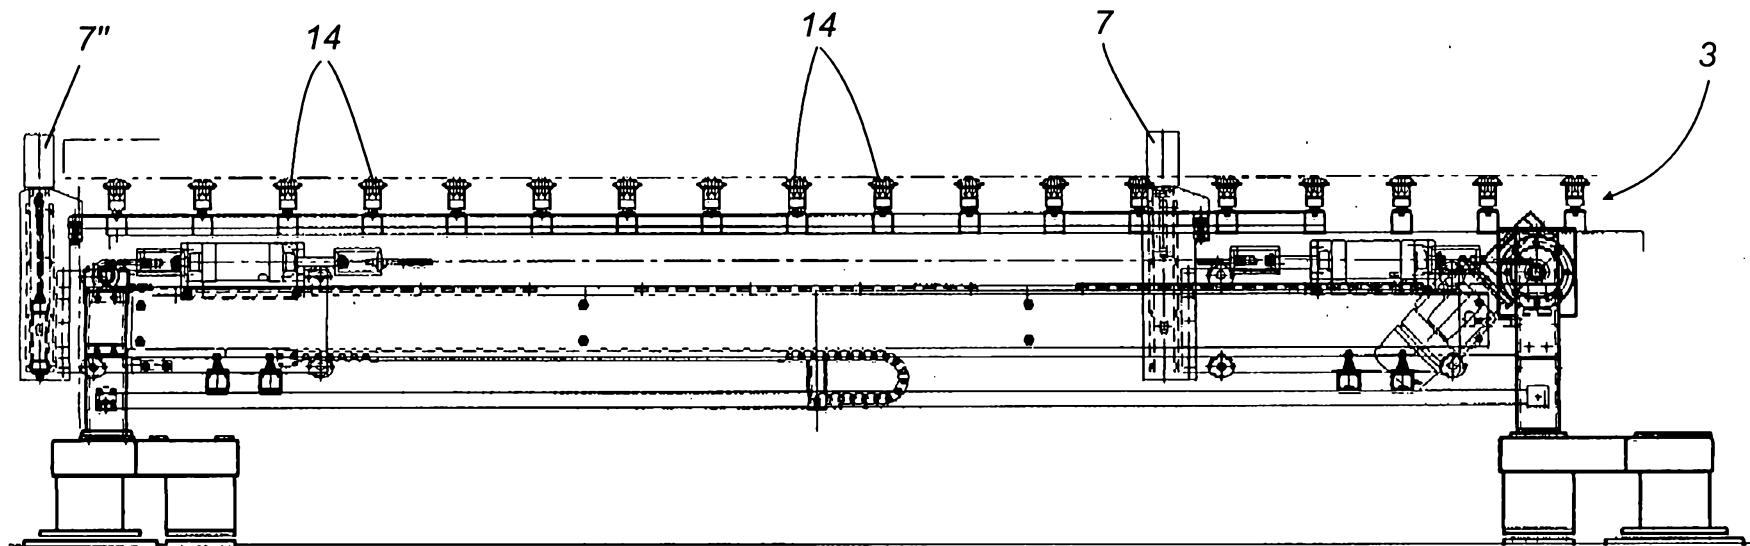


FIG. 6

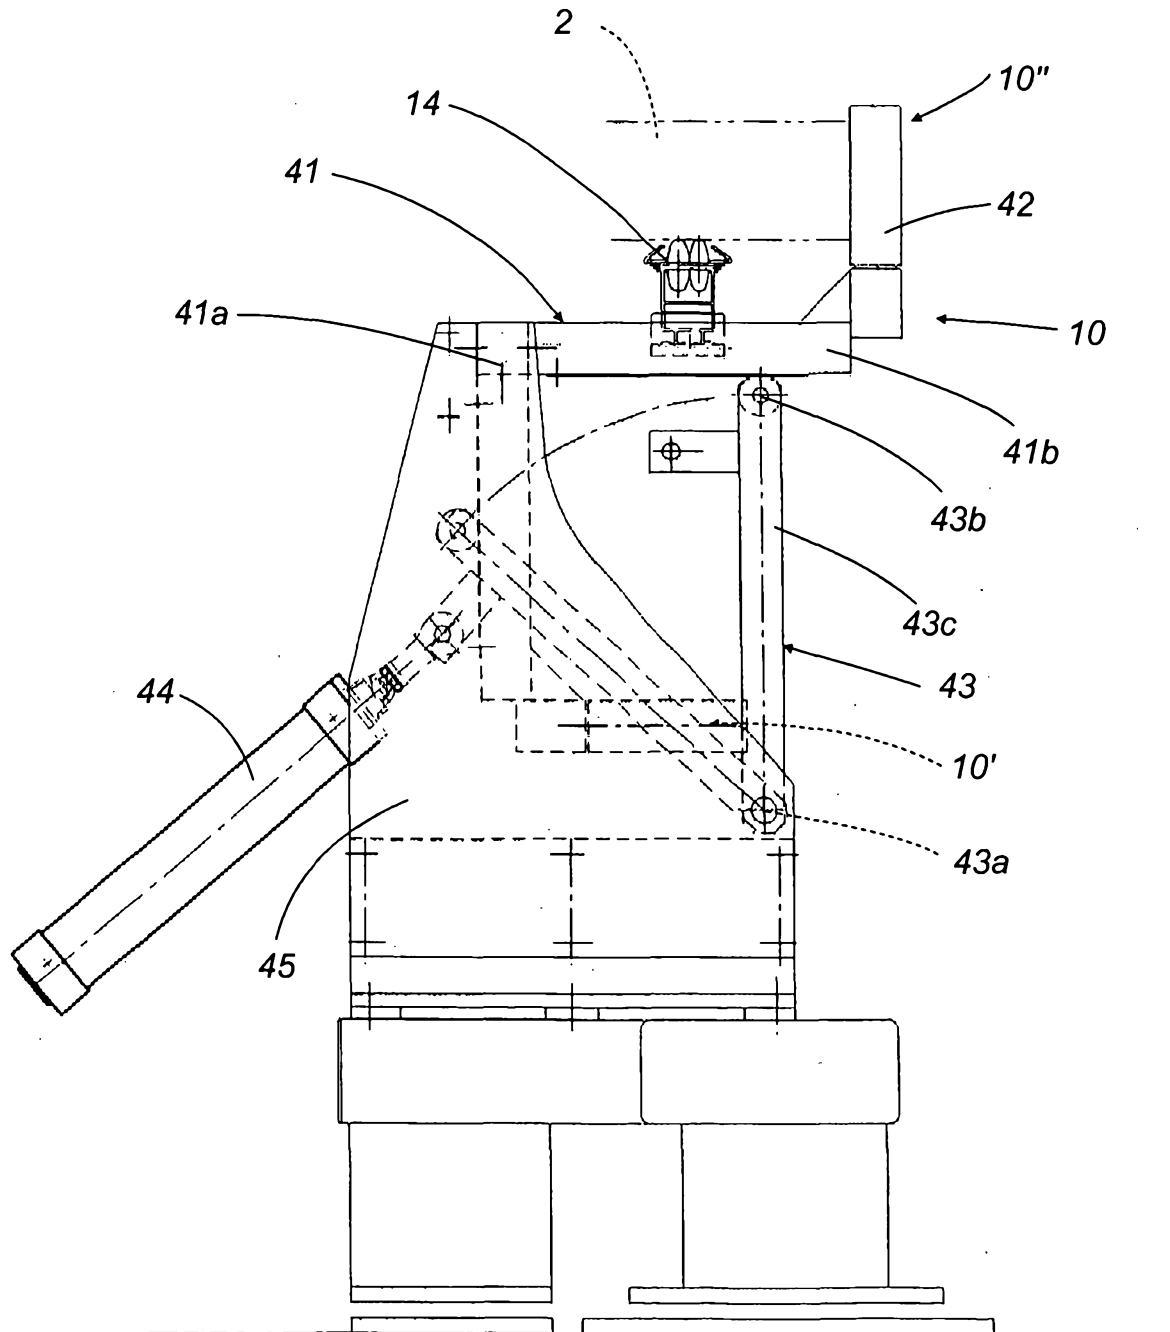


FIG.7

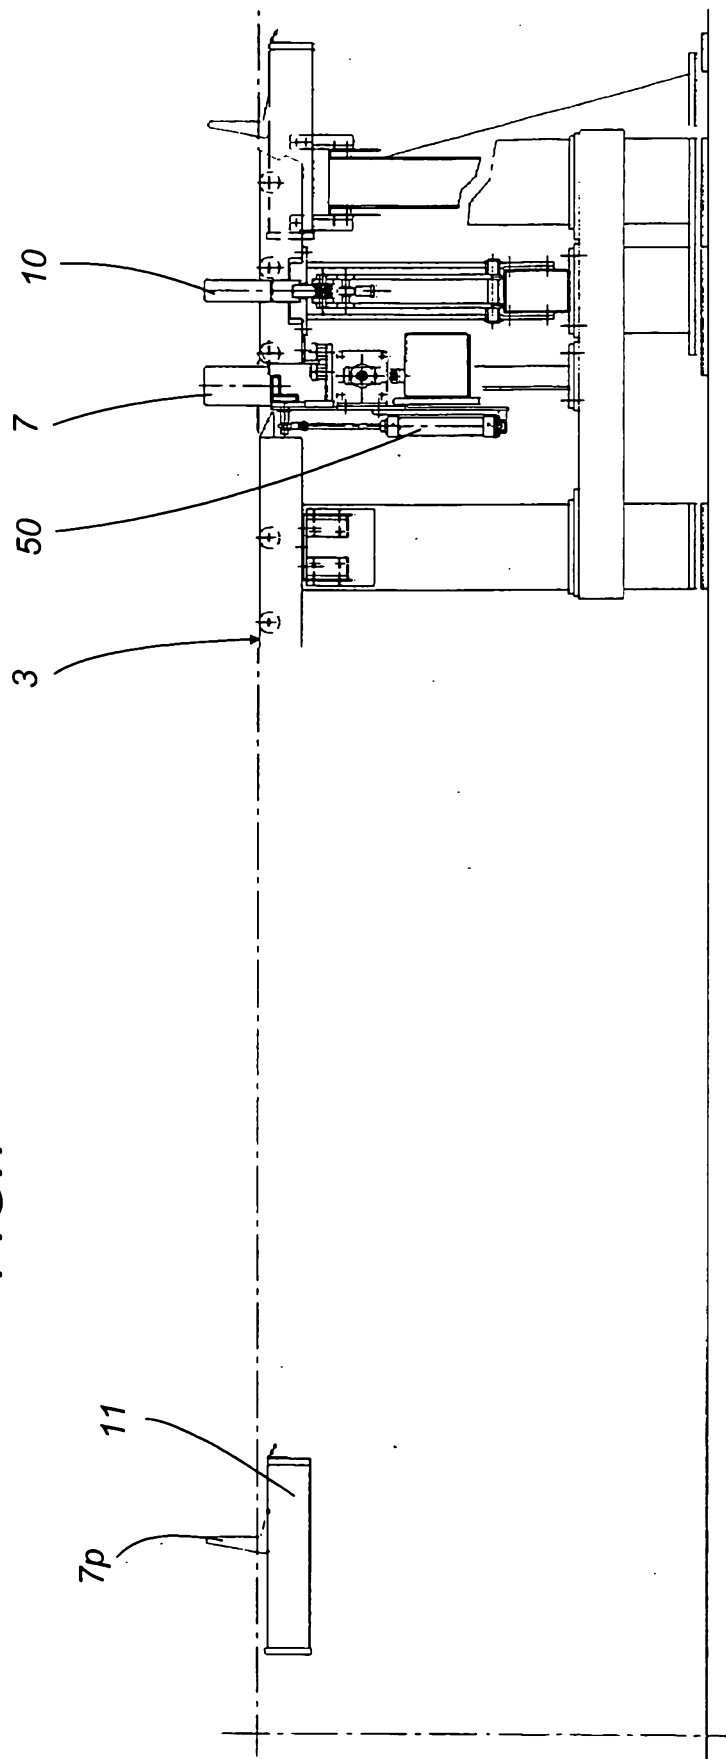


FIG.8

