

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
14 August 2008 (14.08.2008)

PCT

(10) International Publication Number
WO 2008/097149 A1

(51) International Patent Classification:
H04Q 7/38 (2006.01) *H04Q 7/30* (2006.01)

(21) International Application Number:
PCT/SE2007/050080

(22) International Filing Date: 8 February 2007 (08.02.2007)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **TELEFONAKTIEBOLAGET LM ERICSSON (PUBL)**
[SE/SE]; S-164 83 Stockholm (SE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **KLOCKAR, Lars**
[SE/SE]; Mästersimonsväg 15, S-170 66 Solna (SE).

(74) Agent: **NILSSON, Charlotte**; Ericsson AB, Patent Unit
3g, S-164 80 Stockholm (SE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS,
JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS,
LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MY,
MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS,
RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT,
RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:


- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- of inventorship (Rule 4.17(iv))

Published:

- with international search report

(54) Title: PARALLEL TRANSMISSION OF HANDOVER MESSAGE

Fig. 2

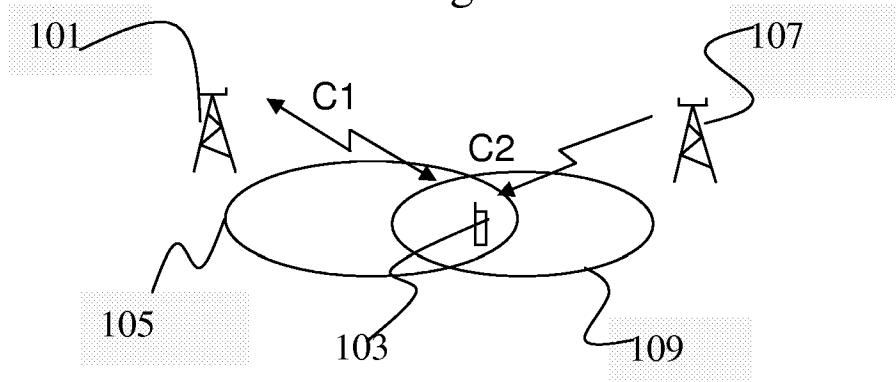

(57) Abstract: In a method and system handover commands to a mobile station supporting simultaneous reception on two different channels is transmitted both on the regular channel and on an additional channel. By supporting decoding of both handover commands in the mobile station the likelihood of a successful handover is greatly increased.

Parallel transmission of handover message

5

TECHNICAL FIELD

10 The present invention relates to a method and a system for handling handover in a radio network system in particular a GSM radio system.

BACKGROUND

15 GSM (Global System for Mobile communications) is a standard for mobile telephony. GSM differs significantly from its predecessors in that both signaling and speech channels are digital, which means that it is seen as a second generation (2G) mobile phone system. GSM is an open standard which is developed by the 3GPP.

As the GSM standard continues to develop, it retains backward compatibility with the
20 original GSM mobile telephones; for example, packet data capabilities were added in the Release '97 version of the standard, by means of General Packet Radio Service (GPRS). Higher speed data transmission has also been introduced with Enhanced Data rates for GSM Evolution (EDGE) in the Release '99 version of the standard.

25 In release 7 of the 3GPP specifications a downlink dual carrier is introduced. The downlink dual carrier GSM EDGE Radio Access Network (GERAN) makes it possible for the mobile station to receive data on two different frequencies simultaneously. The reason for adding a new downlink carrier is to increase the peak throughput for Enhanced GPRS (EGPRS). The second carrier enables the mobile station to receive twice as many time slots as with a
30 conventional Enhanced GPRS (EGPRS) system.

The GSM standard is a cellular radio network standard. A cell is an area served by a base station to which a mobile station connects. When the mobile station travels outside the area served by a particular base station, the mobile station must be served by another base station serving another, adjacent cell. In order for the system to handle the transfer from one cell to another a handover procedure is defined for each GSM system.

The handover procedure is a critical phase for the end-user in a GSM network. The handover procedure is used to control the mobile stations in a GSM network. The handover procedure measures the signal strength of a current serving cell and at least one surrounding cell. The results of these measurements are then reported back to the network. If the current serving cell is determined to be inferior to another cell, the target cell, the network initiates a handover from the current serving cell to the target cell, which upon completion of the handover becomes the new serving cell.

The handover procedure is typically initiated when the signal strength in the serving cell is worse than that of another adjacent cell. At this time it is not uncommon that the quality on the speech channel has degraded and that there can be problems for a control signal indicating a change of cell to reach the mobile station. It is necessary for all signaling in a handover procedure to reach the designated mobile station in order for the connection to continue. If the mobile station has traveled out of range for the signaling from the serving cell the connection will be terminated and the call will be dropped once the mobile station travels from the serving cell and is out of reach for the base station of the serving cell. A lot of efforts are therefore spent in a radio network to ensure that this signaling is successful to as large extent as possible.

The handover procedure becomes even more critical in networks dimensioned for speech version 3. The robustness of the speech and the associated control channels are unbalanced for this speech version. This will not result in any major problems as long as it is used to enhance the speech quality. However, if it is used to extend the service area for a cell the likelihood of dropped calls due to signaling failure on the associated control channels is increased as described above.

Thus, there is a problem in existing GSM networks when the MS has moved too far into a target cell before the handover command is sent. In that case it might be very hard for the MS to successfully decode it, which in turn will lead to a call being dropped. This is especially a problem where low AMR modes are used to extend the service area for Circuit Switched (CS) speech.

Hence, there exists a need for a method and a system that is able to increase the robustness of the handover procedure in a GSM network. A more stable handover procedure would also make the frequency planning less critical in non-AMR networks.

SUMMARY

It is an object of the present invention to overcome or at least reduce some of the problems associated with existing handover procedures.

It is another object of the present invention to provide a method and a system that is capable of increasing the likelihood of a successful handover without introducing complex handover procedures such as soft handover and the like.

It is yet another object of the present invention to provide a handover procedure that enables the handover procedure to remain unchanged and at the same time increase the likelihood of a successful handover.

These objects and others are obtained by the method and system as set out in the appended claims. Thus, by transmitting the handover command to the mobile station both on the regular carrier and on an additional carrier and decoding both handover commands in the mobile station the likelihood of a successful handover is greatly increased. In particular the downlink dual link carrier introduced in release 7 of the 3GPP is advantageously employed as a second downlink carrier for transmission of a parallel handover command.

The handover procedure is thus extended for mobile stations that support dual carrier in downlink by sending the handover command on two different carriers. The additional handover command sent on the second channel can advantageously be transmitted from the

intended target cell or the serving cell. However, in some scenarios it might prove advantageous to transmit the additional handover command from a location other than the serving cell or the target cell, such as an adjacent base station serving a cell other than the serving cell or the target cell.

5

In a typical set-up the serving cell and target cell will simultaneously send the same handover command to the mobile station, but on different frequencies. The difference in quality of the two channels can be rather large and the probability of a successful decoding is therefore increased substantially.

10

In order for the transmission of parallel handover commands to be useful the mobile station needs to be enabled to simultaneously decode both handover commands. Thus, the mobile station needs to have knowledge of the channel used by the system for transmission of the second, additional handover command. This can be accomplished in a number of different ways.

15

Thus, prior to the handover the Base Station Subsystem (BSS) provides the mobile station with information about the second handover signaling channel. When the mobile station receives a handover command on any of the downlink signaling channels it initiates a handover procedure in a conventional manner. There is no need to provide support for the Dual Carrier on the uplink. The channel in the target cell that is used for sending the handover command does not need to be the same channel as the one specified in the handover command, i.e. the channel to which the mobile station is to be handed over to.

20

25 BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will now be described in more detail by way of non-limiting examples and with reference to the accompanying drawings, in which:

- Fig. 1 is a view illustrating handover in accordance with the invention,

30

- Fig. 2 is a view illustrating handover in accordance with another embodiment of the invention,

- Fig. 3 is a flow chart illustrating different steps performed when transmitting a handover command, and
- Fig. 4 is a flow chart illustrating different steps performed when transmitting a handover command in accordance with another embodiment of the invention.

5

DETAILED DESCRIPTION

In Fig.1 a view illustrating transmission of a handover command in accordance with the present invention in a GSM radio system 100 is shown. The GSM radio system comprises a number of cells each served by a base station as is well known in the art. For illustration
10 purpose, only one cell 105 is shown in Fig.1.

A mobile station 103 being served by a base station in the cell 105 will at some point in time travel towards the boundary of the cell 105 which will be detected by the GSM system 100. Typically the detection is made by comparing the signal strength in the serving cell to that
15 of other adjacent cells. Upon detection the base station subsystem will initiate a handover command.

In order to increase the likelihood of a successful reception and decoding of the handover command the base station subsystem will transmit the handover command on two different
20 carriers (C1 and C2). In accordance with a first preferred embodiment the base station subsystem will transmit the handover command on a carrier C2 from the same location as the first Carrier (C1), i.e. from the serving base station as shown in Fig.1.

In Fig. 2 transmission in accordance with another embodiment of the present invention is
25 illustrated. A mobile station 103 being served by a base station in the cell 105 will at some point in time travel towards the boundary of the cell 105 which will be detected by the GSM system 100. Typically the detection is made by comparing the signal strength in the serving cell to that of other adjacent cells. Upon detection the base station subsystem will initiate a handover command.

30

In order to increase the likelihood of a successful reception and decoding of the handover command the base station subsystem will transmit the handover command on two different

carriers (C1 and C2). In accordance with a second preferred embodiment the base station subsystem will transmit the handover command on a carrier C2 from the base station to which the mobile station is to be handed over to, i.e. from the target base station as shown in Fig.2.

5

In yet another, third embodiment of the present invention the duplicated second handover command transmitted on the second carrier is transmitted from another than the base station of the serving cell or the base station of the target cell. The additional handover command can then be transmitted from a radio transmitter covering the area where the mobile station is located and controlled by the radio system. The radio transmitter used for such a purpose can for example be a base station of a cell other than the serving cell or the target cell or any other suitable radio transmitter.

10

In order for the mobile station to have information on which radio channel the additional handover command is to be transmitted, such information must be provided to the mobile station.

15

The information relating to the additional channel could be distributed in a number of different ways. For example the information can be transmitted directly at the call set-up or at establishment of the main signaling link. This is described in the flow chart in Fig. 3.

20

In Fig. 3 a flow chart illustration steps performed in a GSM radio system designed to transmit the handover command in parallel on two different channels is shown. First in a step 301, at call set-up, the base station subsystem transmits a message including data defining the channel to be used as the second handover command channel to the mobile station. Next, the mobile station decodes the message and starts to monitor the assigned frequency in parallel with the frequency on which the call takes place, step 303.

25

Upon detection of a handover command on either of the two frequencies the mobile station acknowledges the receipt of the handover command and initiates handover in accordance with the parameters provided by the handover command, step 305.

30

In another example, a new message on the Slow Associated Control Channel (SACCH) could be used to distribute the information about the second handover signaling channel in target cell. This new message should preferably not be sent too often on the SACCH. In a preferred embodiment the message is only sent when the mobile station is determined to be close to the cell border. One reason to chose the SACCH as the channel on which to send information relating to the additional channel is that the information that is sent there is not very time critical. Thus, the information sent on this channel is system information and also information relating to which output power and timing advance that should be used for the uplink.

In Fig. 4, a flow chart illustration steps performed in a GSM radio system designed to transmit the handover command in parallel on two different channels in accordance with such an alternate procedure is shown. First in a step 401, at call set-up, the base station subsystem transmits conventional control signals to the mobile station. When the base station subsystem detects the mobile station is close to the border of the cell it transmits information regarding a second channel for the mobile station to monitor, step 403. Next, the mobile station decodes the message and starts to monitor the assigned frequency in parallel with the frequency on which the call takes place, step 405.

Upon detection of a handover command on either of the two frequencies the mobile station acknowledges the receipt of the handover command and initiates handover in accordance with the parameters provided by the handover command, step 407. If at any time when the mobile station is in a mode where two channels are monitored simultaneously for handover commands, the base station detects that the mobile station has moved back towards the centre of the cell it can issue a command releasing the mobile from monitoring the second handover command channel.

Furthermore, the second handover signaling channel could either be allocated only for the mobile station involved in the enhanced handover procedure or alternative be a channel that is used by all mobile stations that are capable of employing the handover procedure as described herein. Alternatively a busy channel could be used and if the channel is busy with an ongoing speech connection a number of speech frames will be omitted in order to

transmit the handover command. Hence, in such an embodiment speech frames will be omitted for another user when distributing handover command to the mobile station.

By using the method and system as described herein and transmitting the handover
5 command to a mobile station supporting simultaneous reception on two different channels both on the regular channel and on an additional channel and supporting decoding of both handover commands in the mobile station the likelihood of a successful handover is greatly increased.

CLAIMS

1. A method of transmitting a handover command to a mobile station (103) being served by a first base station of a serving cell of a GSM radio system (100), the method comprising the step of transmitting a handover command signal from the serving base station (101) to the
5 mobile station (103) on a first carrier (C1), characterized by the additional step of initiating and transmitting the same handover command in the GSM radio system to the mobile station (103) on a second carrier (C2) in parallel to the transmission of the handover command transmitted on the first carrier (C1).
- 10 2. The method according to claim 1, characterized in that the handover command transmitted on the second carrier is transmitted from the first base station (101).
3. The method according to claim 1, characterized in that the handover command transmitted on the second carrier is transmitted from a base station (107) serving the cell to
15 which the handover command indicates that the mobile station is to be continued to be served by, the target cell.
4. The method according to any of claims 1 - 3, characterized in that information about the second carrier is transmitted to the mobile station at call set-up or at establishment of the
20 main signaling link.
5. The method according to any of claims 1 - 3, characterized in that information about the second carrier is transmitted to the mobile station when the mobile station is determined to be close to the border of the serving cell.
25
6. The method according to claim 4 or 5, characterized in that information about the second carrier is transmitted to the mobile station on the Slow Associated Control Channel (SACCH).
- 30 7. The method according to any of claims 1 - 6, characterized in that that the handover command transmitted on the second carrier is transmitted on a channel being busy with an

ongoing speech connection by omitting a number of speech frames in order to transmit the handover command.

8. A base station subsystem of a GSM radio system (100) comprising means for transmitting
5 a handover command to a mobile station (103) on a first carrier (C1), via a first base station (101), characterized by:

- means for initiating and transmitting the same handover command to the mobile station (103) on a second carrier (C2) in parallel to the transmission of the handover command transmitted on the first carrier (C1).

10

9. The base station subsystem according to claim 8, characterized by:

- means for transmitting the handover command transmitted on the second carrier from the first base station (101).

15 10. The base station subsystem according to claim 8, characterized by:

- means for transmitting the handover command transmitted on the second carrier from a base station (107) serving the cell to which the handover command indicates that the mobile station is to be continued to be served by, the target cell.

20 11. The base station subsystem according to any of claim 8 or 9, characterized by:

- means for transmitting information about the second carrier to the mobile station at call set-up or at establishment of the main signaling link.

12. The base station subsystem according to any of claim 8 or 9, characterized by:

25 - means for transmitting information about the second carrier is transmitted to the mobile station when the mobile station is determined to be close to the border of the serving cell.

13. The base station subsystem according to any of claim 11 or 12, characterized by:

- means for transmitting information about the second carrier to the mobile station on the
30 Slow Associated Control Channel (SACCH).

14. The base station subsystem according to any of claim 8 or 13, characterized by:

- 11 -

- means for transmitting. the handover command transmitted on the second carrier on a channel being busy with an ongoing speech connection by omitting a number of speech frames in order to transmit the handover command.

1/3

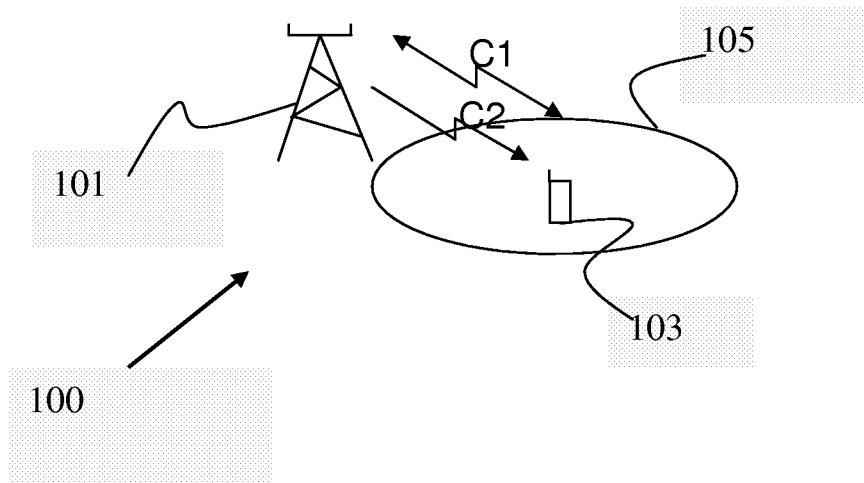


Fig. 1

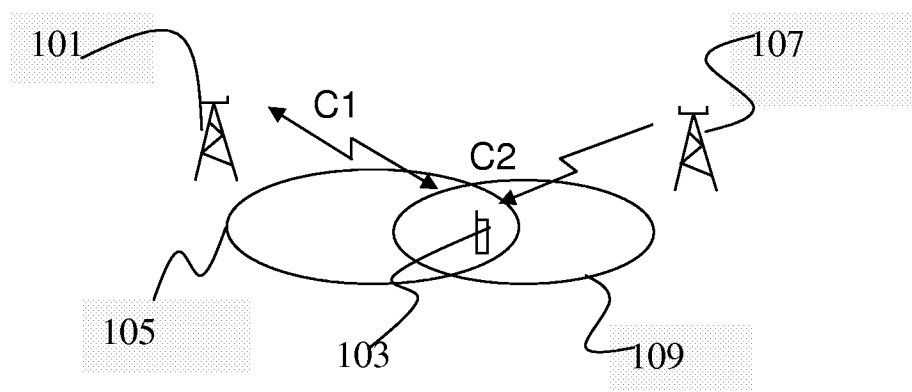


Fig. 2

2/3

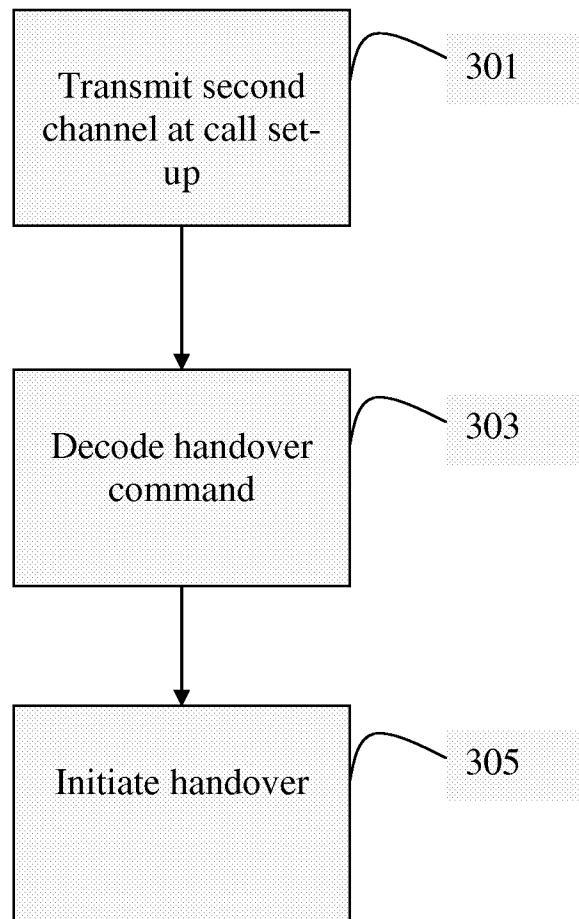


Fig. 3

3/3

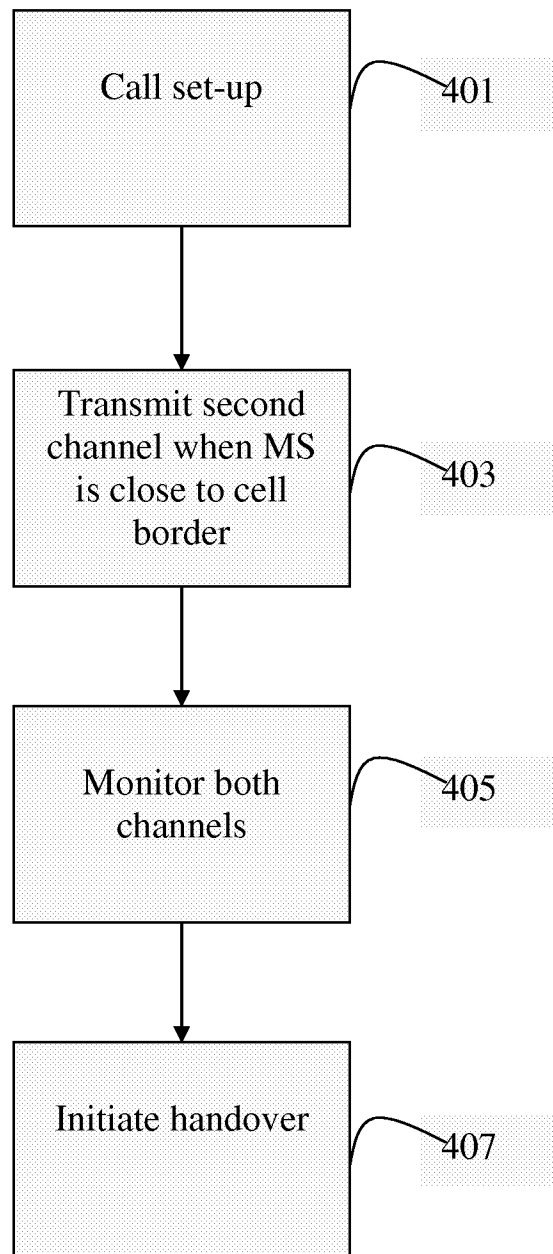


Fig. 4

PATENT COOPERATION TREATY

PCT

INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference P21792WO1	FOR FURTHER ACTION see Form PCT/ISA/220 as well as, where applicable, item 5 below.	
International application No. PCT/SE2007/050080	International filing date (<i>day/month/year</i>) 08-02-2007	(Earliest) Priority Date (<i>day/month/year</i>)
Applicant TELEFONAKTIEBOLAGET LM ERICSSON (PUBL) et al		

This international search report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This international search report consists of a total of 4 sheets.

☐ It is also accompanied by a copy of each prior art document cited in this report.

1. Basis of the report

a. With regard to the **language**, the international search was carried out on the basis of:

- ☒ the international application in the language in which it was filed
☐ a translation of the international application into _____, which is the language of a translation furnished for the purposes of international search (Rules 12.3(a) and 23.1(b))

b. ☐ This international search report has been established taking into account the **rectification of an obvious mistake** authorized by or notified to this Authority under Rule 91 (Rule 43.6bis(a)).

c. ☐ With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, see Box No. I.

2. ☐ **Certain claims were found unsearchable** (See Box No. II)

3. ☐ **Unity of invention is lacking** (See Box No. III)

4. With regard to the **title**,

- ☐ the text is approved as submitted by the applicant.
☒ the text has been established by this Authority to read as follows:

Parallel transmission of handover message

5. With regard to the **abstract**,

- ☒ the text is approved as submitted by the applicant.
☐ the text has been established, according to Rule 38.2, by this Authority as it appears in Box No. IV. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.

6. With regard to the **drawings**,

a. the figure of the **drawings** to be published with the abstract is Figure No. 2

- ☒ as suggested by the applicant.
☐ as selected by this Authority, because the applicant failed to suggest a figure.
☐ as selected by this Authority, because this figure better characterizes the invention.

b. ☐ none of the figures is to be published with the abstract.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE2007/050080

A. CLASSIFICATION OF SUBJECT MATTER

IPC: see extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: H04Q, H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 20040095953 A1 (BELLIER, T ET AL), 20 May 2004 (20.05.2004), paragraphs [0008]-[0012], [0018]-[0022],[0029],[0047]-[0048], figure 3, claims 1-4, abstract --	1-14
X	EP 0471656 B1 (GHISLER,W), 6 May 1999 (06.05.1999), paragraphs [0001],[0007], [0010]-[0015],[0026],[0048]-[0053], claims 1-4 --	1-14
X	US 5182753 A (DAHLIN, J E A S ET AL), 26 January 1993 (26.01.1993), column 1, line 1 - line 43; column 2, line 20 - line 28; column 3, line 20 - line 31, column 9, line 39 - line 50, claims 1-8, abstract --	1-14

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

20 November 2007

Date of mailing of the international search report

23-11-2007

Name and mailing address of the ISA/

Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Maziar Soltani/ABW

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE2007/050080

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6697422 B1 (MATHAI, S S), 24 February 2004 (24.02.2004), abstract -- -----	1-14

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE2007/050080

International patent classification (IPC)

H04Q 7/38 (2006.01)

H04Q 7/30 (2006.01)

Download your patent documents at www.prv.se

The cited patent documents can be downloaded at www.prv.se by following the links:

- In English/Searches and advisory services/Cited documents (service in English) or
- e-tjänster/anförda dokument (service in Swedish).

Use the application number as username.

The password is **VHKIFLZGTQ**.

Paper copies can be ordered at a cost of 50 SEK per copy from PRV InterPat (telephone number 08-782 28 85).

Cited literature, if any, will be enclosed in paper form.

INTERNATIONAL SEARCH REPORT
Information on patent family members

01/09/2007

International application No.
PCT/SE2007/050080

US	20040095953	A1	20/05/2004	AU	2001235402 A	24/07/2002
				WO	02056609 A	18/07/2002
EP	0471656	B1	06/05/1999	SE	0471656 T3	
				AT	179850 T	15/05/1999
				AU	638860 B	08/07/1993
				AU	8244691 A	20/02/1992
				BR	9103502 A	07/04/1992
				CA	2048490 A,C	17/02/1992
				DE	69131191 D,T	14/10/1999
				DK	471656 T	15/11/1999
				ES	2132083 T	16/08/1999
				GR	3030896 T	30/11/1999
				HK	1013895 A	00/00/0000
				JP	3045572 B	29/05/2000
				JP	6121374 A	28/04/1994
				KR	222632 B	01/10/1999
				KR	100222632 B	01/10/1999
				MX	9100584 A	01/04/1992
				NZ	239189 A	26/01/1994
				SG	50484 A	20/07/1998
				US	5230082 A	20/07/1993
US	5182753	A	26/01/1993	NONE		
US	6697422	B1	24/02/2004	EP	1134926 A	19/09/2001
				JP	2001320334 A	16/11/2001