



(51) International Patent Classification:

E21B 10/42 (2006.01) *E21B 10/62* (2006.01)
E21B 10/54 (2006.01)

(21) International Application Number:

PCT/US2015/063919

(22) International Filing Date:

4 December 2015 (04.12.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/098,539 31 December 2014 (31.12.2014) US

(71) Applicant: **SMITH INTERNATIONAL, INC.** [US/US];
1310 Rankin Rd., Houston, Texas 77073 (US).

(72) Inventors: **BELNAP, Lynn**; 1598 S 1760 E, Spanish
Fork, Utah 84660 (US). **MIDDLEMISS, Stewart**; 275
West 2230 North, Provo, Utah 84604 (US).

(74) Agents: **JACKSON, Katherine L.** et al.; 10001 Rich-
mond Avenue, IP Administration Center of Excellence,
Room 4720, Houston, Texas 77042 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: CUTTING ELEMENTS AND DRILL BITS INCORPORATING THE SAME

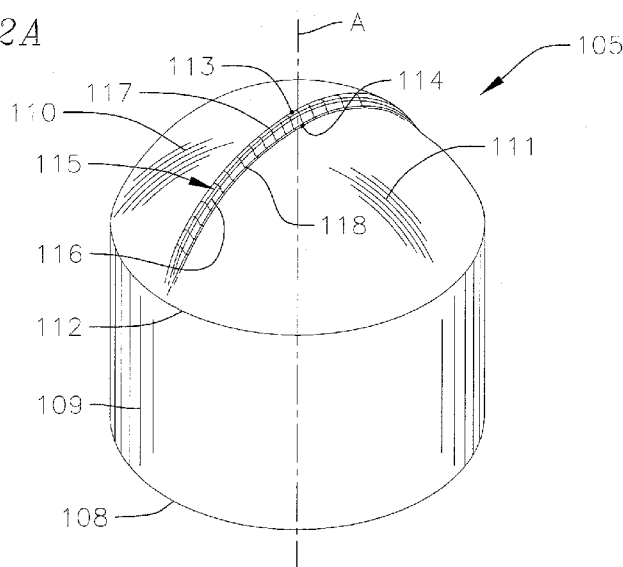FIG. 2A



(57) Abstract: An ultra-hard cutting element for use in a drill bit, such as a percussion drill bit, a rotary cone drill bit, a drag bit, or a reamer. The ultra-hard cutting element includes a base portion, an extension portion on an end of the base portion, and a lip on an outer surface of the extension portion. At least a portion of the outer surface of the extension portion includes an ultra-hard abrasive material. The ultra-hard abrasive material may be polycrystalline diamond or polycrystalline cubic boron nitride.

CUTTING ELEMENTS AND DRILL BITS INCORPORATING THE SAME

CROSS REFERENCE

[0001] This application claims the benefit of U.S. Provisional Application No. 62/098,539, entitled "CUTTING ELEMENTS AND DRILL BITS INCORPORATING THE SAME," filed December 31, 2014, the disclosure of which is hereby incorporated herein by reference.

BACKGROUND

[0002] Systems for drilling wellbores into the earth for the recovery of hydrocarbons, such as oil and natural gas, typically include a drill bit mounted on the lower end of a drill string. Several different types of drill bits exist depending on the primary mechanism by which the drill bit advances into the earthen formation. Common drill bits include rotary cone bits, drag bits, and percussion bits. Additionally, conventional drill bits include a plurality of inserts or cutting elements on a face of the drill bit that are configured to engage the earthen formation.

[0003] In a percussion drilling operation, a hammer is repeatedly raised and lowered to strike an end of the percussion bit, which strikes the earthen formation and thereby progressively increases the depth of the wellbore into the earthen formation (e.g., by crushing, breaking, and/or loosening the earthen formation). In a rotary cone drilling operation, a rotary cone bit having one or more cones is rotated against an earthen formation. An axial force is also applied to the rotary cone bit to progressively increase the depth of the wellbore into the earthen formation (e.g., by crushing, breaking, and/or loosening the earthen formation).

[0004] With conventional drilling systems, the rate of penetration ("ROP") of the drill bit into the earthen formation is limited, in part, by the energy delivered to the drill bit (e.g., the hammer force applied to the percussion drill bit or the torque applied to the drag bit or the rotary cone drill bit). The ROP of conventional drilling systems is also limited by the geometry and the size of the cutting elements or the portion thereof that engages the earthen formation. For instance, conventional

drill bits may include geometric features such that energy delivered to the drill bit during a drilling operation is distributed over a relatively large surface area of the drill bit. Thus, the energy delivered to the drill bit may be dispersed over a relatively large area of the earthen formation, which may limit the ROP of the conventional drilling systems.

SUMMARY

[0005] Embodiments of ultra-hard cutting elements for use with a drill bit are disclosed. In one embodiment, the ultra-hard cutting element includes a base portion defining a longitudinal axis, an extension portion on an end of the base portion, and a lip on an outer surface of the extension portion. At least a portion of the outer surface of the extension portion includes an ultra-hard abrasive material. The ultra-hard abrasive material may be polycrystalline diamond or polycrystalline cubic boron nitride. At least a portion of the ultra-hard abrasive material may have a hardness of at least approximately 4000 kg/mm². The outer surface may include a first spherical portion having a first radius of curvature and a second spherical portion having a second radius of curvature less than the first radius of curvature. The lip may be defined between the first spherical portion and the second spherical portion. The lip may extend beyond the first spherical portion or an outer end of the lip may be flush with the first spherical portion. The lip may include cutting face extending between the first spherical portion and the second spherical portion. The cutting face may be substantially perpendicular to the second spherical portion. The cutting face may be canted at an angle from approximately 15 degrees to approximately 60 degrees relative to the second spherical portion. The lip may extend diametrically across the outer surface. The lip may be offset from the longitudinal axis. A height of the lip may be between a higher end proximate the longitudinal axis and lower ends proximate an interface edge between the outer surface and a sidewall of the base portion. A height of the lip may be substantially constant along a length of the lip.

[0006] The present disclosure is also directed to various embodiments of a drill bit. In one embodiment, the drill bit includes a shank, a bit body on one end of the shank, a series of cutter

pockets in the bit body, and a series of ultra-hard cutting elements at least partially received in the cutter pockets. At least one of the ultra-hard cutting elements includes a base portion defining a longitudinal axis, an extension portion on an end of the base portion, and a lip on an outer surface of the extension portion. At least a portion of the outer surface of the extension portion includes an ultra-hard abrasive material. The ultra-hard abrasive material may be polycrystalline diamond or polycrystalline cubic boron nitride. The outer surface may include a first spherical portion having a first radius of curvature and a second spherical portion having a second radius of curvature less than the first radius of curvature. The lip may be defined between the first spherical portion and the second spherical portion. The lip may extend beyond the first spherical portion or an outer end of the lip may be flush with the first spherical portion. The lip may extend diametrically across the outer surface. A height of the lip may be between a higher end proximate the longitudinal axis and lower ends proximate an interface edge between the outer surface and a sidewall of the base portion. A height of the lip may be substantially constant along a length of the lip. The ultra-hard cutting elements may be oriented on the bit body such that the lips extend radially toward a longitudinal axis of the shank.

[0007] This summary is provided to introduce a selection of concepts that are further described below in the detailed description. This summary is not intended to identify key or essential features of the claimed subject matter, nor is it intended to be used in limiting the scope of the claimed subject matter.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] These and other features and advantages of embodiments of the present disclosure will become more apparent by reference to the following detailed description when considered in conjunction with the following drawings. In the drawings, like reference numerals are used throughout the figures to reference like features and components. The figures are not necessarily drawn to scale.

[0009] FIG. 1 is a perspective view of a drill bit including a plurality of cutting elements according to one embodiment of the present disclosure;

[0010] FIGS. 2A and 2B are a perspective view and a side view, respectively, of a cutting element according to one embodiment of the present disclosure;

[0011] FIGS. 3A and 3B are a perspective view and a side view, respectively, of a cutting element according to another embodiment of the present disclosure;

[0012] FIG. 4 is flowchart illustrating tasks of a method of manufacturing a drill bit according to one embodiment of the present disclosure; and

[0013] FIG. 5 is a schematic view of a device for manufacturing a drill bit according to one embodiment of the present disclosure.

DETAILED DESCRIPTION

[0014] The present disclosure is directed to various embodiments of ultra-hard cutting elements for use in a drill bit, such as, for instance, a percussive drill bit, a rotary cone bit, a drag bit, or a reamer, for drilling a wellbore into an earthen formation for the recovery of hydrocarbons. Embodiments of the ultra-hard cutting elements of the present disclosure include geometric features configured to increase the rate of penetration ("ROP") of the drill bit into the earthen formation compared to conventional drill bits. Embodiments of the ultra-hard cutting elements of the present disclosure may include one or more geometric features configured to concentrate the force of the hammering action of the drill bit onto a localized area of the earthen formation. Embodiments of the cutting elements of the present disclosure may also include one or more geometric features configured to cut into the earthen formation during the rotary action of the drill bit.

[0015] With reference now to FIG. 1, a drill bit **100** according to one embodiment of the present disclosure is a percussive drill bit **100** configured for use in a percussive drilling operation. The percussive drill bit **100** includes a shank **101** and a bit body **102** coupled to the shank **101**. The bit body **102** includes a formation engaging bit face **103**. The formation engaging bit face **103** defines a

plurality of cutter pockets **104** configured to receive and support a plurality of ultra-hard cutting elements **105**. The ultra-hard cutting elements **105** may be coupled to the drill bit **100** by any suitable manufacturing process or technique, such as, for instance, brazing, welding, mechanical fastening, or any combination thereof.

[0016] With reference now to FIGS. 2A and 2B, the ultra-hard cutting element **105** in the illustrated embodiment includes a base portion **106** and an extension portion **107** coupled to or integrally formed with the base portion **106**. In the illustrated embodiment, the base portion **106** is cylindrical and includes a circular base **108** and a cylindrical sidewall **109** extending from the circular base **108**. In one or more embodiments, the base portion **106** of the ultra-hard cutting element **105** may have any other suitable shape depending, for instance, on the composition of the earthen formation the drill bit **100** is intended to drill through and the type of drill bit with which the ultra-hard cutting element **105** is used. The base portion **106** also defines a longitudinal axis **A**. The cylindrical sidewall **109** of the base portion **106** may have any suitable diameter **D** and any suitable length **L** along the longitudinal axis **A**.

[0017] The extension portion **107** of the ultra-hard cutting element **105** includes first and second outer formation-engaging surfaces **110**, **111**. The ultra-hard cutting element **105** also includes a circumferential edge **112** at the interface between the extension portion **107** and the cylindrical sidewall **109** of the base portion **106**. In the illustrated embodiment, the outer formation-engaging surfaces **110**, **111** of the extension portion **107** are spherical or substantially spherical. The extension portion **107** also defines a pair of apices or crowns **113**, **114** on the first and second outer formation-engaging surfaces **110**, **111**, respectively, that are furthest from the circular base **108** of the base portion **106**. The outer formation-engaging surfaces **110**, **111** of the extension portion **107** have a maximum height **H₁**, **H₂**, respectively, defined between the apices **113**, **114** and a plane that is perpendicular to the longitudinal axis **A** and extends through the circumferential edge **112**. The outer formation-engaging surfaces **110**, **111** of the extension portion **107** also have radii of curvature **R₁**, **R₂**, respectively. In one embodiment, the maximum heights **H₁**, **H₂** of the outer formation-engaging

surfaces **110**, **111** of the extension portion **107** may be less than the respective radii of curvature **R₁**, **R₂** of the outer formation-engaging surfaces **110**, **111**. In one or more alternate embodiments, the maximum heights **H₁**, **H₂** of the outer formation-engaging surfaces **110**, **111** of the extension portion **107** may be equal or substantially equal to the respective radii of curvature **R₁**, **R₂** of the outer formation-engaging surfaces **110**, **111**. In one or more embodiments, the outer formation-engaging surfaces **110**, **111** of the extension portion **107** may have any other suitable shape, such as, for instance, ellipsoidal or substantially ellipsoidal. Additionally, in one or more embodiments, at least one of the outer formation-engaging surfaces **110**, **111** may include a flat or substantially flat segment or portion (e.g., at least one of the outer formation-engaging surfaces **110**, **111** may include a straight segment and a curved segment).

[0018] Still referring to the embodiment illustrated in FIGS. 2A and 2B, the maximum height **H₁** and the radius of curvature **R₁** of the first outer formation-engaging surface **110** are larger than the maximum height **H₂** and the radius of curvature **R₂**, respectively, of the second outer formation-engaging surface **111**. Accordingly, the first and second outer formation-engaging surfaces **110**, **111** of the ultra-hard cutting element **105** define a ridge or a lip **115** (i.e., the lip **115** extends between the first outer formation-engaging surface **110** and the second outer formation-engaging surface **111**). In the illustrated embodiment, the lip **115** extends radially outward from the apices **113**, **114** of the outer formation-engaging surfaces toward the circumferential interface edge **112** (e.g., the lip **115** extends diametrically across the extension portion **107** of the ultra-hard cutting element **105**). Accordingly, in the illustrated embodiment, ends of the lip **115** are perpendicular or substantially perpendicular to the circumferential interface edge **112**. Although in the illustrated embodiment, the ultra-hard cutting element **105** includes a single lip **115**, in one or more alternate embodiments, the ultra-hard cutting element **105** may include any other suitable number of lips **115**, such as, for instance, from two to eight lips. Furthermore, in the illustrated embodiment, the lip **115** extends completely to the circumferential interface edge **112** (e.g., the lip **115** extends diametrically across the extension portion **107**). In one or more embodiments, the lip **115** may extend radially across the extension

portion **107**. Accordingly, in the illustrated embodiment, ends of the lip **115** intersect the circumferential interface edge **112** at opposing points. In one or more alternate embodiments, the lip **115** may not extend completely to the circumferential interface edge **112**. Furthermore, although in the illustrated embodiment the lip **115** is straight or substantially straight, in one or more embodiments, the lip **115** may not be straight (e.g., the lip **115** may be curved). Additionally, although in the illustrated embodiment the lip **115** extends diametrically across the extension portion **107** such that the lip **115** passes through the longitudinal axis **A**, in one or more alternate embodiments, the lip **115** may be offset (i.e., spaced apart) from the longitudinal axis **A** by any suitable distance. In an embodiment in which the lip **115** is spaced apart from the longitudinal axis **A**, the ends of the lip **115** may not be orthogonal to the circumferential interface edge **112** (e.g., the ends of the lip **115** may be oriented at an acute angle relative to the circumferential interface edge **112**).

[0019] In the illustrated embodiment, the lip **115** includes a cutting face **116** configured cut into the earthen formation when the ultra-hard cutting element **105** is rotated against the earthen formation. In the illustrated embodiment, the cutting face **116** of the lip **115** is canted at an angle α relative to a plane perpendicular to the first and second outer formation-engaging surfaces **110**, **111**. In one embodiment, the angle α of the cutting face **116** relative to the first and second outer formation-engaging surfaces **110**, **111** may be from approximately 15 degrees to approximately 60 degrees. In one or more embodiments, the angle α of the cutting face **116** may be less than approximately 15 degrees or greater than approximately 60 degrees. In one or more alternate embodiments, the cutting face **116** of the lip **115** may be perpendicular or substantially perpendicular to the first and second outer formation-engaging surfaces **110**, **111**. Additionally, in the illustrated embodiment, an outer end **117** of the cutting face **116** is rounded such that the lip **115** blends into the first outer formation-engaging surface **110** (e.g., the outer end **117** of the cutting face **116** may include a radius). In one or more alternate embodiments, the outer end **117** of the cutting face **116** may define a sharp edge. In one or more alternate embodiments, the outer end **117** of the cutting face **116** may include a chamfer. Opposite sides of the chamfer may be either rounded (e.g., include a radius) or

may define sharp edges. Additionally, in one embodiment, an inner end **118** of the cutting face **116** may be rounded such that the lip **115** blends into the second outer formation-engaging surface **111**, although in one or more alternate embodiments, the inner end **118** of the lip **115** may define a sharp edge.

[0020] A height **h** of the lip **115** is defined between the inner end **118** and the outer end **117** of the cutting face **116** (i.e., the height **h** of the lip **115** is defined between the first outer formation-engaging surface **110** and the second outer formation-engaging surface **111**). In the illustrated embodiment, the height **h** of the lip **115** tapers between a highest point proximate the apex **113** of the first outer formation-engaging surface **110** (i.e., the intersection between the longitudinal axis **A** and the first outer formation-engaging surface **110**) and lowest points proximate the circumferential interface edge **112** where the extension portion **107** joins the sidewall **109** of the base portion **106**. In one or more embodiments, the highest point of the lip **115** may be at any other suitable location, such as, for instance, proximate the circumferential interface edge **112** or at an intermediate point between the apex **113** and the circumferential interface edge **112**. Additionally, in the illustrated embodiment, the height **h** of the lip **115** at or proximate the circumferential interface edge **112** is zero or substantially zero. In one or more embodiments, the radius of curvature **R₁** of the first outer formation-engaging surface **110** and/or the radius of curvature **R₂** of the second outer formation-engaging surface **111** varies such that the height **h** of the lip **115** tapers toward the circumferential interface edge **112**. In one or more alternate embodiments, the height **h** of the lip **115** may be constant or substantially constant along the length of the lip **115**. In one embodiment in which the height **h** of the lip **115** is constant or substantially constant, the radii of curvature **R₁**, **R₂** of the first and second outer formation-engaging surfaces **110**, **111** may not vary (i.e., the radii of curvature **R₁**, **R₂** of the first and second outer formation-engaging surfaces **110**, **111** may be constant or substantially constant). In one or more embodiments, the lip **115** may include a segment or a portion that has a constant or substantially constant height and a segment that tapers between a higher end and a lower end. In one embodiment, the height **h** of the lip **115** may not taper uniformly. The lip **115** may have

any suitable maximum height **h** depending, for instance, on the desired performance characteristics of the ultra-hard cutting element **105** and the composition of the earthen formation the ultra-hard cutting element **105** is intended to drill through. In one embodiment, the ratio of the maximum height **h** of the lip **115** to the diameter **D** of the cylindrical sidewall **109** of the ultra-hard cutting element **105** may be from approximately 0.01 to approximately 0.4. In one or more embodiments, the ratio of the maximum height **h** of the lip **115** to the diameter **D** of the cylindrical sidewall **109** of the ultra-hard cutting element **105** may be from approximately 0.01 to approximately 0.1. In one or more embodiments, the ratio of the maximum height **h** of the lip **115** to the diameter **D** of the cylindrical sidewall **109** may be greater than 0.4. In another embodiment, the ratio of the maximum height **h** of the lip **115** to the diameter **D** of the cylindrical sidewall **109** may be less than 0.01.

[0021] At least a portion of the first outer formation-engaging surface **110**, the second outer formation-engaging surface **111**, and/or the lip **115** may be formed from any material having highly abrasive and/or wear-resistant properties. In one embodiment, at least a portion of the outer formation-engaging surfaces **110**, **111** and the lip **115** may include polycrystalline diamond ("PCD") or polycrystalline cubic boron nitride ("PCBN"). In one embodiment, the outer formation-engaging surfaces **110**, **111** and the lip **115** of the ultra-hard cutting element **105** may include any suitable type of thermally stable polycrystalline diamond (e.g., leached PCD, non-metal catalyst PCD, or catalyst-free PCD) or thermally stable PCBN. In one embodiment, the material of at least a portion of the outer formation-engaging surfaces **110**, **111** and the lip **115** of the ultra-hard cutting element **105** may have a hardness greater than or equal to approximately 4000 kg/mm². In one or more alternate embodiments, the material of at least a portion of the outer formation-engaging surfaces **110**, **111** and the lip **115** of the ultra-hard cutting element **105** may have a hardness less than approximately 4000 kg/mm². Although in one embodiment only the outer formation-engaging surfaces **110**, **111** and the lip **115** (or portions thereof) are formed from PCD or PCBN, in one or more embodiments, any other suitable portion of the extension portion **107** may be formed from PCD or PCBN. For instance, in one embodiment, all or substantially all of the extension portion **107** may be formed from

PCD or PCBN. Additionally, in one or more embodiments, the material properties of at least one of the outer formation-engaging surfaces **110**, **111** and the lip **115** may be different than the material properties of at least one of the other outer formation-engaging surfaces **110**, **111** and the lip **115**. For instance, in one embodiment, one of the outer formation-engaging surfaces **110**, **111** or the lip **115** may have a hardness less than one of the other outer formation-engaging surfaces **110**, **111** or the lip **115** by approximately 500 kg/mm² to approximately 2500 kg/mm², such as, for instance, by approximately 2200 kg/mm².

[0022] In one embodiment, a remainder of the ultra-hard cutting element **105** (i.e., the portion of the ultra-hard cutting element **105** other than the outer formation-engaging surfaces **110**, **111** and the lip **115**) may be formed from any suitably hard and durable material, such as, for instance, tungsten carbide or other matrix materials of carbides, nitrides, and/or borides. In one embodiment, the material of the remainder of the ultra-hard cutting element **105** may be selected to facilitate coupling (e.g., by welding or brazing) the ultra-hard cutting element **105** to the percussion drill bit **100** during a process of manufacturing the drill bit **100**, as described in more detail below. Additionally, in one embodiment, a portion of the material of the remainder of the ultra-hard cutting element **105** may be infiltrated into interstitial spaces (e.g., pores or voids) defined between a network of interconnected crystals of the PCD or PCBN outer formation-engaging surfaces **110**, **111** and/or the PCD or PCBN cutting face **116** of the lip **115**.

[0023] In one embodiment, the ultra-hard cutting element **105** may include one or more transition layers (e.g., a diamond-tungsten carbide composite material). For instance, in one embodiment, the ultra-hard cutting element **105** may include a transition layer between the PCD or PCBN outer formation-engaging surfaces **110**, **111** and the lip **115** and an inner portion of the ultra-hard cutting element **105** formed from tungsten carbide. The material of the transition layer may be selected such that the transition layer has a coefficient of thermal expansion that is between a coefficient of thermal expansion of the PCD or PCBN outer formation-engaging surfaces **110**, **111** and the lip **115** and a coefficient of thermal expansion of tungsten carbide of the inner portion of the ultra-hard cutting

element **105**. In one embodiment, the material of the transition layer may also be selected such that the transition layer has an elastic modulus that is between the elastic modulus of the PCD or PCBN outer formation-engaging surfaces **110, 111** and the lip **115** and the elastic modulus of the tungsten carbide of the inner portion of the ultra-hard cutting element **105**. In one embodiment, a portion of the transition layer may be infiltrated into the interstitial spaces defined between the network of interconnected crystals of the PCD or PCBN outer formation-engaging surfaces **110, 111** and/or the PCD or PCBN lip **115** (e.g., cobalt from the transition layer may be infiltrated into the PCD or PCBN on the outer formation-engaging surfaces **110, 111** and/or infiltrated into the PCD or PCBN on the lip **115**). Accordingly, in one embodiment, the transition layer may be configured to mitigate the formation of thermal stress concentrations which might otherwise develop when the ultra-hard cutting element **105** is subject to elevated temperatures, such as during a drilling operation, due to the thermal expansion differential between the PCD or PCBN layer and the tungsten carbide (i.e., the one or more transition layers may be configured to mitigate the formation of thermal cracks in the outer formation-engage surfaces **110, 111** and/or the lip **115** due to the thermal expansion differential between the PCD or PCBN on the outer formation-engaging surfaces **110, 111** and the lip **115** and the inner tungsten carbide, which may result in the premature failure of the ultra-hard cutting element **105**). The transition layer may also serve to reduce the elastic mismatch between the PCD or PCBN outer formation-engaging surfaces **110, 111** and the lip **115** and the tungsten carbide of the inner portion of the ultra-hard cutting element **105**, thereby improving reliability of the ultra-hard cutting element **105**, particularly during dynamic loading of the ultra-hard cutting element **105**.

[0024] With reference now to FIGS. 3A and 3B, an ultra-hard cutting element **200** according to another embodiment of the present disclosure includes a base portion **201** and an extension portion **202** coupled to or integrally formed with the base portion **201**. In the illustrated embodiment, the base portion **201** is cylindrical and includes a circular base **203** and a cylindrical sidewall **204** extending from the circular base **203**. In one or more embodiments, the base portion **201** of the ultra-hard cutting element **200** may have any other suitable shape depending, for instance, on the

composition of the earthen formation the drill bit **100** (see FIG. 1) is intended to drill through and the type of drill bit with which the ultra-hard cutting element **200** is used. The base portion **201** also defines a longitudinal axis **A'**. The cylindrical sidewall **204** of the base portion **201** may have any suitable diameter **D'** and any suitable length **L'** along the longitudinal axis **A'**.

[0025] The extension portion **202** of the ultra-hard cutting element **200** includes first and second outer formation-engaging surfaces **205**, **206**. The ultra-hard cutting element **200** also includes a circumferential edge **207** at the interface between the extension portion **202** and the cylindrical sidewall **204** of the base portion **201**. In the illustrated embodiment, the outer formation-engaging surfaces **205**, **206** of the extension portion **202** are spherical or substantially spherical. The extension portion **202** also defines a pair of apices or crowns **208**, **209** on the first and second outer formation-engaging surfaces **205**, **206**, respectively, that are furthest from the circular base **203** of the base portion **201**. The outer formation-engaging surfaces **205**, **206** of the extension portion **202** have a maximum height **H₁'**, **H₂'**, respectively, defined between the apices **208**, **209** and a plane that is perpendicular to the longitudinal axis **A'** and extends through the circumferential edge **207**. The outer formation-engaging surfaces **205**, **206** of the extension portion **202** also have radii of curvature **R₁'**, **R₂'**, respectively. In one embodiment, the maximum heights **H₁'**, **H₂'** of the outer formation-engaging surfaces **205**, **206** of the extension portion **202** may be less than the respective radii of curvature **R₁'**, **R₂'** of the outer formation-engaging surfaces **205**, **206**. In one or more alternate embodiments, the maximum heights **H₁'**, **H₂'** of the outer formation-engaging surfaces **205**, **206** of the extension portion **202** may be equal or substantially equal to the respective radii of curvature **R₁'**, **R₂'** of the outer formation-engaging surfaces **205**, **206**. In one or more embodiments, the outer formation-engaging surfaces **205**, **206** of the extension portion **202** may have any other suitable shape, such as, for instance, ellipsoidal or substantially ellipsoidal. Additionally, in one or more embodiments, at least one of the outer formation-engaging surfaces **205**, **206** may include a flat or substantially flat segment or portion (e.g., at least one of the outer formation-engaging surfaces **205**, **206** may include a straight segment and a curved segment).

[0026] Still referring to the embodiment illustrated in FIGS. 3A and 3B, the maximum height H_1' and the radius of curvature R_1' of the first outer formation-engaging surface **205** are larger than the maximum height H_2' and the radius of curvature R_2' , respectively, of the second outer formation-engaging surface **206**. Accordingly, the first and second outer formation-engaging surfaces **205**, **206** of the ultra-hard cutting element **200** define a ridge or a lip **210** (i.e., the lip **210** extends between the first outer formation-engaging surface **205** and the second outer formation-engaging surface **206**). Unlike the lip **115** described above with reference to the embodiment of the ultra-hard cutting element **105** illustrated in FIGS. 2A and 2B, the lip **210** in the embodiment illustrated in FIGS. 3A and 3B projects above the first outer formation-engaging surface **205**. Additionally, in the illustrated embodiment, the lip **210** extends radially outward from the apices **208**, **209** of the outer formation-engaging surfaces **205**, **206** toward the circumferential interface edge **207** (e.g., the lip **210** extends diametrically across the extension portion **202** of the ultra-hard cutting element **200**). Accordingly, in the illustrated embodiment, ends of the lip **210** are perpendicular or substantially perpendicular to the circumferential interface edge **207**. Although in the illustrated embodiment, the ultra-hard cutting element **200** includes a single lip **210**, in one or more alternate embodiments, the ultra-hard cutting element **200** may include any other suitable number of lips **210**, such as, for instance, from two to eight lips. Furthermore, in the illustrated embodiment, the lip **210** extends completely to the circumferential interface edge **207** (e.g., the lip **210** extends diametrically across the extension portion **202** of the ultra-hard cutting element **200**). Accordingly, in the illustrated embodiment, ends of the lip **210** intersect the circumferential interface edge **207** at opposing points. In one or more alternate embodiments, the lip **210** may not extend completely to the circumferential interface edge **207**. Furthermore, although in the illustrated embodiment the lip **210** is straight or substantially straight, in one or more embodiments, the lip **210** may not be straight (e.g., the lip **210** may be curved). Additionally, although in the illustrated embodiment the lip **210** extends diametrically across the extension portion **202** such that the lip **210** passes through the longitudinal axis A' , in one or more alternate embodiments, the lip **210** may be offset (i.e., spaced apart) from the longitudinal

axis **A'** by any suitable distance. In an embodiment in which the lip **210** is spaced apart from the longitudinal axis **A'**, the ends of the lip **210** may not be orthogonal to the circumferential interface edge **207** (e.g., the ends of the lip **210** may be oriented at an acute angle relative to the circumferential interface edge **207**).

[0027] In one embodiment, at least a portion of the first and second outer formation-engaging surfaces **205**, **206** and the lip **210** may be formed from any material having highly abrasive and/or wear-resistant properties, such as, for instance, PCD, PCBN, and/or any material having a hardness greater than or equal to approximately 4000 kg/mm². In one or more embodiments, the first and second outer formation-engaging surfaces **205**, **206** and the lip **210** may be formed from a material having a hardness less than approximately 4000 kg/mm². Although in one embodiment only the first and second outer formation-engaging surfaces **205**, **206** and the lip **210** (or portions thereof) of the extension portion **202** are formed from PCD or PCBN, in one or more embodiments, any other suitable portion of the extension portion **202** may be formed from PCD or PCBN. For instance, in one embodiment, all or substantially all of the extension portion **202** may be formed from PCD or PCBN. Additionally, in one or more embodiments, the material properties of at least one of the outer formation-engaging surfaces **205**, **206** and the lip **210** may be different than the material properties of at least one of the other outer formation-engaging surfaces **205**, **206** and the lip **210**. For instance, in one embodiment, one of the outer formation-engaging surfaces **205**, **206** or the lip **210** may have a hardness less than one of the other outer formation-engaging surfaces **205**, **206** or the lip **210** by approximately 500 kg/mm² to approximately 2500 kg/mm², such as, for instance, by approximately 2200 kg/mm².

[0028] In the illustrated embodiment, the lip **210** includes a cutting face **211** configured cut into the earthen formation when the ultra-hard cutting element **200** is rotated against the earthen formation. In the illustrated embodiment, the cutting face **211** of the lip **210** is perpendicular or substantially perpendicular to the first and second outer formation-engaging surfaces **205**, **206**. In one or more embodiments, the cutting face **211** of the lip **210** may be canted at an angle relative to a

plane perpendicular to the first and second outer formation-engaging surfaces **205**, **206**. Additionally, in the illustrated embodiment, an outer end **212** of the cutting face **211** is rounded such that the lip **210** blends into the first outer formation-engaging surface **205**. In one or more alternate embodiments, the outer end **212** of the cutting face **211** may define a sharp edge. In one or more alternate embodiments, the outer end **212** of the cutting face **211** may include a chamfer. Opposite sides of the chamfer may be either rounded (e.g., include a radius) or may define sharp edges. Additionally, in one embodiment, an inner end **213** of the cutting face **211** may be rounded such that the lip **210** blends into the second outer formation-engaging surface **206**, although in one or more alternate embodiments, the inner end **213** of the lip **210** may define a sharp edge.

[0029] Accordingly, when the ultra-hard cutting element **200** is used in a rotary hammer or hammer drilling operation, the hammering force is initially concentrated on the lip **210** because the lip **210** projects above the first outer formation-engaging surface **205** (i.e., the hammering force imparted to the ultra-hard cutting element **200** during a drilling operation is initially concentrated on the lip **210**, rather than distributed across the area of the first and second outer formation-engaging surfaces **205**, **206**). The concentration of the hammering force onto the lip **210** may increase the rate of penetration of the drill bit **100** incorporating the ultra-hard cutting element **200** into an earthen formation compared to conventional drill bits (i.e., when the ultra-hard cutting elements **200** of the present disclosure are used in a rotary percussive drilling operation, the geometry of the cutting elements **200** is configured to concentrate the percussive force of the impact on a localized region of the earthen formation corresponding to the size of the lip **210**, which serves to advance the drill bit further into the earthen formation). Additionally, in a rotary hammer drilling operation the percussive drill bit **100** is rotated to index the drill bit **100** to a new earthen formation with each impact. Accordingly, when the ultra-hard cutting element **200** is used in a rotary hammer drilling operation, the cutting face **211** of the lip **210** is configured to shear or cut into the earthen formation due to the rotation of the drill bit **100**.

[0030] A height h' of the lip **210** is defined between the inner end **213** and the outer end **212** of the cutting face **211**. In the illustrated embodiment, the height h' of the lip **210** tapers between a highest point proximate the apices **208**, **209** of the outer formation-engaging surfaces **205**, **206** (i.e., the intersection between the longitudinal axis A' and the outer formation-engaging surface **205**, **206**) and lowest points proximate the circumferential interface edge **207** where the extension portion **202** joins the sidewall **204** of the base portion **201**. In one or more embodiments, the highest point of the lip **210** may be at any other suitable location, such as, for instance, proximate the circumferential interface edge **207** or at an intermediate point between the apices **208**, **209** and the circumferential interface edge **207**. Additionally, in the illustrated embodiment, the height h' of the lip **210** at or proximate the circumferential interface edge **207** is zero or substantially zero. In one or more embodiments, the radius of curvature R_1' of the first outer formation-engaging surface **205** and/or the radius of curvature R_2' of the second outer formation-engaging surface **206** varies such that the height h' of the lip **210** tapers toward the circumferential interface edge **207**. In one or more alternate embodiments, the height h' of the lip **210** may be constant or substantially constant along the length of the lip **210**. In one embodiment in which the height h' of the lip **210** is constant or substantially constant, the radii of curvature R_1' , R_2' of the first and second outer formation-engaging surfaces **205**, **206** may not vary (i.e., the radii of curvature R_1' , R_2' of the first and second outer formation-engaging surfaces **205**, **206** may be constant or substantially constant). In one or more embodiments, the lip **210** may include a segment or a portion that has a constant or substantially constant height and a segment that tapers between a higher end and a lower end. In one embodiment, the height h' of the lip **210** may not taper uniformly. The lip **210** may have any suitable maximum height h' depending, for instance, on the desired performance characteristics of the ultra-hard cutting element **200** and the composition of the earthen formation the ultra-hard cutting element **200** is intended to drill through. In one embodiment, the ratio of the maximum height h' of the lip **210** to the diameter D' of the cylindrical sidewall **204** of the ultra-hard cutting element **200** may be from approximately 0.01 to approximately 0.4. In one or more embodiments, the ratio of the maximum height h' of the

lip **210** to the diameter **D'** of the cylindrical sidewall **204** of the ultra-hard cutting element **200** may be from approximately 0.01 to approximately 0.1. In one or more embodiments, the ratio of the maximum height **h'** of the lip **210** to the diameter **D'** of the cylindrical sidewall **204** may be greater than 0.4. In another embodiment, the ratio of the maximum height **h'** of the lip **210** to the diameter **D'** of the cylindrical sidewall **204** may be less than 0.01.

[0031] In one embodiment, the ultra-hard cutting element **200** may include one or more transition layers (e.g., a diamond-tungsten carbide composite material). For instance, in one embodiment, the ultra-hard cutting element **200** may include a transition layer between the PCD or PCBN outer formation-engaging surfaces **205**, **206** and the lip **210** and an inner portion of the ultra-hard cutting element **200** formed from tungsten carbide. The material of the transition layer may be selected such that the transition layer has a coefficient of thermal expansion that is between a coefficient of thermal expansion of the PCD or PCBN outer formation-engaging surfaces **205**, **206** and the lip **210** and a coefficient of thermal expansion of tungsten carbide of the inner portion of the ultra-hard cutting element **200**. In one embodiment, the material of the transition layer may also be selected such that the transition layer has an elastic modulus that is between the elastic modulus of the PCD or PCBN outer formation-engaging surfaces **205**, **206** and the lip **210** and the elastic modulus of the tungsten carbide of the inner portion of the ultra-hard cutting element **200**. In one embodiment, a portion of the transition layer may be infiltrated into the interstitial spaces defined between the network of interconnected crystals of the PCD or PCBN outer formation-engaging surfaces **205**, **206** and/or the PCD or PCBN lip **210** (e.g., cobalt from the transition layer may be infiltrated into the PCD or PCBN on the outer formation-engaging surfaces **205**, **206** and/or infiltrated into the PCD or PCBN on the lip **210**).

[0032] The ultra-hard cutting elements **105**, **200** of the present disclosure may have any suitable arrangement and orientation on the drill bit **100** (see FIG. 1) depending, for instance, on the type of drill bit and the type of drilling operation (e.g., a rotary drill operation or a percussion drilling operation) the ultra-hard cutting elements **105**, **200** are intended to perform. For instance, in one

embodiment, the ultra-hard cutting elements **105, 200** may be oriented on the drill bit **100** such that the lips **115, 210** extend radially inward toward a longitudinal axis **S** of the shank **101** of the drill bit **100** (e.g., the lips **115, 210** may be oriented along radial lines originating from the longitudinal axis **S** of the drill bit **100**). Additionally, in one embodiment, the ultra-hard cutting elements **105, 200** may be oriented on the drill bit **100** such that the cutting faces **116, 211** of the ultra-hard cutting elements **105, 200** are advanced into the earthen formation during a drilling operation (e.g., depending on the direction of rotation of the drill bit **100**, the ultra-hard cutting elements **105, 200** may be oriented on the drill bit **100** such that the cutting faces **116, 211** face toward and are advanced into the earthen formation).

[0033] With reference now to FIGS. 4 and 5, a method **300** of manufacturing a drill bit **100** (see FIG. 1) according to one embodiment of the present disclosure includes a task **310** of forming an ultra-hard cutting element (e.g., an ultra-hard cutting element **105, 200** according to one embodiment described above with reference to FIGS. 2A-3B). In one embodiment, the task **310** of forming the ultra-hard cutting element **105, 200** includes inserting a plurality of solid particulates **401** into a deformable can **402**. In the illustrated embodiment, the deformable can **402** is a hollow shell having an open upper end **403**. In one or more embodiments, the solid particulates **401** may be or include diamond (e.g., diamond crystals), cobalt, tungsten, cubic boron nitride, or any combination thereof. In one embodiment, the composition of the solid particulates **401** may be selected to include highly abrasive and/or wear-resistant properties depending, for instance, on the desired performance characteristics of the ultra-hard cutting element **105, 200** and/or the composition of the earthen formation the ultra-hard cutting element **105, 200** is intended to drill through. In one or more embodiments, the solid particulates **401**, when sintered, may have a hardness greater than or equal to approximately 4000 kg/mm². Additionally, in one or more embodiments, the task **310** may include inserting a transition layer material into the can **402**. The solid particulates **401** of the ultra-hard material and/or the transition layer may also include one or more binder materials. The binder serves to bond the particles together during a subsequent task of forming and shaping the layers of the ultra-

hard cutting element **105, 200**. The binder material may be any suitable material or materials, such as, for instance, various waxes, polymers, or other organic materials. The binder material may be subsequently removed from the layers following the formation of the ultra-hard cutting element **105, 200** by any suitable manufacturing process or technique, such as, for instance, by chemical reaction, high-temperature decomposition, and/or solvent extraction.

[0034] With continued reference to FIGS. 4 and 5, the task **310** of forming the ultra-hard cutting element **105, 200** also includes at least partially inserting a substrate **404** into the can **402** through the open upper end **403**. In the illustrated embodiment, the substrate **404** includes a base portion **405** and an extension portion **406** extending from one end of the base portion **405**. Additionally, in the illustrated embodiment, the base portion **405** is cylindrical and the extension portion **406** is spherical (e.g., hemispherical or a spherical cap or dome), although in one or more alternate embodiments the substrate **404** may have any other suitable shape depending on the desired shape of the ultra-hard cutting element **105, 200**. The substrate **404** may be formed from any suitable strong and durable material, such as, for instance, tungsten carbide. The material of the substrate **404** may also be selected to facilitate coupling the ultra-hard cutting element **105, 200** to a drill bit **100** (see FIG. 1) (e.g., by welding or brazing) during a subsequent task, described below.

[0035] With continued reference to FIGS. 4 and 5, the task **310** of forming the ultra-hard cutting element **105, 200** also includes pressing the can **402**, and the substrate **404** at least partially received therein, down onto a forming device **407**. In the illustrated embodiment, the forming device **407** includes a recess **408** configured to receive at least a portion of the can **402** and the substrate **404** received therein. In the illustrated embodiment, the recess **408** in the forming device **407** includes first and second inner surfaces **409, 410**. Additionally, in the illustrated embodiment the first and second inner surfaces **409, 410** are spherical, although in one or more embodiments, the first and second inner surfaces **409, 410** may have any other suitable shape. The recess **408** in the forming device **407** may also include one or more protrusions and/or one or more depressions. In the

illustrated embodiment, the recess **408** in the forming device includes a depression **411** between first and second inner surfaces **409, 410**.

[0036] In one embodiment, the forming device **407** is configured to deform the can **402**, the solid particulates **401**, and the extension portion **406** of the substrate **404** into the shape of the first and second inner surfaces **409, 410** and the depression **411** when the can **402** and the substrate **404** are pressed onto the recess **408** in the forming device **407**. In one embodiment, the forming device **407** may be configured not to deform the extension portion **406** of the substrate **404** (e.g., the forming device **407** may be configured to deform only the solid particulates **401** and the deformable can **402**). In one or more alternate embodiments, the can **402** may not be deformable and the can **402** may be pre-formed or pre-shaped into the desired shape (or a portion thereof) of the ultra-hard cutting element **105, 200**. In the illustrated embodiment, the first and second inner surfaces **409, 410** in the forming device **407** are configured to form first and second outer formation-engaging surfaces of the ultra-hard cutting element **105, 200** (e.g., the first and second outer formation-engaging surfaces **110, 111** in FIGS. 2A and 2B or the first and second outer formation-engaging surfaces **205, 206** in FIGS. 3A and 3B). Additionally, in the illustrated embodiment, the depression **411** is configured to form a lip in the ultra-hard cutting element **105, 200** (e.g., the lip **210** in FIGS. 2A and 2B). The shape, size, and orientation of the depression **411** in the forming device **407** correspond to the desired configuration of the lip on the ultra-hard cutting element **105, 200**. In one or more alternate embodiments, the forming device **407** may be provided without a depression (e.g., to form the embodiment of the ultra-hard cutting element **105** illustrated in FIGS. 2A and 2B). Accordingly, in one or more embodiments, the recess **408** in the forming device **407** may be a negative impression of the desired shape of the extension portion **107, 202** of the ultra-hard cutting element **105, 200**.

[0037] Pressing the can **402** and the substrate **404** onto the forming device **407** may also cause the solid particulates **401** (e.g., diamond powder) to become a solid mass. Pressing the can **402** and the substrate **404** onto the forming device **407** may also create a connection (e.g., a press-fit

connection) between the solid particulate mass **401** and an outer surface **412** of the extension portion **406** of the substrate **404**.

[0038] Still referring to FIGS. 4 and 5, the task **310** of forming the ultra-hard cutting element **105, 200** also includes exposing the substrate **404** and the solid particulate mass **401** to a high pressure, high temperature ("HPHT") sintering process. The HPHT sintering process may be performing during or after the process of pressing the can **402** and the substrate **404** onto the forming device **407**. In an embodiment in which the solid particulates **401** include diamond powder, the HPHT sintering process causes the solid particulate mass **401** to form into a polycrystalline diamond structure having a network of intercrystalline bonded diamond crystals.

[0039] A catalyst material may be used to facilitate and promote the inter-crystalline bonding of the diamond crystals. In one or more embodiments, the catalyst material may be mixed into the diamond powder prior to the HPTP sintering process and/or may infiltrate the diamond powder from an adjacent substrate during the HPHT sintering process. The HPHT sintering process creates a polycrystalline diamond structure having a network of intercrystalline bonded diamond crystals, with the catalyst material remaining in interstitial spaces (e.g., voids or gaps) between the bonded diamond crystals. In one embodiment, the catalyst material may be a solvent catalyst metal selected from Group VIII of the Periodic table (e.g., iron), Group IX of the Periodic table (e.g., cobalt), or Group X of the Periodic table (e.g., nickel). Accordingly, the HPHT sintering process forms the ultra-hard cutting element **105, 200** having a substrate **404** and solid particulate mass **401** (e.g., polycrystalline diamond structure) coupled to the outer surface **412** of the substrate **404**. The ultra-hard cutting element **105, 200** may be removed from the can **402** and the forming device **407** following the HPHT sintering process.

[0040] The method **300** may also include a task **320** of coupling a plurality of the ultra-hard cutting elements **105, 200** to a drill bit (e.g., a percussion drill bit **100**, a rotary cone drill bit, a drag bit, or a reamer). In one embodiment, the task **320** of coupling the ultra-hard cutting elements **105, 200** to the drill bit includes brazing the ultra-hard cutting elements **105, 200** in the cutter pockets **104**

defined in the bit face **103** of the drill bit **100**. In one or more embodiments, the task **320** of coupling the ultra-hard cutting elements **105, 200** to the drill bit may include any other suitable manufacturing technique or process, such as, for instance, welding (e.g., laser beam welding).

[0041] While this invention has been described in detail with particular references to embodiments thereof, the embodiments described herein are not intended to be exhaustive or to limit the scope of the invention to the exact forms disclosed. Persons skilled in the art and technology to which this invention pertains will appreciate that alterations and changes in the described structures and methods of assembly and operation can be practiced without meaningfully departing from the principles, spirit, and scope of this invention. Additionally, as used herein, the term "substantially" and similar terms are used as terms of approximation and not as terms of degree, and are intended to account for the inherent deviations in measured or calculated values that would be recognized by those of ordinary skill in the art. Furthermore, as used herein, when a component is referred to as being "on" or "coupled to" another component, it can be directly on or attached to the other component or intervening components may be present therebetween.

WHAT IS CLAIMED IS:

1. An ultra-hard cutting element for use in a drill bit, comprising:
a base portion defining a longitudinal axis;
an extension portion on an end of the base portion, wherein at least a portion of an outer surface of the extension portion includes an ultra-hard abrasive material; and
a lip on the outer surface of the extension portion, the at least one lip having a length between a first end and a second end.
2. The ultra-hard cutting element of claim 1, wherein the ultra-hard abrasive material is selected from the group of materials consisting of polycrystalline diamond and polycrystalline cubic boron nitride.
3. The ultra-hard cutting element of claim 1, wherein at least a portion of the ultra-hard abrasive material has a hardness of at least approximately 4000 kg/mm².
4. The ultra-hard cutting element of claim 1, wherein the outer surface includes a first spherical portion having a first radius of curvature and a second spherical portion having a second radius of curvature less than the first radius of curvature, wherein the lip is defined between the first spherical portion and the second spherical portion.
5. The ultra-hard cutting element of claim 4, wherein the lip extends beyond the first spherical portion.
6. The ultra-hard cutting element of claim 4, wherein an outer end of the lip is flush with the first spherical portion.

7. The ultra-hard cutting element of claim 1, wherein the lip comprises a cutting face extending between the first spherical portion and the second spherical portion.
8. The ultra-hard cutting element of claim 7, wherein the cutting face is substantially perpendicular to the second spherical portion.
9. The ultra-hard cutting element of claim 7, wherein the cutting face is canted at an angle from approximately 15 degrees to approximately 60 degrees relative to the second spherical portion.
10. The ultra-hard cutting element of claim 1, wherein the lip extends diametrically across the outer surface.
11. The ultra-hard cutting element of claim 1, wherein the lip is offset from the longitudinal axis.
12. The ultra-hard cutting element of claim 1, wherein a height of the lip tapers between a higher end proximate the longitudinal axis and lower ends proximate an interface edge between the outer surface and a sidewall of the base portion.
13. The ultra-hard cutting element of claim 1, wherein a height of the lip is substantially constant along the length of the lip.
14. The ultra-hard cutting element of claim 1, wherein the base portion is cylindrical.
15. A drill bit, comprising:

a shank;

a bit body on one end of the shank, the bit body defining a plurality of cutter pockets;

and

a plurality of ultra-hard cutting elements at least partially received in the plurality of cutter pockets, wherein at least one of the plurality of ultra-hard cutting elements comprises:

a base portion defining a longitudinal axis;

an extension portion on an end of the base portion, wherein at least a portion of an outer surface of the extension portion includes an ultra-hard abrasive material; and

a lip on the outer surface of the extension portion, the at least one lip having a length between a first end and a second end.

16. The drill bit of claim 15, wherein the ultra-hard abrasive material is selected from the group of materials consisting of polycrystalline diamond and polycrystalline cubic boron nitride.

17. The drill bit of claim 15, wherein the outer surface includes a first spherical portion having a first radius of curvature and a second spherical portion having a second radius of curvature less than the first radius of curvature, wherein the lip is defined between the first spherical portion and the second spherical portion.

18. The drill bit of claim 17, wherein the lip extends beyond of the first spherical portion.

19. The drill bit of claim 17, wherein an outer end of the lip is flush with the first spherical portion.

20. The drill bit of claim 15, wherein the lip extends diametrically across the outer surface.

21. The drill bit of claim 15, wherein a height of the lip tapers between a higher end proximate the longitudinal axis and lower ends proximate an interface edge between the outer surface and a sidewall of the base portion.

22. The drill bit of claim 15, wherein a height of the lip is substantially constant along the length of the lip.

23. The drill bit of claim 15, wherein the ultra-hard cutting elements are oriented on the bit body such that the lips extend radially toward a longitudinal axis of the shank.

24. The drill bit of claim 15, wherein the bit body comprises a rotary cone rotatably coupled to the shank.

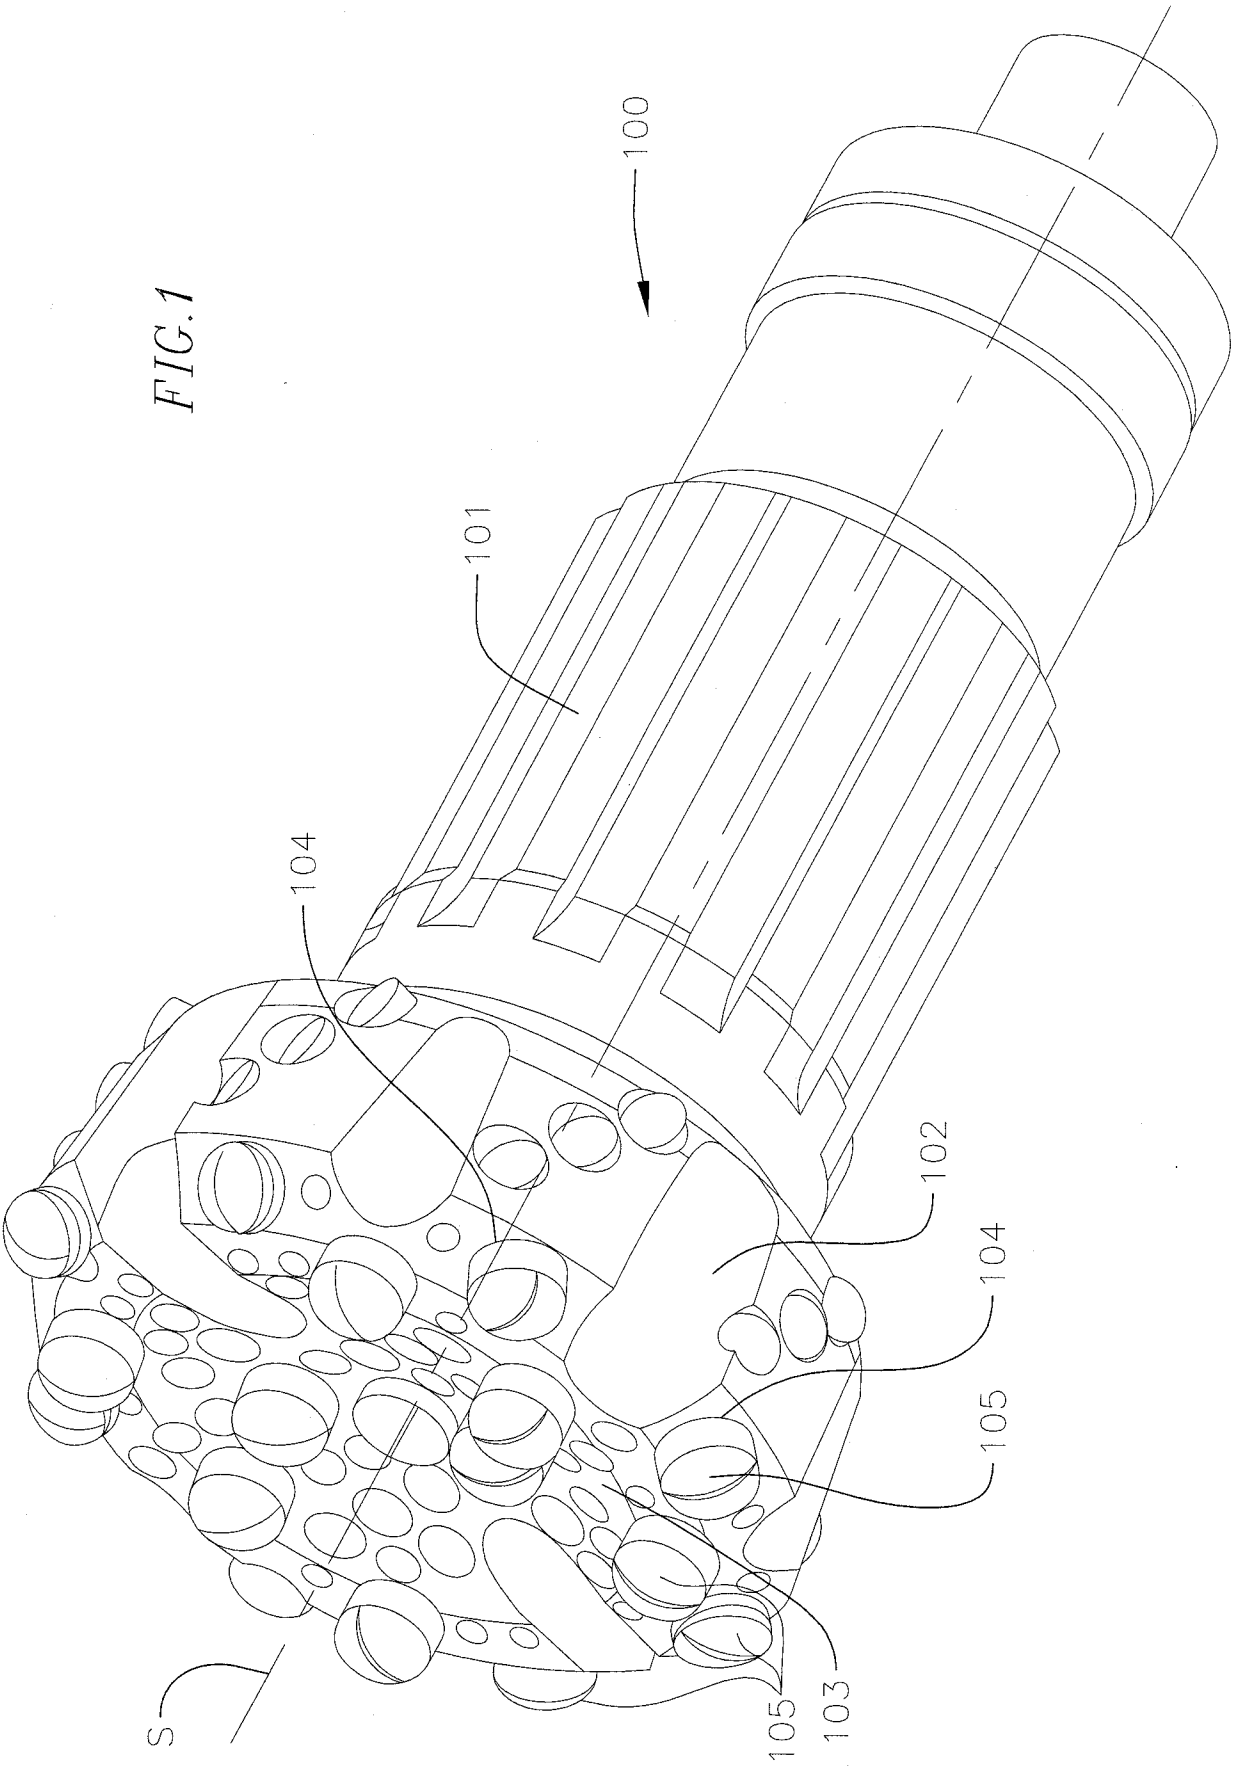


FIG. 2A

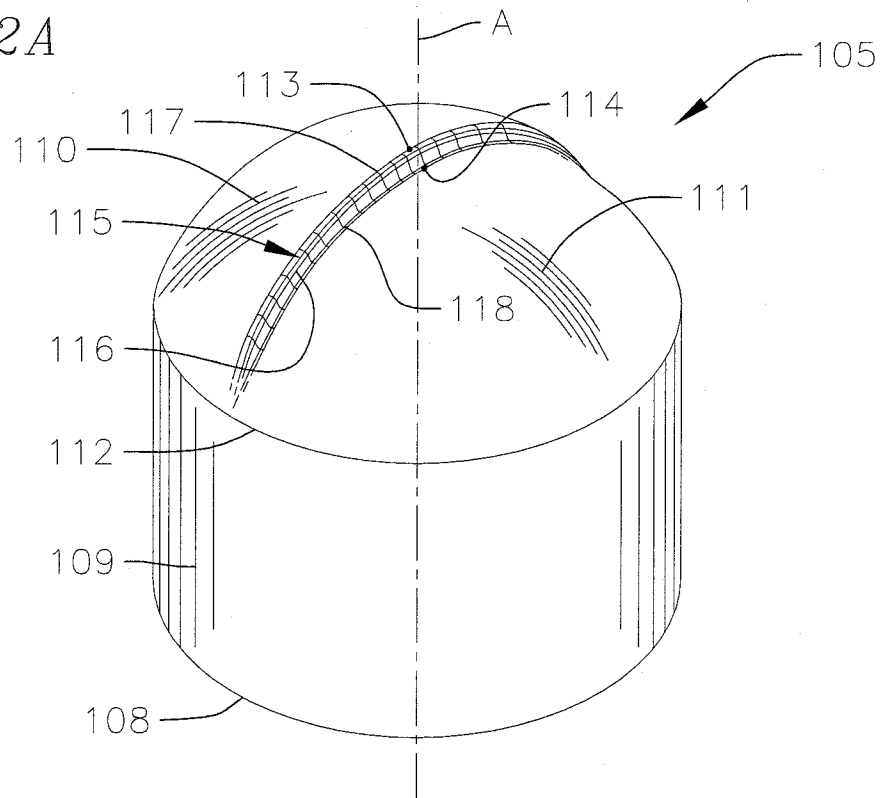


FIG. 2B

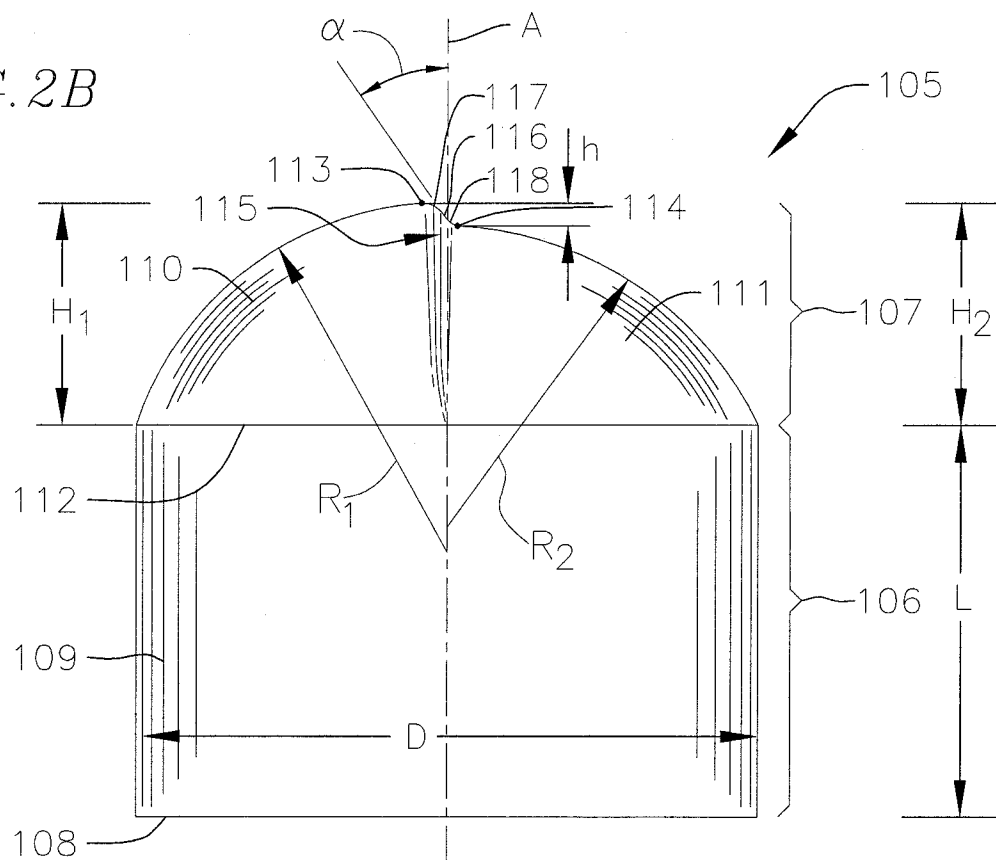


FIG. 3A

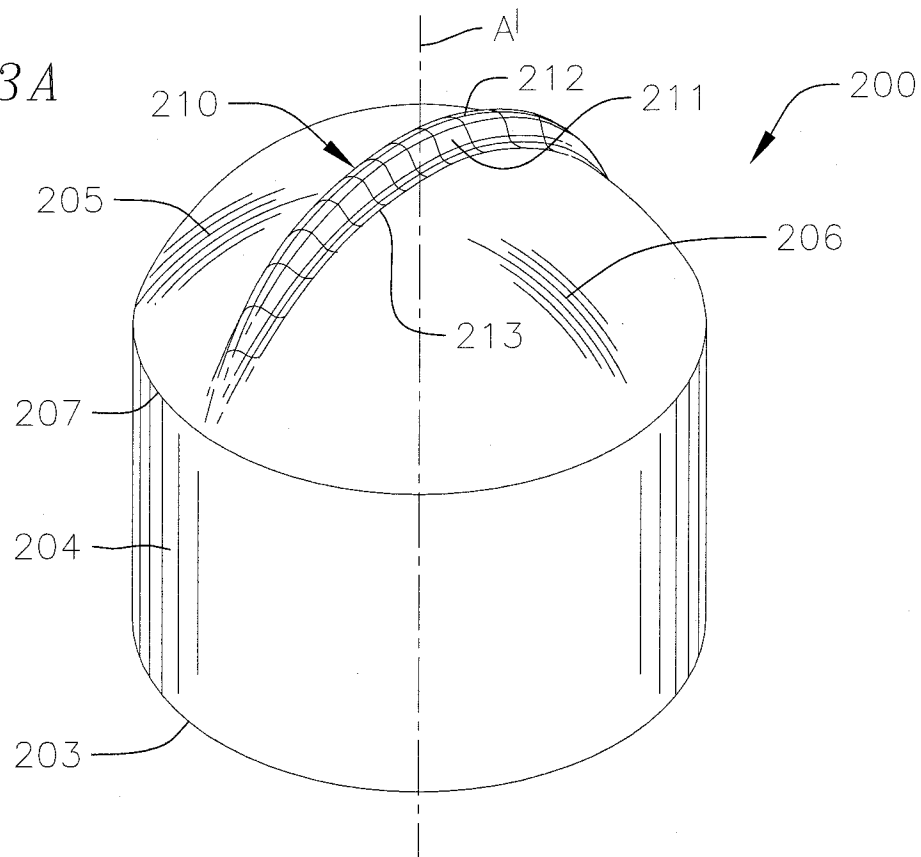


FIG. 3B

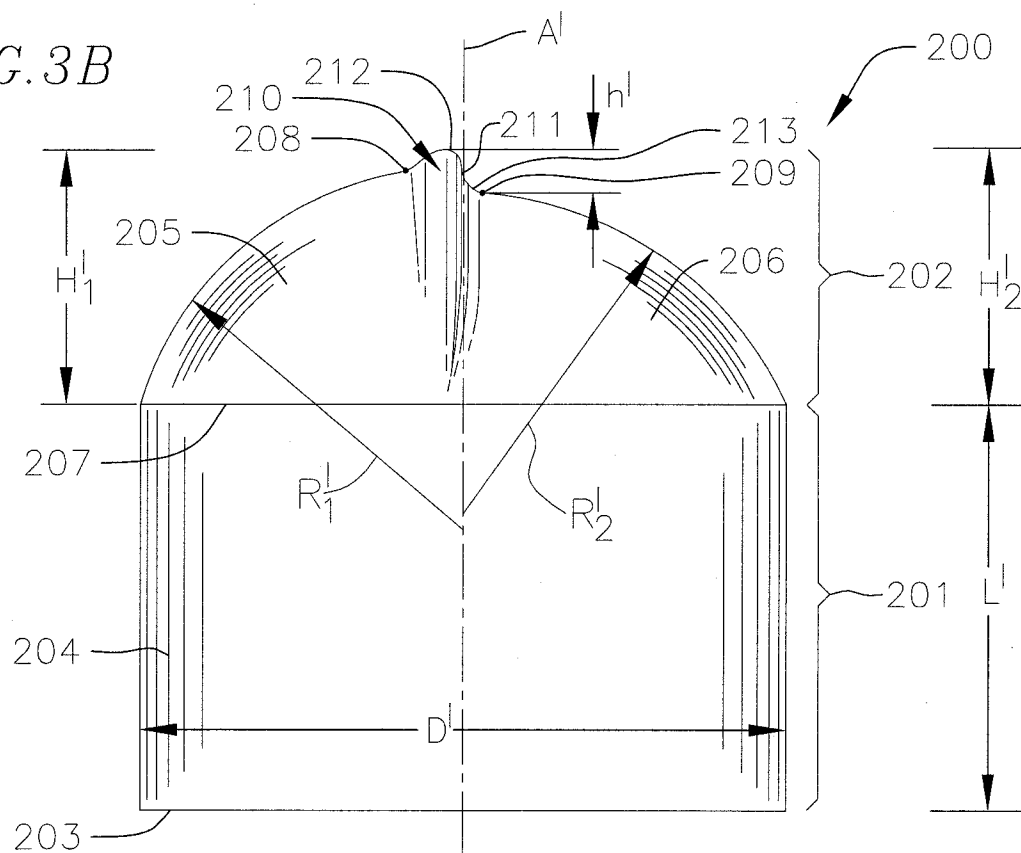



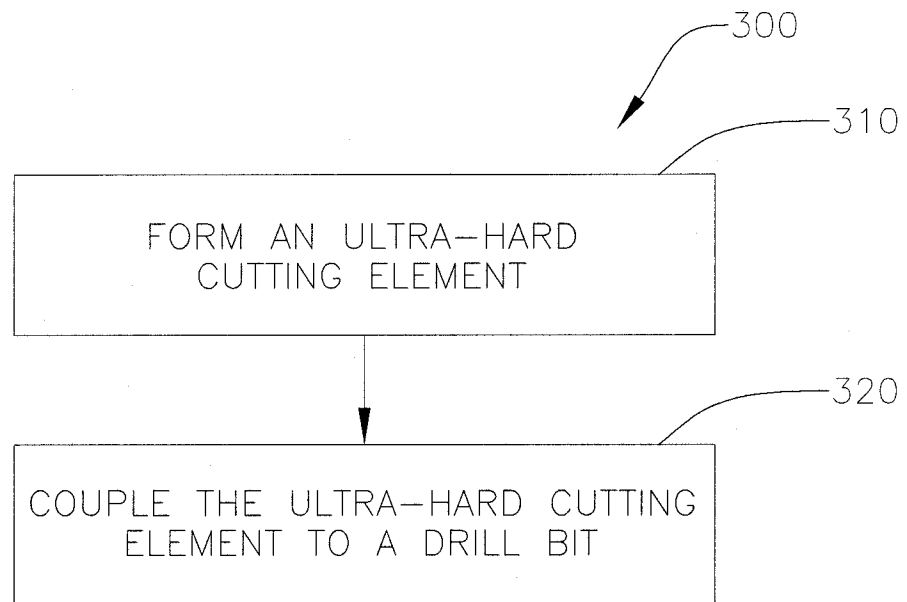
FIG. 4

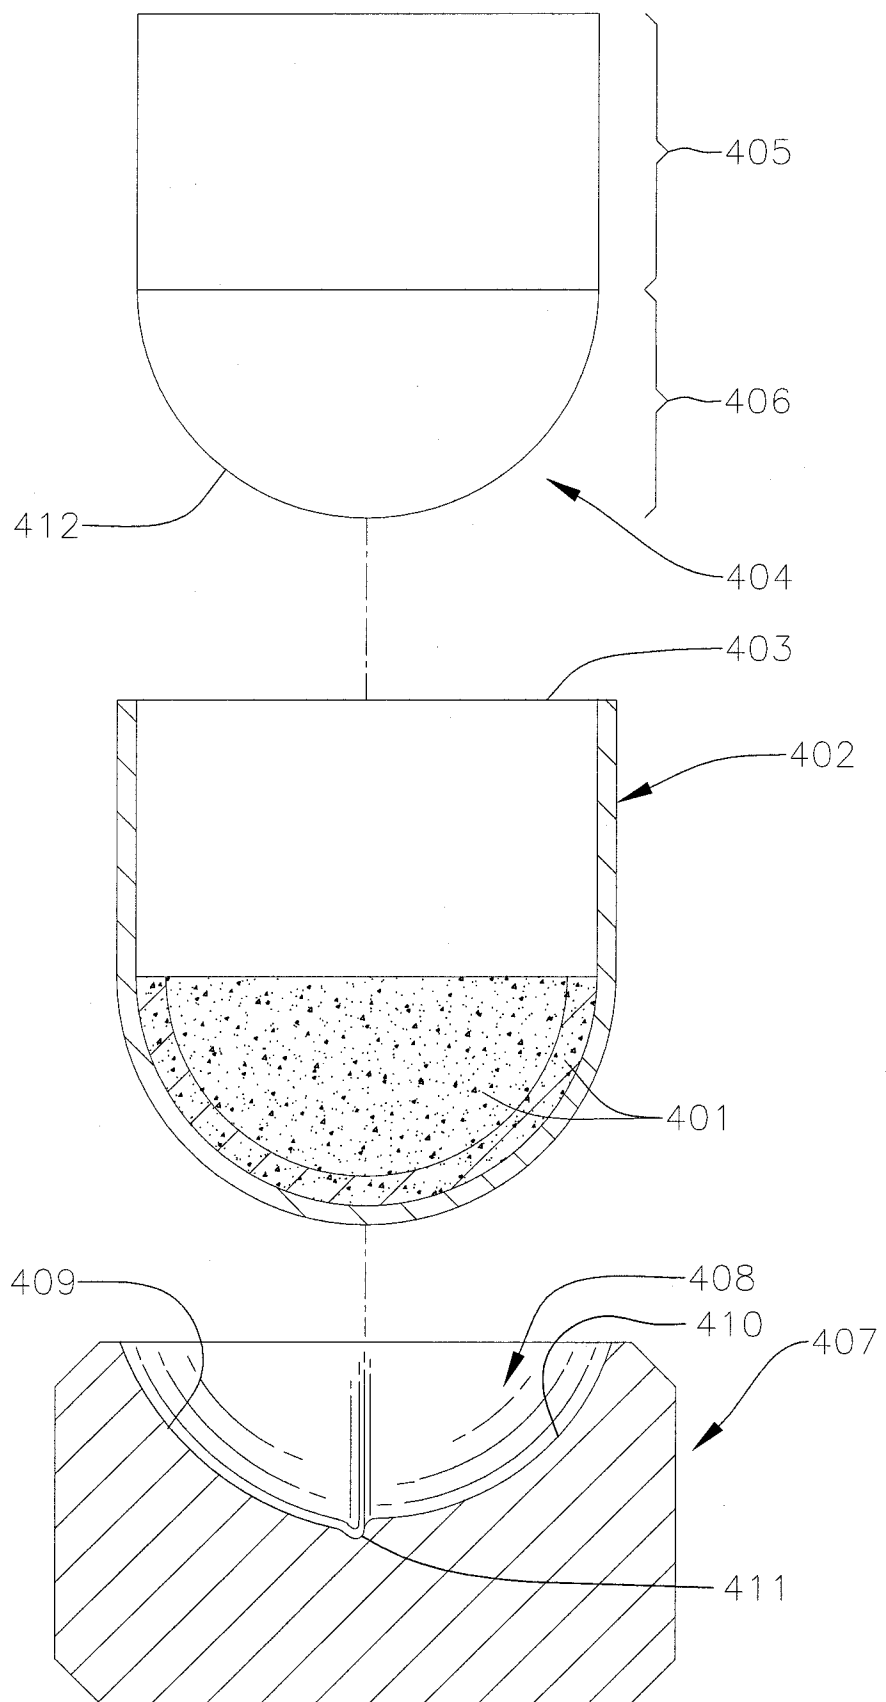FIG. 5



INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2015/063919**A. CLASSIFICATION OF SUBJECT MATTER****E21B 10/42(2006.01)i, E21B 10/54(2006.01)i, E21B 10/62(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

E21B 10/42; E21B 7/00; E21B 10/36; E21B 10/46; E21B 10/08; E21B 10/573; E21B 10/55; E21B 10/58; E21B 7/04; E21B 10/54; E21B 10/62

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: ultra, hard, lip, abrasive, cut, drill, pock, shank, crystal, percussion, cone and surface

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2008-0006448 A1 (ZHANG et al.) 10 January 2008 See paragraphs [0008]-[0045] and figures 1-2, 6A-6C.	1-3, 10-16, 20-24
A		4-9, 17-19
A	US 2010-0059286 A1 (MCDONOUGH et al.) 11 March 2010 See paragraphs [0055], [0082] and figures 9-11, 18.	1-24
A	US 2014-0069725 A1 (SMITH INTERNATIONAL, INC.) 13 March 2014 See paragraphs [0015]-[0057] and figures 1-8B.	1-24
A	US 2008-0087473 A1 (HALL et al.) 17 April 2008 See paragraphs [0026]-[0047] and figures 1-17.	1-24
A	US 2006-0144621 A1 (TANK et al.) 06 July 2006 See paragraphs [0028]-[0044] and figures 1-10.	1-24



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

20 April 2016 (20.04.2016)

Date of mailing of the international search report

20 April 2016 (20.04.2016)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

LEE, Hun Gil

Telephone No. +82-42-481-8525



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/063919

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2008-0006448 A1	10/01/2008	CA 2505709 A1	30/10/2005
		CA 2505709 C	13/09/2011
		CA 2505710 A1	30/10/2005
		CA 2505710 C	14/06/2011
		GB 2413575 A	02/11/2005
		GB 2413575 B	26/07/2006
		GB 2413576 A	02/11/2005
		GB 2413576 B	07/06/2006
		GB 2415447 A	28/12/2005
		GB 2424017 A	13/09/2006
		US 2005-0247486 A1	10/11/2005
		US 2005-0247492 A1	10/11/2005
		US 2005-0269139 A1	08/12/2005
		US 2010-0300765 A1	02/12/2010
		US 2011-0031030 A1	10/02/2011
		US 7726420 B2	01/06/2010
		US 7757785 B2	20/07/2010
		US 7798257 B2	21/09/2010
		US 8037951 B2	18/10/2011
		US 8113303 B2	14/02/2012
US 2010-0059286 A1	11/03/2010	US 2008-0164069 A1	10/07/2008
		US 7631709 B2	15/12/2009
		US 7950476 B2	31/05/2011
US 2014-0069725 A1	13/03/2014	CA 2883778 A1	13/03/2014
		CN 104769209 A	08/07/2015
		EP 2893117 A1	15/07/2015
		EP 2893117 A4	18/11/2015
		WO 2014-039766 A1	13/03/2014
US 2008-0087473 A1	17/04/2008	US 7527110 B2	05/05/2009
US 2006-0144621 A1	06/07/2006	AU 2003-259458 A1	25/05/2004
		CA 2504518 A1	13/05/2004
		CA 2504518 C	09/08/2011
		CN 100557188 C	04/11/2009
		CN 1714225 A	28/12/2005
		EP 1565642 A1	24/08/2005
		EP 1565642 B1	29/12/2010
		WO 2004-040095 A1	13/05/2004