




(86) **Date de dépôt PCT/PCT Filing Date:** 2019/04/12
(87) **Date publication PCT/PCT Publication Date:** 2019/10/31
(45) **Date de délivrance/Issue Date:** 2023/03/28
(85) **Entrée phase nationale/National Entry:** 2020/11/19
(86) **N° demande PCT/PCT Application No.:** EP 2019/059437
(87) **N° publication PCT/PCT Publication No.:** 2019/206678
(30) **Priorité/Priority:** 2018/04/25 (DE10 2018 109 952.5)

(51) **Cl.Int./Int.Cl.** **B01F 23/233** (2022.01),
B01F 27/272 (2022.01), **B01F 27/81** (2022.01),
B03D 1/16 (2006.01), **B03D 1/22** (2006.01)
(72) **Inventeurs/Inventors:**
TEUBER, HEIKO, DE;
BIDARAHALLI, VENKOBABAO, IN;
RAO, MOHAN KUMAR KATUGA SIDDOJI, IN
(73) **Propriétaire/Owner:**
TAKRAF GMBH, DE
(74) **Agent:** KIRBY EADES GALE BAKER

(54) **Titre : DISPOSITIF DE GENERATION DE BULLES DE GAZ DANS DES SUSPENSIONS POUR L'ENRICHISSEMENT DE
MATIERES PREMIERES MINERALES ET NON MINERALES ET UTILISATION D'UN TEL DISPOSITIF**
(54) **Title: DEVICE FOR GENERATING GAS BUBBLES IN SUSPENSIONS FOR THE ENRICHMENT OF MINERAL AND NON-
MINERAL RAW MATERIALS AND USE OF SUCH A DEVICE**

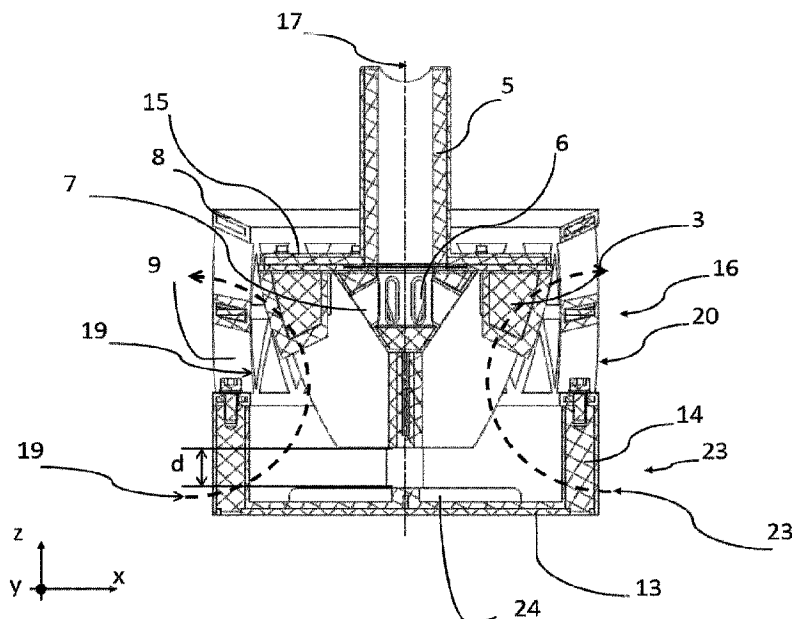

(57) **Abrégé/Abstract:**

The invention relates to a device for generating gas bubbles in suspensions, which are contained in a tank, having a rotation-symmetric stator (16) and a rotation-symmetric rotor (15), which is connected to a hollow drive shaft (5), wherein the stator, the rotor and the hollow drive shaft are arranged concentrically about a vertical axis of rotation (17) of the rotor and the drive shaft, and the rotor executes a rotational movement about the axis of rotation inside the stator.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property

Organization

International Bureau

(43) International Publication Date

31 October 2019 (31.10.2019)



(10) International Publication Number

WO 2019/206678 A1

(51) International Patent Classification:

B01F 7/16 (2006.01)**B03D 1/22** (2006.01)**B03D 1/16** (2006.01)**B01F 7/00** (2006.01)

(21) International Application Number:

PCT/EP2019/059437

(22) International Filing Date:

12 April 2019 (12.04.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

10 2018 109 952.5

25 April 2018 (25.04.2018)

DE

(71) Applicant: **TAKRAF GMBH** [DE/DE]; Torgauer Straße 336, 04347 Leipzig (DE).

(72) Inventors: **TEUBER, Heiko**; Oeserstr. 13, 04229 Leipzig (DE). **BIDARAHALLI, Venkoba Rao**; No. 44, 2nd Cross, Jakkur Layout, Bangalore 560064 (IN). **RAO, Mohan Ku-**

mar Katuga Siddoji; #201, 10th Main, M. S. Ramayya Road, Mathikere, Bangalore 560054 (IN).


(74) Agent: **KAILUWEIT & UHLEMANN PATENTAN-WÄLTE PARTNERSCHAFT MBB**; Bamberger Str. 49, 01187 Dresden (DE).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,

(54) Title: DEVICE FOR GENERATING GAS BUBBLES IN SUSPENSIONS FOR THE ENRICHMENT OF MINERAL AND NON-MINERAL RAW MATERIALS AND USE OF SUCH A DEVICE

Fig. 1

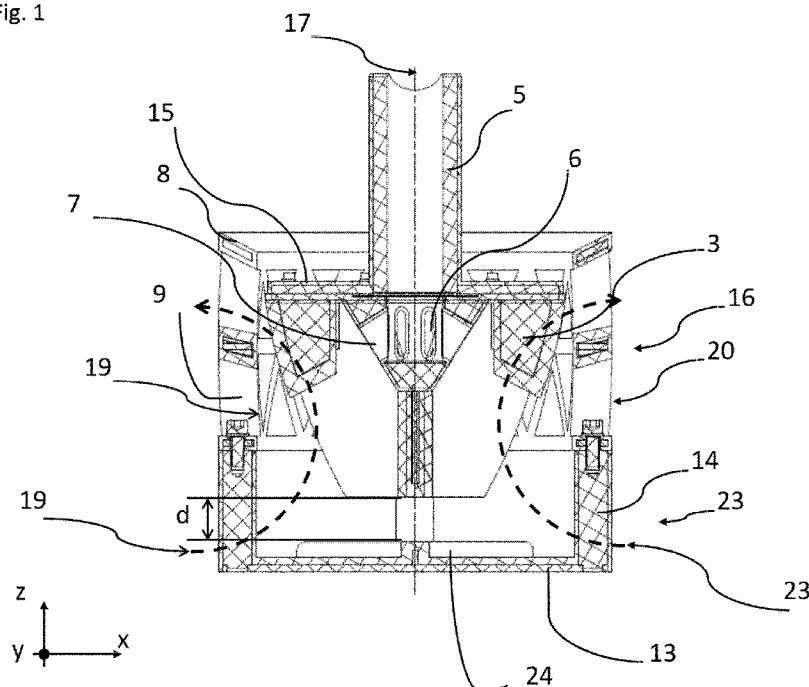

(57) Abstract: The invention relates to a device for generating gas bubbles in suspensions, which are contained in a tank, having a rotation-symmetric stator (16) and a rotation-symmetric rotor (15), which is connected to a hollow drive shaft (5), wherein the stator, the rotor and the hollow drive shaft are arranged concentrically about a vertical axis of rotation (17) of the rotor and the drive shaft, and the rotor executes a rotational movement about the axis of rotation inside the stator.

[Continued on next page]



WO 2019/206678 A1

WO 2019/206678 A1

UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *with amended claims (Art. 19(1))*

Device for generating gas bubbles in suspensions for the enrichment of mineral and non-mineral raw materials and use of such a device

The invention relates to a device for generating gas bubbles in suspensions for the enrichment of mineral and non-mineral raw materials and the use of such a device. For the purposes of this application, suspensions are mixtures of liquids and raw materials, in particular mineral resources, such as copper, tin, platinum group metals (iridium, rhodium or palladium), phosphates and slag in a finely ground phase, which are contained in tanks of flotation cells. For the purpose of separating desired raw materials from this suspension, said suspension is mixed and swirled with air within the tanks, so that a gas bubble-air mixture is formed. As a result, three zones are formed within the suspension. In the lower third of the tank, the swirling of the suspension and, as a result, the generation of bubbles takes place. In the overlying third of the tank, the so-called calming zone, the bubbles with the adhering hydrophobic raw material particles drive towards the surface of the suspension and deposit in the upper third of the tank as foam. This foam leaves the tank of the flotation cell at its top by an overflow and is available for further processing by means, which are known per se.

In order to generate the swirling of the suspension within the tank, a rotor executes a rotational movement with a speed to be defined within a surrounding stator. As a result of this rotational movement, the suspension is sucked through the gap between the stator and the support device and returned to the surrounding area of the suspension through the casing of the stator. In this case, a portion of the suspension containing hydrophilic raw materials sinks back to the bottom of the tank and is dug from there.

By simultaneously introducing air into the suspension, the suspension is enriched with gas bubbles. As a result of the swirling of this gas bubble suspension mixture, a force acts on the gas bubbles and these break down further into smaller and smaller bubbles.

Category-specific devices for generating gas bubbles are well known from the prior art.

The document US 4283357 A describes a rotor-stator mechanism in which the air distributor, which is located in the rotor, directs the air against the stator vanes using tangentially arranged air guidance channels. In this case, the air guidance channels form an angle between 20° and 60° relative to the radial.

The document US 9266121 B2 discloses a rotor with vanes, which extend vertically and are arranged radially to the axis of rotation and which are provided with curved vane exterior edges.

flows through the channel extending inside the drive shaft and the rotor through the air intake openings and into the suspension. The air is directed to the air intake openings of the rotor through a network of inner air guidance channels located at the upper central portion of the rotor. Furthermore, the rotor is designed such that the suspension in the middle part of the rotor is sucked axially along the axis of rotation and is directed through corresponding outlet openings back into the surrounding suspension.

The document US 2015/0251192 A1 describes a stator with a plurality of vertically aligned baffles arranged around the rotor. The rotor is connected to a vertically aligned shaft. The vanes of the rotor extend vertically and are curved at their exterior edges. The baffles of the stator also extend vertically and are provided with a plurality of horizontally arranged slots for better shear effect. Furthermore, the air intake openings required for ventilation of the suspension are arranged so that the air is passed between the vanes of the rotor.

The document US 4425232 A discloses a stator-rotor combination in which the inner sides of the stator baffles follow the contour of the exterior edges of the stator vanes and have the same distance.

Possible arrangements and embodiments of air outlet openings are described in the document US 6805243 B1. In this case, flat, horizontal slots are a preferred embodiment. Furthermore, the position of the air outlet openings underneath the plate of the rotor is disclosed.

The document US 4551285 A describes a rotor which is surrounded by vertically arranged baffles. The vanes of the rotor are radially arranged on a rod and extend from its exterior side to half of the radius. Furthermore, smaller vanes act as air intake vanes in the area of the drive shaft.

The document US6772885 B2 discloses an embodiment of the plate of a rotor, which has an angle of inclination between 5° and 70° in the direction of the bottom side of the rotor.

An embodiment of a stator-rotor arrangement for improving the pumping power of such arrangements is described by EP 0287251 B1. Due to the arrangement of the baffles in relation to the exterior edge of the rotor, precisely the gas bubbles located at the bottom of the tank of the suspension-filled flotation cell are lifted and split.

CN 2 02 490 592 U discloses a powder-liquid mixing device comprising a mixer having a powder inlet, a liquid inlet and a liquid outlet. The mixer comprises a stator and a rotor. The wall of the stator comprises a plurality of holes and the rotor has a claw-shaped metal sheet, which is

attached to the rotor by means of screws. The rotor is driven by a motor wherein shear and centrifugal forces are generated to disperse and homogenize the powder in the liquid.

A disadvantage of all above-mentioned rotor-stator combinations is that these devices have a low efficiency in the extraction of raw materials with low-grade occurrence. Especially in this case it is necessary to extract such raw materials from a finely ground mineral phase, which requires the smallest possible gas bubbles with small size differences. Existing plants are able, by extending the residence time of the swirled suspension in the region of the rotor-stator combination, to generate small bubbles, which are suitable for the extraction of these raw materials. However, this leads to a deterioration in the efficiency of such flotation plants.

To overcome these disadvantages of the prior art, the object of the invention is to generate a flow in suspensions, which extends the residence time of the gas bubble suspension mixture in the region of the stator and at the same time sets the flow rates at such a high level that the plants maintain a high efficiency.

This object is achieved by a stator-rotor combination for generating gas bubbles in suspensions.

According to the invention, the rotation-symmetric rotor is connected to a hollow drive shaft, whose axis of rotation is arranged concentrically with respect to the central axis of a surrounding stator. The rotor is composed of a plate, which represents the upper side of the rotor and a plurality of vanes extending axially and parallel to the axis of rotation away from the plate. Furthermore, the rotor is provided beneath its plate with air intake openings, which allow air to enter the suspension via the hollow drive shaft, the air guidance channels and the air intake openings. Preferably, the rotor is designed as a welded component, an additively manufactured component or a moulded component. The axis of rotation of the rotor is normal to the surface of the suspension.

The stator is designed as a cylindrical hollow body, which encloses the rotor. In this case, the rotor and stator are arranged to each other so that the stator projects beyond the rotor on its upper side. The lower end of the rotor projects beyond the bottom of the stator and is located at the level of the gap between the stator and a vortex breaker, which is connected to the bottom surface of a support device. The casing of the stator consists of a plurality of strip-shaped, radially oriented

baffles, which thereby form a perforated, cage-like shell, which can be flowed through by the suspension.

The stator is positioned on a support device which ensures a defined distance between the stator and the bottom surface and which introduces the forces acting on the stator due to the flow resistance into the bottom of the tank of the flotation cell. On the bottom plate a vortex breaker, known per se, is positioned, which serves to swirl the flowing suspension and the use of which is well known.

According to the invention, the vanes of the rotor extend at different distances from the plate in the axial direction. In this case, the inner edges of the shorter vanes have a radial distance from the drive shaft. The baffles of the stator are inclined relative to the axis of rotation. In this case, a first partial quantity of the baffles has an angle α of 30° to 60° and a second partial quantity of the baffles have an angle α' of -30° to -60° and thus allow a continuous swirling and thus fragmentation of the bubbles within the suspension. In particular, the values of the angles α and α' are the same. The baffles are materially interconnected and thereby form the casing of the stator.

In a preferred embodiment of the rotor, the exterior contours of all the vanes taper in a convex-curved manner as the distance from the plate increases. A straight exterior edge of the rotor is used when the production costs should be as low as possible. A higher efficiency of the rotor can be achieved with a curved exterior contour of the vanes.

In a preferred embodiment, a first partial quantity of the rotor vanes has the same length as the overall height of the rotor. A second and third partial quantity is made shorter, wherein the vane lengths of this second and third partial quantity are the same length, or in a preferred embodiment, have different longitudinal extensions, in order to obtain a stronger mixing of the suspension gas bubble mixture.

Preferably, all the vanes of the rotor are connected with the drive shaft in a form-fitting or materially connected manner. In a particularly preferred embodiment of the rotor, the shorter vanes are radially spaced from the drive shaft. This radial distance r is between 30% and 70% of the radius R and leads to an improved air bubble distribution within the suspension.

In a particularly preferred form of the rotor, the inside edges of the shorter vanes are tapered or pointed to a point towards the axis of rotation. This has the advantage that the air entering the

suspension is guided with a low resistance on these vanes along these vanes and thus contributes significantly to the high efficiency of flotation systems, which are provided with such a device.

In a further preferred embodiment, the lower edges of the shorter vanes are horizontally oriented or inclined. They form an angle γ between 0° and 60° , relative to the horizontal, which has an advantageous effect on the swirling of the suspension.

In order to supply air to the suspension, the drive shaft of the rotor is made hollow. Thus, air can be blown through this drive shaft into the rotor. Within the rotor, this air is distributed via air guidance channels to the preferably radially arranged air intake openings. The air guidance channels are preferably aligned so that they direct the air towards the bottom of the tank of the flotation cell. Here, the air guidance channels are preferably oriented at an angle ϵ between 20° - 60° , relative to the axis of rotation.

In one embodiment of the invention, the inner and outer circumferential surfaces of the stator are formed in a straight line and spaced from each other. In an alternative embodiment of the stator, the exterior circumferential surface is convexly curved. The inner and exterior circumferential surface in this embodiment always have the same distance from each other and thus have a positive influence on the bubble distribution.

The stator is preferably a welded component or a molded component or an additively manufactured component having a plurality of integrally interconnected metal sheets. On the one hand, the metal sheets represent the total quantity of the baffles, on the other hand, the cover ring, the intermediate rings and the seal ring are formed as metal sheet and are integrally connected to the baffles. The total quantity of baffles is divided in a preferred embodiment evenly on two partial quantities of baffles. The baffles are enclosed by the cover ring and the seal ring and subdivided by the optional intermediate rings. In this way, it is possible to advantageously produce a stiff and firm stator, which, on the one hand, absorbs the loads due to the flow resistance, while on the other hand, it may quickly be replaced, since the stator is subject to wear. In a preferred embodiment, the stator is divisible for the purpose of disassembly and assembly. Preferably, this dividing plane is vertically aligned by vertically aligned metal sheets or is arranged horizontally by divisible intermediate rings. In this preferred embodiment, the vertical divider plates or divisible intermediate rings are releasably connected together. In a particularly preferred embodiment of the rotor, the vertically divided segments can additionally be divided horizontally in order to then remove or insert them through manholes located at the bottom of the tank of the flotation cell. Advantageously, it is possible to disassemble and assemble the stator without

having to manipulate the rotor. The segments are designed such that they consist of a part of the baffles, which are enclosed in the vertical direction by the cover ring, the intermediate ring and the cover ring. In the circumferential direction of the stator, a segment is delimited by the vertically arranged baffles.

For the purpose of easy manufacture of the stator, the cover ring is aligned horizontally. However, it has proven to be useful to tilt the ring. The inclination is such that the inner edge of the cover ring is inclined toward the bottom. The particularly preferred inclination angle β is 30° to 60° . By means of this particularly preferred embodiment, the flow resistances for the swirled suspension are reduced, so that a more uniform swirling in the region of the stator can be ensured. The foam which is formed can then be removed from the surface by means of pumps.

The abrasive effect of the suspension on the vanes of the rotor and on the baffles of the stator cause a strong wear of the metallic material. It therefore proves to be advantageous if these components are coated with a low-cost wearable layer of plastic. In an alternative embodiment, the regions of the vanes and baffles that are exposed to the flow of the suspension, are hardened by a local structural change. This reduces the wear of the components. In addition, eliminating the polyurethane coating provides a weight advantage and increases the efficiency of the plants.

According to the invention, such rotor-stator combinations are used within tanks of flotation cells and are positioned in the lower third of the tank.

In order to practice the invention, it is also expedient to combine the above-described designs, embodiments and features of the claims of the invention with each other in a suitable arrangement.

The invention will be described below with reference to several embodiments and is represented graphically in the accompanying figures. The coordinate system used in the figures illustrates the orientation of the device within the suspension. The plane formed by the axes x and y is parallel to the surface of the suspension. The axis z is aligned normal to this plane.

Fig. 1 shows a sectional view of a rotor-stator combination with a drive shaft, which is positioned on a support device. The elements required to drive the rotor and the surrounding tank of the flotation cell are not shown.

Fig. 2 shows a side view of a rotor. The drive shaft is not shown.

Fig. 3 illustrates the bottom side of the rotor of Fig. 2.

Fig. 4 shows a sectional view A-A of the geometric relationships of the vanes of the rotor of Fig. 3

Fig. 5 shows an alternative embodiment of the rotor with curved vanes.

Fig. 6 illustrates the bottom side of the rotor of Fig. 5.

Fig. 7 shows the central sectional view of a two-part embodiment of the stator, which is positioned on a support device.

Fig. 8 shows a central sectional view of the stator of Fig. 7 and the geometric relationships of the baffles.

Fig. 9 shows a central sectional view of the stator of Fig. 7 and the geometric relationships of the upper cover ring.

Fig. 10 shows a side view of a vertically divisible stator. In this case, the detachable connection of the segments is not shown.

Fig. 11 shows a side view of a horizontally divisible stator. To clarify the divisibility, the stator rings are shown spaced.

Fig. 12 shows in a side view the vertically divisible stator of Fig. 11, in its individual segments.

Fig. 13 shows a side view of an embodiment of the stator having linear circumferential surfaces

A preferred embodiment of the device for generating gas bubbles is shown in Fig. 1 and consists essentially of a rotation-symmetric stator (16), which encloses a rotation-symmetric rotor (15) and is detachably connected to a support device (23). The stator is designed as a cylindrical hollow body and projects beyond the rotor (15) on its upper side. Furthermore, the rotor (15) projects beyond the stator (16) on its bottom side and is arranged at a distance d from the vortex breaker (24) positioned on the bottom (13) of the support device. The rotor (15) is connected to a hollow drive shaft (5) which is designed such that air can be introduced into the suspension through the

air guidance channel (7) located inside the drive shaft (5) and via the air inlet openings (6). (29) indicates the flow direction of the suspension.

The embodiment of the rotor (15) shown in Fig. 2 is particularly suitable if the service life of such components is to be increased, since the gas bubbles in the suspension can be generated independently of the direction of rotation of the rotor (15). The rotor (15) has at its upper end a plate (1) from which vanes (2,3,4) with different lengths in the axial direction, extend radially to the axis of rotation (17). Here, the exterior edges of the vanes (2,3,4) taper with increasing distance from the plate continuously in a linear or convexly-curved manner. Furthermore, it is shown that the vanes (2, 3, 4) extend differently in the axial direction. A first part of the vanes (2) extends over the entire length of the rotor. A second (3) and a third (4) part of the vanes is shorter than the first part (2) of the vanes, wherein a part of the vanes (4) is in turn shorter than the other part (3) and thus a stronger swirling of the suspension gas bubble mixture is generated.

Fig. 3 shows the bottom side of a rotor (15) from the viewing direction B (see Fig. 2). Here it is shown that the vanes (2), which extend over the entire length of the rotor (15) are arranged in a cross shape around the axis of rotation (17) and are connected to the drive shaft. Furthermore, it is shown that the short vanes (3,4) are radially spaced from the drive shaft and that the inner edge (22) of these vanes (3,4) are sharp-edged and tapered in order to generate a large number of almost uniformly-distributed gas bubble diameters in the suspension.

Fig. 4 shows in a side view the sectional view corresponding to the section A-A (see Fig. 4). The lower edges (21) of the short vanes (3,4) are inclined in the direction of the plate, and cover an angle γ of 23° . Furthermore, it is shown that the drive shaft (5) in the region of the short vanes (3,4) is formed so that the air guidance channels (7) deflect the air entering the suspension so that it impinges on the inner edges (22) of the short vanes (3, 4). The angle ε is 26° .

Fig. 5 shows in a side view an alternative embodiment of the rotor (15) provided for rotation with a preferred direction of rotation. Here, the vanes (2,3,4) extend with different lengths in the axial direction of the plate (1). With respect to the radial, the vanes (2,3,4) have a curved circular path.

Fig. 6 shows the view of the bottom side, corresponding to the viewing direction C (see Fig. 5), of the alternative embodiment of the rotor (15) with curved vanes (2, 3, 4). Furthermore, the direction of rotation (28) for this embodiment of the stator is indicated.

Fig. 7 shows a sectional view of the stator (16) of the device for generating gas bubbles, which is releasably connected to a support device (23). In this preferred embodiment, the stator (16) consists of an upper stator ring (16a), wherein the cover ring (8) and the divisible intermediate ring of the upper stator ring (10a) surround a partial quantity of the baffles (9). Accordingly, the intermediate ring of the lower stator ring (10b) and the seal ring (12) enclose a further partial quantity of the baffles (9). In the overall view of the stator, the exterior edges (20) of the baffles (9) have a convex contour. The inner edges (19) of the baffles (9) are concave and uniformly spaced from the exterior edges (20). The intermediate rings (10a and 10b) are detachably connected to each other. Furthermore, the seal ring (12) and the spacers (14) of the support device (23) are releasably connected to each other.

Fig. 8 shows a sectional view of the stator (16) of Fig. 7. Here it is shown that a partial quantity of the baffles is arranged at an angle α of 25° and a second partial quantity of baffles (9) is arranged at an angle α' of -25° . Furthermore, it is shown that the baffles intersect in the region of the intermediate rings (10a, 10b), the seal ring (12) and the cover ring (8).

In Fig. 9, a preferred embodiment of the stator (16) is shown. It is shown that the upper cover ring (8) is inclined in the direction of the support device (23) and thereby forms an angle β of 62° .

In Fig. 10 an exemplary embodiment of a vertically divisible stator (16) is shown in a side view. The vertically extending dividing plane divides the stator into a part (25) and a part (26) which are detachably connected to one another in the region of the vertically extending, divisible guide plates (27a, b). Furthermore, it is shown that the exterior circumferential surface (20) of the stator (16) tapers towards the intermediate ring (10) and is convex.

Fig. 11 is a side view showing the stator (16) and the support device (23) showing the divisibility of the individual components composed of the upper stator ring (16a), the lower stator ring (16b) and the support device (23). The separation planes are located in each case in the region of the intermediate rings (10a, 10b) and between the seal ring (12) and spacers (14) of the support device (23).

The vertically divisible stator (16) of Fig. 11, its two individual parts (25) and (26), as well as the support device (23) are shown in Fig. 12. In this case, the stator is subdivided by vertically arranged divider plates (27a, b), which are detachably connected to one another and thus enable a simpler mounting of the stator.

Another alternative embodiment of the stator (16) is disclosed by Fig. 13. In this case, the rectilinear exterior circumferential surface (20) forms the exterior wall of a hollow cylinder.

Reference Numerals

1	Plate
2	Rotor vane, long
3	Rotor vane
4	Rotor vane
5	Drive shaft
6	Air outlet opening
7	Air guidance channel
8	Cover ring
9	Stator baffles
10	Intermediate ring
10 a	Divisible intermediate ring of the upper stator ring
10 b	Divisible intermediate ring of the lower stator ring
12	Seal ring
13	Bottom surface of the stator
14	Spacer
15	Rotor

- 16** Stator
- 16 a** Stator ring
- 16 b** Stator ring
- 17** Axis of rotation
- 18** Tank of a flotation cell
- 19** Inner circumferential surface of the stator
- 20** Exterior circumferential surface of the stator
- 21** Bottom edge of the vanes
- 22** Inner edge of the vanes
- 23** Support device of the stator
- 24** Vortex breaker
- 25** Vertically divided stator part
- 26** Vertically divided stator part
- 27** Vertical divider plates
- 28** Direction of rotation of the rotor
- 29** Flow direction of the suspension

Claims

1. A device for generating gas bubbles in suspensions, which are contained in a tank, having a rotation-symmetric stator and a rotation-symmetric rotor, which is connected to a hollow drive shaft, wherein the stator, the rotor and the hollow drive shaft are arranged concentrically about a vertical axis of rotation of the rotor and the drive shaft, and the rotor executes a rotational movement about the axis of rotation inside the stator, wherein:
 - the rotor has, on its upper end, a plate, which is oriented perpendicular to the axis of rotation and on which vanes are arranged that are oriented perpendicular to this plate and radially to the axis of rotation, wherein the radial extension of the vanes is greatest in the region of the plate,
 - the stator is constructed as a cylindrical hollow body and the latter projects axially beyond the rotor on its upper side, wherein the casing of the cylindrical hollow body consists of a plurality of strip-shaped, radially oriented baffles and is arranged on a support device,
 - the support device has a bottom surface, a spacer and a vortex breaker,
 - the stator is spaced from the bottom surface by the spacer of the vortex breaker,
 - the top surface, opposite the bottom surface, of the stator has an opening, which is constructed in such a manner that the rotor can be passed through it and the opening is surrounded by a cover ring, which seals the baffles in an axial direction,
 - at least one air inlet opening for the intake of air into the suspension is arranged on the hollow drive shaft of the rotor, below the plate of the rotor, in the region of the vanes,
 - the rotor has vanes, which extend from the plate in an axial direction to varying distances,
 - at least two vanes of the rotor, which are arranged in the circumferential direction of the drive shaft, have a radial distance to the axis of rotation, a first portion of the baffles of the stator runs at an angle α of 30° to 60° to the axis of rotation and a second portion of the baffles of the stator runs at an angle α' of -30° to -60° to the axis of rotation and the angles α and α' have the same value, and
 - the baffles of the stator are connected to each other.
2. The device according to claim 1, wherein the exterior contour of the vanes continually decreases in an axial direction as the distance from the plate increases.
3. The device according to claim 2, wherein the exterior contour of the vanes continually decreases in a straight-line or convex-curved manner.

4. The device according to any one of claims 1 to 3, wherein the vanes comprise a first partial quantity, a second partial quantity, and a third partial quantity, and wherein the second and third partial quantities of the vanes have a smaller extension in the axial direction than the first partial quantity of the vanes, which has the maximum dimension in the axial direction.
5. The device according to claim 4, wherein the second and third partial quantities of the vanes are constructed having equal or variable lengths in the axial direction.
6. The device according to any one of claims 1 to 5, wherein the radial distance corresponds to between 30% and 70 % of a radius of the rotation-symmetric plate.
7. The device according to any one of claims 4 to 6, wherein the second and third partial quantities of the vanes are connected in a radial orientation to the drive shaft.
8. The device according to any one of claims 4 to 7, wherein inside edges of the second and third partial quantities of the vanes are constructed in a tapering manner, or in a manner so as to taper to a point, toward the axis of rotation.
9. The device according to any one of claims 4 to 8, wherein bottom edges of the second and third partial quantities of the vanes are inclined toward the at least one air inlet opening and thereby form an angle γ between 0° and 60° relative to the horizontal.
10. The device according to claim 4, wherein air guidance devices are arranged in the region of the at least one air inlet opening and are inclined toward the bottom, and thereby form an angle between 20° and 60° relative to the axis of rotation.
11. The device according to any one of claims 1 to 10, wherein the hollow body of the stators is shaped in a linear or convex manner at its outer circumferential surface.
12. The device according to any one of claims 1 to 11, wherein the hollow body of the stators is shaped in a concave manner at its inner circumferential surface and the inner circumferential surface has the same distance to the outer circumferential surface.
13. The device according to any one of claims 1 to 12, wherein the first portion of the baffles and the second portion of the baffles are of the same size and wherein both the first

portion of the baffles and the second portion of the baffles constitute the total quantity of baffles).

14. The device according to any one of claims 1 to 13, wherein the stator consists of at least one stator ring which consists of the cover ring and one or more intermediate ring, and the baffles connecting the cover ring and the intermediate ring.
15. The device according to claim 14, wherein the one or more intermediate ring or vertical divider plates are detachably connected to each other.
16. The device according to any one of claims 1 to 15, wherein the cover ring of the stator is oriented horizontally or inclined toward the rotor and forms an angle β of between 30° and 90° to the axis of rotation of the rotor.
17. The device according to any one of claims 1 to 16, wherein the rotor and the stator are fully or partially provided with a wear-protection layer.
18. The device according to claim 17, wherein the wear-protection layer is a plastic coating or is constructed as a modification of the microstructure of the material of the rotor and stator.
19. Use of the device for generating gas bubbles as defined in any one of claims 1 to 18 in tanks of flotation cells.
20. The use according to claim 19, wherein the rotor and the stator are arranged in the bottom third of the tank of the flotation cell.

Fig. 1

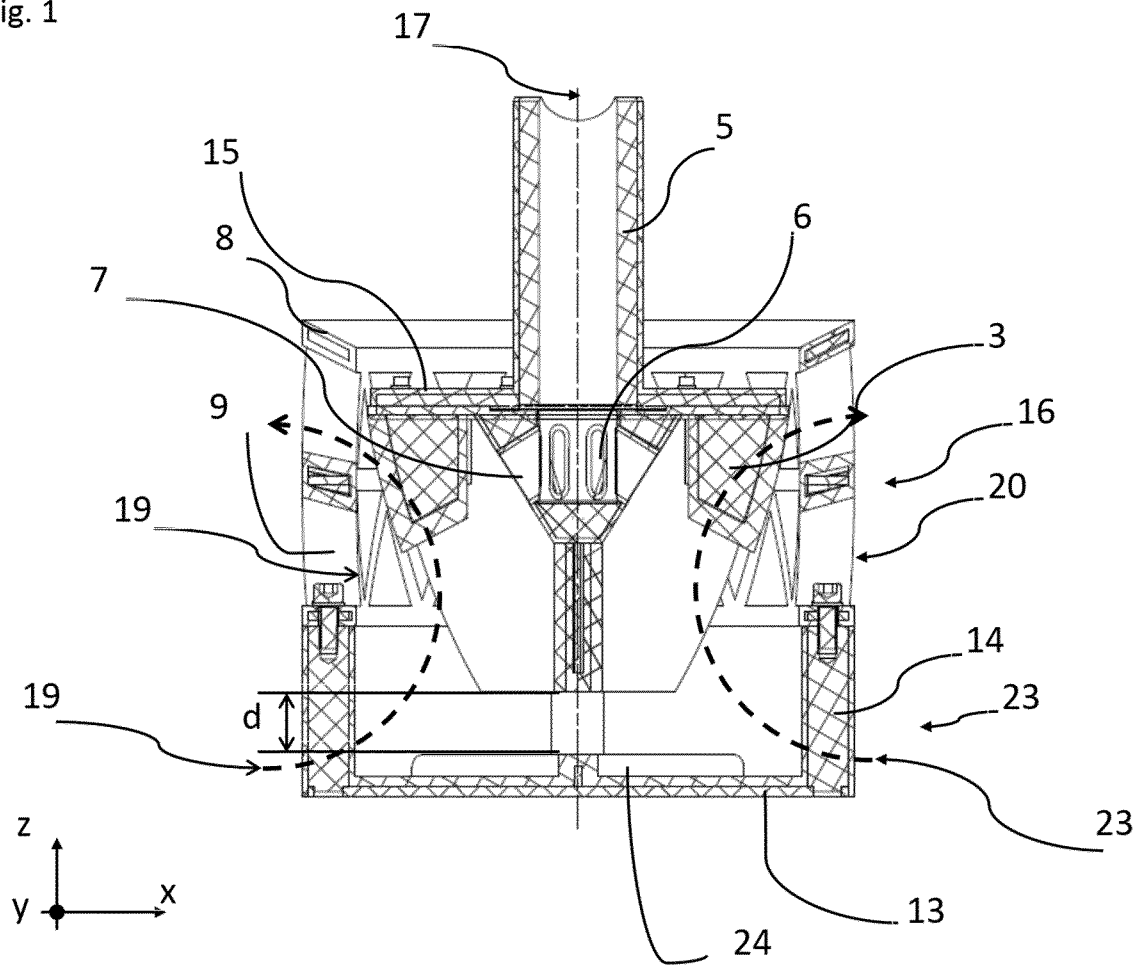


Fig. 2

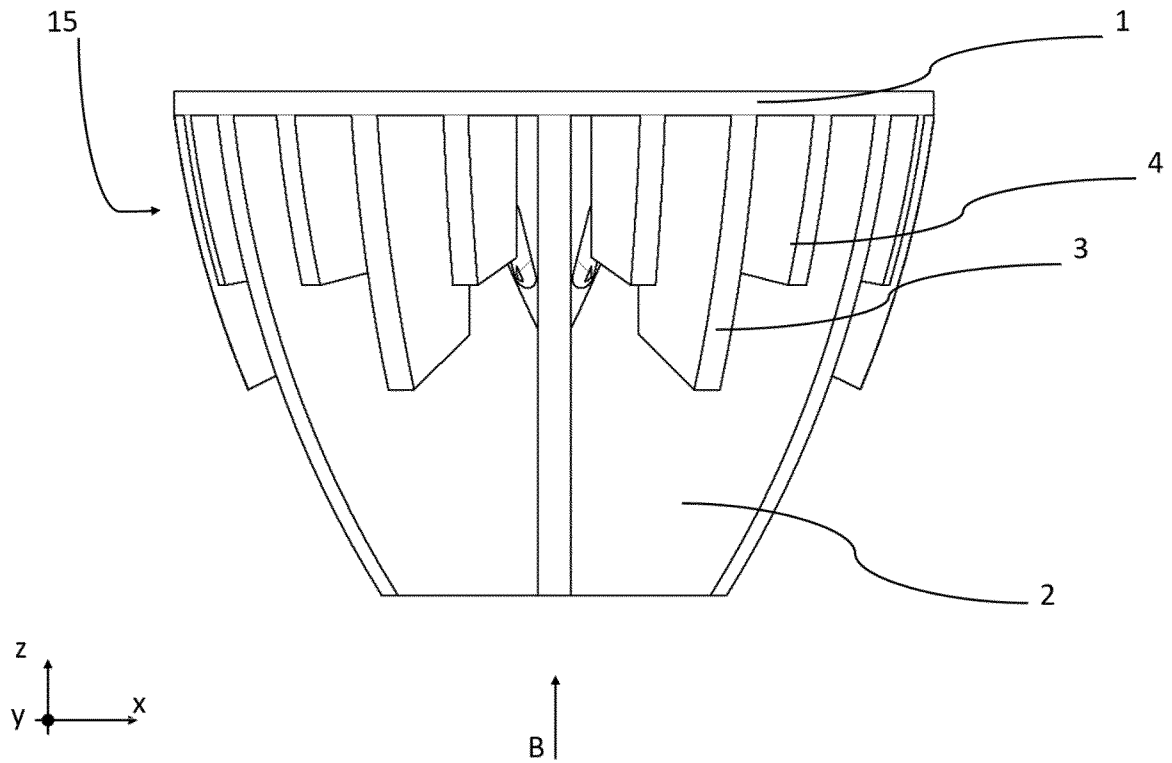
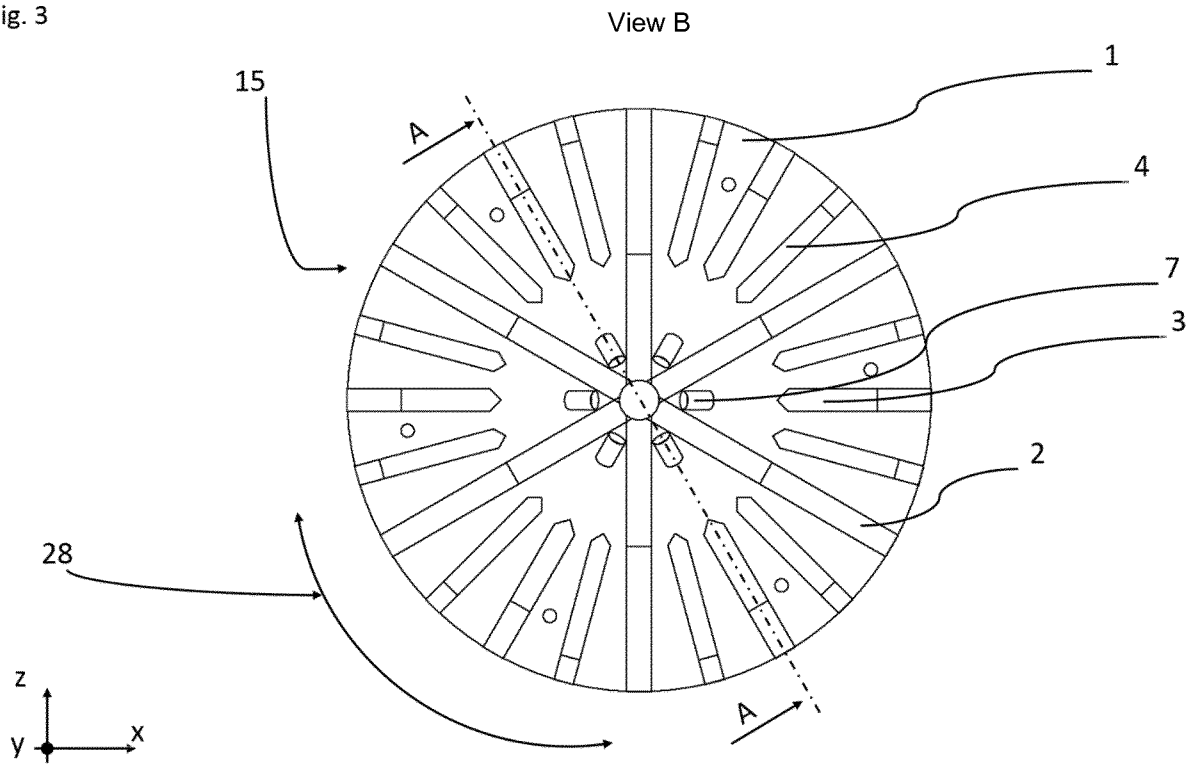


Fig. 3



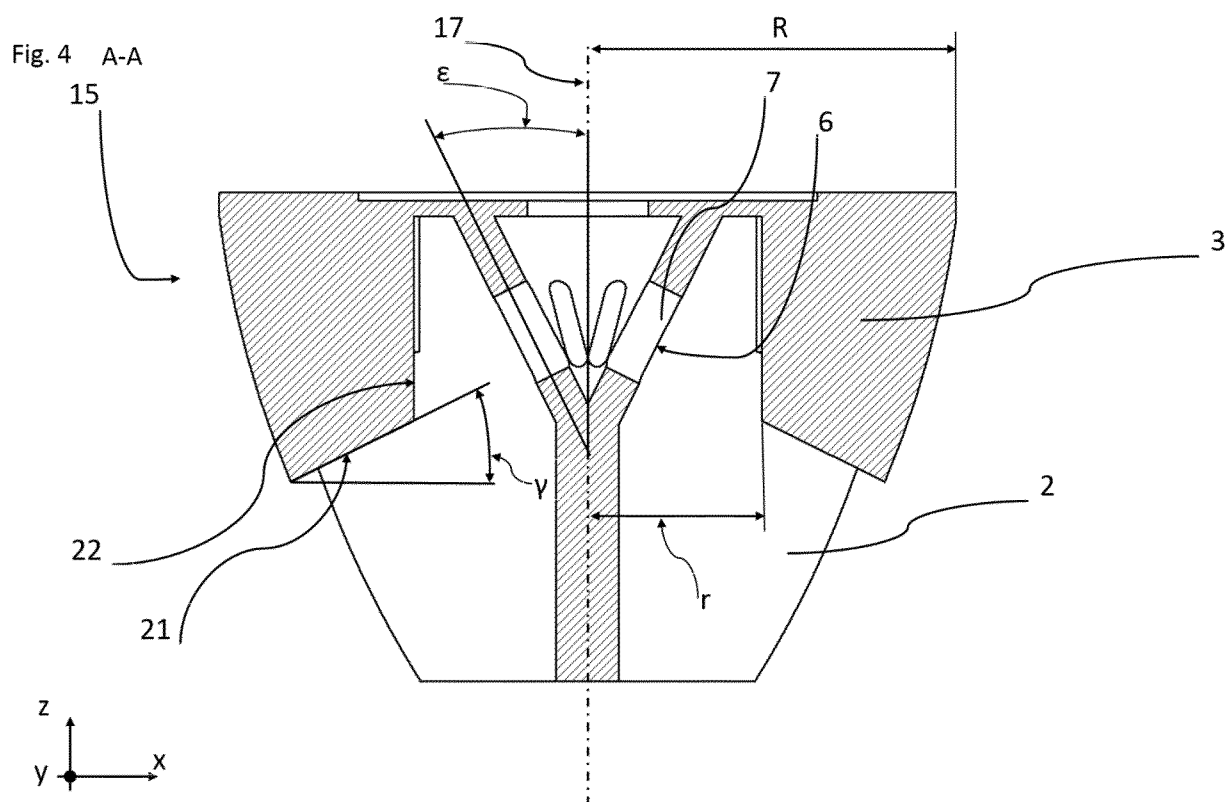


Fig. 5

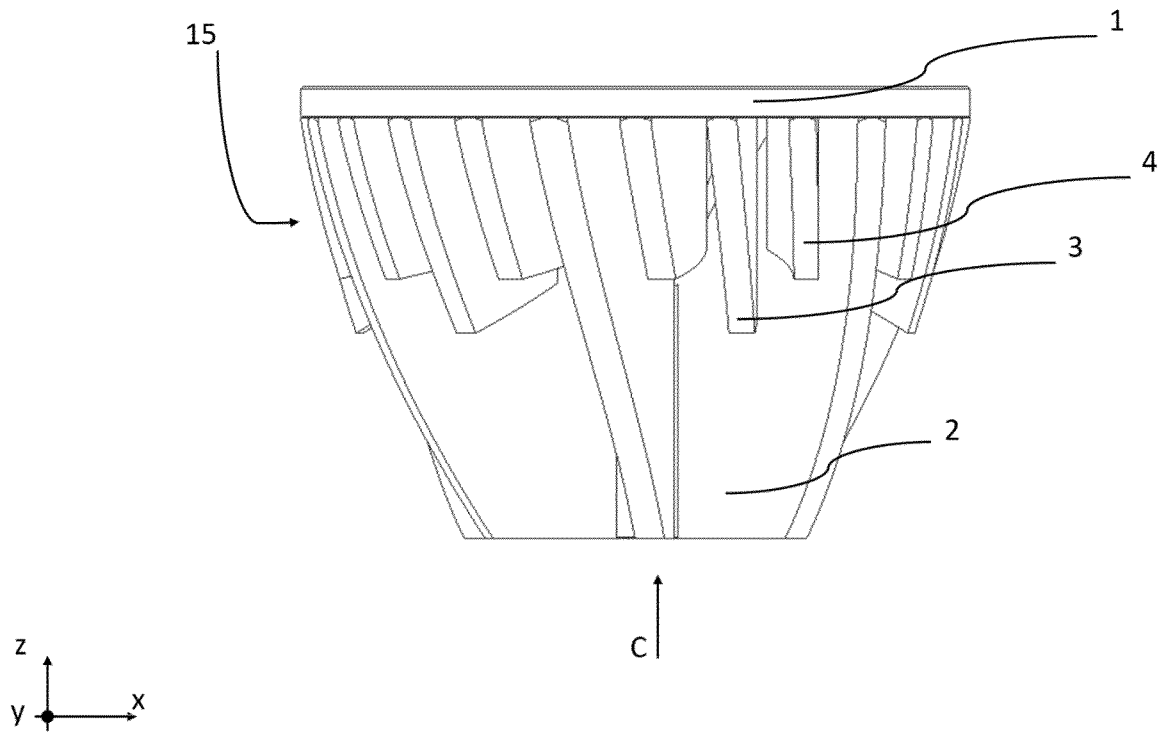


Fig. 6

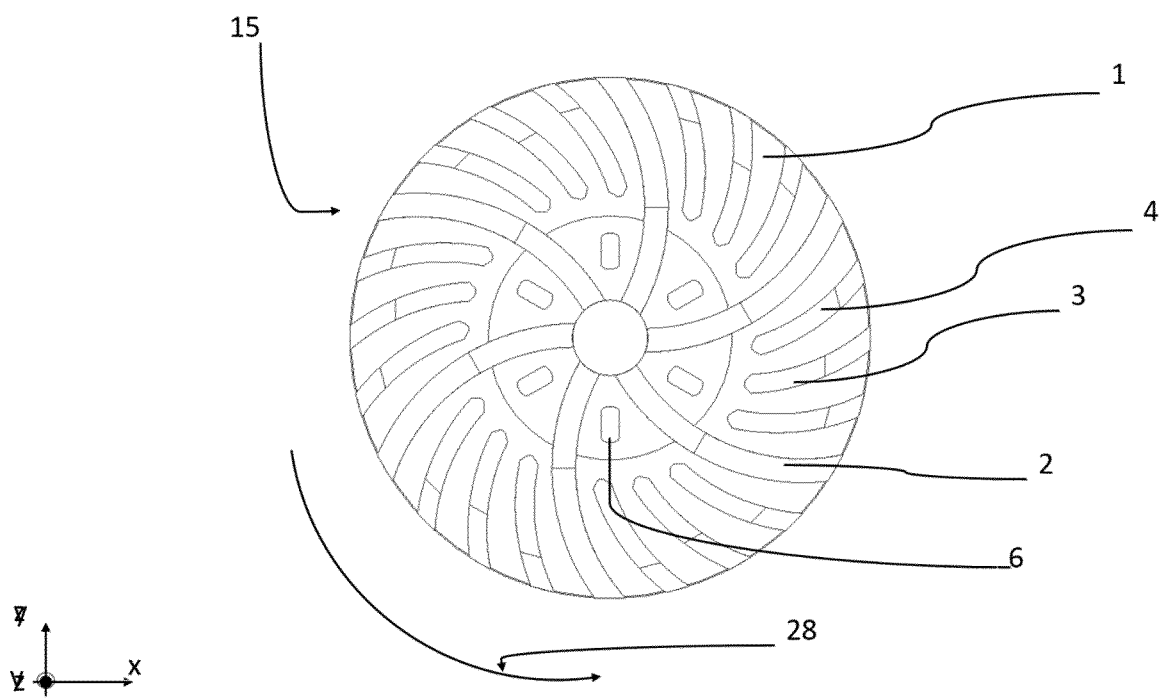


Fig. 7

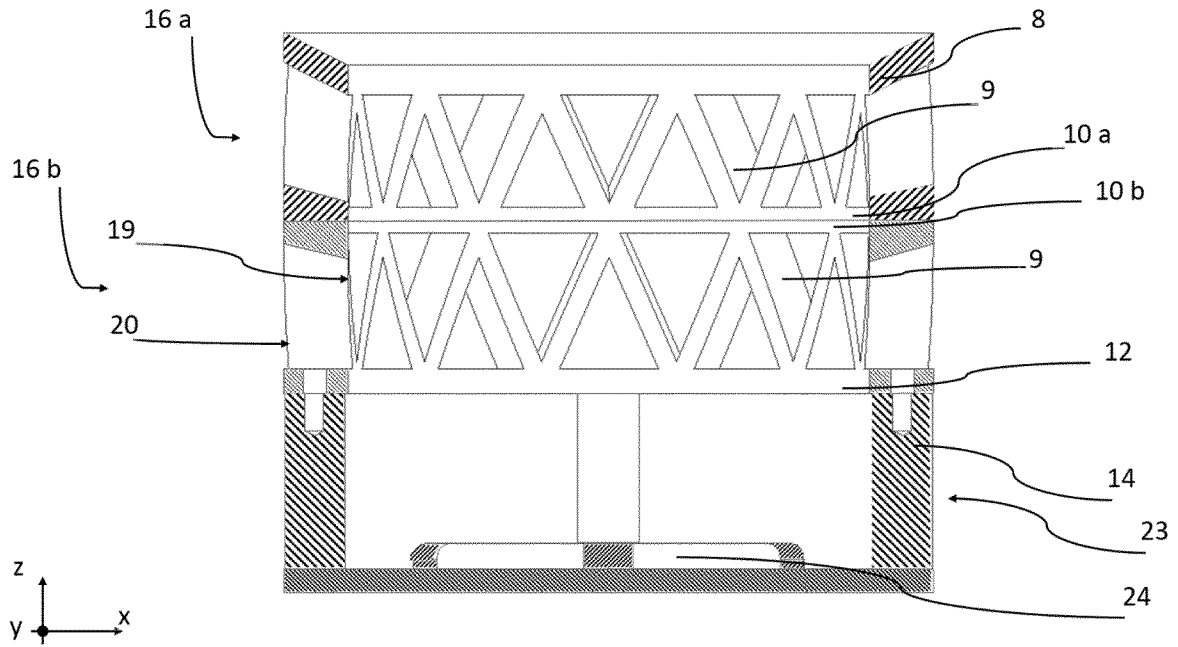


Fig. 8

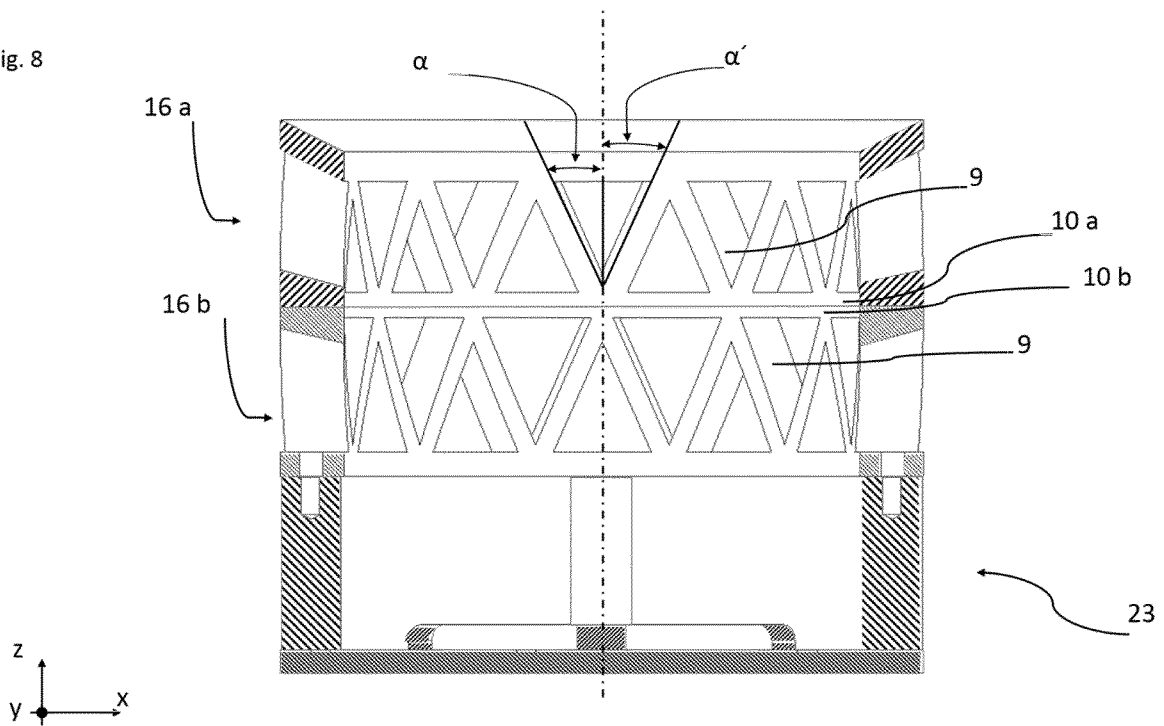


Fig. 9

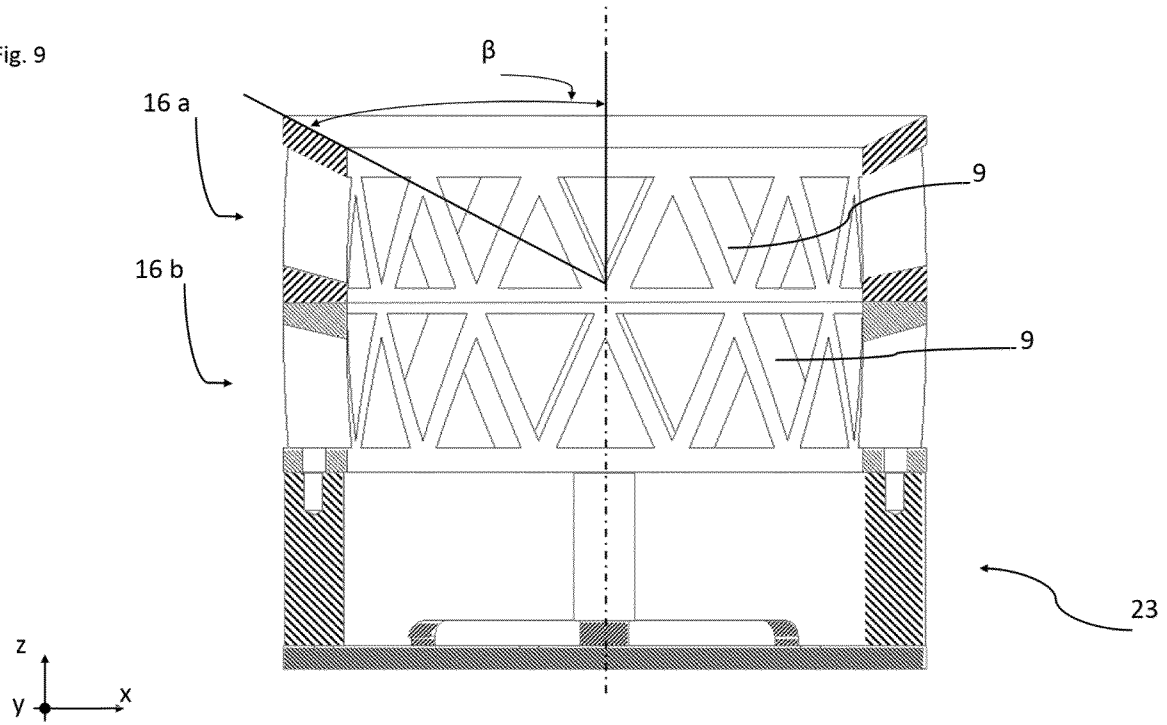


Fig. 10

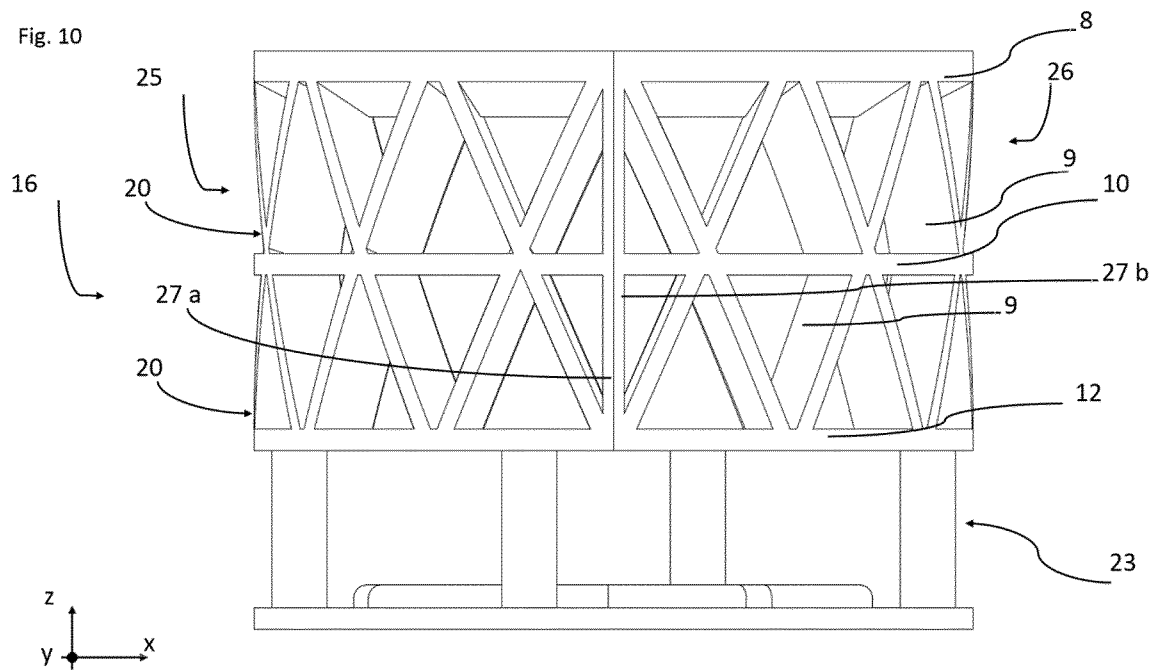


Fig. 11

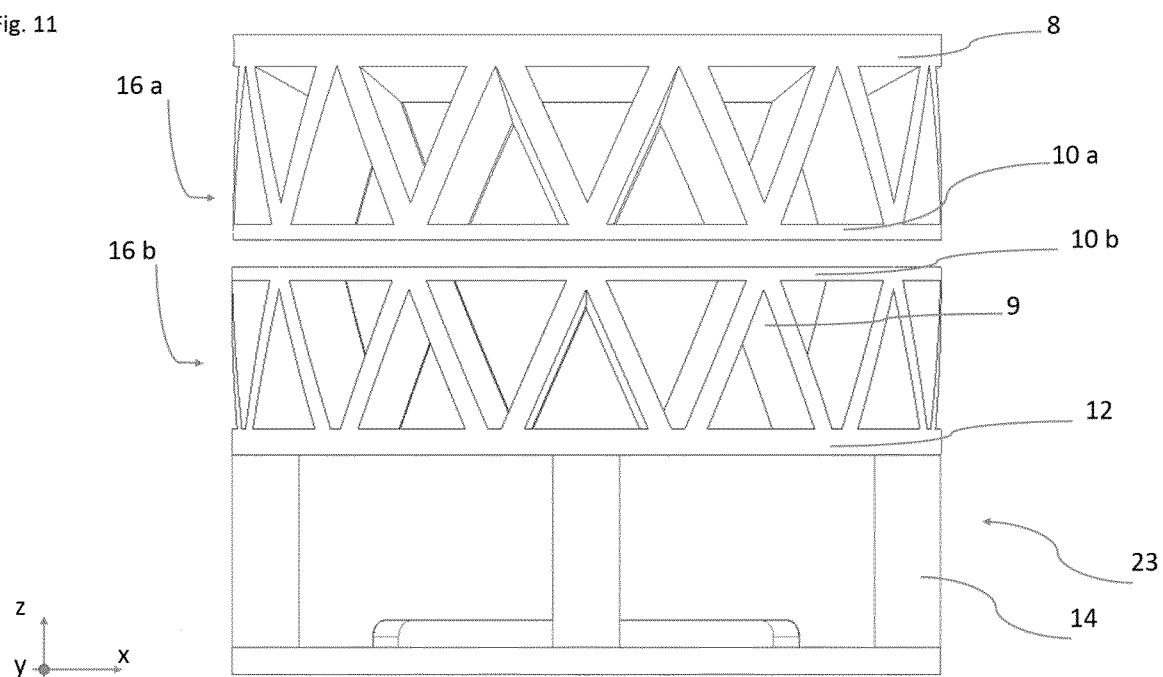


Fig. 12

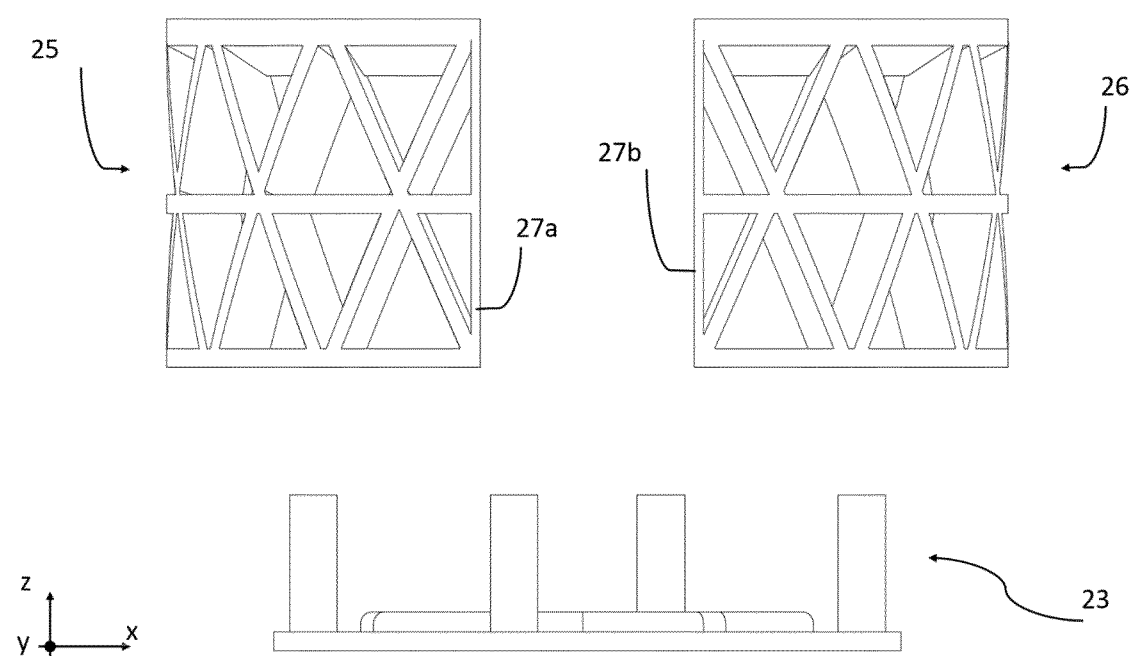


Fig. 13

