

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date
10 March 2005 (10.03.2005)

PCT

(10) International Publication Number
WO 2005/022485 A1

(51) International Patent Classification⁷: G08G 1/14, (74) Agent: ELLA CHEONG SPRUSON & FERGUSON 1/0968, 1/127 (SINGAPORE) PTE LTD; P. O. Box 1531, Robinson Road Post Office, Singapore, 903031 (SG).

(21) International Application Number: PCT/SG2004/000280 (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 3 September 2004 (03.09.2004) (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(25) Filing Language: English (30) Priority Data: English

(26) Publication Language: English

(30) Priority Data: 200305650-4 3 September 2003 (03.09.2003) SG

(71) Applicant (for all designated States except US): STRATECH SYSTEMS LIMITED [SG/SG]; 2 International Business Park, Level 6, Tower 2, The Strategy, Singapore, 609930 (SG).


(72) Inventor; and (75) Inventor/Applicant (for US only): CHEW, David Khien Meow [SG/SG]; 80 Belmont Road, Singapore, 269905 (SG).

Published:

— with international search report

[Continued on next page]

(54) Title: APPARATUS AND METHOD FOR LOCATING, IDENTIFYING AND TRACKING VEHICLES IN A PARKING AREA

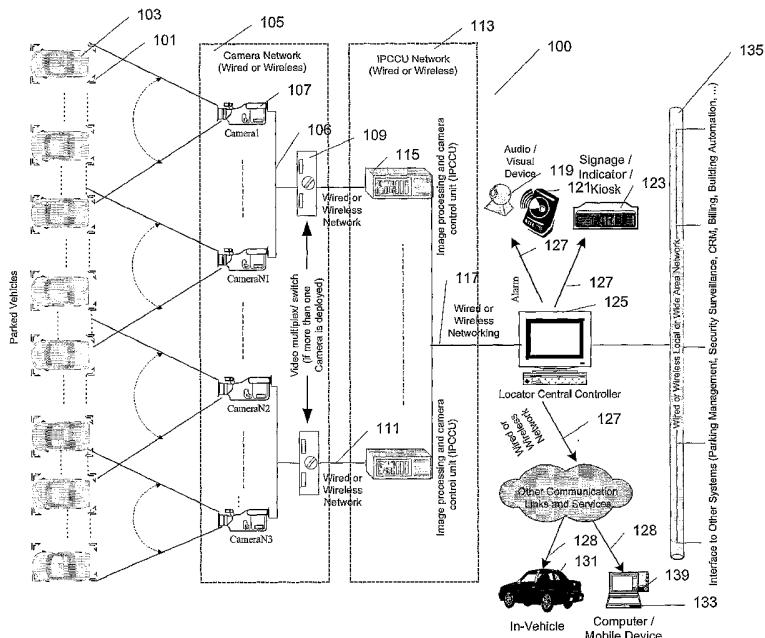

(57) Abstract: A method for use in the management of vehicle parking in a vehicle parking area having a plurality of vehicle parking spaces, the method comprising determining the locations of vacant vehicle parking spaces, and displaying the locations of vacant vehicle parking spaces to people seeking to park vehicles.

WO 2005/022485 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

APPARATUS AND METHOD FOR LOCATING, IDENTIFYING AND TRACKING
VEHICLES IN A PARKING AREA

Field of the Invention

5

The invention relates to vehicle parking. In particular, it relates to apparatus and method for locating, identifying and tracking vehicles in a car park.

Background

10

A driver encounters many problems while parking vehicles in a huge car park. For instance, in a crowded huge multi-storey car park, , it is difficult for a driver to remember where his/her vehicle is parked. Often it is a frustrating experience to search for his/her vehicle. Quite often, it is difficult for a driver to locate an empty parking space to park his/her vehicle in a huge car park, despite being informed that numerous parking spaces are available. Precious time is wasted by drivers when he/she cannot remember where the vehicle is parked or not being in a position to trace an empty parking space.. The present car parking systems are not efficient enough for a car park operator to ease the problems mentioned above. Slow vehicle retrieval and delay in searching for empty lots results in problems, such as delayed exit of vehicles, increased car park jams , less effective parking capacity, and poor car park utilisation. Furthermore, motorists are at great inconvenience, and may even result in discouraging others from parking in such car parks. For the car park operators, these problems translate directly to revenue loss. This in turn, reduces the revenue of the shop keepers or businessmen who are present in a building having such a car park..

25

Presently, some car parks have addressed the above problems to some extent. Some car parks provide empty lot information. For example, a car park is divided into many different zones and vehicle detection sensors are installed between each zone to count the 30 numbers of vehicles coming in and going out of a zone. These vehicle sensors provide information to derive the number of vehicles parked inside each zone. Other systems involve the installation of vehicle detection sensors (infra red, proximity, or light sensors, etc) for each parking lot, thus providing parking lot availability information. However, the existing car park systems have many drawbacks, including inability to determine

when specific lots become available, high infrastructural costs, high per car park lot equipment, high installation and maintenance costs. Moreover, existing methods are based on the principle of counting of vehicles or the occupation of lots.

5

Summary of the invention

10 In accordance with a first aspect of the present invention there is provided a method for use in the management of vehicle parking in a vehicle parking area having a plurality of vehicle parking spaces, the method comprising:

determining the locations of vacant vehicle parking spaces; and
displaying the locations of vacant vehicle parking spaces to people seeking to park vehicles.

15

In accordance with second first aspect of the present invention there is provided a method for use in the management of vehicle parking in a vehicle parking area having a plurality of vehicle parking spaces, the method comprising:

20 determining one or more identifying features of each of a plurality of vehicles located in vehicle parking spaces;
receiving a request to locate a specific vehicle with at least one of said one or more identifying features;
determining one or more possible locations for said specific vehicle based on said at least one of said one or more identifying features and the determined one or 25 more identifying features of each of a plurality of vehicles; and
displaying said one or more possible locations in response to said request.

Said one or more identifying features may comprise one or more of: the number plate, the colour, the make and the model of a vehicle.

30

In accordance with a fourth aspect of the present invention there is provided a system for use in the management of vehicle parking in a vehicle parking area having a plurality of vehicle parking spaces, the apparatus comprising:

a detection unit for determining the locations of vacant vehicle parking spaces; and

a display unit for displaying the locations of vacant vehicle parking spaces to people seeking to park vehicles.

5

The detection unit may comprise a plurality of camera elements and an image processing unit for processing images obtained by the camera elements, each camera element surveying one or more of the vehicle parking spaces.

10

Each camera element may be arranged such that different cells of an image from the camera element is associated with one vehicle parking space, and the image processing determines the location of the vacant vehicle spaces based on individual cells of the images.

15

The display unit may comprise one or more audio display devices and/or one or more visual display devices.

The display unit may be arranged to communicate with one or more remote devices for facilitating displaying the locations of the vacant parking spaces.

20

The remote devices may comprise on-vehicle devices.

25

In accordance with a fourth aspect of the present invention there is provided a system for use in the management of vehicle parking in a vehicle parking area having a plurality of vehicle parking spaces, the apparatus comprising:

a first detection unit for determining one or more identifying features of each of a plurality of vehicles located in vehicle parking spaces;

an interface unit for receiving a request to locate a specific vehicle with at least one of said one or more identifying features;

30

a processing unit for determining one or more possible locations for said specific vehicle based on said at least one of said one or more identifying features and the determined one or more identifying features of each of a plurality of vehicles; and

a display unit for displaying said one or more possible locations in response to said request.

The system may further comprise:

5 a second detection unit for determining the locations of vacant vehicle parking spaces; and

the display unit further displays the locations of vacant vehicle parking spaces to people seeking to park vehicles.

10 The first and second detection units may be implemented in a single detection unit.

Said one or more identifying features may comprise one or more of: the number plate, the colour, the make and the model of a vehicle.

15 Thee first and/or second detection units may comprise a plurality of camera elements and an image processing unit for processing images obtained by the camera elements, each camera element surveying one or more of the vehicle parking spaces.

20 Each camera element may be arranged such that different cells of an image from the camera element is associated with one vehicle parking space, and the image processing determines the location of the vacant vehicle spaces based on individual cells of the images.

25 The display unit may comprise one or more audio display devices and/or one or more visual display devices.

The display unit may be arranged to communicate with one or more remote devices for facilitating displaying the locations of the vacant parking spaces.

30 The remote devices may comprise on-vehicle devices.

In accordance with a fifth aspect of the present invention there is provided a method for automatically providing the occupancy status of specific, individual car park spaces, and identifying the vehicles that occupy them, comprising:

5 processing one or more images of the car park spaces to provide information regarding the locations and numbers of empty and occupied car park spaces, and guidance information to their locations; and

processing one or more images of the vehicles occupying car park spaces, to identify one or more of their features, thereby to enable the accurate locating of the vehicles, and to provide guidance information to their locations.

10

The processing one or more images of the vehicles occupying car park spaces may comprise processing said images of the vehicles to determine one or more of: the number plate, the colour, the make and the model of the vehicle in each image.

15

In accordance with a sixth aspect of the present invention there is provided a computer readable data storage medium having stored thereon computer code means for instructing a computer to execute a method for use in the management of vehicle parking in a vehicle parking area having a plurality of vehicle parking spaces, the method comprising:

20

determining the locations of vacant vehicle parking spaces; and
displaying the locations of vacant vehicle parking spaces to people seeking to park vehicles.

25

In accordance with a seventh aspect of the present invention there is provided a computer readable data storage medium having stored thereon computer code means for instructing a computer to execute a method for use in the management of vehicle parking in a vehicle parking area having a plurality of vehicle parking spaces, the method comprising:

30

determining one or more identifying features of each of a plurality of vehicles located in vehicle parking spaces;
receiving a request to locate a specific vehicle with at least one of said one or more identifying features;

determining one or more possible locations for said specific vehicle based on said at least one of said one or more identifying features and the determined one or more identifying features of each of a plurality of vehicles; and
displaying said one or more possible locations in response to said request.

5

In accordance with an eighth aspect of the present invention there is provided a computer readable data storage medium having stored thereon computer code means for instructing a computer to execute a for automatically providing the occupancy status of specific, individual car park spaces, and identifying the vehicles that occupy them, 10 comprising:

processing one or more images of the car park spaces to provide information regarding the locations and numbers of empty and occupied car park spaces, and guidance information to their locations; and

processing one or more images of the vehicles occupying car park spaces, to identify one or more of their features, thereby to enable the accurate locating of the vehicles, and to provide guidance information to their locations.

Brief description of the drawings

20

The invention is further described by way of non-limitative examples, with reference to the accompanying drawings, in which:-

Figure 1 shows a System Concept Diagram of an embodiment of the invention;

25

Figure 2 shows an example embodiment of a high level process flow diagram for use with the embodiment shown in Figure 1 ; and

30

Figure 3 Illustrates an example embodiment of the invention complementing an integrated deployment of a Car Park System.

Detailed description

The System Concept Diagram 100 of an embodiment of the invention is presented in Figure 1.

The embodiment of the invention describes an apparatus and method for automatically providing the occupancy status of specific, individual car park lots 101 or spaces, and identifying each of the vehicles 103 that occupy them. The provision of occupancy status of the car park lots 101 is achieved by processing one or more images of the car park lots 101 to provide information regarding the locations and numbers of empty and occupied car park lots 101, and guidance information to locate the car park lots 101. The identification of vehicles 103 is achieved by processing one or more images of the vehicles 103, which may include identifying the license plate (i.e., a series of number and/or characters) of vehicles 103, providing the accurate location (e.g., in which car park lot and where is that lot within the entire car park) of vehicles 103 by identifying by one or more of their features (e.g. colour, model, brand etc of a car), and providing guidance information to locate the vehicles 103. The apparatus and method can be extended to provide vehicle-related information, such as parking lot booking/reservation, parking enforcement, car park surveillance, vehicle look-up, traffic flow analysis, and congestion regulation.

A camera network 105 having a plurality of cameras 107 is installed inside and/or outside of a vehicle parking facility to monitor continuously some or all of the parking lots 101 and/or vehicle lanes for the presence/absence and movement of objects, people and vehicles 103. The camera network 105 may be wired or wireless 106.

The images acquired by the camera sensor network 105 are transmitted through wired or wireless network 111 to a network of Image Processing and Camera Control Units (IPCCUs) 113 via an array of video multiplexes/switches 109. The IPCCUs network 113 comprises a plurality discrete IPCCUs 115 each of which may be assigned to process the images from the camera network 105. Each of the IPCCUs 115 process the images that are channelled to them using built-in advanced adaptive self-learning image-processing algorithms that are stored in the memory of the IPCCU 115. These algorithms deduce the status of the car park, and transmit the car park status through wired or wireless network 117 to the Locator Central Controller 125.

Apart from the IPCCUs 115, the image-processing algorithms may also be located in the locator central controller 125, the video multiplex/switch 109 or camera units 107. However, a typical design will involve placing most (if not all) of the image processing algorithms (e.g. those for car park lot status determination and vehicle image acquisition and feature processing) at the IPCCUs 115. In some cases, the central controller 125 may also host certain image processing algorithms. The IPCCU 115 and central controller 125 could be provided in the same machine.

Given the car park status from the IPCCUs 115, the central controller 125 facilitates value-added services and extends them to the users, which include, but not limited to, car park customers, operators and owners. To deliver these services to the users, the locator central controller 125 uses a variety of means to interact with the users and/or external systems. These interactive means include, but not limited to, in-vehicle units 131, audio devices 121, video devices 119, mobile devices 139, computers 133, LED panels, plasma display panels, and signage 123, located e.g. at a junction within the car park, or at a self-service kiosk. The signage 123 may guide a driver in the direction of empty parking lots. The communication between the locator central controller 125 and external interactive means may be wired or wireless 127, 128.

20

A High Level Process Flow Diagram 200 of an example embodiment of the invention is presented in Figure 2.

The flow diagram 200 comprises three basic blocks, namely a camera sensor network 202, a image processing and camera control unit 204, and a central controller 206.

The process flow starts at step 201. At step 208, a camera sensor from a plurality of camera sensor network 202 in a car park repeatedly captures a sequence of a respective car park cell images. The captured cell images are sent for processing at a respective IPCCU from a plurality of IPCCUs 204, the processing being done at fixed or dynamic time intervals.

At the IPCCUs 204, images received at step 205 are processed and segmented into vehicle and non-vehicle objects.

At step 209, the non-vehicle objects are further processed to determine the event status by 5 analysing the current and previous images and the image database is updated. Previous non-vehicle object databases are stored and retrieved at step 203. Incident status database are stored and retrieved at step 211. At step 217, each of the non-vehicle object is identified by its features and the incident status of the car park is formulated and updated in the database.

10

At step 215, the vehicle objects are further processed to determine the event status by analysing the current and previous images and the image database is updated. Previous vehicle object databases are stored and retrieved at step 207. Parking status database are stored and retrieved at step 213. At step 219, each of the vehicle object is identified by its 15 features and the parking status of the car park is formulated and updated in the database.

The combined output from step 217 (details of the incident status) and 219 (details of parking status) are channelled to a respective central controller (of a plurality of central controllers 206) and are stored in a respective central controller at step 221.

20

From the data stored at step 221, services, such as vacant lot location application 223, parked vehicle location application 225, vacant lot booking application 227, vehicle look-up application 229, car park surveillance application 231, traffic flow enquiry application 233, congestion pricing application 235, etc are made available on a respective graphic 25 user interface (GUI).

At step 237, the processing is terminated.

30 The above embodiment of the invention, besides being deployed as a standalone system, can be used to complement a car park system. Figure 3 shows an example embodiment of an integrated deployment system 300.

The car park system 300, regulates vehicles 325 entering and leaving parking facility 306 by charging the users a parking fee . In order to provide supplemental valueadded services to the drivers and the car park operators, the system 300 is deployed in parallel with the car park system 100 described in the above embodiment. Supplemental services 5 include but not limited to, vacant lots locating, parked vehicles locating, vacant lots reservation, vehicle safety surveillance, illegal parking enforcement, parked vehicle look-up, traffic flow forecast, and congestion control.

In the example embodiment of the integrated deployment system 300 , a field controller 10 305 and a IPCCUs 307 are shown to be independently deployed. Alternatively, the field controller 305 and the IPCCU 307 can be integral. The integrated car park system in the example embodiment uses separate network of cameras 311, 317 to identify vehicles.. Alternatively the car park system 100 as described above and the integrated deployment system 300 can potentially share the same cameras network.

15

A vehicle 325 enters the car park at entry points 333 and exits the car park at exit points 331. The entry point has a barrier 319 to block vehicles before entering the car park 306. Similarly, the exit point has a barrier 315 to block vehicles before exiting the car park 306.

20

The field controller 305 controls the opening and closing of the barriers 315, 319 depending on whether payment for parking was done before a vehicle exits the car park.

The field controllers 305 , IPCCUs 307 and central controllers 301, 303 are typically located in a car park central control room 302. The communication between the field controllers 305, IPCCUs 307 and central controllers is through a common private communication network 304. This network 304 can be either wired such as, but not limited to, LAN and Serial, or wireless such as, but not limited to, wireless LAN 802.11a. The communication between the cameras 311 mounted inside the car park may be wired or wireless 337, whilst the communication between the cameras 317 mounted outside the 30 car park may be wired or wireless 339.

The car park central controller 301 regulates the entry and exit of vehicles 325, and the locator central controller 303 tracks and monitors the vehicles 325 while they are within

the car park premises 306. Although the car park central controller 301 and the locator central controller 303 is shown to be standalone and independent systems, in case the car park central controller 301 is a microprocessor-based system, the two central controllers 301, 303 can share the same microprocessor-based system i.e. the controllers 301, 303
5 can be integral.

The embodiment of the invention employs computer vision and information technology to detect and analyse events inside and outside car parks 306 which, in turn, activates 10 sub-systems based on the analysis to provide value-added services to the customers, operators and owners of car parks.

Cameras 311,317 are respectively mounted on the inside and outside of a car park premises 306. The car park 306 is divided into an array of physically labelled cells for 15 monitoring and identification purposes. Each car park cell, at any given time, may contain objects, people and/or vehicles 325. Each cell is being monitored and analysed repeatedly at a pre-defined time interval for one or more event status. These event status for vehicles parking, include, but not limited to, lot-vacant, lot-occupied, lot-in-transit, no-vehicle, vehicle-towards, vehicle-away, and vehicle-stop. The event status for car park 20 surveillance, include, but not limited to, no-human, human-towards, human-away, crowd-towards, crowd-away, and crowd-stop.

Given the event status related to vehicle parking being defined continuously by the IPCCU 307 for each car park cell, the real-time parking status of the entire car park can 25 be derived and stored in the database of the central controller 301, 303. This information of the car park status is updated on a regular time interval to facilitate accurate retrieval of information when needed.

Status related to vehicles parking includes, but not limited to,
30 1. Number of vacant lots in the car park
2. Location of a vacant lot by its lot ID
3. Location of a parked vehicle by its unique features
4. Congestion level at a particular car park cell

Status related to car park surveillance includes, but not limited to:

1. Alert level of a particular car park cell based on density and pattern of movement
2. Alert level of a particular parked vehicle based on unusual movement pattern around
5 the vehicle

With the above status parameters defined in real-time, the following services of the embodiment of the invention can be deployed:

1. Parking vacancy locating system to assist the drivers to identify and locate vacant lots
- 10 2. Parked vehicle locating system to assist the drivers to identify and locate their parked vehicles
3. Parking reservation system to allow remote booking of vacant parking lots
4. Parking enforcement system to prevent illegal parking or use of facility
- 15 5. Intelligent car park surveillance system to detect unusual events in the car park, for example: noticeable sweating, loitering, fidgeting movements, damaging vehicles, etc.
6. Graphical vehicle search system for visual identification of vehicles
7. Traffic flow analysis system to broadcast congested areas within the car park premise
- 20 8. Congestion pricing system for balancing the utilisation of the car park

To deliver the above services to the users, one or more of the following information disseminating techniques can be employed:

- 25 1. In-vehicle information devices via wireless communication
2. Mobile devices such as PDA and mobile phones via wireless communication
3. Desktop and lap top computer systems over Intranet and Internet
4. Roadside and in-building infrastructure such as LED panels and plasma screens
5. Auto-pay stations and self-service kiosks via LAN
- 30 6. Car park attendants and customer service representatives over the counter

The cameras 311 can be used for surveillance, e.g. for detecting abnormal movement of people or anything from the list of unusual events mentioned above. For example, if a

person were found loitering in any particular area for more than a certain period of time, a PTZ (Pan Tilt Zoom) camera would automatically zoom in to capture an image of the person and alert the relevant authorities. The system can also store the image for further reference. This would help in apprehending suspicious characters and to reduce car theft and vandalism.

Main components of the above example embodiment are listed below:

1. Camera Sensor Network

10

A single or network of cameras 311, 317 to monitor a region of interest inside and/or outside of a car park 306 and to provide the features mentioned above.

15 The camera sensor network provides image/data acquisition by cameras 311, 317 installed to cover one or more car park lots 335. Some cameras 311, 317 are installed for monitoring the lanes or other non-parking areas within the car park to provide value added services mentioned above.

20 For multi-cameras deployment, at least one video switches/multiplexers 309, 321, 323 is required to channel the images to the IPCCUs 307. For single camera deployment, images can be streamed directly to the IPCCU 307 or the Central Controllers 301, 303. In the case of single camera deployment the use of , video switch/multiplexer 309, 321, 323 becomes optional.

25 Some or all the cameras 311, 317 can be mounted on PTZ platforms, if necessary. The means to control these PTZ platforms may be a function of the cameras if the cameras are equipped with embedded microprocessors, or can be remotely controlled by the IPCCUs 307.

30 Cameras 311, 317 built-in with an embedded microprocessor, can be dynamically programmed to pre-evaluate the quality of each image taken, and intelligently adjust the PTZ to obtain additional images until an image with acceptable quality is found. If no

acceptable image is obtained after a predefined period of time, the system proceeds to the next task and a notification is activated to prompt the operator for appropriate action.

Some or all cameras 311, 317 can be high-performance cameras that are capable of
5 monitoring the region of interest with some or none of the PTZ functions.

Apart from cameras, it is possible to include other sensors in the system.. The camera may also be network compatible, such that it can be interfaced directly to the IPCCU 307 or central controllers 301, 303 via e.g. an IP network 304.

10

The connection from the cameras 311, 317 to the switches/multiplexers 309, 321, 323, and from the switches/multiplexers 309, 321, 323 to IPCCUs 307 can be either wired, or wireless 337, 339.

15 2. Image Processing and Camera Control Unit (IPCCU)

A microprocessor-based system converts the images transmitted from the video switches/multiplexers 309, 321, 323 directly from the cameras 311, 317, and implements the primary features mentioned above.

20

For each switch/multiplexer 309, 321, 323, one IPCCUs 307 is be needed to process the images and channel the outcomes to the Central Controller 301, 303 of the embodiment of the invention. If no switch/multiplexer 309, 321, 323 is deployed, the images will be channelled directly from the cameras to either the IPCCU 307 or the Central Controller 25 301, 303. In the latter case, the Central Controller 301, 303 assumes the role of the IPCCU 307.

Each IPCCU 307 employs proprietary advanced adaptive self-learning image processing algorithms to perform real-time identification/classification/ location of vehicles 325, and
30 real-time detection/location of vacant/occupied parking lots 335. The system also determines the identity of the vehicle at each occupied parking lot 335.

If the cameras 311, 317 are mounted on a PTZ platform do not have embedded microprocessors, the IPCCU 307 assumes the role of controlling the PTZ platform.

If the cameras 311, 317 or video switches/multiplexers 309, 321, 323 have built-in 5 embedded microprocessors, the embedded microprocessors could potentially perform the processing functions of the IPCCU 307. In such case, there is no need for IPCCU 307.

IPCCUs 307 communicates with the Central Controller 301, 303 through either a wired, or a wireless network 304. Possible networks 304 include, but not limited to, Local Area 10 Network (LAN), Wide Area Network (WAN), Wireless LAN 802.11a, and WIFI 802.11b.

3. Central Controller 301, 303

15 A microprocessor-based system that accepts information from the IPCCUs as input, re-configures the information, and implements secondary and other features of the example embodiment. There can be more than one central controller 301, 303 in a system.

20 The central controller 301, 303 in the example embodiment employs proprietary advanced software engineering to implement software applications that allow the users to locate vacant lots, locate parked vehicles, book vacant lots, enforce parking rules, detect incidents, look-up parked vehicles, analyse traffic flow, and regulate car park utilisation.

25 For the purpose of exchanging information with the users, central controller 301, 303 can be built with interface for devices such as, but not limited to, in-vehicle units 131, audio devices 121, video devices 119, mobile devices 139, computers 133, LED panels, plasma display panels, and self-service kiosk 123. The communication between the central controllers 301, 303 and the devices can be either wired or wireless.

30 To enable the connection with external devices and systems, central controller can be equipped with communication channels such as, but not limited to, serial ports, parallel ports, Universal Serial Buses (USB), least lines, Integrated Services Digital Network (ISDN), Local Area Network (LAN), and Wide Area Network (WAN). The central

controller could also host web services for a user to access the stated service via the Internet.

As an alternative to vacant lot 335 detection, it may be, for example, possible to use light 5 sensors installed at each lot 335 to detect the present of vehicle at the lot 335, or induction loop sensors embedded under the surface of the flooring to count vehicles 325 entering and leaving a parking zone.

Secondary components of an embodiment of the invention are listed below:

10

1. In-Vehicle Units (IUs) 131 and On-board Units (OBUs) for accessing incident and parking status

2. Computer terminals 133 and Self-service Kiosks 123 for accessing incident and parking status

15

3. Hand-held mobile devices 139 such as, but not limited to mobile phones and PDAs for accessing incident and parking status

4. Roadside display medium such as, but not limited to LED and plasma-display panels for disseminating incident and parking status

5. Audio and Visual devices 119, 121 for generating alerts based on incident and parking 20 status

6. Other IT systems such as, but not limited to web server, modems, leased lines, hubs, switches, routers and appliances that help disseminating incident and parking status to the general public.

25

The invention, as embodied can locate a vehicle by its visual features (i.e., not requiring to place any identification tag or label on any part of the vehicle) including possibly its license plate identifier (i.e., a series of number and/or characters), and map it to a specific location including possibly a particular parking lot inside or outside of a car park.

30

Although the above embodiment relates to use of the invention in a car park, the present invention may also have other applications, including in the monitoring, verification, and enforcement of street parking.

In case of the application to street parking, an example embodiment may have cameras strategically located at buildings or other high vantage points along the street to monitor parking lots along the street. These cameras provide real-time information on vacant and occupied lots along the street, similar to those provided for car parks in a building or open air. For example, if a driver is looking for an empty lot to park his car, a display board can inform him whether there is any vacant lot in the side road before he turns into it.

As a driver is about to reverse into a parking lot, the camera detects this phenomenon and triggers a PTZ camera to capture the license plate of the vehicle. After the car is properly parked, the system will capture the time, which will be the commencement of parking fee. Similarly, when a car is about to leave a parking lot, this phenomenon is noticed by the scanning camera and the PTZ camera is activated to monitor the event and captures the time that the car leaves the parking lot.

Payment of parking charges can be through cash card, where a booth can be positioned at the driver's side of the road for him to insert the cash card into a reader. Alternatively, if the city has implemented Electronic Toll Collection for use of its roads and highways, a similar device can be triggered by the camera system to deduct the parking charges.

There will also be information kiosks conveniently located along the streets for the drivers to enquire about the location where he has parked his car, and how much parking charge has been incurred before he reaches to his/her car.

The primary usage of the information from an example embodiment of the invention may be for real-time identification or classification of vehicles, locating of the vehicles within the car park premises, and enabling the look-up of vehicles based on a set of search criteria.

The basic functionality of the example embodiment described include:

Real-time identification / classification of vehicles	Real-time identification of vehicles by one or more features (e.g. model label, colour, contour, size) obtained through the processing of one or more images of the vehicles in real-time, which may include their license plate identifier (i.e., a series of number and/or characters). By associating the features with a set of predefined classification information, the class of the vehicles can be derived.
Real-time detection of vehicle-presence at a predefined location within the premise of a car park	Real-time detection of vehicle-presence at a predefined location within the premises of a car park by processing one or more images of the predefined location. The predefined locations can be labelled car park lots within the car park. In such case, the number of empty and occupied lots within the car park at any given time can be determined.
Real-time looking-up of vehicles within the premise of a car park	Real-time mapping of identified and/or classified vehicles to predefined locations detected with vehicle-presence. With this mapping, vehicles within the car park premise can be located based on a fully or partially matched set of search criteria. This set of search criteria shall consist of the features of the vehicles, which may include their license plate identifier (i.e., a series of number and/or characters).

Other usage of the information from the described embodiment may be for parking lot booking / reservation, parking and vehicle locating guidance, and illegal parking enforcement.

5

Further features of the example embodiment of the invention may include:

Real-time parking lot booking / reservation service	Real-time parking lot booking / reservation service can be provided to users through various possible customer service channels, including telephone, mobile phone, internet, kiosk, SMS, etc.
Real-time parked	Knowing the location of the enquiry source and the location

vehicle locating guidance service	of the vehicle, a predefined set of directional instructions can be provided to show the best way from the location of the inquiry source to the location of the vehicle. This can be accomplished through the use of information dissemination means such as electronic signage.
Real-time vacant parking lot locating guidance service	Knowing the location of entrances to the car park as well as the vacant lots' location, directional instructions can be provided for users to locate an available, booked or reserved lot. This can be accomplished through the use of an information dissemination means such as electronic signage.
Real-time illegal parking enforcement service	By mapping the vehicle to their parking location, the policy of reserved parking can be managed and enforced.

Yet other features of an example embodiment may include several value-added services, including:

Intelligent surveillance of car park for effective management of incidents within the car park premise	Monitor the objects, people and vehicles at a predefined location within a car park premise, and apply advanced image-processing algorithms to intelligently analyse the activities at that location to detect incidents such as abnormal events, crimes, vehicle breakdowns, call-for-help, or suspicious behaviours.
Display and indexing of live car park images for efficient look-up of vehicles	Display graphical live car park images that is linked to the digital map of the car park to assist the users, such as the driver, the customer service personnel, the valet service attendance, security officer, or others, to visually locate and identify the vehicle of interest.
Broadcasting of car park's traffic flow condition for easing of traffic congestion	Broadcast the traffic flow conditions inside the car park by means of signage and/or other visual indicators to the users. These include indicating congested lanes (paths or routes) within the car park along which vehicles searching for lots or

within the car park	exiting the car park may take. This is based on the images and visual information produced by the cameras and image processing programs. This information may also be a result of data from other subsystems or sensors. This value-add feature can be used together with Secondary Feature #3.
Strategic charging and guidance of parking vehicles for effective utilisation of car park lots.	Apply differential parking charges to vehicles based on their parked locations, and/or strategically direct in-coming vehicles to less popular car park locations so that parked vehicles are effectively distributed across the car park.

The method and system of the example embodiment can be implemented on a computer system 800, schematically shown in Figure 4. It may be implemented as software, such as a computer program being executed within the computer system 800, and instructing the computer system 800 to conduct the method of the example embodiment.

The computer system 800 comprises a computer module 802, input modules such as a keyboard 804 and mouse 806 and a plurality of output devices such as a display 808, and printer 810.

10 The computer module 802 is connected to a computer network 812 via a suitable transceiver device 814, to enable access to e.g. the Internet or other network systems such as Local Area Network (LAN) or Wide Area Network (WAN).

15 The computer module 802 in the example includes a processor 818, a Random Access Memory (RAM) 820 and a Read Only Memory (ROM) 822. The computer module 802 also includes a number of Input/Output (I/O) interfaces, for example I/O interface 824 to the display 808, and I/O interface 826 to the keyboard 804.

20 The components of the computer module 802 typically communicate via and interconnected bus 828 and in a manner known to the person skilled in the relevant art.

The application program is typically supplied to the user of the computer system 800 encoded on a data storage medium such as a CD-ROM or floppy disk and read utilising a corresponding data storage medium drive of a data storage device 830. The application program is read and controlled in its execution by the

processor 818. Intermediate storage of program data maybe accomplished using RAM 820.

It will be appreciated by a person skilled in the art that numerous variations and/or modifications may be made to the present invention as shown in the specific embodiments without departing from the spirit or scope of the invention as broadly described. The present embodiments are, therefore, to be considered in all respects to be illustrative and not restrictive.

CLAIMS

1 A method for use in the management of vehicle parking in a vehicle parking area having a plurality of vehicle parking spaces, the method comprising:

5 determining the locations of vacant vehicle parking spaces; and
displaying the locations of vacant vehicle parking spaces to people seeking to park vehicles.

10 A method for use in the management of vehicle parking in a vehicle parking area having a plurality of vehicle parking spaces, the method comprising:

 determining one or more identifying features of each of a plurality of vehicles located in vehicle parking spaces;

 receiving a request to locate a specific vehicle with at least one of said one or more identifying features;

15 determining one or more possible locations for said specific vehicle based on said at least one of said one or more identifying features and the determined one or more identifying features of each of a plurality of vehicles; and
displaying said one or more possible locations in response to said request.

20 3. The method according to claim 2, wherein said one or more identifying features comprise one or more of: the number plate, the colour, the make and the model of a vehicle.

25 4. A system for use in the management of vehicle parking in a vehicle parking area having a plurality of vehicle parking spaces, the apparatus comprising:

 a detection unit for determining the locations of vacant vehicle parking spaces; and

 a display unit for displaying the locations of vacant vehicle parking spaces to people seeking to park vehicles.

30

 5. The system as claimed in claim 4, wherein the detection unit comprises a plurality of camera elements and an image processing unit for processing images obtained

by the camera elements, each camera element surveying one or more of the vehicle parking spaces.

6. The system as claimed in claim 5, wherein each camera element is
5 arranged such that different cells of an image from the camera element is associated with one vehicle parking space, and the image processing determines the location of the vacant vehicle spaces based on individual cells of the images.

7. The system as claimed in any one of claims 4 to 6, wherein the display unit
10 comprises one or more audio display devices and/or one or more visual display devices.

8. The system as claimed in any one of claims 4 to 7, wherein the display unit is arranged to communicate with one or more remote devices for facilitating displaying the locations of the vacant parking spaces.

15 9. The system as claimed in claim 8, wherein the remote devices comprise on-vehicle devices.

10. A system for use in the management of vehicle parking in a vehicle
20 parking area having a plurality of vehicle parking spaces, the apparatus comprising:
a first detection unit for determining one or more identifying features of each of a plurality of vehicles located in vehicle parking spaces;
an interface unit for receiving a request to locate a specific vehicle with at least one of said one or more identifying features;
25 a processing unit for determining one or more possible locations for said specific vehicle based on said at least one of said one or more identifying features and the determined one or more identifying features of each of a plurality of vehicles; and
a display unit for displaying said one or more possible locations in response to said request.

30 11. The system according to claim 10, further comprising:
a second detection unit for determining the locations of vacant vehicle parking spaces; and

the display unit further displays the locations of vacant vehicle parking spaces to people seeking to park vehicles.

12. The system as claimed in claim 11, wherein the first and second detection
5 units are implemented in a single detection unit.

13. The system according to claim 10 or 12, wherein said one or more identifying features comprise one or more of: the number plate, the colour, the make and the model of a vehicle.

10

14. The system as claimed in any one of claims 10 to 13, wherein the first and/or second detection units comprise a plurality of camera elements and an image processing unit for processing images obtained by the camera elements, each camera element surveying one or more of the vehicle parking spaces.

15

15. The system as claimed in claim 14, wherein each camera element is arranged such that different cells of an image from the camera element is associated with one vehicle parking space, and the image processing determines the location of the vacant vehicle spaces based on individual cells of the images.

20

16. The system as claimed in any one of claims 10 to 15, wherein the display unit comprises one or more audio display devices and/or one or more visual display devices.

25

17. The system as claimed in any one of claims 10 to 16, wherein the display unit is arranged to communicate with one or more remote devices for facilitating displaying the locations of the vacant parking spaces.

30

18. The system as claimed in claim 17, wherein the remote devices comprise

on-vehicle devices.

19. A method for automatically providing the occupancy status of specific, individual car park spaces, and identifying the vehicles that occupy them, comprising:

5 processing one or more images of the car park spaces to provide information regarding the locations and numbers of empty and occupied car park spaces, and guidance information to their locations; and

processing one or more images of the vehicles occupying car park spaces, to identify one or more of their features, thereby to enable the accurate locating of the vehicles, and to provide guidance information to their locations.

10 20. The method according to claim 19, wherein the processing one or more images of the vehicles occupying car park spaces comprises processing said images of the vehicles to determine one or more of: the number plate, the colour, the make and the model of the vehicle in each image.

15 21 A computer readable data storage medium having stored thereon computer code means for instructing a computer to execute a method for use in the management of vehicle parking in a vehicle parking area having a plurality of vehicle parking spaces, the method comprising:

determining the locations of vacant vehicle parking spaces; and

20 displaying the locations of vacant vehicle parking spaces to people seeking to park vehicles.

22 25 A computer readable data storage medium having stored thereon computer code means for instructing a computer to execute a method for use in the management of vehicle parking in a vehicle parking area having a plurality of vehicle parking spaces, the method comprising:

determining one or more identifying features of each of a plurality of vehicles located in vehicle parking spaces;

30 receiving a request to locate a specific vehicle with at least one of said one or more identifying features;

determining one or more possible locations for said specific vehicle based on said at least one of said one or more identifying features and the determined one or more identifying features of each of a plurality of vehicles; and

displaying said one or more possible locations in response to said request.

23. A computer readable data storage medium having stored thereon computer code means for instructing a computer to execute a for automatically providing the 5 occupancy status of specific, individual car park spaces, and identifying the vehicles that occupy them, comprising:

processing one or more images of the car park spaces to provide information regarding the locations and numbers of empty and occupied car park spaces, and guidance information to their locations; and

10 processing one or more images of the vehicles occupying car park spaces, to identify one or more of their features, thereby to enable the accurate locating of the vehicles, and to provide guidance information to their locations.

1/4

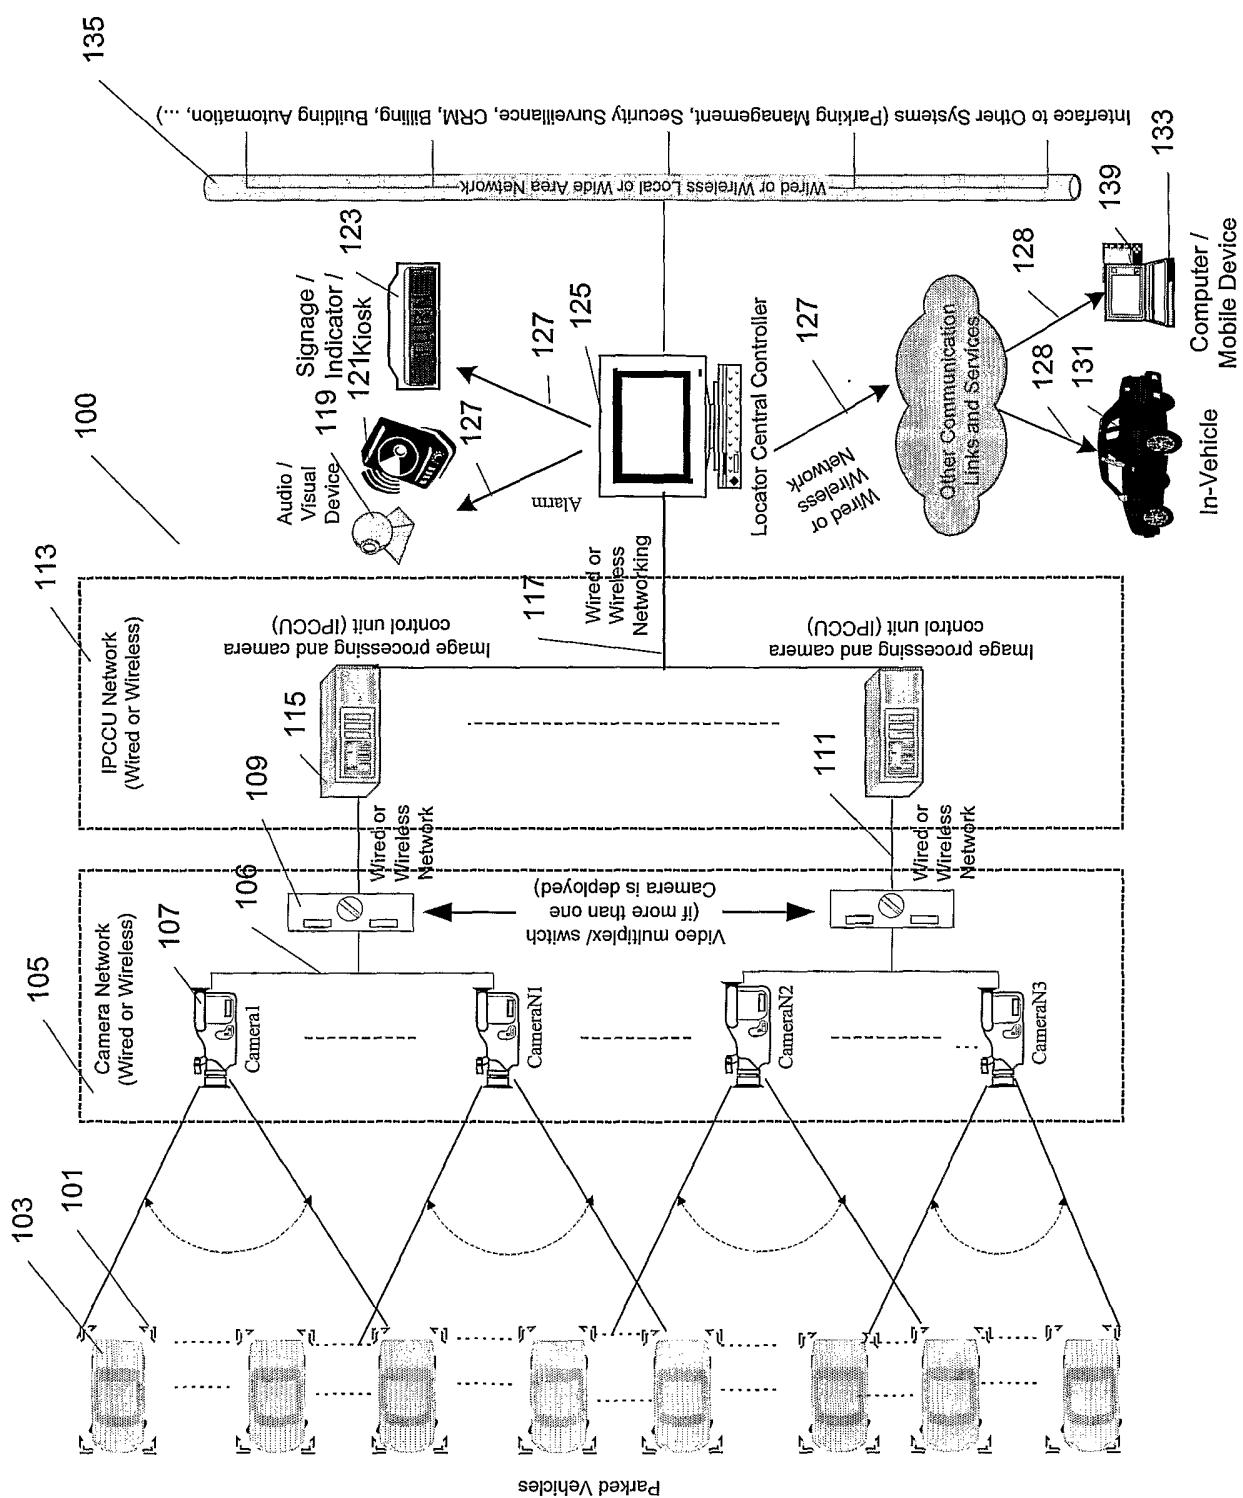


FIGURE 1

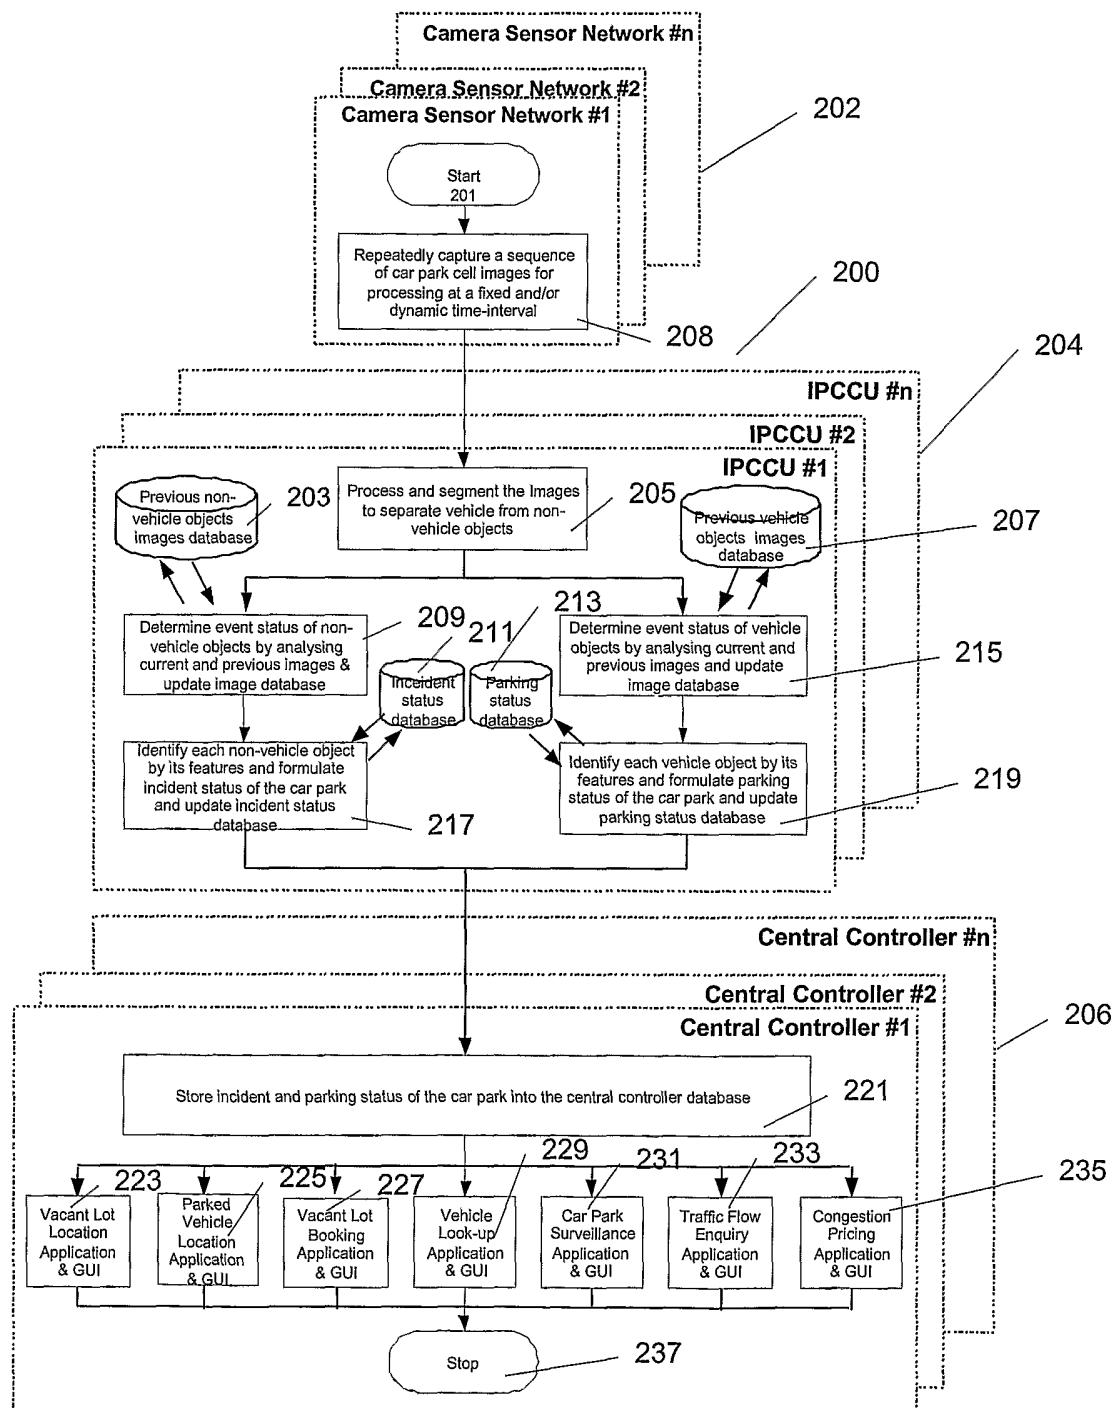
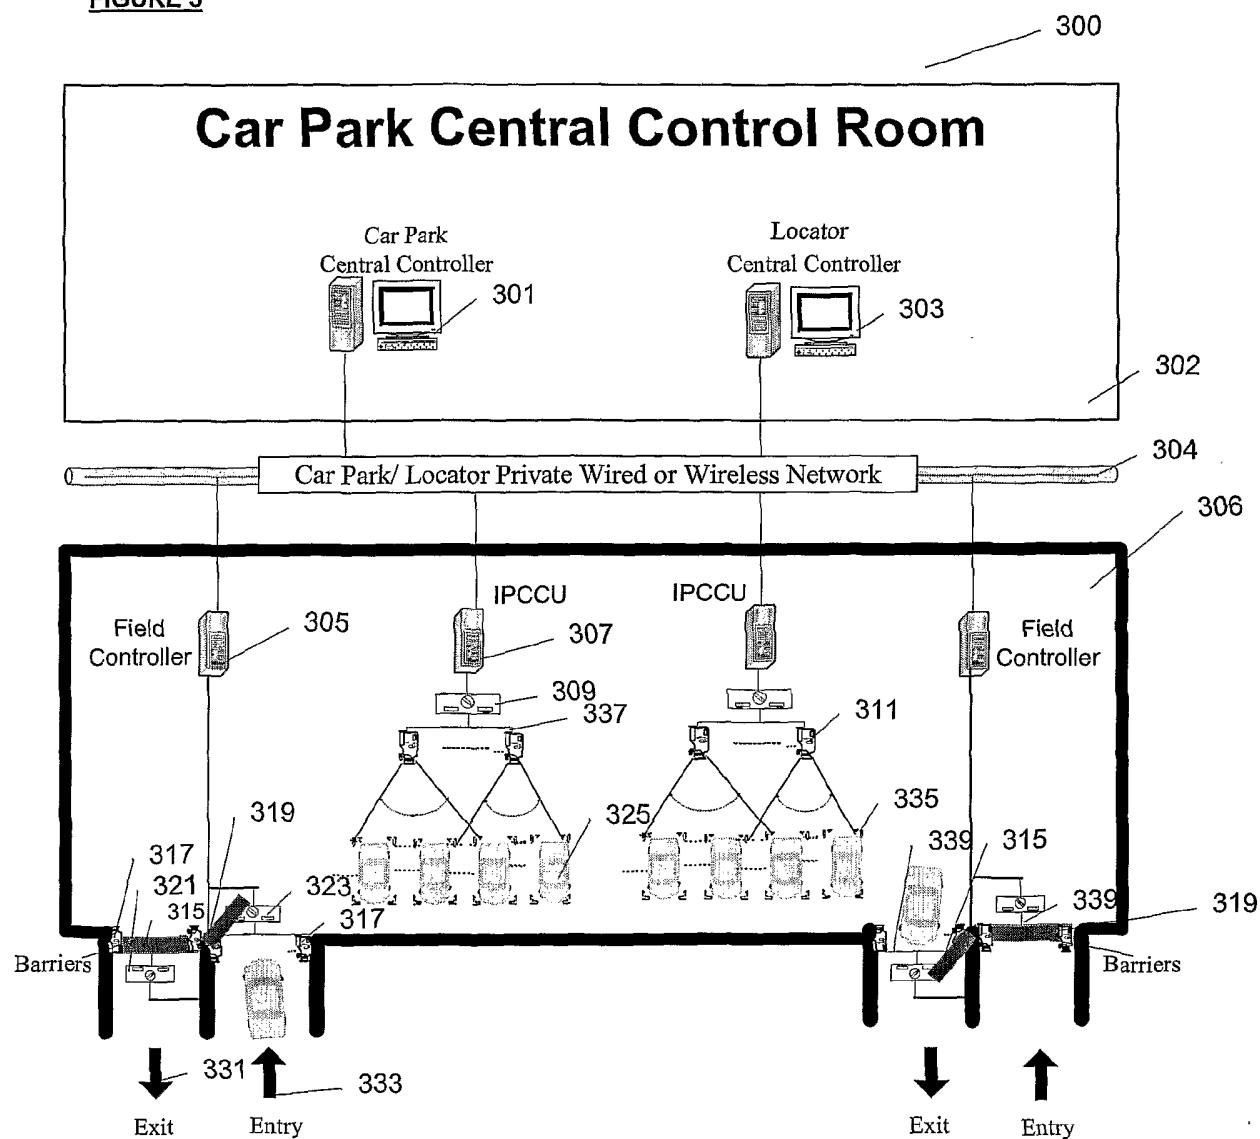
FIGURE 2

FIGURE 3

4/4

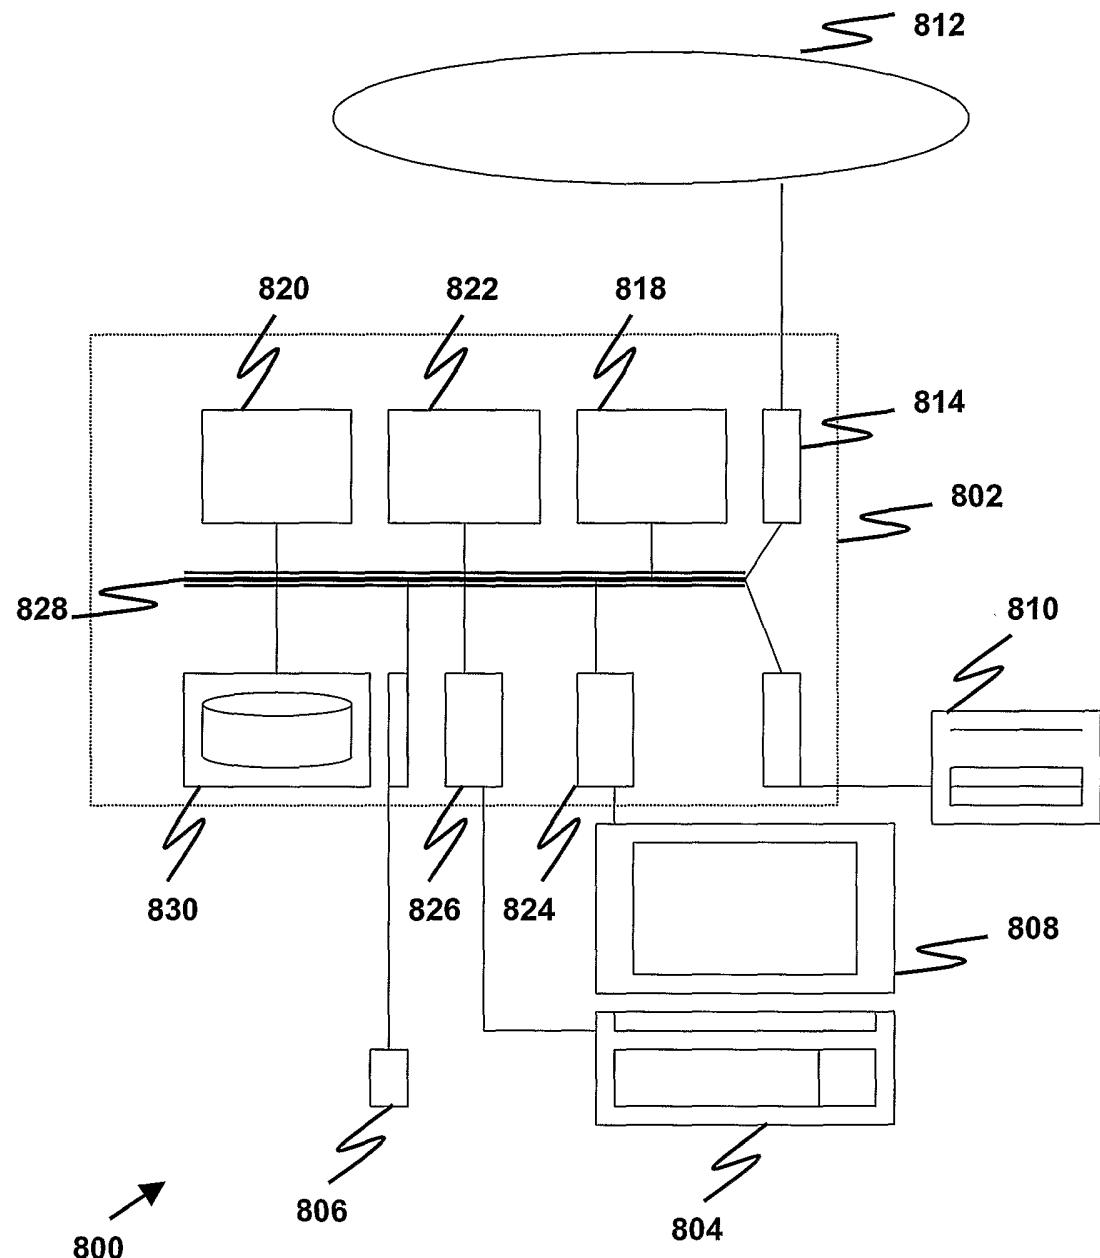


Figure 4

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SG2004/000280

A. CLASSIFICATION OF SUBJECT MATTER

Int. Cl. 7: G08G 1/14, 1/0968, 1/127

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

Derwent WPAT: vehicle, car, automobile, park, space, location, display, identification and similar terms

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	Patent Abstracts of Japan, JP 09-016897 A (SANYO ELECTRIC CO LTD), 17 January 1997 abstract	1, 4-9, 21
X	Patent Abstracts of Japan, JP 03-161898 A (NEPTUNE:KK), 11 July 1991 abstract	1, 4-5, 7-9, 21
X	US 2003/0133594 A1 (SEFTON) 17 July 2003 whole document	1-3, 10-18, 22
X	US 6163278 A (JANMAN) 19 December 2000 whole document	1-3, 10-13, 17, 22

 Further documents are listed in the continuation of Box C See patent family annex

* Special categories of cited documents:		
"A" document defining the general state of the art which is not considered to be of particular relevance	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier application or patent but published on or after the international filing date	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&"	document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed		

Date of the actual completion of the international search
24 November 2004Date of mailing of the international search report
6 DEC 2004Name and mailing address of the ISA/AU
AUSTRALIAN PATENT OFFICE
PO BOX 200, WODEN ACT 2606, AUSTRALIA
E-mail address: pct@ipaaustralia.gov.au
Facsimile No. (02) 6285 3929Authorized officer
Mani Ramachandran
Telephone No : (02) 6283 2233

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SG2004/000280

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	Patent Abstracts of Japan, JP 11-144195 A (CHUGOKU ENGINEERING:KK), 28 May 1999 abstract	1, 4, 8, 21
X	US 2002/0128769 A1 (DER GHAZARIAN et al) 12 September 2002 whole document	1-3, 8, 10, 17, 19-23
X	EP 1221684 A1 (SIEMENS AG) 10 July 2002 whole document	1-3, 8, 10-13, 17, 19-23
X	Patent Abstracts of Japan, JP 08-297800 A (TOSHIBA CORP), 12 November 1996 abstract	1-3, 8-10, 13, 17-23
X	US 2002/0171562 A1 (MURAKI) 21 November 2002 whole document	1, 4, 8, 9, 17, 18, 19, 21, 23
A	Patent Abstracts of Japan, JP 2000-099894 A (OMRON CORP), 7 April 2000 abstract	
A, P	Patent Abstracts of Japan, JP 2003-288421 A (NTT COMWARE CORP), 10 October 2003 abstract	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/SG2004/000280

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report			Patent Family Member		
JP	09-016897	NONE			
JP	03-161898	NONE			
US	2003/0133594	WO	2003/060836		
US	6163278	NONE			
JP	11-144195	NONE			
US	2002/0128769	NONE			
EP	1221684	NONE			
JP	08-297800	NONE			
US	2002/0171562	JP	2002-342896	US	6650250
JP	2000-099894	NONE			
JP	2003-288421	NONE			

Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001.

END OF ANNEX