



(22) Date de dépôt/Filing Date: 2000/03/30

(41) Mise à la disp. pub./Open to Public Insp.: 2001/09/30

(51) Cl.Int.⁷/Int.Cl.⁷ G05F 3/16


(71) Demandeur/Applicant:
NORTEL NETWORKS CORPORATION, CA

(72) Inventeur/Inventor:
ILIASEVITCH, STEPAN, CA

(74) Agent: DE WILTON, ANGELA C.

(54) Titre : SOURCE DE REFERENCE DE TENSION

(54) Title: VOLTAGE REFERENCE SOURCE

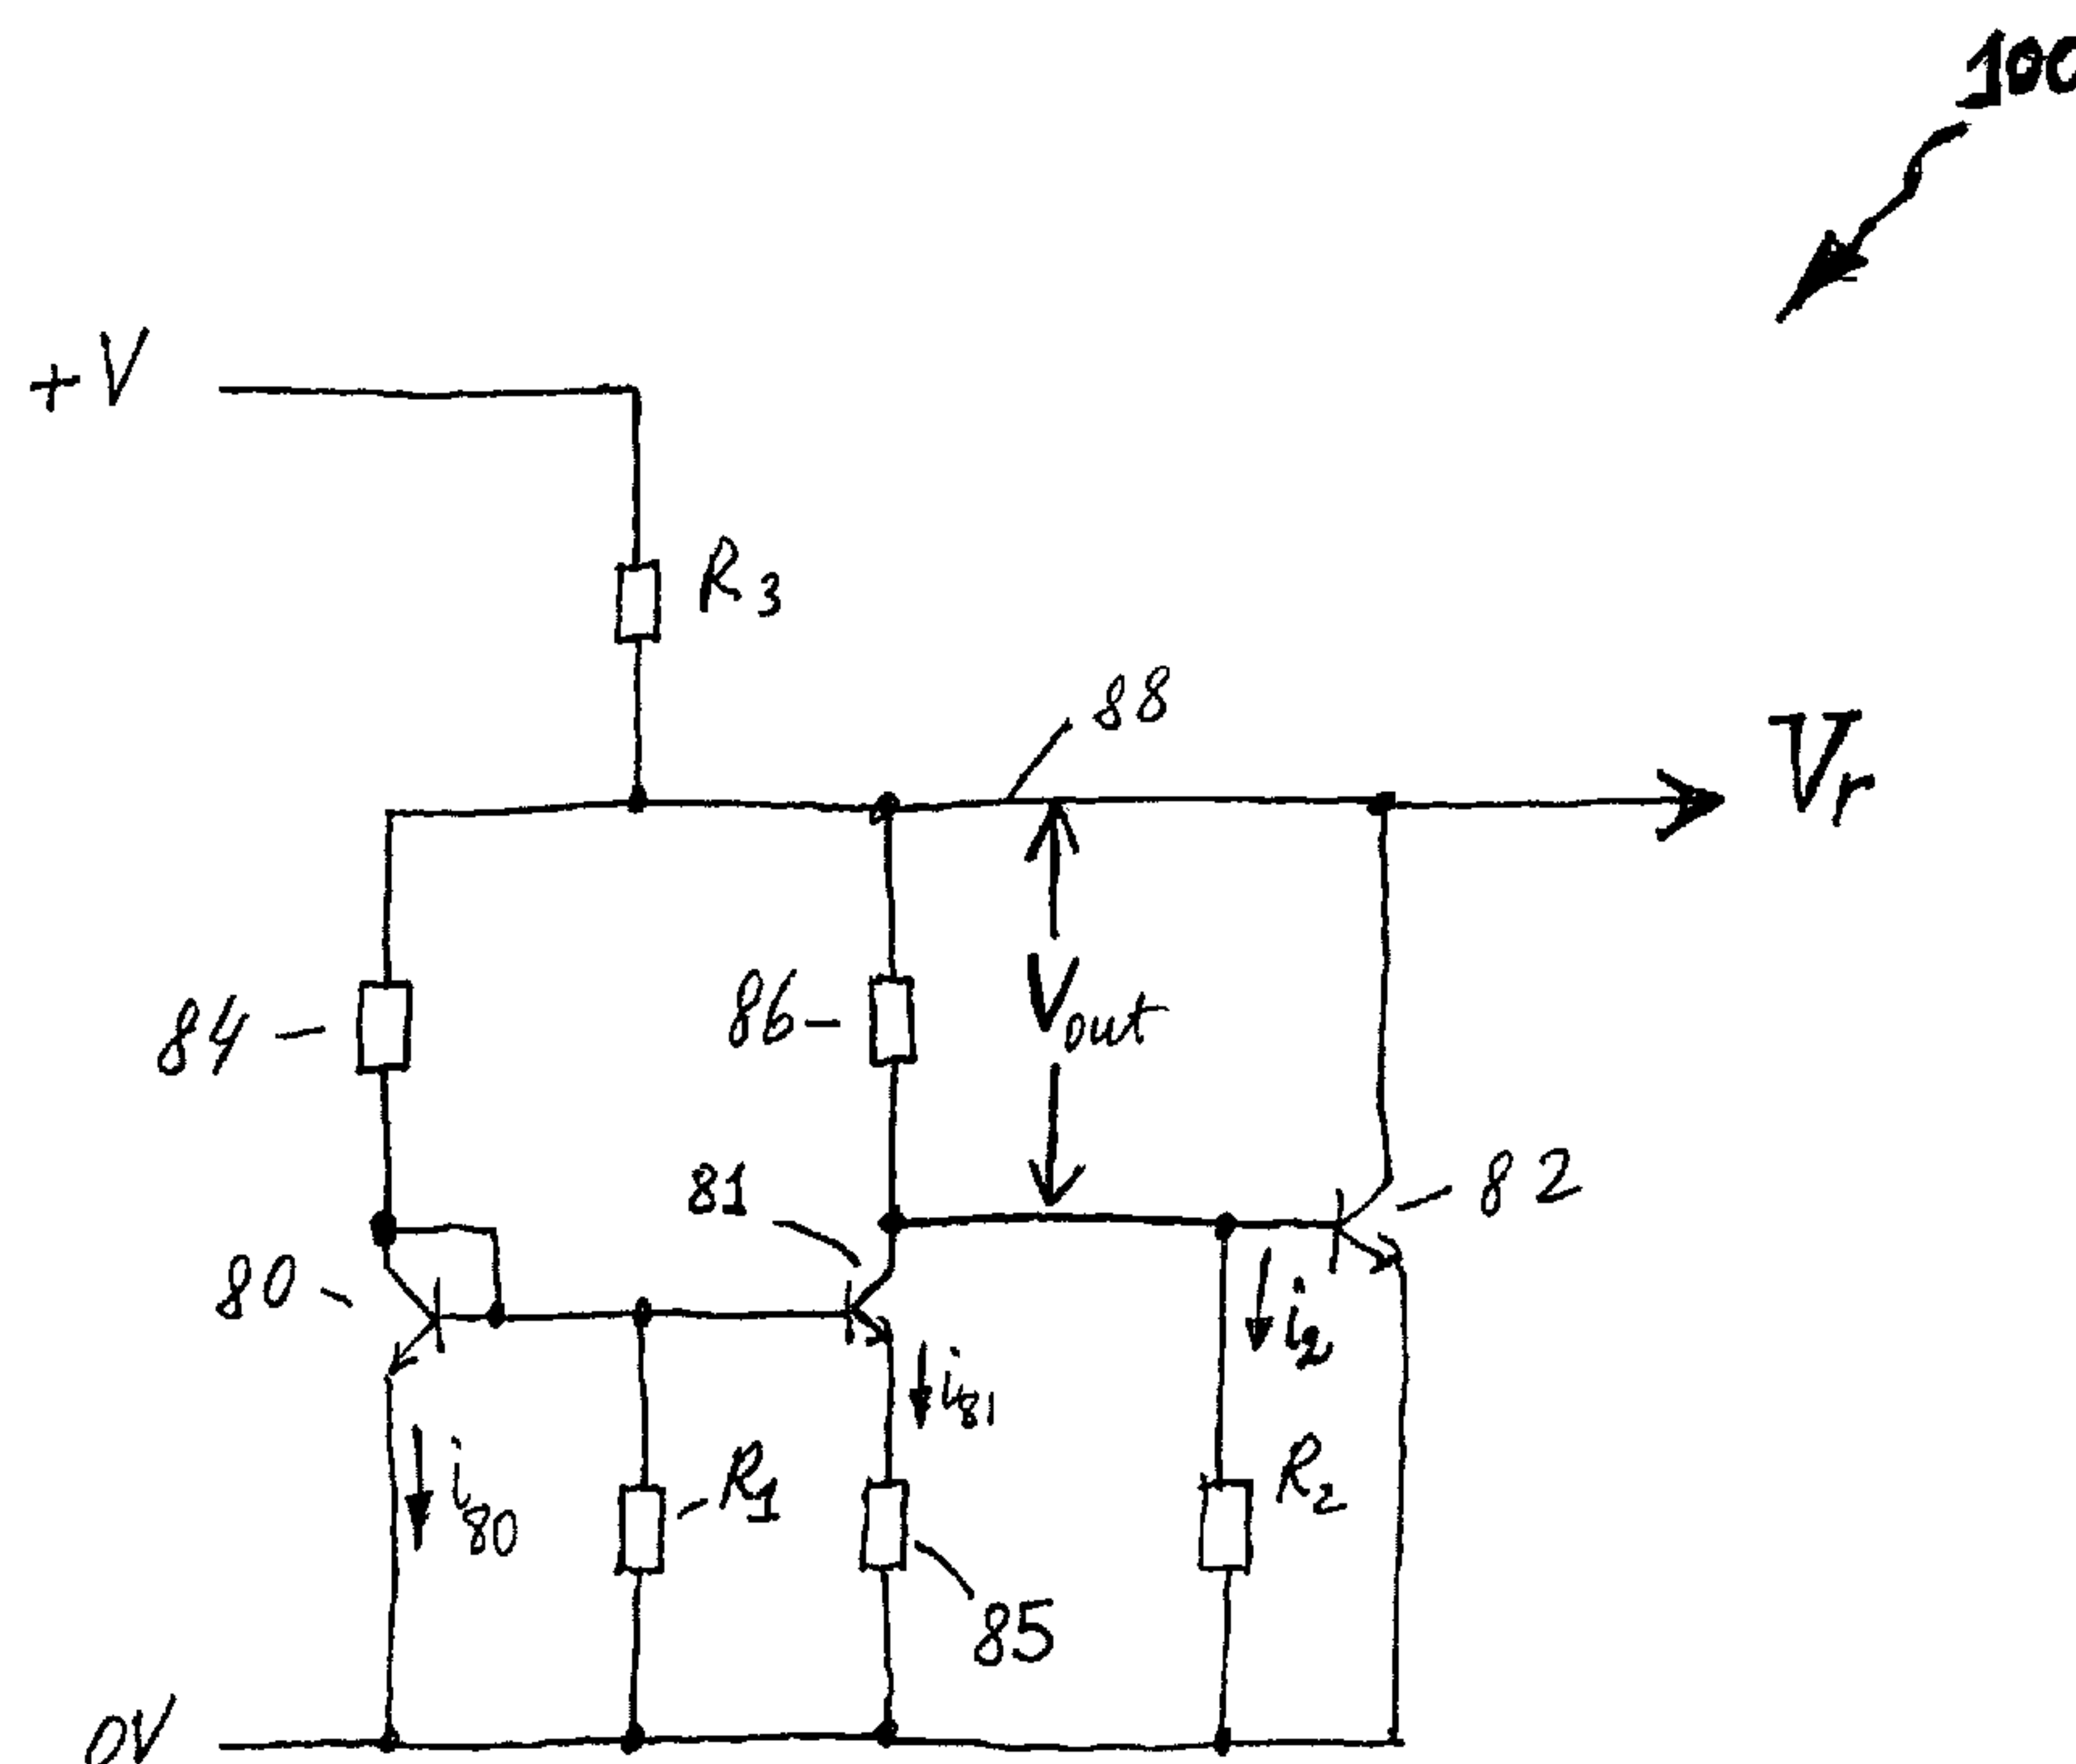

(57) Abrégé/Abstract:

The invention relates to a voltage reference source which is operable at a low voltage supply, e.g. 1.5V or lower, and allows for independent control of the magnitude and temperature dependence of the reference voltage. The source includes three transistors connected in parallel balanced with five resistors so as to provide the reference voltage in the form: $V_r = m_1 V_{be} + m_2 V_T + V_{be}$, wherein V_r is the reference voltage, V_{be} is a base-emitter voltage of a transistor, V_T is a thermal voltage, and m_1 and m_2 are weight coefficients whose absolute and relative magnitudes can be varied. The sixth resistor is used for connection to a positive voltage. Corresponding method of forming the reference voltage is provided.

ABSTRACT

The invention relates to a voltage reference source which is operable at a low voltage supply, e.g. 1.5V or lower, and allows for independent control of the magnitude and temperature dependence of the reference voltage. The source includes three transistors connected in parallel balanced with five resistors so as to provide the reference voltage in the form: $V_r = m_1 V_{be} + m_2 V_T + V_{be}$, wherein V_r is the reference voltage, V_{be} is a base-emitter voltage of a transistor, V_T is a thermal voltage, and m_1 and m_2 are weight coefficients whose absolute and relative magnitudes can be varied. The sixth resistor is used for connection to a positive voltage. Corresponding method of forming the reference voltage is provided.

VOLTAGE REFERENCE SOURCE

FIELD OF INVENTION

The invention relates to a voltage reference
5 source, and in particular, to the voltage reference
source operable at a low voltage supply, for example of
the order of 1.5V.

BACKGROUND OF THE INVENTION

10 For many microelectronics applications, it is
extremely desirable to have a voltage reference circuit
which would have a simple design and operate at a low
voltage supply, for example of the order of 1.5V.
Additionally, it would be desired for such a circuit to
15 provide the required voltage temperature dependence and
control it independently from the voltage magnitude.
Unfortunately, the existing voltage reference circuits
hardly satisfy the above requirements which clearly
identifies the need for further developments in this
20 area.

An object of this invention is to provide an
improved voltage reference source.

SUMMARY OF THE INVENTION

25 According to a first aspect of the invention there
is provided a method of forming an output voltage,
comprising the steps of:

forming a first voltage V_1 which is proportional
to a base-emitter voltage V_{be} of a transistor ($V_1 = m_1 V_{be}$),
30 wherein m_1 is a first weight coefficient;

forming a second voltage V_2 which is proportional to a thermal voltage V_T of a transistor ($V_2 = m_2 V_T$), wherein m_2 is a second weight coefficient;

adding first and second voltages to form the
5 output voltage V_{out} .

The method further comprises the step of selecting the weight coefficients so as to provide the output voltage having a predetermined magnitude and predetermined function of the temperature.
10 Conveniently, the method comprises the step of selecting the weight coefficients so as to control magnitude and temperature dependence of the output voltage independently. The weight coefficients may be selected so as to provide the output voltage which is
15 independent of the temperature, or alternatively, to provide the output voltage which is an increasing or decreasing function of the temperature. Advantageously, it may be arranged that the increasing or decreasing function of the temperature are linear functions.

20 To form the first voltage as a fraction of the base-emitter voltage of a transistor, it can be selected that the first weight coefficient is less than unity, i.e. $m_1 < 1$. For many practical applications it may be selected that the output voltage is proportional
25 to a bandgap voltage, e.g. equal to a fraction of the bandgap voltage, the bandgap voltage being typically 1.244V.

According to a second aspect of the invention, there is provided a method of forming a reference
30 voltage, comprising the steps of:

forming the output voltage V_{out} as defined above according to the first aspect of the invention; and

adding a base-emitter voltage of a transistor V_{be} to the output voltage V_{out} , thus forming the reference
5 voltage $V_r = V_{out} + V_{be}$.

Conveniently, it may be arranged that the step of forming the output voltage is performed so as to provide that the output voltage is equal to a fraction of the bandgap voltage.

10 According to a third aspect of the invention, there is provided a voltage reference source, comprising:

means for forming a first voltage V_1 which is proportional to a base-emitter voltage V_{be} of a
15 transistor ($V_1 = m_1 V_{be}$), wherein m_1 is a first weight coefficient;

means forming a second voltage V_2 which is proportional to a thermal voltage V_T of a transistor ($V_2 = m_2 V_T$), wherein m_2 is a second weight coefficient;

20 means for adding first and second voltages to form the output voltage V_{out} .

Preferably, the weight coefficients are selected so as to provide the output voltage having a predetermined magnitude and predetermined function of
25 the temperature. Conveniently, it may be arranged that the weight coefficients are selected so that the magnitude and temperature dependence of the output voltage can be controlled independently, e.g. the magnitude of the output voltage is determined by
30 absolute magnitudes of the weight coefficients, and the

temperature dependence of the source is controlled by relative magnitudes of the weight coefficients. Depending on circuit requirements, it can be provided that the output voltage is independent of the
5 temperature or has an increasing or decreasing function of temperature, the function being preferably linear functions.

To form the first voltage as a fraction of the base-emitter voltage of a transistor, the first weight
10 coefficient should be less than unity, i.e. $m_1 < 1$. For many practical applications it may be arranged that the output voltage is proportional to a bandgap voltage, e.g. equal to a fraction of the bandgap voltage.

Advantageously, the voltage reference source
15 includes three transistors only which are coupled in parallel and balanced with a number of resistors. It allows for a low voltage supply of the circuitry because the lower limit of the voltage supply is defined by only one base-emitter voltage which is
20 typically below 1V.

According to a fourth aspect of the invention there is provided a reference voltage source, comprising:

means for forming the output voltage V_{out} as
25 defined in accordance with the third aspect of the invention described above; and

means for adding a base-emitter voltage of a transistor V_{be} to the output voltage V_{out} to form the reference voltage $V_r = V_{out} + V_{be}$.

30 According to a fifth aspect of the invention there is provided a voltage reference source, comprising:

first, second and third transistors and first to fifth resistors;

collector and base of the first transistor being connected to the base of the second transistor and to a
5 through the first resistor to an output terminal;

collector of the second transistor being connected to the base of the third transistor and through the second resistor to the output terminal;

emitters of the first and third transistors being
10 connected to a negative voltage terminal directly with the emitter of the third transistor being connected to the negative voltage terminal through the third resistor;

collector of the third transistor being connected
15 to the output voltage terminal; and

fourth and fifth resistors being connected across base-emitter junctions of the third and first transistors respectively.

Additionally, the output terminal is
20 connected to a positive voltage terminal through a resistance means or through a current source.

Advantageously, the reference voltage source is operable at a low voltage supply, wherein the low voltage supply is of the order of 1.5V and lower. The
25 voltage reference source circuit includes three transistors only connected in parallel and a number of resistors.

BRIEF DESCRIPTION OF THE DRAWINGS

Embodiments of the invention will now be described, by way of example, with reference to the accompanying drawings in which:

- 5 FIGURE 1 illustrates a voltage reference circuit according to an embodiment of the invention.

DESCRIPTION OF THE PREFERRED EMBODIMENT

Figure 1 illustrates a voltage reference source
10 100 according to the embodiment of the invention. It comprises first, second and third NPN transistors 80 to 82, and five resistors 84 to 86 and 1 to 3. The resistors are referred to as in the following manner: the resistor 84 is referred to as a first resistor, 86
15 as a second resistor, 85 as a third resistor, 12 as a forth resistor, and 1 as a fifth resistor. The transistor 80 has its emitter connected to negative voltage terminal or ground (0V), and its collector connected to its base and via the resistor 84 to an
20 output terminal designated by line 88 on which the circuit produces a reference voltage V_r . The transistor 81 has its emitter connected via the resistor 85 to ground (0V), its base connected to the base of the transistor 80. The transistor 81 is being sized
25 relative to the transistor 80 to provide a current density through the transistor 81 which is lower than through the transistor 80, the ratio of current densities being for example of about 8. The collector of the transistor 81 is connected via the resistor 86
30 to the line 88. The transistor 82 has its base connected to the collector of the transistor 81, its

emitter connected to ground (0V), and its collector connected to line 88. Resistors 1 and 2 are connected across base-emitter junctions of transistors 80 and 82 respectively, and the resistor 3 is connected between
 5 line 88 and a positive voltage terminal +V. The reference voltage V_r and voltage produced on the resistor 86 referred to as an output voltage have predetermined temperature characteristics and provide independent control of the voltage magnitude as will be
 10 described in detail below.

The circuit 100 operates in the following manner. According to the Ohm's law, current i_2 through the resistor 2 may be expressed as follows:

$$15 \quad i_2 = V_{be82} / R_2 \quad (1)$$

wherein R_2 is a magnitude of the resistor 2 and V_{be82} is a base-emitter voltage of the transistor 82. Accordingly, a first voltage V_1 defined as a voltage drop on the
 20 resistor 86 produced by the current i_2 is equal to:

$$V_1 = i_2 R_{86} = (R_{86} / R_2) V_{be82} = m_1 V_{be82} \quad (2)$$

wherein R_{86} is a magnitude of the resistor 86, and m_1 is
 25 a first weight coefficient.

Derivations of a second voltage V_2 , defined as a voltage drop on the resistor 86 produced by current i_{81} , which flows through the transistor 81 and resistor 85, can be performed in the following manner.

It is known that a collector current of a bipolar transistor may be expressed as follows (see, e.g. a textbook "Microelectronics Circuits" by Adel S. Sedra and Kenneth C. Smith, Oxford University Press, 1991)

5

$$i = i_{ss} A \exp(V_{be} / V_T) \quad (3)$$

wherein i_{ss} is a constant called a saturation current, V_T is a thermal voltage, A is an emitter area, and V_{be} is a voltage between the base and emitter.

10 Accordingly, applying equation (3) to transistors 80 and 81, we obtain expressions for corresponding collector currents of the transistors:

$$i_{80} = i_{ss} A_{80} \exp(V_{be80} / V_T) \quad (4)$$

15
$$i_{81} = i_{ss} A_{81} \exp(V_{be81} / V_T) \quad (5)$$

wherein A_{80} and A_{81} are areas of transistors 80 and 81 respectively, and V_{be80} and V_{be81} are corresponding voltages between their bases and emitters.

20 Dividing equations (4) and (5), we may find the ratio of currents flowing through transistors 80 and 81

$$\frac{i_{80}}{i_{81}} = \frac{A_{80}}{A_{81}} \exp\left(\frac{V_{be80} - V_{be81}}{V_T}\right) \quad (6)$$

25 and the difference between their base-emitter voltages

$$V_{be80} - V_{be81} = V_T \ln\left(\frac{i_{80}}{i_{81}} \frac{A_{81}}{A_{80}}\right) \quad (7)$$

The expression of equation (7) equals to a voltage on the resistor 85, i.e. $V_{85} = V_{be80} - V_{be81}$.

Accordingly, current flowing through the resistor 85 and transistor 81 may be found as

5

$$i_{81} = \frac{V_T \ln\left(\frac{i_{80} A_{81}}{i_{81} A_{80}}\right)}{R_{85}} \quad (8)$$

Now it is easy to find the second voltage V_2 which is produced by current i_{81} on the resistor R_{86} :

$$10 \quad V_2 = i_{81} R_{86} = \left[\frac{R_{86}}{R_{85}} \ln\left(\frac{i_{80} A_{81}}{i_{81} A_{80}}\right) \right] V_T = m_2 V_T \quad (9)$$

$$\text{wherein } m_2 = \frac{R_{86}}{R_{85}} \ln\left(\frac{i_{80} A_{81}}{i_{81} A_{80}}\right)$$

15 Accordingly, the output voltage V_{out} equal to the voltage drop on the resistor 86 has two components V_1 and V_2 and may be expressed as

$$V_{out} = V_{86} = V_1 + V_2 = m_1 V_{be82} + m_2 V_T \quad (10)$$

20 It is known that base-emitter voltage of a transistor decreases with the temperature, while thermal voltage has an increasing dependence with the temperature. As follows from equation (10), by proper selection of the weight coefficients m_1 and m_2 it is possible to control
25 temperature dependence of the output voltage and its magnitude. Conveniently, it may be arranged that the

output voltage is equal to a fraction of a bandgap voltage, i.e. $V_{out} = kV_{bg}$, wherein k is a scaling coefficient and V_{bg} is bandgap voltage.

Resistor 1 is required to control the current
5 flowing through the resistor 84 and to provide balance of currents in the circuit 100. It is required that voltages on the resistors 84 and 86 be equal, which means that resistors 1, 2, 84 and 86 would satisfy the following proportion $R_{86}/R_{84}=R_2/R_1$. For example, it can be
10 arranged that $R_{86}=R_{84}$ and $R_2=R_1$.

The reference voltage V_r is formed by adding another base-emitter voltage V_{be82} to the output voltage V_{out} , thus providing the required biasing voltage that is widely used in microelectronics applications:

15

$$V_r = V_{out} + V_{be82} \quad (11)$$

Similar to the above discussion with regard to the output voltage, the magnitude and temperature
20 dependence of the output voltage can be controlled independently by proper selection of absolute and relative values of weight coefficients. Conveniently it may be arranged that $V_r = kV_{bg} + V_{be82}$, i.e. the reference voltage is a fraction of the bandgap voltage plus one
25 base-emitter voltage, the voltage which is required for biasing purposes.

In modifications to the embodiment of the voltage reference source described above, the circuit may comprise different types of transistors, e.g. MOSFET,
30 FET hetero-junction or any other known transistors. The

first to fifth resistors may comprise a combination of resistors, or alternatively any other semiconductor devices having resistance. The sixth resistor designated by reference numeral 3 may be replaced with
5 any known resistance means or a current source.

Advantages of the embodiment of the present invention are as follows. The circuit described above has simple design, occupies less area compared to other known reference voltage circuits and correspondingly
10 dissipates less heat and consumes less power. Due to the use of a minimal number of transistors, which are connected in parallel, the circuit is operable at much lower voltage supply than other known circuits, e.g. of the order of 1.5V or lower. Additionally, it provides
15 an independent control of the magnitude of the reference voltage and its temperature dependence.

Thus, it will be appreciated that, while specific embodiments of the invention are described in detail above, numerous variations, combinations and
20 modifications of these embodiments fall within the scope of the invention as defined in the following claims.

WHAT IS CLAIMED IS:

1. A method of forming an output voltage, comprising the steps of:

5 forming a first voltage V_1 which is proportional to a base-emitter voltage V_{be} of a transistor ($V_1 = m_1 V_{be}$), wherein m_1 is a first weight coefficient;

forming a second voltage V_2 which is proportional to a thermal voltage V_T of a transistor ($V_2 = m_2 V_T$),
10 wherein m_2 is a second weight coefficient;

adding first and second voltages to form the output voltage V_{out} .

2. A method as defined in claim 1, comprising
15 the step of selecting the weight coefficients so as to provide the output voltage having a predetermined magnitude and predetermined function of the temperature.

20 3. A method as defined in claim 1, comprising the step of selecting the weight coefficients so as to control magnitude and temperature dependence of the output voltage independently.

25 4. A method as defined in claim 2, comprising the step of selecting the weight coefficients so as to provide that the output voltage is independent of the temperature.

5. A method as defined in claim 2, comprising the step of selecting the weight coefficients so as to provide that the output voltage is an increasing function of the temperature.

5

6. A method as defined in claim 2, comprising the step of selecting the weight coefficients so as to provide that the output voltage is a decreasing function of the temperature.

10

7. A method as defined in claim 5, wherein the step of selecting the weight coefficients comprises selecting the coefficients so that the increasing function of the temperature is a linear function.

15

8. A method as defined in claim 6, wherein the step of selecting the weight coefficients comprises selecting the coefficients so that the decreasing function of the temperature is a linear function.

20

9. A method as defined in claim 1, comprising the step of selecting $m_i < 1$.

10. A method as defined in claim 1, comprising the step of selecting the weight coefficients so as to provide that the output voltage is proportional to a bandgap voltage.

11. A method as defined in claim 10, wherein the step of selecting the weight coefficients comprises

30

selecting the coefficients so that the output voltage is a fraction of the bandgap voltage.

12. A method of forming a reference voltage,
5 comprising the steps of:

forming the output voltage V_{out} as defined in claim 1; and

adding a base-emitter voltage of a transistor V_{be} to the output voltage V_{out} , thus forming the reference
10 voltage $V_r = V_{out} + V_{be}$.

13. A method as defined in claim 11, wherein the step of forming the output voltage is performed in accordance with claim 11.

15

14. A voltage reference source, comprising
means for forming a first voltage V_1 which is proportional to a base-emitter voltage V_{be} of a transistor ($V_1 = m_1 V_{be}$), wherein m_1 is a first weight
20 coefficient;

means forming a second voltage V_2 which is proportional to a thermal voltage V_T of a transistor ($V_2 = m_2 V_T$), wherein m_2 is a second weight coefficient;

means for adding first and second voltages to form
25 the output voltage V_{out} .

15. A source as defined in claim 14, wherein the weight coefficients are selected so as to provide the output voltage having a predetermined magnitude and
30 predetermined function of the temperature.

16. A source as defined in claim 14, wherein the weight coefficients are selected so as to control magnitude and temperature dependence of the output
5 voltage independently.

17. A source as defined in claim 15, wherein the magnitude of the output voltage is determined by absolute magnitudes of the weight coefficients.
10

18. A source as defined in claim 15, wherein the temperature dependence is controlled by relative magnitudes of the weight coefficients.

15 19. A source as defined in claim 15, wherein the weight coefficients are selected so as to provide that the output voltage is independent of the temperature.

20 20. A source as defined in claim 15, wherein the weight coefficients are selected so as to provide that the output voltage is an increasing function of the temperature.

25 21. A source as defined in claim 15, wherein the weight coefficients are selected so as to provide that the output voltage is a decreasing function of the temperature.

30 22. A source as defined in claim 20, wherein the weight coefficients are selected so that the increasing function of the temperature is a linear function.

23. A source as defined in claim 16, wherein the weight coefficients are selected so that the decreasing function of the temperature is a linear function.

5

24. A source as defined in claim 14, wherein $m_1 < 1$.

25. A source as defined in claim 1, wherein the weight coefficients are selected so as to provide that the output voltage is proportional to a bandgap voltage.

10

26. A source as defined in claim 25, wherein the weight coefficients are selected so that the output voltage is a fraction of the bandgap voltage.

15

27. A source as defined in claim 14, comprising three transistors only.

20

28. A source as defined in claim 27, consisting of three transistors connected in parallel which are balanced with a number of resistors.

25

29. A source as defined in claim 28, wherein the total number of resistors is six.

30. A reference voltage source, comprising:
means for forming the output voltage V_{out} as defined in claim 1; and

30

means for adding a base-emitter voltage of a transistor V_{be} to the output voltage V_{out} to form the reference voltage $V_r = V_{out} + V_{be}$.

5 31. A reference voltage source as defined in claim 30, operable at a low voltage supply.

32. A reference voltage source as defined in claim 31, wherein the low voltage supply is of the
10 order of 1.5V and lower.

33. A reference voltage source as defined in claim 30, comprising three transistors only connected in parallel which are balanced with a number of
15 resistors.

34. A voltage reference source, comprising:
first, second and third transistors and first to fifth resistors;
20 collector and base of the first transistor being connected to the base of the second transistor and to a through the first resistor to an output terminal;
collector of the second transistor being connected to the base of the third transistor and through the
25 second resistor to the output terminal;
emitters of the first and third transistors being connected to a negative voltage terminal directly with the emitter of the third transistor being connected to the negative voltage terminal through the third
30 resistor;

collector of the third transistor being connected to the output voltage terminal; and

fourth and fifth resistors being connected across base-emitter junctions of the third and first
5 transistors respectively.

35. A voltage reference source as defined in claim 34, wherein the output terminal is connected to a positive voltage terminal through a resistance means.

10

36. A voltage reference source as defined in claim 34, wherein the output terminal connected to a positive voltage terminal through a current source.

12006RO

100

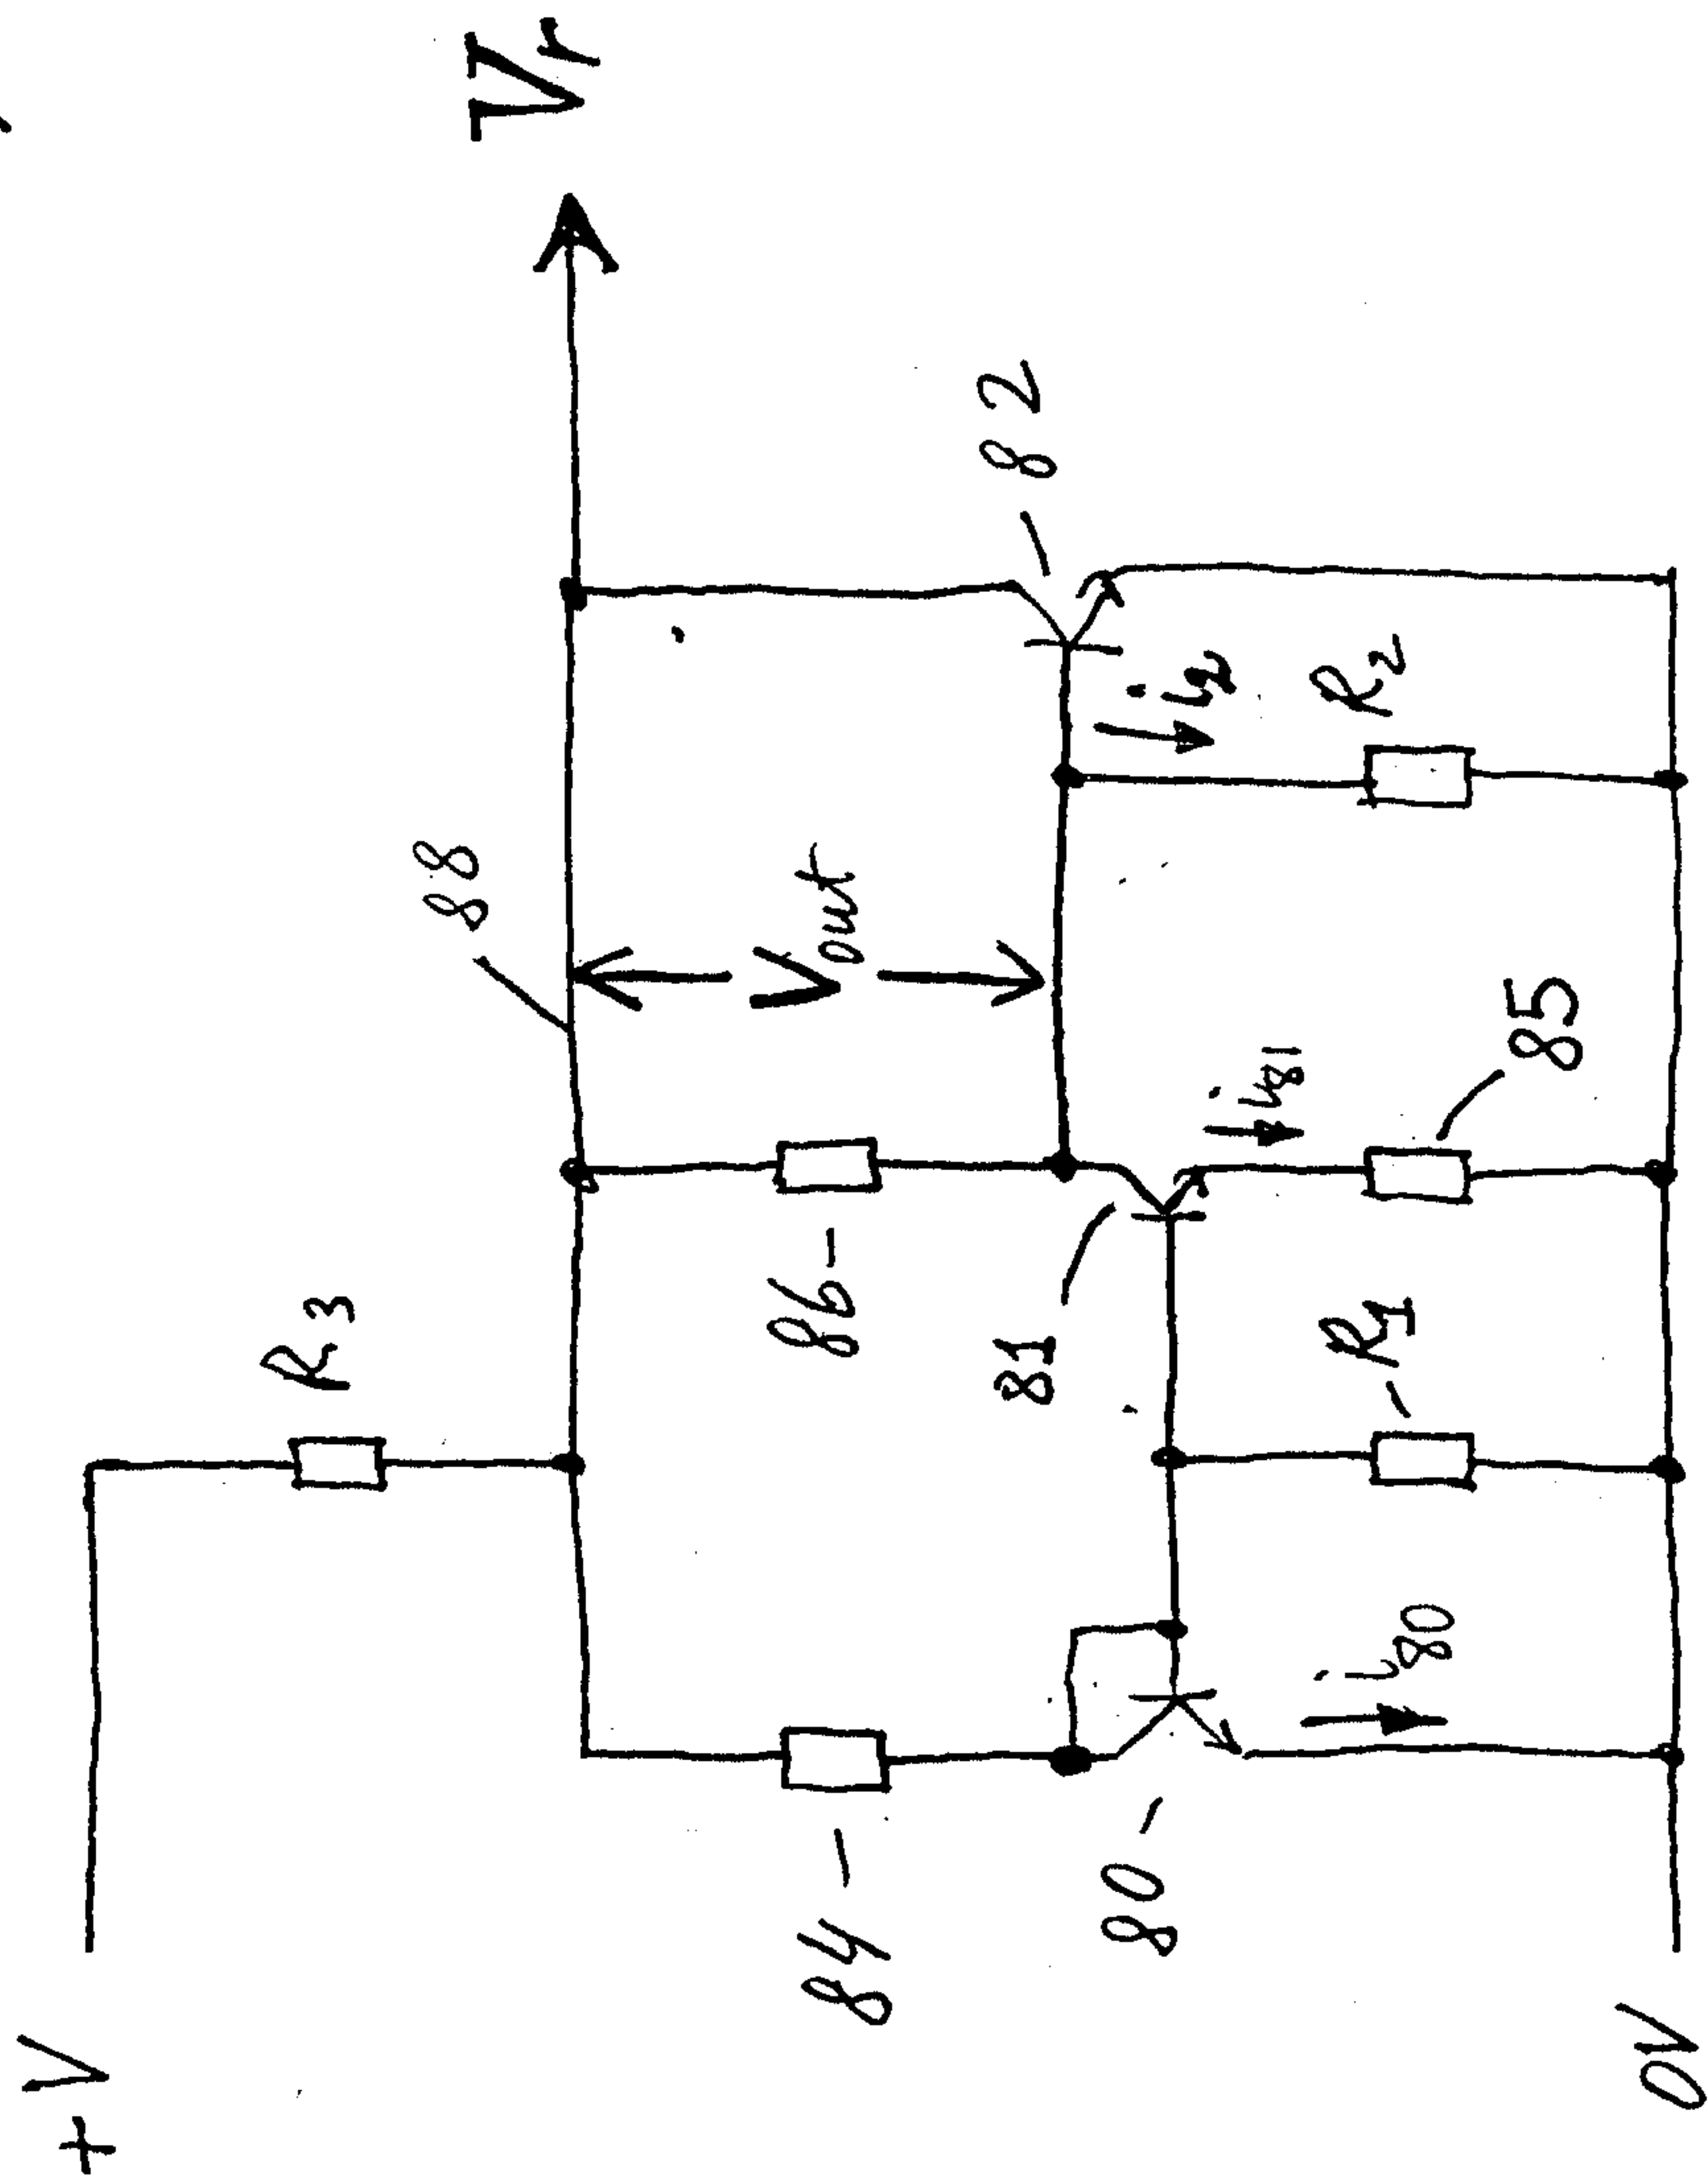


FIGURE 1

$+V$

100

R_3

88

V_r

84 -

86 -

V_{out}

81

82

80 -

i_{81}

i_{82}

i_{80}

R_1

85

R_2

0V

