

19



NL Octrooi Centrum

11

2007309

12 A OCTROOIAANVRAAG

21 Aanvraagnummer: **2007309**

51 Int.Cl.:
G07D 7/00 (2006.01) **B41M 3/14** (2006.01)

22 Aanvraag ingediend: **29.08.2011**

30 Voorrang:
03.09.2010 AU 2010903953

71 Aanvrager(s):
**Securency International Pty. Ltd.
te Craigieburn, Australië (AU).**

41 Aanvraag ingeschreven:
06.03.2012


72 Uitvinder(s):
Karlo Ivan Jolic te West Footscray (AU).

43 Aanvraag gepubliceerd:
14.03.2012

74 Gemachtigde:
ir. C.M. Jansen c.s. te Den Haag.

54 **Optically variable device.**

57 A security element is disclosed having a plurality of focusing elements, a first and a second group of image elements. Each image element is located in an object plane to be viewable through a focusing element, and being located a distance from the focusing element such that the focal point width of the focusing element in the object plane is substantially equal to the size of the image element or differs from the size of the image element by a predetermined amount. The image elements of the first group are visible in a first range of viewing angles and those of the second group are visible in a second range of viewing angles. A second image formed in the second range of viewing angles is a contrast-inverted version of a first image formed in the first range of viewing angles.

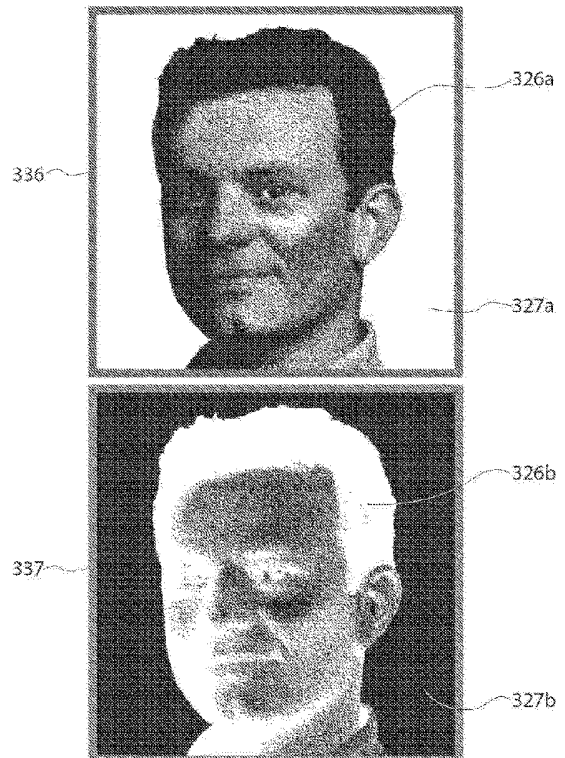

NL A 2007309

Deze publicatie komt overeen met de oorspronkelijk ingediende stukken.

OPTICALLY VARIABLE DEVICE

FIELD OF THE INVENTION

The present invention relates to optically variable devices for security and decorative purposes, and methods of their manufacture.

BACKGROUND OF THE INVENTION

5 It is known to provide optically variable devices in which arrays of lenticular (part-cylindrical) lenses focus on an object plane containing multiple sets of interleaved image elements. Each set of image elements (strips) belongs to a distinct image, so that as the person viewing the device changes the angle of view, a different image becomes visible.

10 In security applications, and in particular when dealing with flexible security documents such as banknotes, it is desirable to minimise the thickness of a lens array applied to the security document. For example, a preferred thickness for polymer banknote substrates currently in use is approximately 90 microns, including the thickness of the lens array. In order to meet this design constraint,
15 lenses of diameter approximately 50 microns or less are used.

 The effect produced by optically variable devices containing multiple sets of interleaved image elements as described above is sometimes known as a "flipping image" effect. The number of distinct images in the flipping image effect is limited by the number of sets of image elements that can be placed in the field
20 of view of a lens in the lens array. For example, if a two-channel flipping image is to be produced, then two sets of image elements are required. This means that each image element can have a width no greater than half the width of a lens.

 If lenses of width 50 microns are used, the image elements should be no greater than 25 microns wide in order to ensure that there is minimal cross-talk
25 between the channels of the flipping image. An image element width of 25 microns or less is achievable with some techniques used in security printing. However, other commonly used techniques, such as gravure (sometimes known as rotogravure) printing cannot consistently apply image elements having this width. A minimum practical width of line elements currently achievable with
30 gravure printing is approximately 35-45 microns. Image elements of this width produce unacceptably large amounts of cross-talk when used with 50 micron diameter lenses.

It has previously been found that a given substrate thickness can be maintained, whilst increasing the diameter of the lenses in the lenticular array, by adjusting the lens parameters such that the focal point width of the lenses in the object plane is approximately the same as the width of the image elements, as described in our PCT application PCT/AU2010/000243, incorporated herein by reference in its entirety. For example, for a substrate thickness of 90 microns, lenses of diameter 63.5 microns can be used. However, even with lenses of this increased diameter, a flipping image device with two channels still produces unacceptable cross-talk because the minimum practically achievable width of gravure line elements is 35-45 microns, which is still more than half the lens diameter.

There is therefore a need for an optically variable device which can produce flipping image effects, and which can be produced using a wider variety of security printing techniques, whilst being less susceptible to cross-talk.

DEFINITIONS

Focal point size H

As used herein, the term focal point size refers to the dimensions, usually an effective diameter or width, of the geometrical distribution of points at which rays refracted through a lens intersect with an object plane at a particular viewing angle. The focal point size may be inferred from theoretical calculations, ray tracing simulations, or from actual measurements.

Focal length f

In the present specification, focal length, when used in reference to a microlens in a lens array, means the distance from the vertex of the microlens to the position of the focus given by locating the maximum of the power density distribution when collimated radiation is incident from the lens side of the array (see T. Miyashita, "Standardization for microlenses and microlens arrays" (2007) *Japanese Journal of Applied Physics* **46**, p 5391).

Gauge thickness t

The gauge thickness is the distance from the apex of a lenslet on one side of the transparent or translucent material to the surface on the opposite side of the translucent material on which the image elements are provided which substantially coincides with the object plane.

Lens frequency and pitch

The lens frequency of a lens array is the number of lenslets in a given distance across the surface of the lens array. The pitch is the distance from the apex of one lenslet to the apex of the adjacent lenslet. In a uniform lens array, the pitch has an inverse relationship to the lens frequency.

Lens width W

The width of a lenslet in a microlens array is the distance from one edge of the lenslet to the opposite edge of the lenslet. In a lens array with hemispherical or semi-cylindrical lenslets, the width will be equal to the diameter of the lenslets.

Radius of curvature R

The radius of curvature of a lenslet is the distance from a point on the surface of the lens to a point at which the normal to the lens surface intersects a line extending perpendicularly through the apex of the lenslet (the lens axis).

Sag height s

The sag height or surface sag s of a lenslet is the distance from the apex to a point on the axis intersected by the shortest line from the edge of a lenslet extending perpendicularly through the axis.

Refractive index n

The refractive index of a medium n is the ratio of the speed of light in vacuo to the speed of light in the medium. The refractive index n of a lens determines the amount by which light rays reaching the lens surface will be refracted, according to Snell's law:

$$n_1 * \sin(\alpha) = n * \sin(\theta),$$

where α is the angle between an incident ray and the normal at the point of incidence at the lens surface, θ is the angle between the refracted ray and the normal at the point of incidence, and n_1 is the refractive index of air (as an approximation n_1 may be taken to be 1).

Conic constant P

The conic constant P is a quantity describing conic sections, and is used in geometric optics to specify spherical ($P = 1$), elliptical ($0 < P < 1$, or $P > 1$), parabolic ($P = 0$), and hyperbolic ($P < 0$) lens. Some references use the letter K to represent the conic constant. K is related to P via $K = P - 1$.

Lobe Angle

The lobe angle of a lens is the entire viewing angle formed by the lens.

Abbe number

The Abbe number of a transparent or translucent material is a measure of the dispersion (variation of refractive index with wavelength) of the material. An
5 appropriate choice of Abbe number for a lens can help to minimize chromatic aberration.

Security document

As used herein, the term security document includes all types of documents and tokens of value and identification documents including, but not
10 limited to the following: items of currency such as banknotes and coins, credit cards, cheques, passports, identity cards, securities and share certificates, driver's licences, deeds of title, travel documents such as airline and train tickets, entrance cards and tickets, birth, death and marriage certificates, and academic transcripts.

Transparent Windows and Half Windows

As used herein the term window refers to a transparent or translucent area in the security document compared to the substantially opaque region to which printing is applied. The window may be fully transparent so that it allows the transmission of light substantially unaffected, or it may be partly transparent or
20 translucent partially allowing the transmission of light but without allowing objects to be seen clearly through the window area.

A window area may be formed in a polymeric security document which has at least one layer of transparent polymeric material and one or more opacifying layers applied to at least one side of a transparent polymeric substrate, by
25 omitting least one opacifying layer in the region forming the window area. If opacifying layers are applied to both sides of a transparent substrate a fully transparent window may be formed by omitting the opacifying layers on both sides of the transparent substrate in the window area.

A partly transparent or translucent area, hereinafter referred to as a "**half-**
30 **window**", may be formed in a polymeric security document which has opacifying layers on both sides by omitting the opacifying layers on one side only of the security document in the window area so that the "half-window" is not fully transparent, but allows some light to pass through without allowing objects to be

viewed clearly through the half-window.

Alternatively, it is possible for the substrates to be formed from an substantially opaque material, such as paper or fibrous material, with an insert of transparent plastics material inserted into a cut-out, or recess in the paper or
5 fibrous substrate to form a transparent window or a translucent half-window area.

Opacifying layers

One or more opacifying layers may be applied to a transparent substrate to increase the opacity of the security document. An opacifying layer is such that

$L_T < L_0$, where L_0 is the amount of light incident on the document, and L_T is
10 the amount of light transmitted through the document. An opacifying layer may comprise any one or more of a variety of opacifying coatings. For example, the opacifying coatings may comprise a pigment, such as titanium dioxide, dispersed within a binder or carrier of heat-activated cross-linkable polymeric material. Alternatively, a substrate of transparent plastic material could be sandwiched
15 between opacifying layers of paper or other partially or substantially opaque material to which indicia may be subsequently printed or otherwise applied.

Zero-order diffraction grating

A zero-order diffraction grating is a surface-relief or buried microstructure which produces light in only the zero diffraction order under illumination by light of
20 a given wavelength.

Generally, such zero-order structures have a periodicity which is less than the desired wavelength of incident light. For this reason, zero-order diffraction gratings are sometimes also known as sub-wavelength gratings.

Embossable Radiation Curable Ink

25 The term embossable radiation curable ink used herein refers to any ink, lacquer or other coating which may be applied to the substrate in a printing process, and which can be embossed while soft to form a relief structure and cured by radiation to fix the embossed relief structure. The curing process does not take place before the radiation curable ink is embossed, but it is possible for
30 the curing process to take place either after embossing or at substantially the same time as the embossing step. The radiation curable ink is preferably curable by ultraviolet (UV) radiation. Alternatively, the radiation curable ink may be cured by other forms of radiation, such as electron beams or X-rays.

The radiation curable ink is preferably a transparent or translucent ink formed from a clear resin material. Such a transparent or translucent ink is particularly suitable for printing light-transmissive security elements such as numerical-type DOEs and lens structures.

5 In one particularly preferred embodiment, the transparent or translucent ink preferably comprises an acrylic based UV curable clear embossable lacquer or coating.

Such UV curable lacquers can be obtained from various manufacturers, including Kingfisher Ink Limited, product ultraviolet type UVF-203 or similar.
10 Alternatively, the radiation curable embossable coatings may be based on other compounds, eg nitro-cellulose.

The radiation curable inks and lacquers used in the invention have been found to be particularly suitable for embossing microstructures, including diffractive structures such as DOEs, diffraction gratings and holograms, and
15 microlenses and lens arrays. However, they may also be embossed with larger relief structures, such as non-diffractive optically variable devices.

The ink is preferably embossed and cured by ultraviolet (UV) radiation at substantially the same time. In a particularly preferred embodiment, the radiation curable ink is applied and embossed at substantially the same time in a Gravure
20 printing process.

Preferably, in order to be suitable for Gravure printing, the radiation curable ink has a viscosity falling substantially in the range from about 20 to about 175 centipoise, and more preferably from about 30 to about 150 centipoise. The viscosity may be determined by measuring the time to drain the lacquer from a
25 Zahn Cup #2. A sample which drains in 20 seconds has a viscosity of 30 centipoise, and a sample which drains in 63 seconds has a viscosity of 150 centipoise.

With some polymeric substrates, it may be necessary to apply an intermediate layer to the substrate before the radiation curable ink is applied to
30 improve the adhesion of the embossed structure formed by the ink to the substrate. The intermediate layer preferably comprises a primer layer, and more preferably the primer layer includes a polyethylene imine. The primer layer may also include a cross-linker, for example a multi-functional isocyanate. Examples

of other primers suitable for use in the invention include: hydroxyl terminated polymers; hydroxyl terminated polyester based co-polymers; cross-lined or uncross-linked hydroxylated acrylates; polyurethanes; and UV curing anionic or cationic acrylates. Examples of suitable cross-linkers include: isocyanates; 5 polyaziridines; zirconium complexes; aluminium acetylacetonate; melamines; and carbodi-imides.

The type of primer may vary for different substrates and embossed ink structures. Preferably, a primer is selected which does not substantially affect the optical properties of the embossed ink structure.

10 **SUMMARY OF THE INVENTION**

The present invention provides a security element, including:

a plurality of focusing elements,
a first group of image elements, and
a second group of image elements,

15 each image element being located in an object plane to be viewable through a focusing element, and being located a distance from the focusing element such that the focal point width of the focusing element in the object plane is substantially equal to the size of the image element or differs from the size of the image element by a predetermined amount,

20 wherein image elements of the first group are visible in a first range of viewing angles and image elements of the second group are visible in a second range of viewing angles, and

25 wherein a second image formed in the second range of viewing angles is a contrast-inverted version of a first image formed in the first range of viewing angles.

Preferably, the predetermined amount by which the focal point width varies from the size of the image elements is not more than 20% of the size of the image elements.

30 The present inventors have found that by using first and second images which are contrast-inverted versions of each other, together with a slightly off-focus lens design, a recognisable optically variable effect in the form of a flipping image can be produced despite the presence of some cross-talk. When the first group of image elements is visible it forms a foreground region of the first image.

Although some cross-talk from the second group of image elements is visible, the cross-talk is greatly reduced compared to a design using on-focus lenses, because only part of the focal spot overlaps with the image elements of the second group. This reduced cross-talk forms a uniform background for the first image.

Preferably the image elements are a colour other than black. It has been found in some cases that a flipping image effect produced by black image elements can be mimicked by using a metallic ink. The use of colours other than black precludes the use of metallic inks for counterfeiting.

In one embodiment, the first group of image elements is a different colour to the second group of image elements. The use of different colours further increases the difficulty to the counterfeiter.

The image elements may have a size distribution or a spatial distribution corresponding to the grey levels or brightness levels of an input monochromatic image. The input image may be a portrait or other image having a large degree of information content.

Preferably, the image elements are printed image elements, for example gravure-printed, offset-printed, screen-printed or flexographically-printed elements. Alternatively, the image elements may be embossed image elements.

In one preferred embodiment, the focusing elements are on one side of a transparent or translucent substrate. The image elements may be on the opposite side of the transparent or translucent substrate.

The image elements are preferably line elements, but may be any other suitable shape, for example dots or geometrical shapes.

In one embodiment, the focusing elements are refractive or diffractive part-cylindrical lenses, or zone plates. Alternatively, the focusing elements may be refractive or diffractive part-spherical or polygonal-base micro lenses.

In another aspect of the present invention there is provided a method of forming a security device, including the steps of:

providing a transparent or translucent substrate,
applying a plurality of focusing elements to a first surface of the substrate,
and
applying a first group of image elements and a second group of image

elements to an image surface of the substrate, each image element being located in an object plane to be viewable through a focusing element, and being located a distance from the focusing element such that the focal point width of the focusing element in the object plane is substantially equal to the size of the image element or differs from the size of the image element by a predetermined amount,

5 whereby image elements of the first group are visible in a first range of viewing angles and image elements of the second group are visible in a second range of viewing angles, and

10 whereby a second image formed in the second range of viewing angles is a contrast-inverted version of a first image formed in the first range of viewing angles.

The focusing elements may be applied by embossing, preferably by embossing in a layer of embossable radiation-curable ink applied to the first surface of the substrate.

15 Preferably, the image elements are applied by a printing method. Preferred methods are gravure-printing, offset-printing, screen-printing or flexographic-printing. The image elements may also be applied by embossing.

In a further aspect, the present invention provides a security document, including a security element according to any one of the above embodiments, a security device according to the second aspect of the invention, or a security device manufactured according to any of the methods described above. In one preferred embodiment, the security element or security device is located within a window or half-window region of the security document.

BRIEF DESCRIPTION OF THE DRAWINGS

25 Preferred embodiments of the invention will now be described, by way on non-limiting example only, with reference to the accompanying drawings, in which:

Figures 1(a) to 1(d) show a lenticular device of known type;

Figures 2(a) to 2(d) show a modified version of the lenticular device of

30 Figures 1(a) to 1(d);

Figure 3 shows a flipping image effect produced by one embodiment of the present invention;

Figure 4 is a perspective view of part of a security element producing the

effect of Figure 3;

Figure 5 is a cross-section through the security element of Figure 4;

Figures 6 and 7 schematically depict a method of producing artwork for another embodiment of the present invention; and

5 Figure 8 shows the effect generated by the embodiment of Figures 6 and 7.

DETAILED DESCRIPTION OF THE DRAWINGS

Referring initially to Figure 1, there is shown part of a lenticular device 10 of known design, having a plurality of focusing elements in the form of part-cylindrical lenses 14. The device 10 includes a substrate 11 having an upper surface 12 and a lower surface 13. The focusing elements 14 are applied to the upper surface 12, and the lower surface 13 is an object plane carrying a first group of image elements 16 and a second group of image elements 17. Image elements 17 are shown slightly offset in the cross-sectional view of Figure 1(a) for purposes of clarity.

The left-hand edges of neighbouring image elements 16 of the first group are aligned with the left-hand edges of associated focusing elements 14 through which the image elements 16 are to be viewed. The left-hand edges of image elements 17 of the second group are aligned with the optical axes associated of focusing elements 14. Image elements 16 and 17 are in interleaved relationship in the object plane 13 (Figure 1(d)) to form first and second channels of a flipping image.

Object plane 13 is placed substantially at the focal length of the focusing elements 14. This results in a very narrow region 15 in the object plane over which incoming rays are focused, much narrower than the width of image elements 16, 17.

In Figure 1(a), the security element substrate 11 has a thickness of approximately 75 microns. In order to keep the total security element thickness to less than 90 microns, the sag height of the lenses 14 is less than 15 microns, and the lens diameter is of the order of 45 to 50 microns. If image elements 16, 17 are applied by gravure printing, their width will be larger than half the lens diameter. This results in a cross-talk region of viewing angles in which both image elements 16 and image elements 17 are visible. In the cross-talk region, for example at

viewing angles which view positions 20 of the device (Figure 1(c)), the image elements 16 and 17 are each spanned by the entire width of focal region 15, resulting in identical apparent brightnesses 26 and 27 (Figure 1(b)) to the viewer. The ability to distinguish between images 36 (character '5') and 37 (character 'A') is thus completely lost due to the cross-talk between the two groups of image elements 16, 17.

The cross-talk of Figure 1 can be reduced by using off-focus lens designs such as the one shown in Figure 2. In Figure 2(a), a lenticular device 100 includes focusing elements 114 applied to a first surface 112. The focusing elements 114 have a focusing region 115 in the object plane 113 which is almost as wide as the image elements 116 of a first group and image elements 117 of a second group. The focusing region may have a width which is up to 20% smaller or 20% larger than the width of the image elements 116 or 117.

The use of a non-focusing design reduces cross-talk because in a cross-talk region, a reduced portion of the focal region overlaps with an image element which is not intended to be seen by the viewer. For example, in region 120 shown in Figure 2(c), image elements 116 of the first group should be visible to display the first channel of the flipping image, whilst image elements 117 of the second group should not be seen. The entire width of the focal region 115 overlaps with image elements 116 at the viewing angle shown in Figure 2(c), to produce an apparent intensity 126 (Figure 2(b)). On the other hand, only part of image element 117 overlaps with the focal region 115, so that a reduced intensity 127 is seen by the viewer.

The net impression to the viewer emerging from the viewing angle shown in Figure 2(d) is a first image 136 comprising a foreground region 126a in the form of the character '5', produced by the first group of image elements 116. Due to the presence of cross-talk 128 from the second group of image elements 117, a shadow 127a of character 'A' is seen in the background. As the device is tilted, character 'A' becomes more prominent, due to a greater proportion of the width of focusing region 115 viewing the image elements 117, and character '5' becomes gradually more muted, until the two characters '5' and 'A' become undistinguishable. On further tilting, the character 'A' dominates and forms the foreground 126b of an image 137, with the cross-talk 128 from image elements

116 of character '5' forming the background 127b.

Whilst the device 100 of Figure 2 gives an improved result compared to device 10 of Figure 1, the amount of cross-talk between the two channels 126a, 126b of the flipping image may be unacceptably large for security document applications. It has therefore been found greatly advantageous to select a design in which the two images of the flipping image are contrast-inverted versions of each other, as shown in the embodiment of Figures 3 to 5.

Referring to Figure 3, 4 and 5, there is shown a perspective view of part of a security element 200 having a substrate 211 with upper surface 212 and lower surface (object plane) 213. A first group of image elements 216 and a second group of image elements 217, in the form of gravure-printed lines, are applied to lower surface 213. The image elements 216, 217 are viewable through associated focusing elements (part-cylindrical lenses) 214 applied to the upper surface 212 of the substrate 211.

In the cross-sectional view of Figure 5, image elements 217 are slightly offset from lower surface 213 for reasons of clarity. Image elements 217 of the first group are viewable in a first range of viewing angles from direction 230 to direction 231, whilst image elements 216 of the second group are viewable in a second range of viewing angles from direction 231 to direction 232. There is also a range of viewing angles from direction 231a to 231b, in which the whole of cross-talk region 220 is seen by the viewer.

When the device 200 is viewed from angle 232, a first image 236 is visible, in which the image elements 216 of the first group are brightest and produce the impression of a character '5'. Similarly, when the device 200 is viewed from angle 230, a second image 237 is visible, in which the image elements 217 of the first group are brightest and produce the impression of a contrast-inverted character '5'.

In first image 236, first image elements 216 thus form the foreground region 226a whilst second image elements 217 form a uniform background region 227a. Conversely, in second image 237, second image elements 217 form the foreground region 226b whilst first image elements form a uniform background region 227b. In each case, the cross-talk 228 becomes a uniform background to the image 236, 237 which is desired to be projected.

Referring now to Figures 6 to 8, a method of producing a more complex security element is depicted schematically.

In Figure 6, a monochromatic input image in the form of a portrait 300 is shown. Portrait 300 is a greyscale bitmap having 256 grey levels. This is then converted to a binary bitmap 302, for example by applying a frequency-modulated dithering, error diffusion, or random or stochastic screening. The result is a two-level (binary) bitmap which appears as a tonal portrait due to the spatial distribution of the black pixels. A region with a higher spatial density of black pixels will tend to appear darker, whilst a sparser distribution will appear lighter.

Figure 7 shows a close-up of one region 304 of the bitmap 302, a subregion 306 of which is shown in further close-up. Region 306 includes black pixellated regions 316a, 316b, 316c, 316d, and white pixellated regions 317a, 317b, 317c.

To produce a flipping image with contrast inversion, the black regions are first mapped to a first group of image elements 321a, 321b, 321c and 321d respectively, which are applied to security element 400 as a series of gravure-printed lines with their left-hand edges substantially aligned with left-hand edges of lenses 314. The gravure-printed lines 321a-321d each have a length corresponding to the length of the corresponding black pixellated region 316a-316d.

The white pixellated regions are mapped to a second group of image elements 322a, 322b and 322c respectively, which are applied to security element 400 as a second series of gravure-printed lines with their right-hand edges substantially aligned with right-hand edges of associated lenses 314. Gravure-printed lines 322a-322c each have a length corresponding to the length of the corresponding white pixellated region 317a-317c.

In a first range of viewing angles, a first image 336, substantially reproducing the portrait 300, is seen by a person viewing the device 400 (Figure 8). This includes foreground region 326a from image elements 321a-321d, and uniform background region 327a due to cross-talk from image elements 322a-322c. As the device 400 is tilted through the first range of viewing angles, the amount of reflected light from background region 327a decreases, until the viewer reaches a second range of viewing angles in which background 327a begins to

dominate. In the second range of viewing angles, a second, contrast-inverted image 337 is seen, in which image elements 322a-322c form the foreground 327b, whilst cross-talk from image elements 321a-321d forms the uniform background 326b.

5 In a representative example of a method for manufacturing security elements substantially as described above, a layer of embossable radiation curable ink, for example UV-curable ink, is applied to one side of a 75 micron thick biaxially oriented polypropylene (BOPP) film. The UV-curable ink is then embossed with lens structures 214 or 314 and cured to produce a lenticular
10 substrate with a total thickness of approximately 85 to 90 microns.

 The surface opposite the lens structures is gravure printed with image elements 216, 217 (Figures 4 to 6) or 321a-321d, 322a-322c (Figure 7) of a single colour. A preferred colour for the image elements is one which will produce sufficient contrast yet is difficult to imitate. Blue, magenta, violet or scarlet are
15 preferred colours.

 In a representative gravure printing process, a gravure cylinder engraved with the resolution of 10,160 dpi (smallest incremental change in image element position of 2.5 microns) is used. The corresponding gravure engraving file is a binary digital image of the image elements, compensated for the anticipated
20 growth in size of the digital image elements after they are printed.

 In order to design lenses of appropriate characteristics for the particular substrate thickness being used, the lenses should have a focal point width which is substantially equal to the image element size, or differs from the image element size by a predetermined amount, preferably no more than 20%. A suitable
25 method is described in PCT application PCT/AU2010/000243, and includes a measurement of the width of the image elements.

 Measurement of the characteristics of the gravure-printed lines can be accomplished using a variety of known methods. For example, the average line width can be determined by printing a press calibration template consisting of
30 swatches of lines of a given size and having various densities, where each swatch typically represents a density value from one percent to ninety nine percent. The template is subsequently imaged to film or plate, and printed onto the smooth side of an optical effect substrate. The printed result is then scanned

using a densitometer, or similar tool, to determine the printed line width.

Alternatively, the average line width can be measured directly, for example using a microscope fitted with a reticle displaying increments of measurement. In the direct method, a sample of lines can be measured in each tonal value range, recorded, and their sizes averaged.

In order to obtain lens parameters suitable for image elements of a given width and a substrate of given thickness, the following relation between gauge thickness t and lens parameters s (sag height), w (width), R (radius of curvature), P (the conic constant of the lens) and n (refractive index) is optimised:

$$t = s + \frac{h-w}{A}, \quad (1)$$

with h being the measured half-width of a printed line, and A being given by

$$A = -\text{Tan} \left[\alpha(s) - \text{ArcSin} \left(\frac{\text{Sin}(\alpha(s))}{n} \right) \right], \quad (2)$$

where

$$\alpha(s) = \text{ArcTan} \left(\frac{w}{\sqrt{R^2 - P * w^2}} \right). \quad (3)$$

The thickness t can be optimised with respect to one or more of the lens parameters R , n , P , w and s in the usual way, ie by taking the partial derivatives of the expression in Eq (2) with respect to one or more of those parameters and setting the partial derivatives equal to zero. The resulting system of equations can be solved analytically or numerically in order to find the set of lens parameters which gives the optimal lens thickness.

The optimisation may be a constrained optimisation. For example, for banknote substrates, it is desirable to limit t to a range of values between about 85 microns and 100 microns. Constrained optimisation methods are known in the art.

We have found that as long as the focal point size does not exceed the average width of a printed halftone dot by more than 20%, the quality of the image is not compromised. We have also found that simply producing an arbitrary

non-focussing design severely degrades the image quality, resulting in an objectionably blurred image. The focal point size may also be slightly smaller than the average width, preferably no more than 20% smaller.

5 Many variations of the above embodiments are possible without departing from the spirit and scope of the present invention. For example, the security elements described above may be manufactured separately, and then applied to a security document, or may be applied to a security document in situ, for example within a window or half-window region.

Reference list to figure 1(a)-1(d)- 2(a)-6

Fig. 1(a)

- 5
- ref. 1a.1 = 12-15 microns
 - ref. 1a.2 = 10 microns
 - ref. 1a.3 = 45-50 microns

Fig. 1(d)

- 10
- ref. 1d.1 = Frame 1
 - ref. 1d.2 = Frame 2

Fig. 2(a)

- 15
- ref. 2a.1 = 12-15 microns
 - ref. 2a.2 = 10 microns
 - ref. 2a.3 = 63.50 microns
 - ref. 2a.4 = 75 microns

Fig. 6

- 20
- ref. 6.1 = dithering




Conclusies

1. Een waardepapierelement, omvattende:
een veelvoud aan focuserende elementen,
een eerste groep van beeldelementen, en
een tweede groep van beeldelementen,
5 waarbij elk beeldelement geplaatst is in een voorwerpvlak om door een
focuserend element bekijkbaar te zijn, en geplaatst is op een afstand van het
focuserende element zodat de brandpuntsbreedte van het focuserende
element in het voorwerpvlak in hoofdzaak gelijk is aan de afmeting van het
beeldelement of met een vooraf bepaalde hoeveelheid verschilt van de afmeting
10 van het beeldelement,
waarin beeldelementen van de eerste groep zichtbaar zijn in een eerste
bereik van kijkhoeken en beeldelementen van de tweede groep zichtbaar zijn in
een tweede bereik van kijkhoeken, en
waarin een tweede beeld gevormd in het tweede bereik van kijkhoeken
15 een contrastgeïnverteerde versie is van een eerste beeld gevormd in het eerste
bereik van kijkhoeken.
2. Een waardepapierelement volgens conclusie 1, waarin de
beeldelementen een kleur anders dan zwart hebben.
3. Een waardepapierelement volgens een van de voorgaande conclusies,
20 waarin de beeldelementen een afmetingverdeling of een ruimtelijke verdeling
hebben corresponderende met de grijsniveaus of helderheidsniveaus van een
ingevoerd monochromatisch beeld.
4. Een waardepapierelement volgens een van de voorgaande conclusies,
waarin de beeldelementen gedrukte beeldelementen zijn.

5. Een waardepapierelement volgens conclusie 4, waarin de beeldelementen door diepdrukken, offsetdrukken, rasterdrukken of flexografie gedrukte elementen zijn.
6. Een waardepapierelement volgens een van de conclusies 1 tot en met 4,
5 waarin de beeldelementen door reliëfdrukken gedrukte elementen zijn.
7. Een waardepapierelement volgens een van de voorgaande conclusies, waarin de eerste groep van beeldelementen van een andere kleur is dan de tweede groep van beeldelementen.
8. Een waardepapierelement volgens conclusie 6, waarin de
10 beeldelementen lichtbuigende elementen of subgolflengte buigingsroosterelementen zijn.
9. Een waardepapierelement volgens een van de voorgaande conclusies, waarin de focuserende elementen op één zijde van een transparant of translucide substraat aanwezig zijn.
- 15 10. Een waardepapierelement volgens conclusie 9, waarin de beeldelementen op de tegenoverliggende zijde van het transparante of translucide substraat aanwezig zijn.
11. Een waardepapierelement volgens een van de voorgaande conclusies, waarin de beeldelementen lijnelementen zijn.
- 20 12. Een waardepapierelement volgens een van de voorgaande conclusies, waarin de focuserende elementen lichtbrekende of lichtbuigende deelcilindrische lenzen of zoneplaten zijn.
13. Een waardepapierelement volgens een van de conclusies 1 tot en met 11, waarin de focuserende elementen lichtbrekende of lichtbuigende gedeeltelijk
25 sferische microlenzen of microlenzen met een polygoonbasis zijn.
14. Een waardepapierelement volgens een van de voorgaande conclusies, waarin de vooraf bepaalde hoeveelheid waarmee de brandpuntsbreedte varieert van de afmeting van de beeldelementen niet meer dan 20% van de afmeting van de beeldelementen is.

15. Een waardepapierinrichting bevattende een waardepapierelement volgens een van de conclusies 1 tot en met 14.
16. Een werkwijze voor het vormen van een waardepapierinrichting omvattende de stappen van:
- 5 het verschaffen van een transparant of translucide substraat,
 het aanbrengen van een veelvoud aan focuserende elementen op een eerste oppervlak van het substraat, en
 het aanbrengen van een eerste groep van beeldelementen en een tweede groep van beeldelementen op een beeldoppervlak van het substraat, waarbij elk
10 beeldelement geplaatst is in een voorwerpvak dat door een focuserend element bekijkbaar is, en geplaatst is op een afstand van het focuserende element zodat de brandpuntsbreedte van het focuserende element in het voorwerpvak in hoofdzaak gelijk is aan de afmeting van het beeldelement of met een vooraf bepaalde hoeveelheid verschilt van de afmeting van het
15 beeldelement,
 waardoor beeldelementen van de eerste groep zichtbaar zijn in een eerste bereik van kijkhoeken en beeldelementen van de tweede groep zichtbaar zijn in een tweede bereik van kijkhoeken, en
 waardoor een tweede beeld gevormd in het tweede bereik van kijkhoeken
20 een contrastgeïnverteerde versie is van een eerste beeld gevormd in het eerste bereik van kijkhoeken.
17. Een werkwijze volgens conclusie 16, waarin de beeldelementen een kleur anders dan zwart hebben.
18. Een werkwijze volgens conclusie 16 of conclusie 17, waarin de
25 beeldelementen een afmetingverdeling of een ruimtelijke verdeling hebben corresponderende met de grijsniveaus of helderheidsniveaus van een ingevoerd monochromatisch beeld.
19. Een werkwijze volgens een van de conclusies 16 tot en met 18, waarin de focuserende elementen door reliëfdrukken aangebracht zijn.

20. Een werkwijze volgens conclusie 19, waarin de focusserende elementen door reliëfdrukken in een laag van door straling uithardbare inkt aangebracht op het eerste oppervlak van het substraat gedrukt worden.
21. Een werkwijze volgens een van de conclusies 16 tot en met 20, waarin de
5 beeldelementen aangebracht zijn door een drukwerkwijze.
22. Een werkwijze volgens conclusie 21, waarin de beeldelementen aangebracht worden door diepdrukken, offsetdrukken, rasterdrukken of flexografie.
23. Een werkwijze volgens een van de conclusies 16 tot en met 21, waarin de
10 beeldelementen aangebracht worden door reliëfdrukken.
24. Een waardepapierdocument bevattende een waardepapierelement volgens een van de conclusies 1 tot en met 14, een waardepapierinrichting volgens conclusie 15, of een waardepapierinrichting vervaardigd volgens de werkwijze volgens een van de conclusies 16 tot en met 23.
- 15 25. Een waardepapierdocument volgens conclusie 24, waarin het waardepapierelement of waardepapierinrichting geplaatst is in een venster- of halfvenstergebied van het waardepapierdocument.

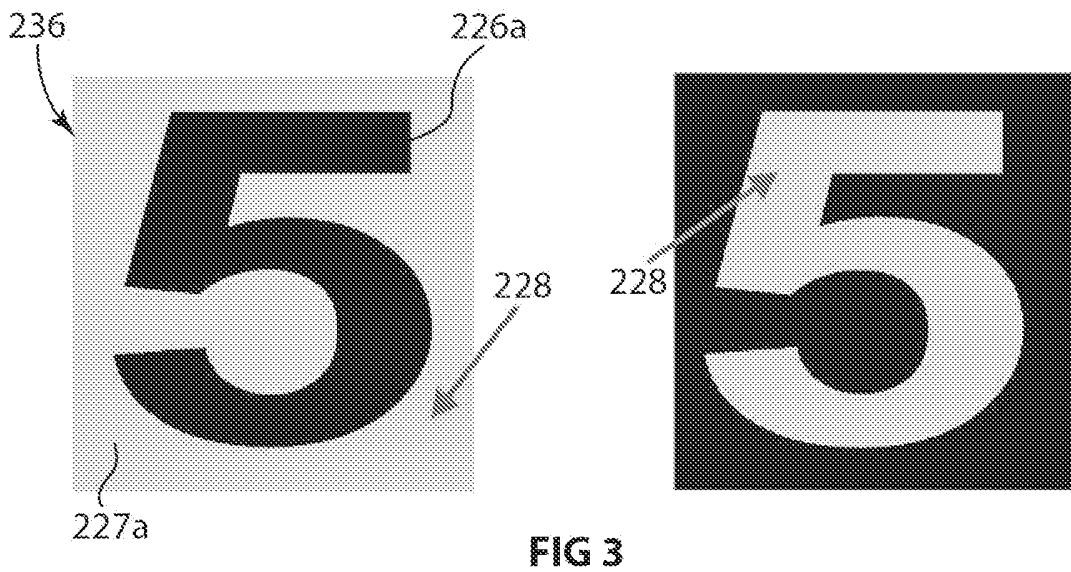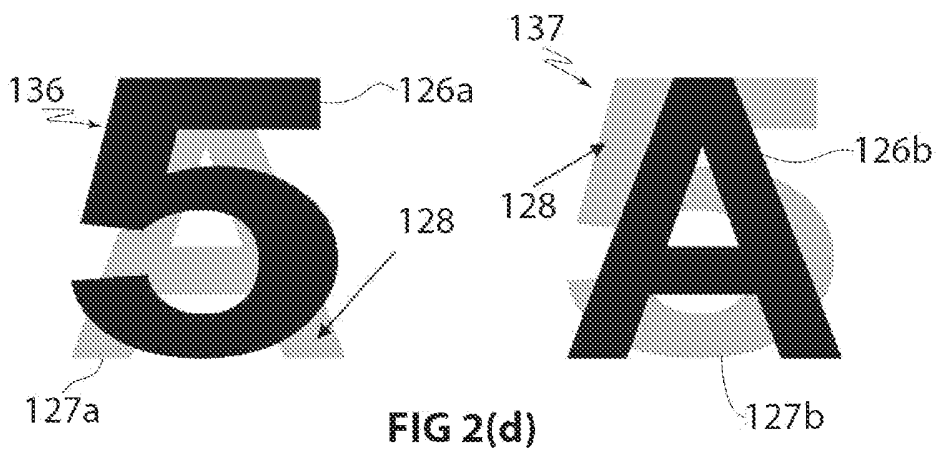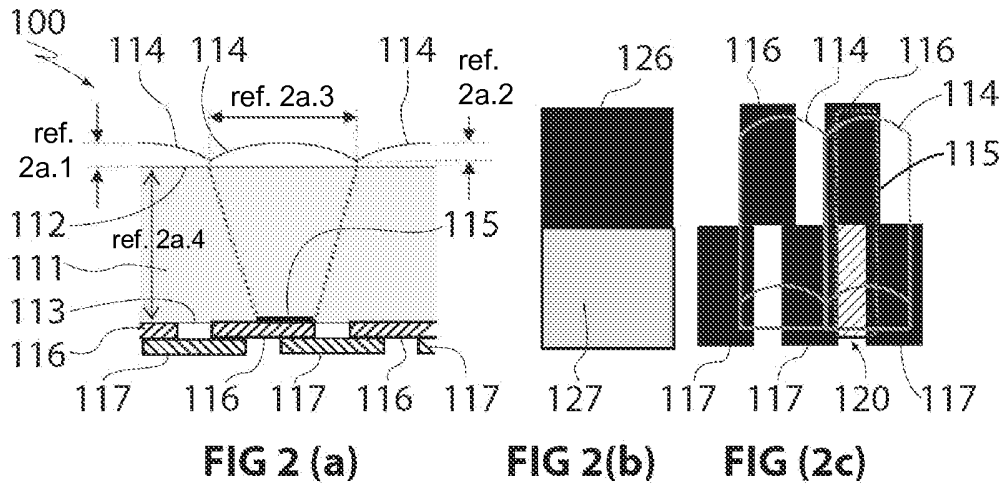

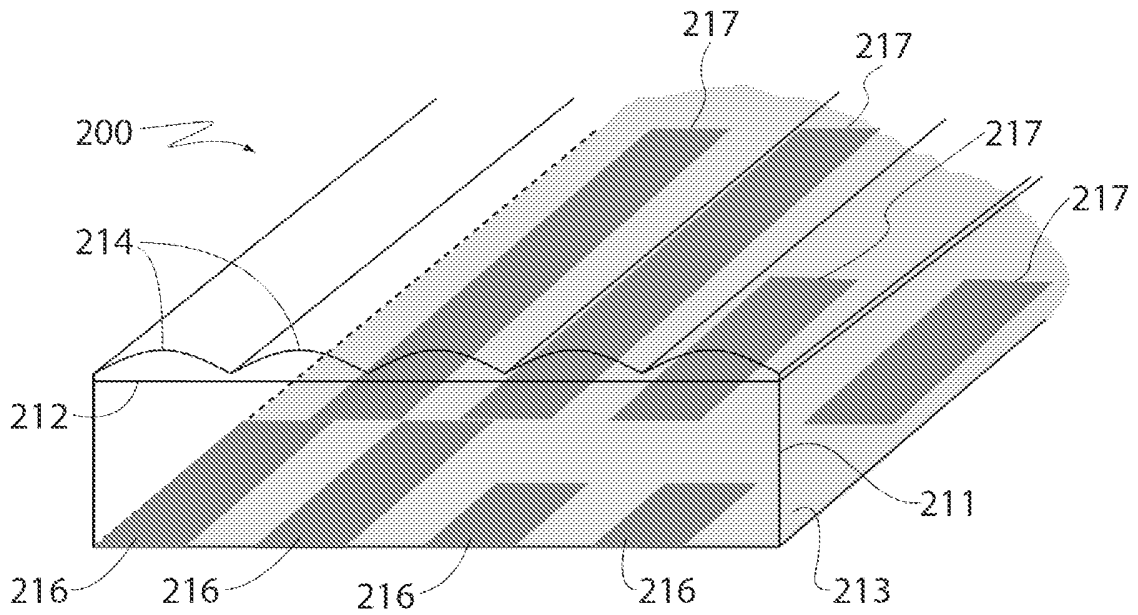


FIG 4

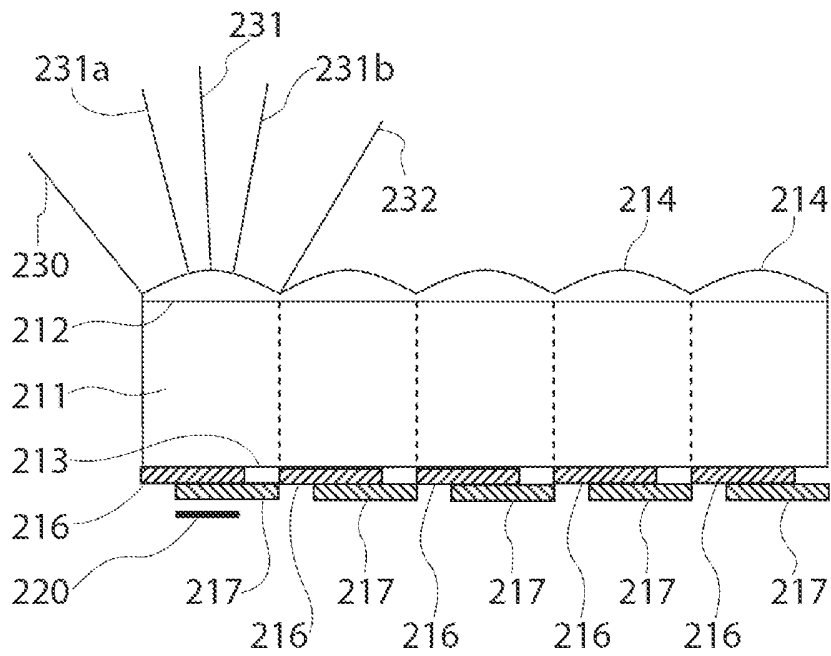
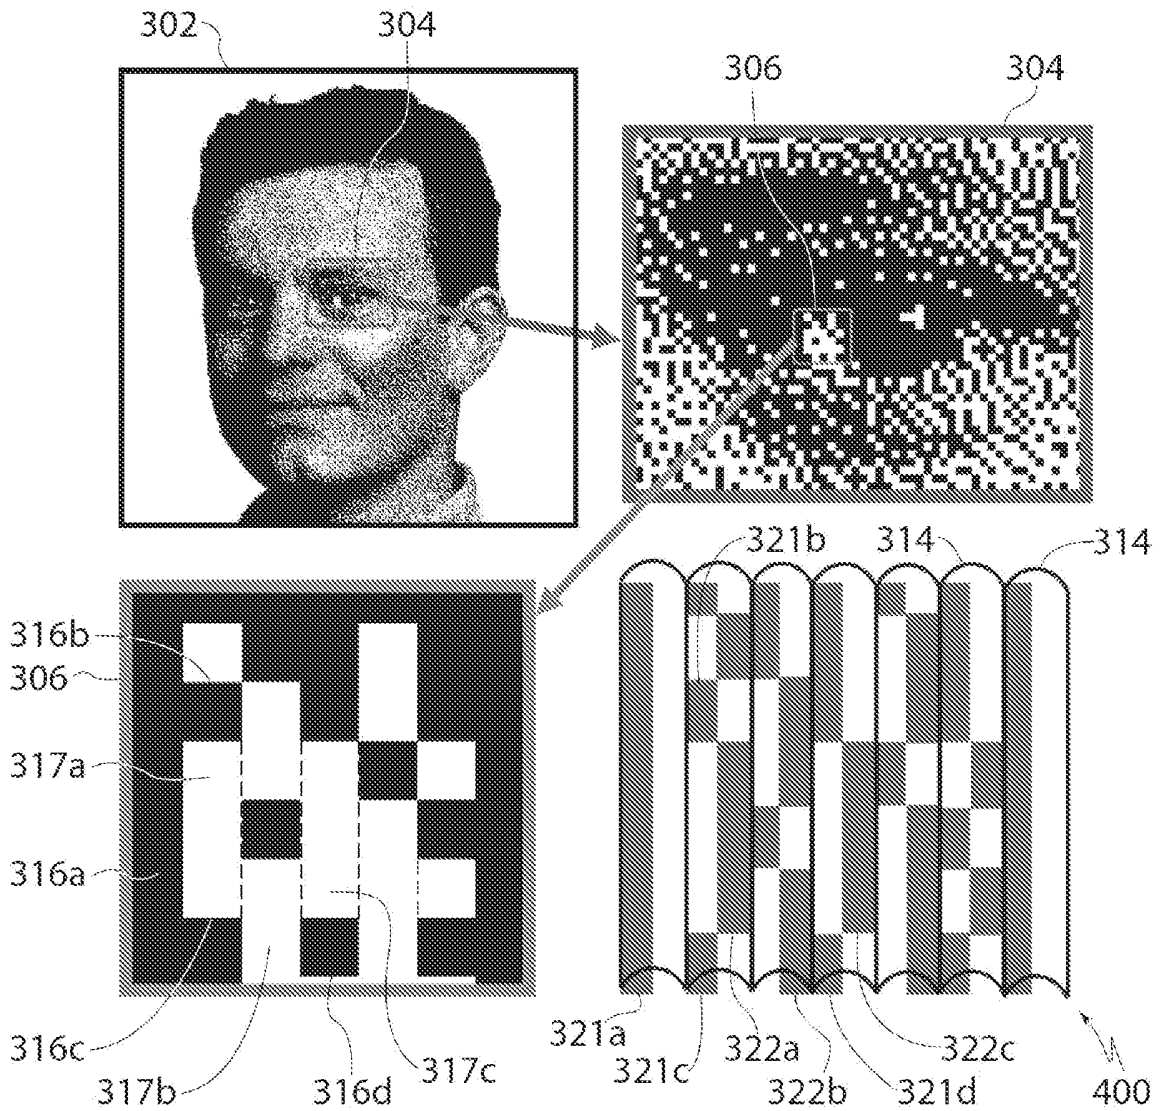
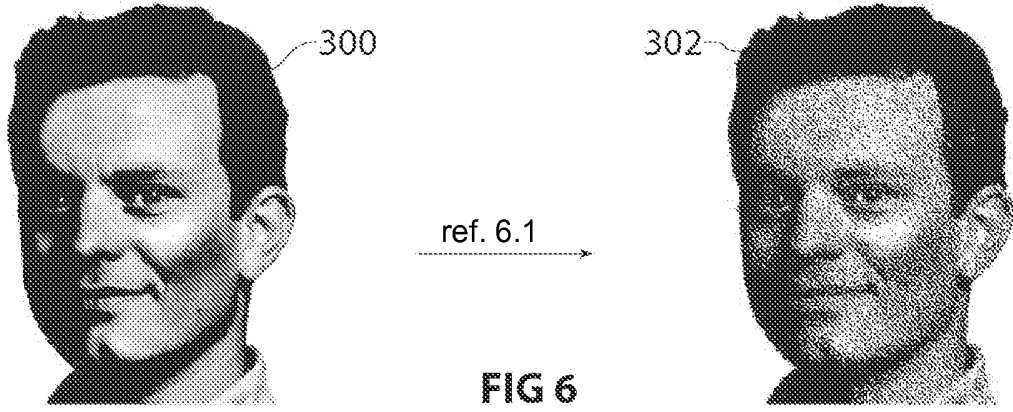


FIG 5



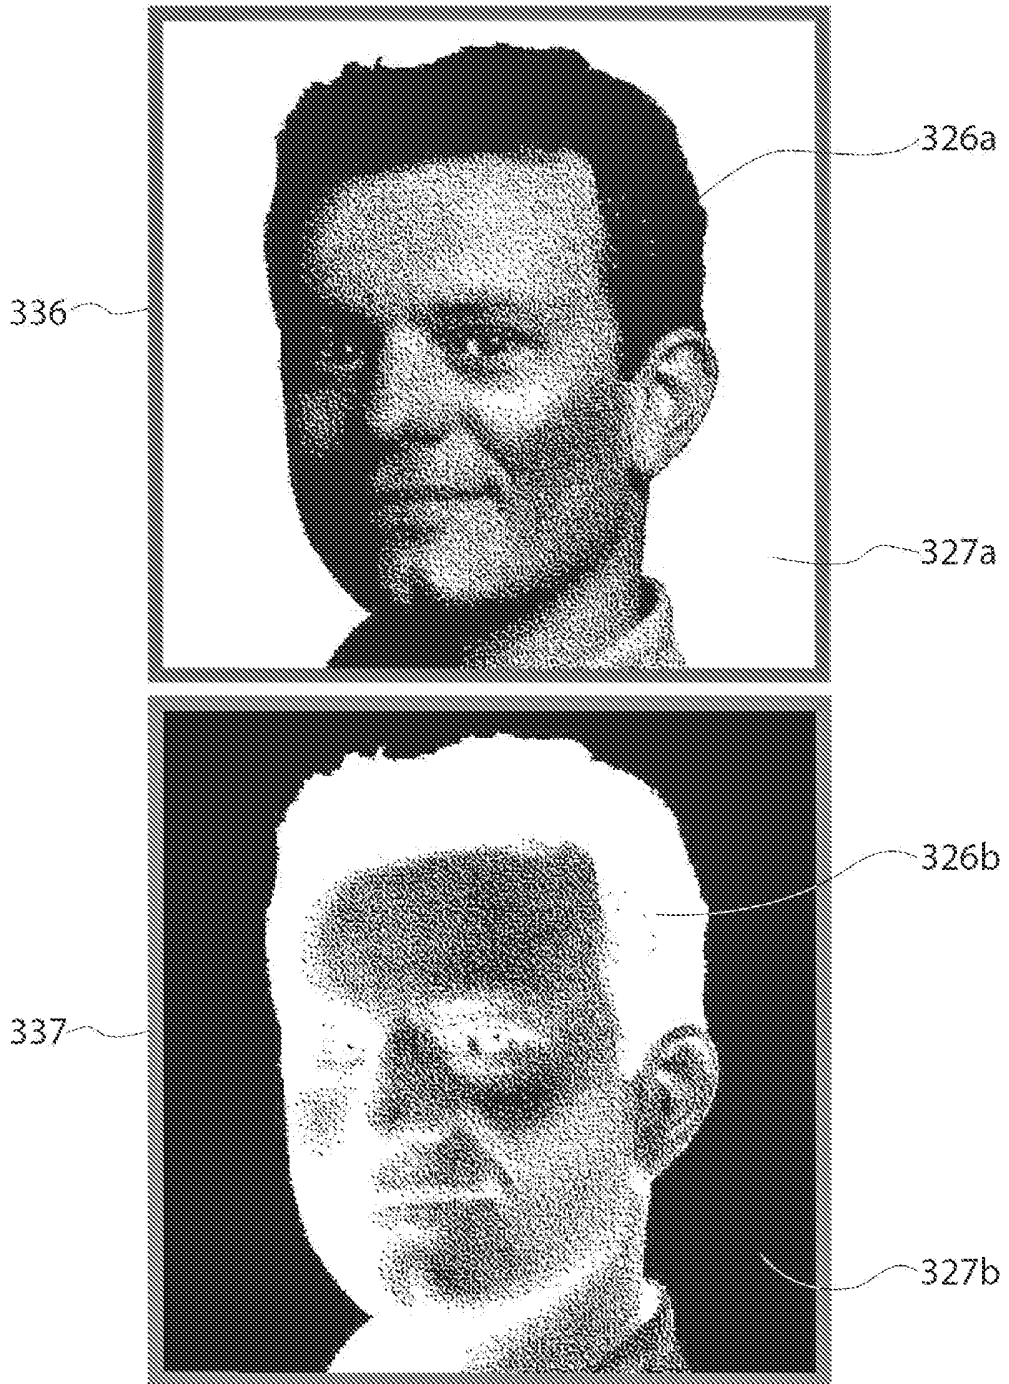


FIG. 8