

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
7 September 2007 (07.09.2007)

PCT

(10) International Publication Number
WO 2007/100924 A1(51) International Patent Classification:
G02B 6/02 (2006.01)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(21) International Application Number:
PCT/US2007/005535

(22) International Filing Date: 2 March 2007 (02.03.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/778,229 2 March 2006 (02.03.2006) US

(71) Applicant (for all designated States except US): THE BOARD OF TRUSTEES OF THE LELAND STANFORD JUNIOR UNIVERSITY [US/US]; 1705 El Camino Real, Palo Alto, CA 94306-1106 (US).

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and

Declaration under Rule 4.17:

— of inventorship (Rule 4.17(iv))


(75) Inventors/Applicants (for US only): DANGUI, Vinayak [FR/US]; 344 Olmstead Road, Apt. 239, Stanford, CA 94305 (US). DIGONNET, Michel J., F. [FR/US]; 1045 College Avenue, Palo Alto, CA 94306 (US). KINO, Gordon S. [US/US]; 867 Cedro Way, Stanford, CA 94305 (US).

Published:— with international search report
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(74) Agent: ALTMAN, Daniel E.; Knobbe Martens Olson & Bear, LLP, 2040 Main Street, Fourteenth Floor, Irvine, CA 92614 (US).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: MULTIPLE-CORE PHOTONIC-BANDGAP FIBER WITH COUPLING BETWEEN THE CORES

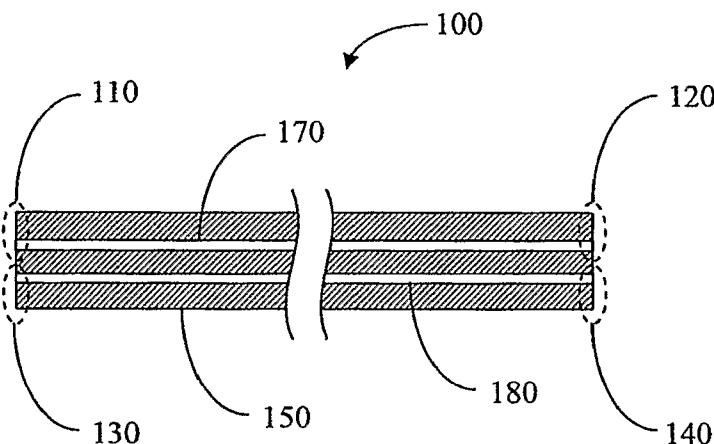

(57) Abstract: An optical coupler (100) includes a first optical port (110), a second optical port (120), a third optical port (130), and a fourth optical port (140). The optical coupler further includes a photonic-bandgap fiber (150) having a cladding (160), a first core (170), and a second core (180). The cladding includes a material with a first refractive index and regions within the cladding. The regions have a second refractive index lower than the first refractive index. The first core is substantially surrounded by the cladding. The first core is optically coupled to the first optical port and to the second optical port. The second core is substantially surrounded by the cladding. The second core is optically coupled to the third optical port and to the fourth optical port. At least a portion of the first core is generally parallel to and spaced from at least a portion of the second core such that the first core is optically coupled to the second core. The first core, the second core, or both the first core and the second core is hollow.

surrounded by the cladding. The second core is optically coupled to the third optical port and to the fourth optical port. At least a portion of the first core is generally parallel to and spaced from at least a portion of the second core such that the first core is optically coupled to the second core. The first core, the second core, or both the first core and the second core is hollow.

WO 2007/100924 A1

MULTIPLE-CORE PHOTONIC-BANDGAP FIBER WITH COUPLING BETWEEN THE CORES

CLAIM OF PRIORITY

[0001] This application claims the benefit of U.S. Provisional Patent Application No. 60/778,229, filed March 2, 2006, which is incorporated in its entirety by reference herein.

BACKGROUND OF THE INVENTION

Field of the Invention

[0002] This application relates generally to optical devices utilizing photonic-bandgap fibers.

Description of the Related Art

[0003] Photonic-crystal fibers have been the subject of much interest and developments in recent years. (See, e.g., J. Broeng *et al.*, "Photonic crystal fibers: A new class of optical waveguides," Optical Fiber Technology, Vol. 5, pages 305-330 (1999); J.C. Knight *et al.*, "Photonic crystals as optical fibers-physics and applications," Optical Materials, Vol. 11, pages 143-151 (1999); R.S. Windeler *et al.*, "Silica-air microstructured fibers: Properties and applications," Optical Fiber Communications conference, San Diego, CA (1999).) Because of their unique properties, including low optical nonlinearities and good temperature stability, hollow-core photonic-bandgap fibers (PBFs) are finding interesting applications as sensors and delivery systems. (See, e.g., V. Dangui *et al.*, "Phase sensitivity to temperature of the fundamental mode in air-guiding photonic-bandgap fibers," Optics Express, Vol. 13, pages 6669-6684 (2005); H.K. Kim *et al.*, "Fiber-optic gyroscope using an air-core photonic-bandgap fiber," Proceeding of SPIE - The International Society for Optical Engineering, 17th International Conference on Optical Fibre Sensor, OFS-17, Vol. 5855, pages 198-200 (2003).) In addition, the propagation loss in hollow-core PBFs is not limited by the core material, and it is expected that the propagation loss can be exceedingly low. The hollow core can be filled with air, or other gases or combinations of gases to generate the desired light-matter interaction. With further research and improvements, hollow-core PBFs could well replace conventional fibers in optical communication links.

[0004] One of the most important components of fiber circuits for these applications is the optical fiber coupler. Fiber circuits utilizing hollow-core PBFs can be readily assembled using conventional (*i.e.*, solid-core) fiber couplers, which can be either butt-coupled or spliced to the hollow-core PBF. However, this approach suffers from various shortcomings. Butt-coupled junctions often do not provide sufficient mechanical stability, and splices of dissimilar fibers can introduce significant amount of back-reflection and associated loss, as well as being somewhat difficult to fabricate. In addition, the use of a conventional fiber coupler introduces a length of solid-core fiber in the hollow-core fiber circuit, thereby re-introducing dispersion and nonlinearity into the fiber circuit and negating some of the benefits of using the hollow-core PBFs.

[0005] Examples of applications in which these effects can be detrimental include, but are not limited to, delivery by a hollow-core PBF of pulse-distortion-free high-peak-power pulses for fluorescence imaging (*see, e.g.*, T.P. Hansen *et al.*, “*All-fiber chirped pulse amplification using highly-dispersive air-core photonic bandgap fiber*,” *Optics Express*, Vol., 11, pages 2832-2837 (2003)) and in hollow-core PBF gyroscopes (*see, e.g.*, R.A. Bergh *et al.*, “*Single-mode Fibre Optic Directional Coupler*,” *Electronics Letters*, Vol. 16, pages 260-261 (1980); J.V. Wright, “*Variational Analysis of Fused Tapered Couplers*,” *Electronics Letters*, Vol. 21, pages 1064-1065 (1985).), where the Kerr effect is advantageously minimized and additional lengths of solid-core fibers are to be avoided.

SUMMARY OF THE INVENTION

[0006] In certain embodiments, an optical coupler is provided. The optical coupler comprises a first optical port, a second optical port, a third optical port, and a fourth optical port. The optical coupler further comprises a photonic-bandgap fiber comprises a cladding, a first core, and a second core. The cladding comprises a material with a first refractive index and regions within the cladding. The regions have a second refractive index lower than the first refractive index. The first core is substantially surrounded by the cladding. The first core is optically coupled to the first optical port and to the second optical port. The second core is substantially surrounded by the cladding. The second core is optically coupled to the third optical port and to the fourth optical port. At least a portion of the first core is generally parallel to and spaced from at least a portion of the second core such

that the first core is optically coupled to the second core. The first core, the second core, or both the first core and the second core is hollow.

[0007] In certain embodiments, a method for using a photonic-bandgap fiber is provided. The method comprises providing a photonic-bandgap fiber comprising a cladding, a first core, and a second core. The cladding comprises a material with a first refractive index and regions within the cladding. The regions have a second refractive index lower than the first refractive index. The first core is substantially surrounded by the cladding. The second core is substantially surrounded by the cladding. The first core is spaced from the second core such that the first core is optically coupled to the second core. The method further comprises coupling light between the first core and the second core.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] Figure 1A schematically illustrates an example optical coupler in accordance with certain embodiments described herein.

[0009] Figure 1B schematically illustrates an example fiber coupler formed by side polishing two hollow-core photonic-bandgap fibers mounted on silica blocks.

[0010] Figure 1C schematically illustrates a cross-sectional view of an example two-core photonic-bandgap fiber (PBF) in accordance with certain embodiments described herein.

[0011] Figure 2 illustrates dispersion curves of the four fundamental modes of an example two-core PBF structure with $R = 0.8A$, $\rho = 0.47A$, and $d = 3A$.

[0012] Figures 3A-3B illustrate contour and logarithmic scale plots, respectively, of the odd mode, x -polarized intensity profile of the two-core PBF ($d = 3A$) at $\lambda = 0.6A$.

[0013] Figures 3C-3D illustrate contour and logarithmic scale plots, respectively, of the even mode, x -polarized intensity profile of the two-core PBF ($d = 3A$) at $\lambda = 0.6A$.

[0014] Figures 3E-3F illustrate contour and logarithmic scale plots, respectively, of the odd mode, y -polarized intensity profile of the two-core PBF ($d = 3A$) at $\lambda = 0.6A$.

[0015] Figures 3G-3H illustrate contour and logarithmic scale plots, respectively, of the even mode, y -polarized intensity profile of the two-core PBF ($d = 3A$) at $\lambda = 0.6A$.

[0016] Figures 4A-4D illustrate the contour intensity profiles of the (i) odd, x -polarized, (ii) even, x -polarized, (iii) odd, y -polarized, and (iv) even, y -polarized modes for $d = 4\Lambda$ at $\lambda = 0.6\Lambda$, respectively.

[0017] Figure 5 illustrates the dispersion curves of the four fundamental modes of another example two-core PBF structure with $R = 0.8\Lambda$, $\rho = 0.47\Lambda$, and $d = 4\Lambda$.

[0018] Figure 6 illustrates the normalized coupling length L_C/Λ as a function of wavelength for an example two-core PBF with $R = 0.8\Lambda$, $\rho = 0.47\Lambda$, and d varying from Λ to 6Λ .

[0019] Figure 7A illustrates the coupling ratios for x - and y -polarization for an example two-core PBF with a crystal period $\Lambda = 2.6$ microns, a bandgap centered around 1.55 microns, $d = 3\Lambda = 7.8$ microns, and a length $L = 10.5$ millimeters.

[0020] Figure 7B illustrates the coupling ratios of Figure 7A in the region of 1522 nanometers.

[0021] Figure 7C illustrates the coupling ratios of Figure 7A in the region of 1569 nanometers.

[0022] Figure 7D illustrates the coupling ratios of Figure 7A in the region of 1599 nanometers.

[0023] Figures 8A and 8B illustrate the transmission as a function of wavelength for both polarizations in example two-core PBFs with lengths of 2 millimeters and 3 millimeters, respectively.

[0024] Figure 9 illustrates the x - and y -polarization coupling lengths for various values of the core radius R as functions of wavelength.

[0025] Figures 10A and 10B schematically illustrate two example two-core PBFs compatible with certain embodiments described herein.

[0026] Figure 11 illustrates the birefringence as a function of the defect radius for the point defect of Figure 10A with a core separation of 4 crystal spatial periods.

[0027] Figure 12 illustrates the birefringence as a function of the defect radius for the point defect of Figure 10A with a core separation of 6 crystal spatial periods.

[0028] Figure 13 illustrates the birefringence as a function of the defect radius for the line defect of Figure 10B with a core separation of 6 crystal spatial periods.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0029] Figure 1A schematically illustrates an example optical coupler 100 in accordance with certain embodiments described herein. The optical coupler 100 comprises a first optical port 110, a second optical port 120, a third optical port 130, and a fourth optical port 140. The optical coupler 100 further comprises a two-core photonic-bandgap fiber (PBF) 150 comprising a cladding 160, a first core 170, and a second core 180. The first core 170 is optically coupled to the first optical port 110 and to the second optical port 120. The second core 180 is optically coupled to the third optical port 130 and to the fourth optical port 140. In certain embodiments, the first optical port 110 comprises a first portion of the first core 170, and the second optical port 120 comprises a second portion of the first core 170. In certain embodiments, the third optical port 130 comprises a first portion of the second core 180, and the fourth optical port 140 comprises a second portion of the second core 180. Persons skilled in the art can identify appropriate means or techniques for splicing or butt-coupling the two-core PBF to other portions of an optical system in accordance with certain embodiments described herein.

[0030] Two hollow-core photonic-bandgap fibers (PBFs) can be coupled to each other by using the same technologies developed for coupling solid-core fibers. For example, as described more fully below, in certain embodiments, a two-core PBF coupler can be fabricated with two hollow cores, each of which is substantially surrounded by a cladding. In certain other embodiments, other technologies can be used to fabricate a hollow two-core PBF coupler, including but not limited to, side-by-side coupling of polished hollow-core PBFs, fusing of two hollow-core PBFs together, and utilizing micro-optic beam splitters. Figure 1B schematically illustrates an example fiber coupler 100 formed by side polishing two hollow-core PBFs 102, 104 mounted on silica blocks. Micropositioners can be used to position both hollow-core PBFs 102, 104 together, and by controlling the distance and/or angle of the PBFs 102, 104, a tunable device can be fabricated.

[0031] Figure 1C schematically illustrates a cross-sectional view of the two-core PBF 150 in a plane generally perpendicular to a longitudinal axis of the two-core PBF 150. The cladding 160 comprises a material 162 with a first refractive index and regions 164 within the cladding 160. The regions 164 have a second refractive index lower than the first

refractive index. Figure 1B does not show all of the regions 164. In certain embodiments, the first core 170 and the second core 180 are substantially identical to one another (e.g., twin-core PBF).

[0032] In certain embodiments, the material 162 comprises silica, while in certain other embodiments, the material 162 comprises another solid material or a multiplicity of solid materials (e.g., high-index glasses such as chalcogenides, or polymers such as PMMA). In certain embodiments, at least one or both of the first core 170 and the second core 180 is hollow. In certain embodiments, the regions 164 are hollow. As used herein, the term “hollow” is used in its broadest sense, including being empty or filled with a gaseous material. For example, the first core 170, the second core 180, and the regions 164 of certain embodiments are filled with a gaseous second material (e.g., air), which can be at atmospheric pressure, at higher pressures, or at lower pressures (e.g., at vacuum).

[0033] Various shapes and patterns of the regions 164 of the cladding 160 are compatible with certain embodiments described herein. The regions 164 can have circular cross-sections (with radius ρ), as schematically illustrated by Figure 1B, but other shapes of these regions 164 (e.g., elliptical, hexagonal, non-geometrical, or non-symmetric) are also compatible with certain embodiments described herein. As schematically illustrated by Figure 1B, the regions 164 each have a respective center and adjacent regions 164 are spaced apart by a center-to-center distance A . In certain embodiments, the regions 164 of the cladding 160 are cylindrical extending along the longitudinal axis of the two-core PBF 150. In certain embodiments, the regions 164 are generally identical to one another and are in a periodic, triangular pattern. In addition, the regions 164 can be in other patterns (e.g., hexagonal patterns, square patterns, non-periodic patterns, etc.).

[0034] In certain embodiments, one or both of the cores 170, 180 has a circular cross-section (with a radius R), as schematically illustrated by Figure 1B. However, other cross-sectional shapes for the first core 170 and the second core 180 are also compatible with certain embodiments described herein. In certain embodiments, the first core 170 and the second core 180 each have a respective center, and the centers are separated along a lattice vector of the regions 164 of the cladding 160. In certain such embodiments in which the cores 170, 180 are centered on two regions 164, the core-to-core separation d is a multiple of

the crystal spatial period A , i.e., $d = mA$, where m is an integer. In certain such embodiments, the integer m is even, while in certain other embodiments, the integer m is odd.

[0035] The first and second refractive indices are selected in certain embodiments such that each of the cores 170, 180 supports a guided mode via the photonic-bandgap effect. This implies that the second refractive index of the regions 164 is lower than the first refractive index of the material 162, and that the difference between these indices is large enough to support guided modes. In certain embodiments, neither of the cores 170, 180 comprises a core ring, while in certain other embodiments, one or both of the first core 170 and the second core 180 comprises a core ring.

[0036] Coupling between the first core 170 and the second core 180 can generally be described by either coupled-mode or normal-mode theory. In coupled-mode theory, when light is launched into the fundamental mode of the first core 170, the evanescent field of the light extends into the adjacent second core 180 and excites the fundamental mode of the second core 180, which results in the energy of the light gradually transferring into the second core 180.

[0037] In normal-mode theory, the structure is viewed as a two-core waveguide, which supports four non-degenerate eigenmodes: an even (or symmetric) mode and an odd (or antisymmetric) mode for each of the two orthogonal linear polarizations. When light of a given polarization is launched into one of the cores 170, 180, it excites the even and odd modes of this polarization with almost equal power. Because these two non-degenerate modes have different phase velocities, as they propagate along the fiber, they accumulate a phase shift. After a certain length, called the coupling length or beat length, this phase shift reaches π radians, so the two modes are out of phase from one another, and they interfere destructively in the original core and constructively in the other core. Thus, at the beat length, the energy of the light has been coupled from one core to the other core. It can be shown that the beat length is proportional to the reciprocal of the effective index mismatch between the even modes and the odd modes.

[0038] To model the coupling properties of the two-core PBF structure, a numerical simulator can be used to calculate the effective indices of the two fundamental eigenmodes supported by the two cores 170, 180. Such numerical simulations, performed

using the Stanford Photonic-Bandgap Fiber (SPBF) code, are described more fully below. The numerical simulations used a finite-difference method to solve a vectorial transverse-magnetic-field equation in a matrix form to quickly and accurately calculate the effective index, electric fields, and magnetic fields of the four fundamental eigenmodes of a fiber of arbitrary index profile. (See, e.g., V. Dangui *et al.*, “*A fast and accurate numerical tool to model the mode properties of photonic-bandgap fibers*,” Optical Fiber Conference Technical Digest, Anaheim, CA (2005).) Only one quadrant of the two-core PBF structure was modeled, and the fields in the other quadrants were reconstructed by symmetry. The code’s boundary conditions imposed that all fields are zero outside of the simulation area. The code was run with a step size of $\lambda/50$ and a window size (for one quadrant) of $11\lambda \times 11\lambda$ (10 rows of cladding regions plus an outer cladding of solid silica about $\lambda/2$ thick). On a 3.2-GHz personal computer, the calculations took about 20 minutes to model 80 modes (core, surface, and cladding modes) of the two-core PBF structure schematically illustrated by Figure 1B at a particular wavelength.

[0039] For a triangular cladding lattice, the modes of a single-core PBF have the symmetries of the point group C_{6v} . However, twin-core fiber structures have two axes of symmetry: one along a line joining both core centers, (termed the y -axis), and the other along a line orthogonal to the line joining both core centers (termed the x -axis) and formed by the points equidistant from both core centers. Consequently, the modes of a two-core PBF belong to the C_{2v} point group, and all their modes can be classified in one of four representations, defined as:

- Representation A1: x -polarized, odd mode;
- Representation A2: y -polarized, odd mode;
- Representation B1: x -polarized, even mode; and
- Representation B2: y -polarized, even mode.

[0040] The four fundamental core modes of the two-core PBF fiber 150 can be calculated across the bandgap, and the coupling lengths between the odd and even modes for each polarization can be determined by the effective index differences between the corresponding representations:

$$L_{C,x}(\lambda) = \frac{\lambda}{2|n_{eff,A1}(\lambda) - n_{eff,B1}(\lambda)|} \text{ and } L_{C,y}(\lambda) = \frac{\lambda}{2|n_{eff,A2}(\lambda) - n_{eff,B2}(\lambda)|}. \quad \text{Eq. (1)}$$

[0041] An example embodiment of a two-core PBF 150 was modeled using a core radius $R = 0.8\lambda$, a hole radius $\rho = 0.47\lambda$ of the regions 164 and core separations d ranging from λ to 6λ in increments of λ . This core radius R corresponds to a structure in which each isolated core 170, 180 is free of surface modes (see, e.g., U.S. Patent No. 7,110,650, U.S. Patent Application Publication No. 2005/0281522A1, and H.K. Kim *et al.*, “*Designing air-core photonic-bandgap fibers free of surface modes*,” IEEE J. Quant. Electron., Vol. 40, pages 551-556 (2004), each of which is incorporated in its entirety by reference herein). The calculated dispersion curves of all the core modes that fall within the bandgap, highlighted according to their symmetry class, are plotted in Figure 2 for a core separation of $d = 3\lambda$. This two-core PBF exhibits a bandgap that extends from 0.56λ to 0.64λ , which are identical to the bandgap for a single-core PBF. Neither the first core 170 nor the second core 180 of the two-core PBF supports surface modes, thereby retaining the surface mode-free properties of the single core structure resulting from the proper choice of core radius, as predicted by the existence criterion presented by M.J.F. Digonnet *et al.*, “*Simple geometric criterion to predict the existence of surface modes in air-core photonic-bandgap fibers*,” Optics Express, Vol. 12, pages 1864-1872 (2004).

[0042] As illustrated by Figure 2, both polarizations exhibit a significant birefringence between the odd and even modes. For example, at a wavelength of $\lambda = 0.6\lambda$, the index difference Δn is approximately 6×10^{-4} for the x -polarization and 4×10^{-4} for the y -polarization. The even modes have a higher effective index than do the odd modes (for this core spacing $d = 3\lambda$), similar to the situation prevailing in solid-core fibers (where even modes have a slower phase velocity than do odd modes). For a typical crystal period of $\lambda = 2.5$ microns, the coupling lengths calculated from these index differences are $L_{c,x} = 1.2$ millimeters and $L_{c,y} = 1.9$ millimeters.

[0043] These values are comparable to the coupling lengths of conventional index-guiding two-core fibers with similar core spacings. This result is somewhat surprising since the cladding field of the fundamental mode is much weaker in an air-core fiber than in a conventional single-mode fiber, so the coupling length was consequently expected to be substantially longer. The direct consequence of this result is that full coupling can be achieved between the cores of a two-core PBF over lengths of the order of one millimeter

(e.g., a coupling length in a range between approximately 1 millimeter and approximately 1.9 centimeters), which means that optical couplers of practical lengths can be fabricated in hollow-core fibers.

[0044] Another property of the two-core PBF illustrated by Figure 2 is that coupling can depend rather strongly on polarization. This feature is not generally desirable in certain embodiments in which the polarization of the incoming signal has a generally unknown and time-dependent state of polarization. However, a side benefit of this strong dependence is that two-core PBFs can be used as wavelength-dependent and polarization-dependent filters, as discussed more fully below.

[0045] Figures 3A-3H illustrates the calculated intensity profiles of the four fundamental modes of the two-core PBF ($d = 3A$) at $\lambda = 0.6A$. Each representation is quasi-gaussian in the neighborhood of a core center, and it exhibits small side lobes localized on the thicker regions of the cladding material (e.g., silica) closest to each core. The main lobes have the same sign for the two even modes, and opposite signs for the two odd modes. For $d = 3A$, $\lambda = 0.6A$, and $A = 2.5$ microns, the coupling length for x -polarized light is about 1.18 millimeters and for y -polarized light is about 1.59 millimeters.

[0046] Both the x -polarized and y -polarized even modes exhibit some energy localized around the mid-point between the cores. This property is shown in Figures 3C and 3G, but is more readily seen in the logarithmic scale plots of Figures 3D and 3H. The closest opposite sidelobes, for both cores, are shown to be linked together in Figure 3D and 3H, resulting in a stronger effective index for the even modes, and decreased coupling length. This property results from the presence of a solid membrane at the mid-point, which is surrounded by hollow regions on both sides and thus constitutes a local index-guided waveguide.

[0047] In contrast, the odd modes carry virtually no energy at the mid-point between the cores, as shown in Figures 3A and 3E. Therefore, the even modes have a larger amount of energy in the solid membrane, which raises their effective index relative to the odd modes. This phenomenon is at the origin of the surprisingly large predicted coupling: the presence of the solid membrane at the mid-point between the cores raises the effective index of the even modes relative to the odd modes, and it does so by a substantial amount because

of the large index difference between the hollow regions and the solid material (e.g., silica). This phenomenon also explains why the even modes of this two-core PBF ($d = 3\Lambda$) have a higher effective index than do the odd modes.

[0048] Based on this physical explanation, the coupling strength can be considerably smaller when there is a hollow region rather than a solid membrane at the center of the fiber. This configuration can be accomplished by changing the core spacing from an odd to an even multiple of Λ . Figures 4A-4D illustrate the contour intensity profiles of the four fundamental modes of the same two-core PBF and at the same wavelength, but for $d = 4\Lambda$. The mid-point between both cores is now located at the center of a hollow region of the cladding, and the differences between the intensity profiles of the odd and even modes are much less pronounced. The dispersion curves of the four modes are therefore much closer to each other than they are for a spacing of $d = 3\Lambda$, as shown in Figure 5. The high-index mid-point solid membrane has been replaced by a lower index material (e.g., air), and the birefringence of all modes is noticeably reduced. For $d = 4\Lambda$, for the x -polarization, the relative position of the dispersion curves for the odd and even modes is reversed from what it is for $d = 3\Lambda$, as shown by a comparison of Figures 2 and 5. The order of the dispersion curves of the odd and even modes remains unchanged for the y -polarization by changing from $d = 3\Lambda$ to $d = 4\Lambda$.

[0049] The polarization dependence of the coupling length in a two-core PBF is a feature not present in conventional two-core fibers. In the latter, due to the azimuthal invariance of the refractive index profile, the fields of the two orthogonally polarized fundamental modes differ only very slightly under a 90-degree rotation. Hence, the mode overlap from one fiber core to the other depends extremely weakly on polarization. This behavior can be seen mathematically in the expression of the coupling coefficient κ defined as $\kappa = \pi/(2L_C)$, and is given by:

$$\kappa = \omega \epsilon_0 \frac{\iint_{\text{coupler}} n^2(x, y) \bar{E}_1 \cdot \bar{E}_2^* dx dy}{\iint_{\text{coupler}} u_z \cdot (\bar{E}_1^* \times \bar{H}_1 + \bar{E}_1 \times \bar{H}_1^*) dx dy} \quad \text{Eq. (2)}$$

where \bar{E}_1 and \bar{H}_1 are the fields of the fundamental mode for the first core and \bar{E}_2 and \bar{H}_2 are the fields of the fundamental mode for the second core. In a single-mode solid-core fiber,

both solutions for the orthogonal polarizations are deduced from each other through a 90-degree rotation, so both the numerator and the denominator of Equation (2) are polarization-independent. This results in the coupling coefficient κ being essentially independent of polarization. In contrast, in a two-core PBF, the fundamental modes belong to a two-dimensional representation and are not invariant under a 90-degree rotation. The field distribution of one polarization mode cannot be derived from the distribution of the other polarization mode through a simple rotation, and the field overlap integral in the numerator of Equation (2) is polarization-dependent.

[0050] Figure 6 illustrates the normalized coupling length L_C/Λ calculated against the normalized wavelength λ/Λ for both the x - and y -polarizations and increasing values of the core separation. The coupling length increases rapidly (e.g., approximately exponentially) as the core separation increases, because the mode energy decreases rapidly away from the center of a given core. The coupling length is found to increase roughly by a factor of 3 to 5 for every increase in d of Λ . For example, at $0.6\lambda/\Lambda$, for x -polarization, L_c increases from 1.2 millimeters for $d = 3\Lambda$ to 5.5 millimeters for $d = 4\Lambda$. This rate is consistent with the fundamental core mode field intensity spatial attenuation in a single-core PBF of similar parameters. The polarization dependence of the coupling length is again significant, even for larger core separations. For a separation of one period ($d = \Lambda$), the two cores strongly overlap with each other and form a single, roughly “8”-shaped core elongated along the y -axis, which explains the reduced polarization dependence. The anomalous behavior for $d = 2\Lambda$ is also believed to be caused by overlap between the cores. For $d = 3\Lambda$, which is the shortest possible separation along the y -axis without core overlap, the wavelength dependence is relatively strong. Across the bandgap, the coupling length varies by about a factor of about 4.

[0051] Two-core PBFs also exhibit different modal behavior than conventional two-core fibers. In typical fiber coupler structures made with index-guiding fibers, the even mode exhibits a higher effective index than does the odd mode. In contrast, due to the presence of either a hollow region or a solid material at the middle point between both fiber cores (depending on the core separation d), the parity of d/Λ determines the modal behavior of the two-core PBF structures. For even values of d/Λ , the middle point between the two

cores is at a hollow region, and for odd values of d/λ , the middle point between the two cores is located in the solid cladding material. Depending on the parity of d/λ , the relative positions of the odd and even fundamental core modes of the two-core PBF structure are exchanged, as shown in Figures 2 and 5. For odd values of d/λ , the even fundamental mode has a higher effective index than does the odd mode, regardless of polarization, as in the case of a conventional index-guiding two-core fiber. However, for even values of d/λ , the odd fundamental mode has a higher effective index than the even mode for the x -polarization, while that behavior is opposite for the y -polarization.

[0052] As shown in Figures 3C and 3G, the even x -polarized mode of representation A2 shows a linking of the closest sidelobes across the y -axis. The even y -polarized mode of representation B2 exhibits some energy located within the solid membrane located at the mid-point. The combination of solid material at the mid-point with hollow regions on both sides forms a waveguide locally, and the even modes of the two-core PBF structure can concentrate a larger amount of energy in the solid membrane, thus raising their effective index. This observation explains the unique PBF feature of the even modes of the two-core PBF structure having a higher effective index than does the odd modes for odd values of the core-to-core spacing parameter d/λ . For even values of the core-to-core spacing parameter d/λ , the mid-point between both cores is located in a hollow region, and the differences between odd and even mode intensity profiles are much smaller.

[0053] In certain embodiments, the two-core PBF can be used as a four-port fiber coupler 100, as schematically illustrated by Figure 1A. The optical coupler 100 can be only a few millimeters in length and can provide full coupling between the ports. Figure 7A illustrates the performance of an example optical coupler 100 by plotting the coupling ratio for a two-core PBF 150 with a crystal period $\lambda = 2.6$ microns, such that the bandgap is centered around 1.55 microns, with $d = 3\lambda = 7.8$ microns and a length $L = 10.5$ millimeters. The coupling ratio is plotted for both x - and y -polarized light. In certain embodiments having a sizable wavelength dependence, the optical coupler 100 can be used as a wavelength-division multiplexer with the same input polarization restrictions. The wavelength separation between 0 and 100% coupling ranges from about 18 nanometers to about 32 nanometers for the x -polarization, and from about 26 nanometers to about 42 nanometers for the y -polarization.

polarization. To be useable over a broad range of wavelengths, in certain embodiments, the input polarization is advantageously maintained to be stable, for example by circuits using polarization-maintaining fiber.

[0054] In certain embodiments, the two-core PBF 150 can be used as a polarization-independent directional optical coupler at any of the wavelengths where the two curves of Figure 7A intersect. For example, the two-core PBF 150 can be used as an approximately 3-dB fiber coupler at 1584 nanometers (point A of Figure 7A), and an approximately 100% coupler at 1522 nanometers (point B of Figure 7A). In the vicinity of point B, the coupling ratio exceeds 90% over a bandwidth of about 5 nanometers. Either the wavelengths or the coupling ratios at the crossing points can be adjusted to desired values by proper selection of the length of the two-core PBF 150.

[0055] The polarization dependence of the two-core PBF 150 can also be exploited in certain embodiments to be used as either a fiber polarizer, a polarization splitter at discrete wavelengths, or a polarization sensor. Based on the curves of Figure 7A, at 1569 nanometers (point C of Figure 7A, magnified in Figure 7C), x-polarized light comes out of one core or port and y-polarized light comes out of the other core or port. The 10-dB and 20-dB bandwidths are approximately 10 nanometers and 4 nanometers, respectively. Similar bandwidths are obtained at 1599 nanometers (point D of Figure 7A, magnified in Figure 7D), except that the roles of the polarizations are switched.

[0056] In certain embodiments, the center wavelengths can be adjusted by selecting the coupler length appropriately. Figures 8A and 8B illustrate the transmission as a function of wavelength for both polarizations in example two-core PBFs with lengths of 2 millimeters and 3 millimeters, respectively. Other geometrical parameters can also be adjusted to design a coupler with the desired coupling properties.

[0057] In certain embodiments, one or both of the cores has a thin ring of the first material (e.g., silica) surrounding the core. A calculation of the coupling length for a two-core PBF with a core ring of thickness $t = 0.025A$ showed a polarization-dependent change in coupling. For example, for $d = 3A$, $\lambda = 0.6A$, and $A = 2.5$ microns, the coupling length for x-polarization decreased from 1.2 millimeters to 0.6 millimeters by adding the core ring, while the coupling length for y-polarization increased from 1.9 millimeters to 2.9 millimeters. This

change may have originated from a modification in the mode field distribution towards the edge of the core when a ring is present, which modifies the overlap between the core modes and thus the coupling. Similarly, increasing the air-filling ratio of the fiber increases the coupling length. For example, for $d = 3A$ and at $\lambda = 1.5$ microns at the center of the bandgap, when the cladding hollow region radius was increased from $\rho = 0.47A$ to $\rho = 0.49A$ (a typical value for commercial PBFs), the x -polarization coupling length increased from 1.2 millimeters to 2.7 millimeters and the y -polarization coupling length increased from 1.9 millimeters to 2.9 millimeters.

[0058] In certain embodiments, the wavelength at which the x -polarization and y -polarization coupling lengths intersect (e.g., the wavelength at which the two-core PBF can be used as a polarization-independent directional coupler) can be selected by tailoring the core radius. This behavior is illustrated by Figure 9 which shows the x - and y -polarization coupling lengths for various values of the core radius R as functions of wavelength. In certain embodiments in which the coupling length as a function of wavelength has an inflection point at which the slope is zero, the two-core PBF can be used as a broadband polarizer over a range of wavelengths.

[0059] Figures 10A and 10B schematically illustrate two example two-core PBFs 150 compatible with certain embodiments described herein. Each of these structures can increase the coupling coefficient for larger core separations. Figure 10A schematically illustrates a point defect 190 between the two cores 170, 180 and Figure 10B schematically illustrates a line defect 192 between the two cores 170, 180. In certain embodiments, the propagation properties of the two-core PBF 150 are strongly affected by the structure of the defect between the two cores 170, 180.

[0060] Figure 11 illustrates the birefringence as a function of the defect radius for the point defect 190 of Figure 10A with a core separation of 4 crystal spatial periods. An increase of the coupling coefficient by about a factor of 20 is possible, and discontinuities due to interactions with surface modes are supported by the defect. Figure 12 illustrates the birefringence as a function of the defect radius for the point defect 190 of Figure 10A with a core separation of 6 crystal spatial periods. An increase of the coupling coefficient by about a

factor of 10 is possible, and there is a high sensitivity to the defect radius when there are interactions with surface modes.

[0061] Figure 13 illustrates the birefringence as a function of the defect radius for the line defect 192 of Figure 10B with a core separation of 6 crystal spatial periods. An increase of the coupling coefficient by about a factor of 1000 is possible, and there is a high sensitivity to the defect size in specific areas. In certain embodiments, the two-core PBF is operated at a wavelength at which the transmission is very strongly dependent on the defect size. The signal transmitted through the two-core PBF in certain such embodiments would exhibit a strong variation due to any perturbation of the defect size, and could serve as a sensor for any effects (e.g., pressure waves) that would perturb the defect size.

[0062] Various embodiments of the present invention have been described above. Although this invention has been described with reference to these specific embodiments, the descriptions are intended to be illustrative of the invention and are not intended to be limiting. Various modifications and applications may occur to those skilled in the art without departing from the true spirit and scope of the invention as defined in the appended claims.

WHAT IS CLAIMED IS:

1. An optical coupler comprising:
 - a first optical port;
 - a second optical port;
 - a third optical port;
 - a fourth optical port; and
 - a photonic-bandgap fiber comprising:

a cladding comprising a material with a first refractive index and regions within the cladding, the regions having a second refractive index lower than the first refractive index;

a first core substantially surrounded by the cladding, the first core optically coupled to the first optical port and to the second optical port; and

a second core substantially surrounded by the cladding, the second core optically coupled to the third optical port and to the fourth optical port, wherein at least a portion of the first core is generally parallel to and spaced from at least a portion of the second core such that the first core is optically coupled to the second core, wherein the first core, the second core, or both the first core and the second core is hollow.

2. The optical coupler of Claim 1, wherein the regions are hollow.
3. The optical coupler of Claim 1, wherein the regions each have a respective center and adjacent regions are spaced apart in a periodic pattern having a spatial period.
4. The optical coupler of Claim 3, wherein the first core and the second core have a center-to-center distance that is substantially equal to a multiple of the spatial period.
5. The optical coupler of Claim 4, wherein the multiple is an even integer.
6. The optical coupler of Claim 4, wherein the multiple is an odd integer.
7. The optical coupler of Claim 1, wherein the first core does not support surface modes and the second core does not support surface modes.
8. The optical coupler of Claim 1, wherein the optical coupling between the first core and the second core is polarization-dependent.

9. The optical coupler of Claim 1, wherein the first core and the second core photonic-bandgap fiber has a coupling length in a range between approximately 1 millimeter and approximately 1.9 centimeters.

10. The optical coupler of Claim 1, wherein one of the first core and the second core comprises a core ring.

11. The optical coupler of Claim 10, wherein each of the first core and the second core comprises a core ring.

12. The optical coupler of Claim 1, wherein the cladding comprises a defect between the first core and the second core.

13. The optical coupler of Claim 12, wherein the defect comprises a point defect on a central hole of the cladding.

14. The optical coupler of Claim 12, wherein the defect comprises a linear defect.

15. A method for using a photonic-bandgap fiber, the method comprising:
providing a photonic-bandgap fiber comprising:

a cladding comprising a material with a first refractive index and regions within the cladding, the regions having a second refractive index lower than the first refractive index;

a first core substantially surrounded by the cladding;

a second core substantially surrounded by the cladding, wherein the first core is spaced from the second core such that the first core is optically coupled to the second core; and

coupling light between the first core and the second core.

16. The method of Claim 15, further comprising using the photonic-bandgap fiber as a polarization-dependent optical coupler.

17. The method of Claim 15, further comprising using the photonic-bandgap fiber as a polarization-independent optical coupler.

18. The method of Claim 15, further comprising using the photonic-bandgap fiber as a wavelength-division multiplexer.

19. The method of Claim 15, further comprising using the photonic-bandgap fiber as a fiber polarizer.

20. The method of Claim 5, further comprising using the photonic-bandgap fiber as a polarization splitter.

Figure 1A:

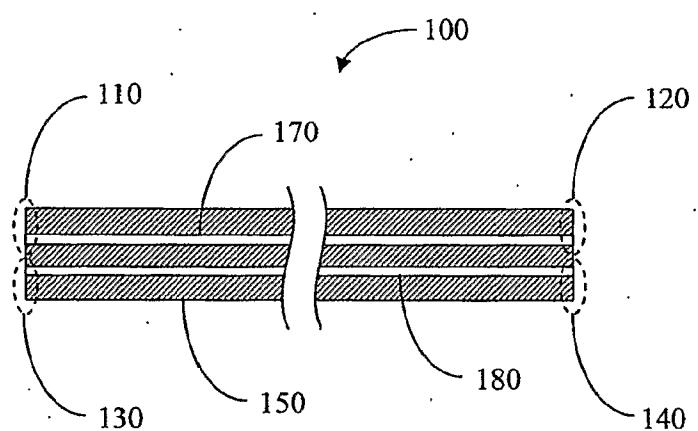


Figure 1B:

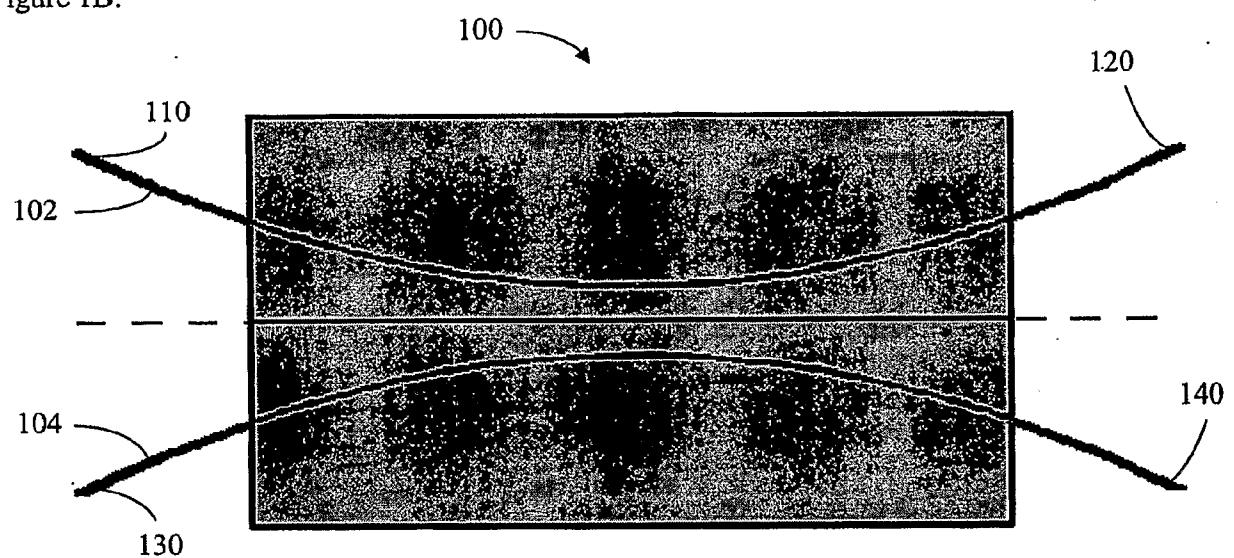


Figure 1C:

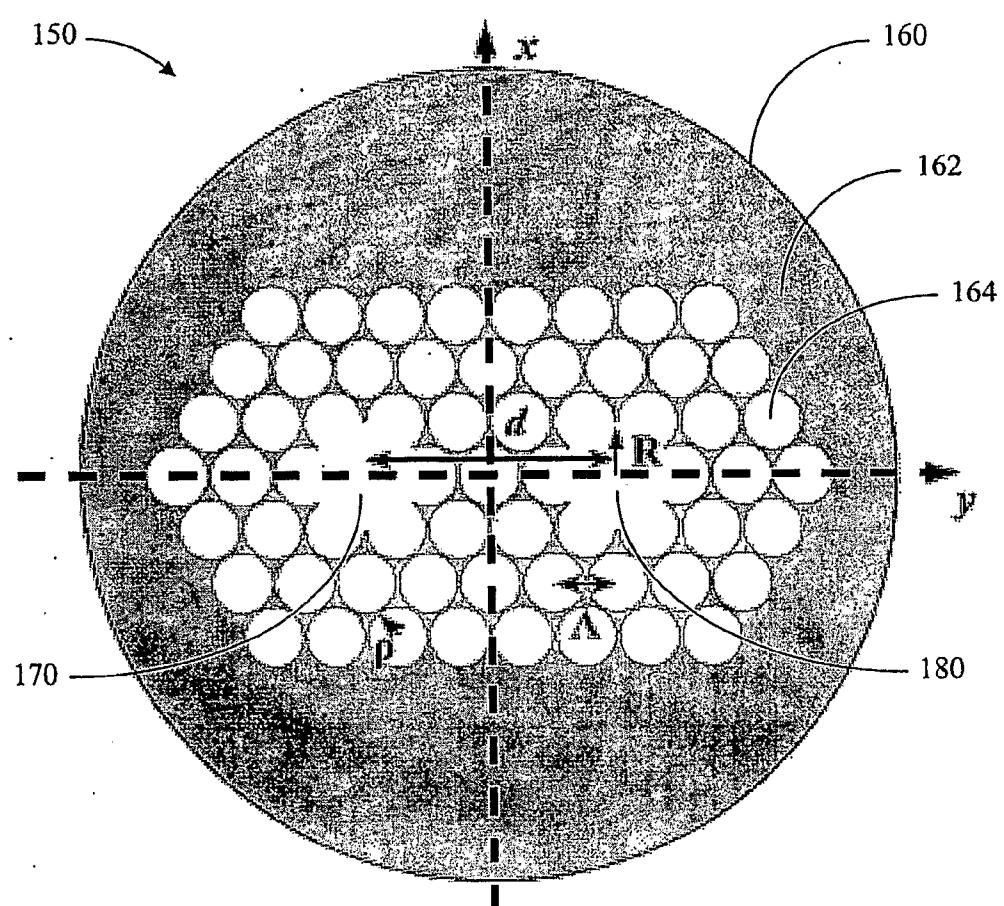


Figure 2:

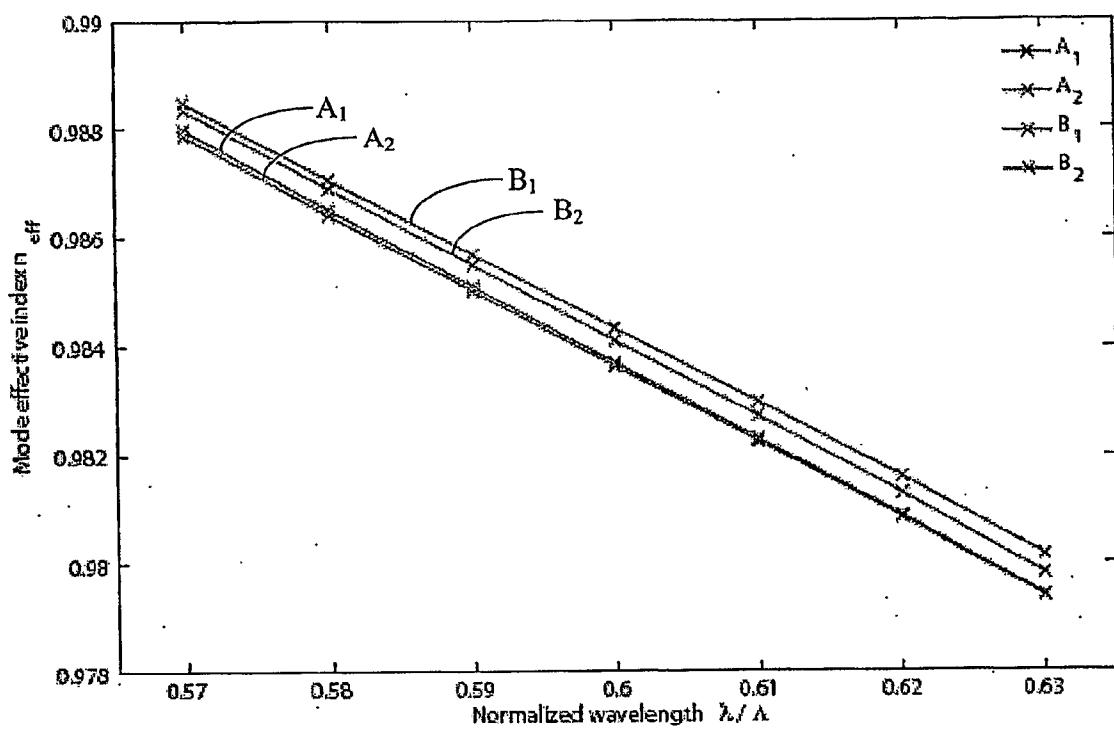


Figure 3A:

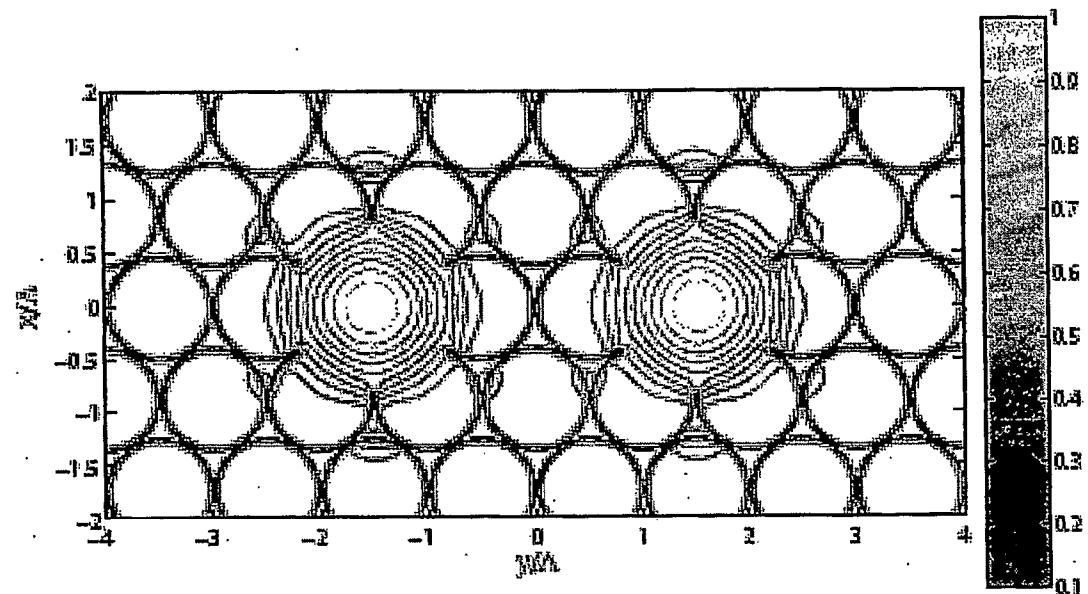


Figure 3B:

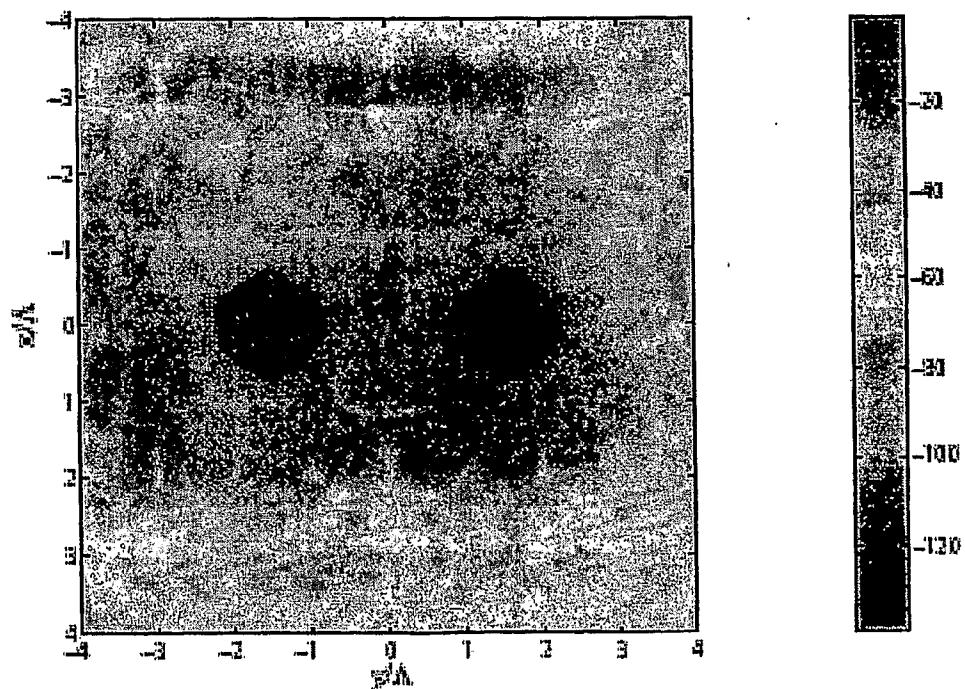


Figure 3C:

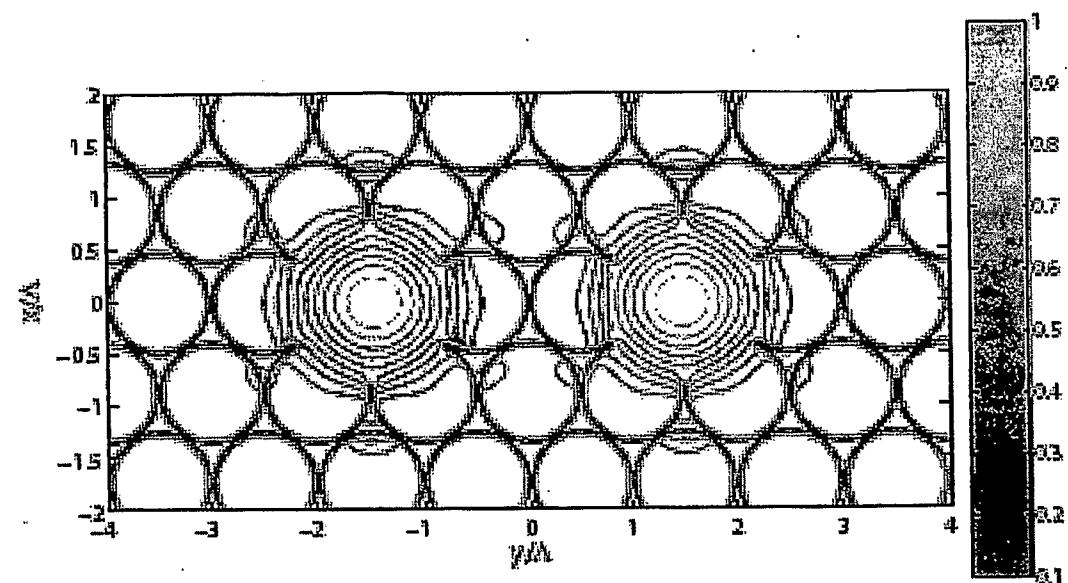


Figure 3D:

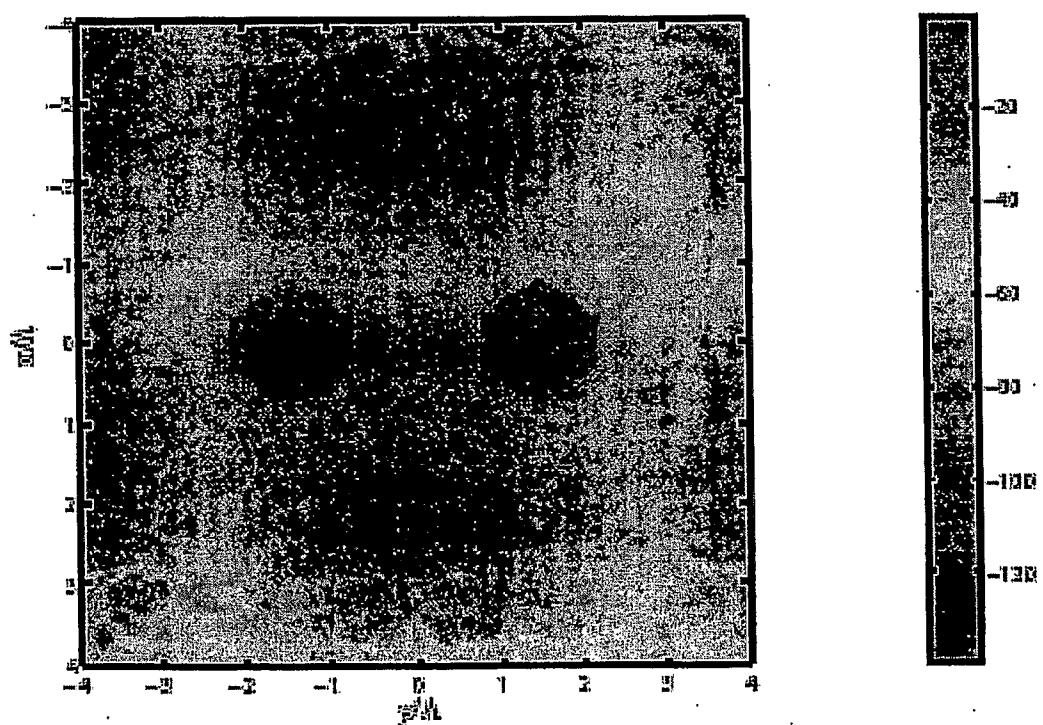


Figure 3E:

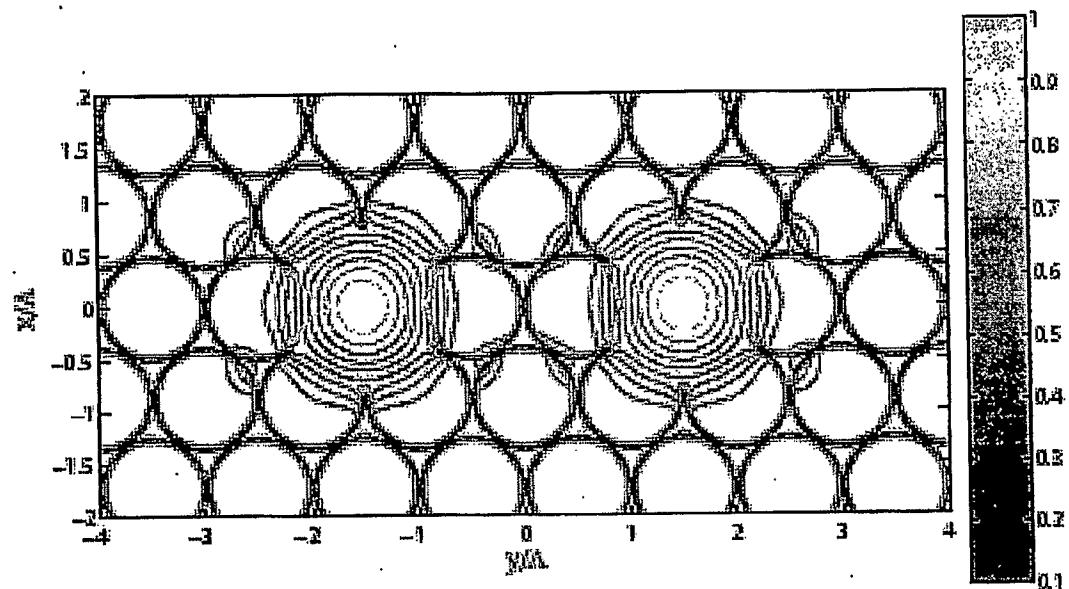


Figure 3F:

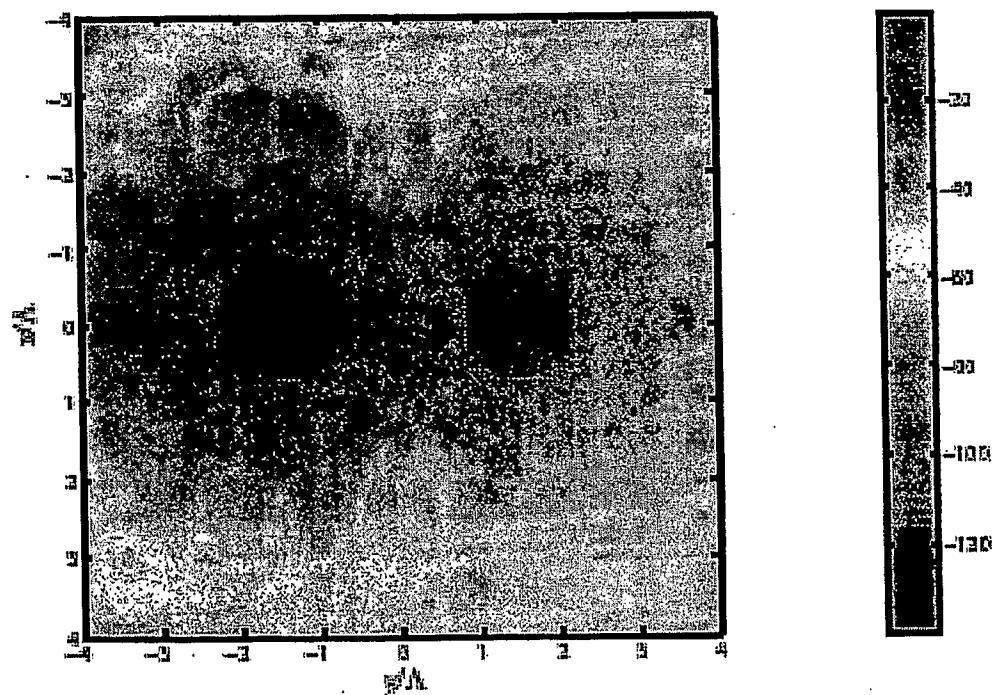


Figure 3G:

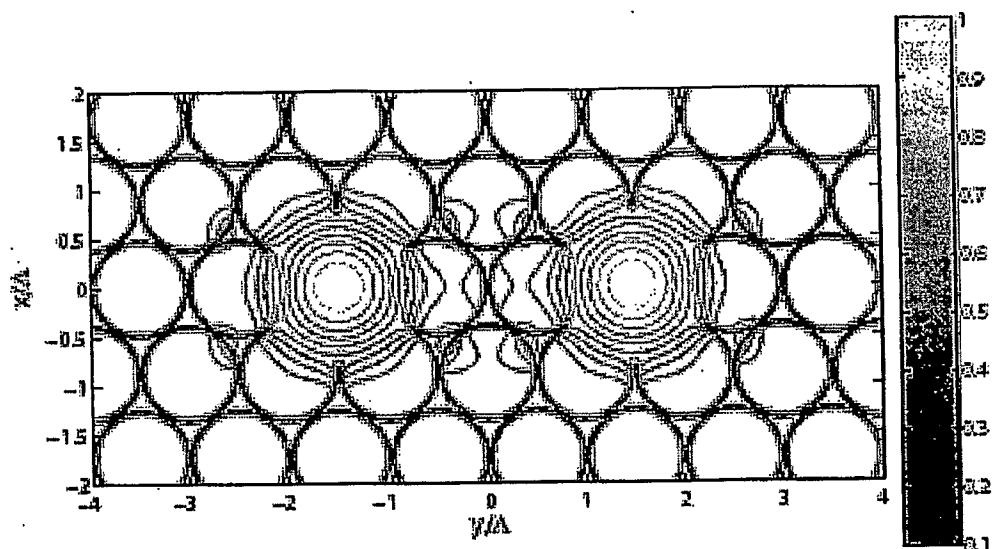


Figure 3H:

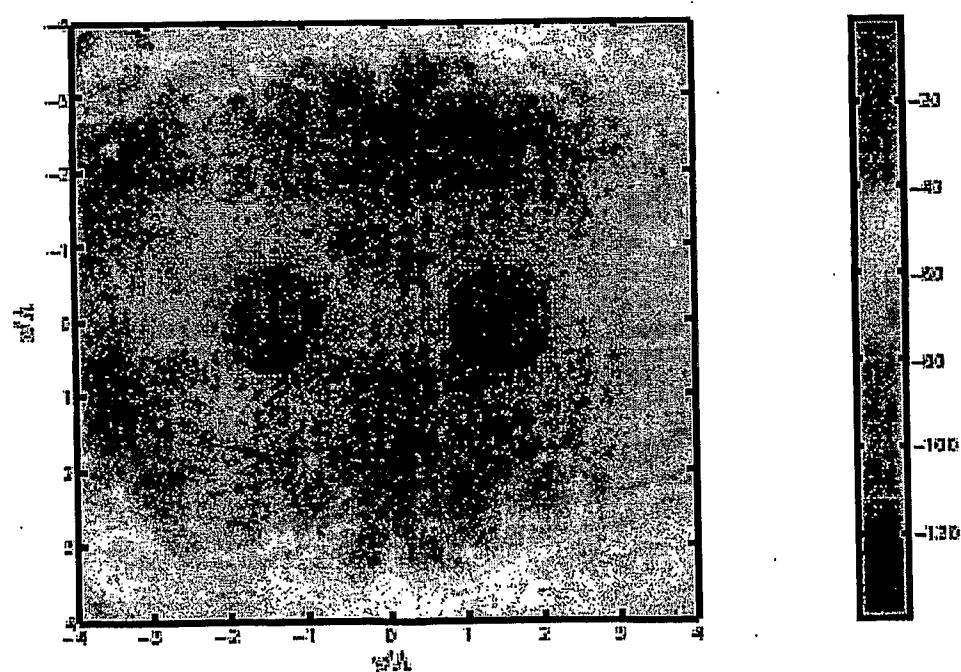


Figure 4A:

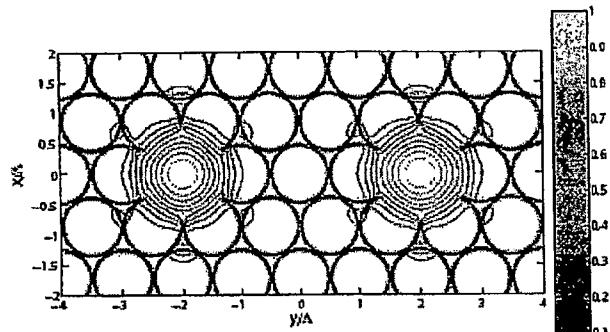


Figure 4B:

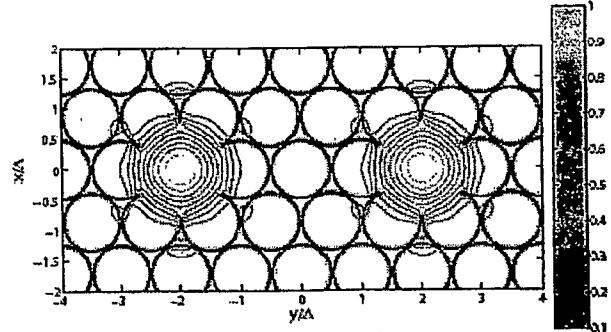


Figure 4C:

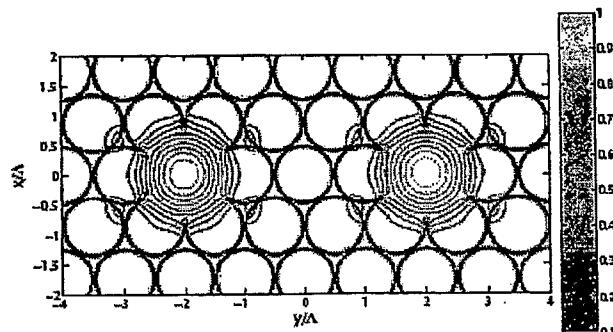


Figure 4D:

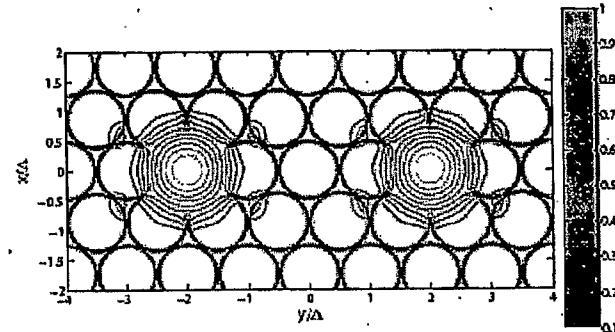


Figure 5:

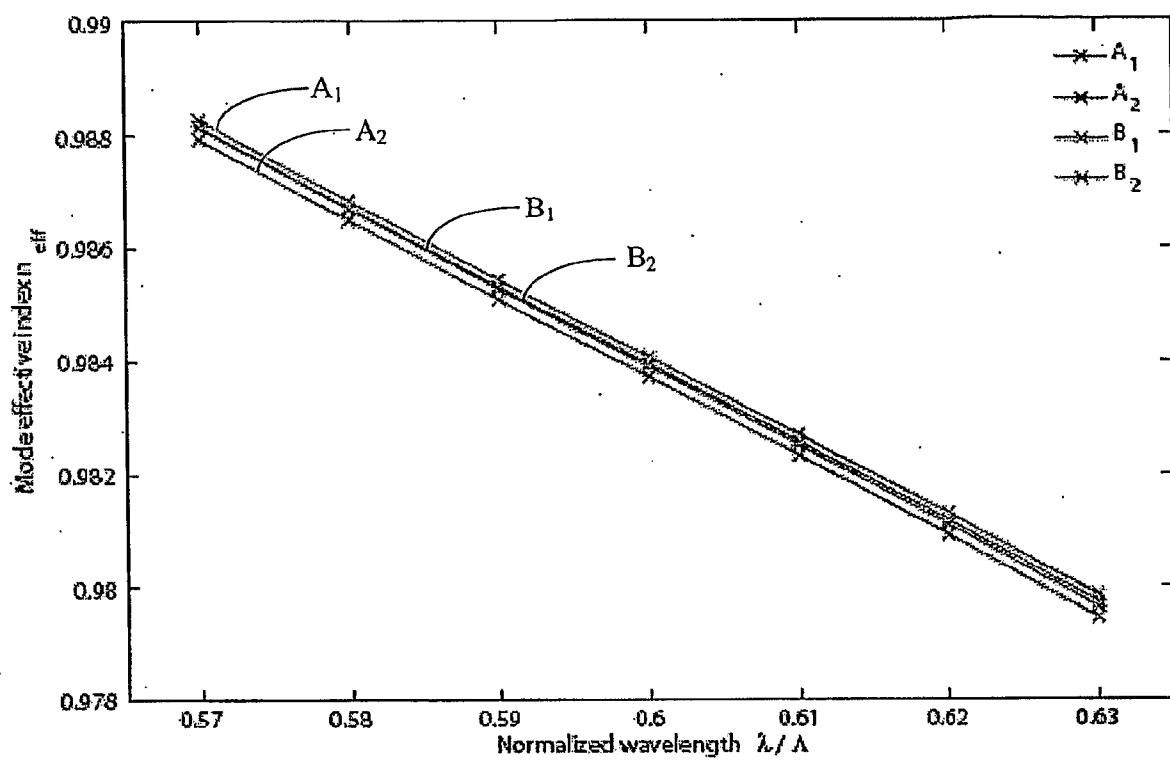


Figure 6:

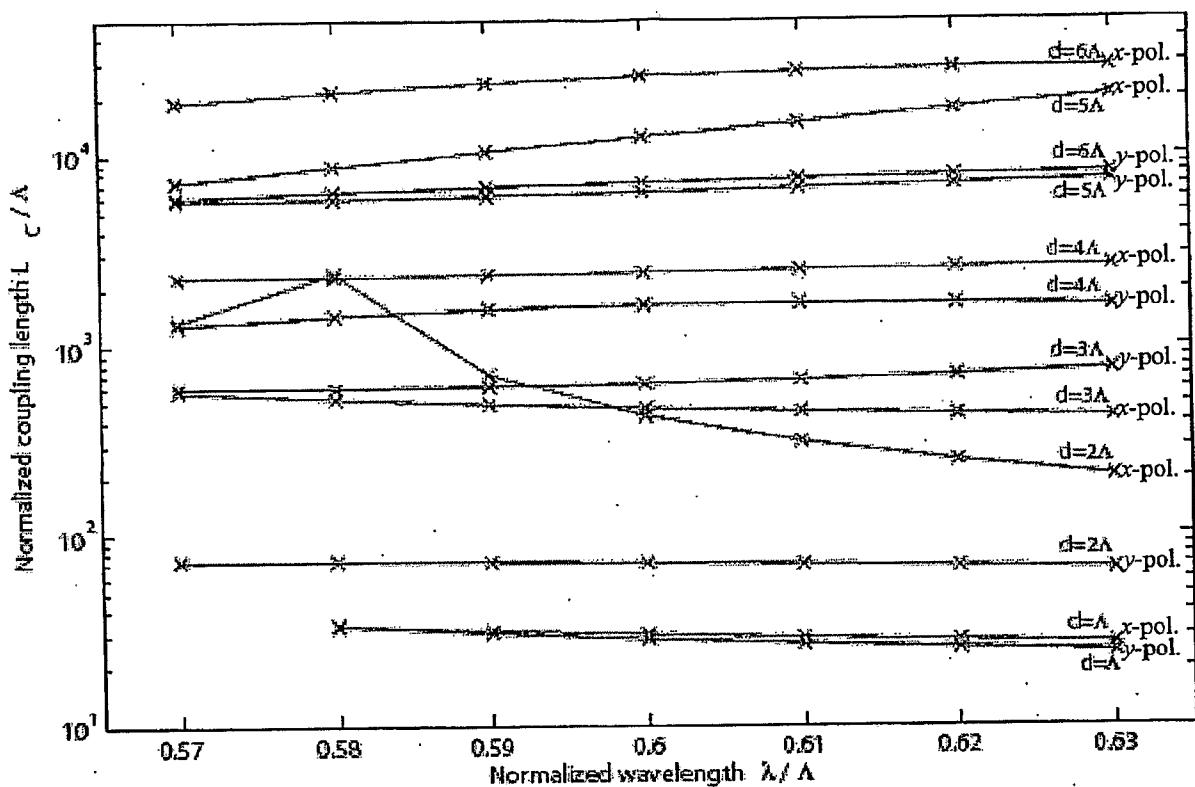


Figure 7A:

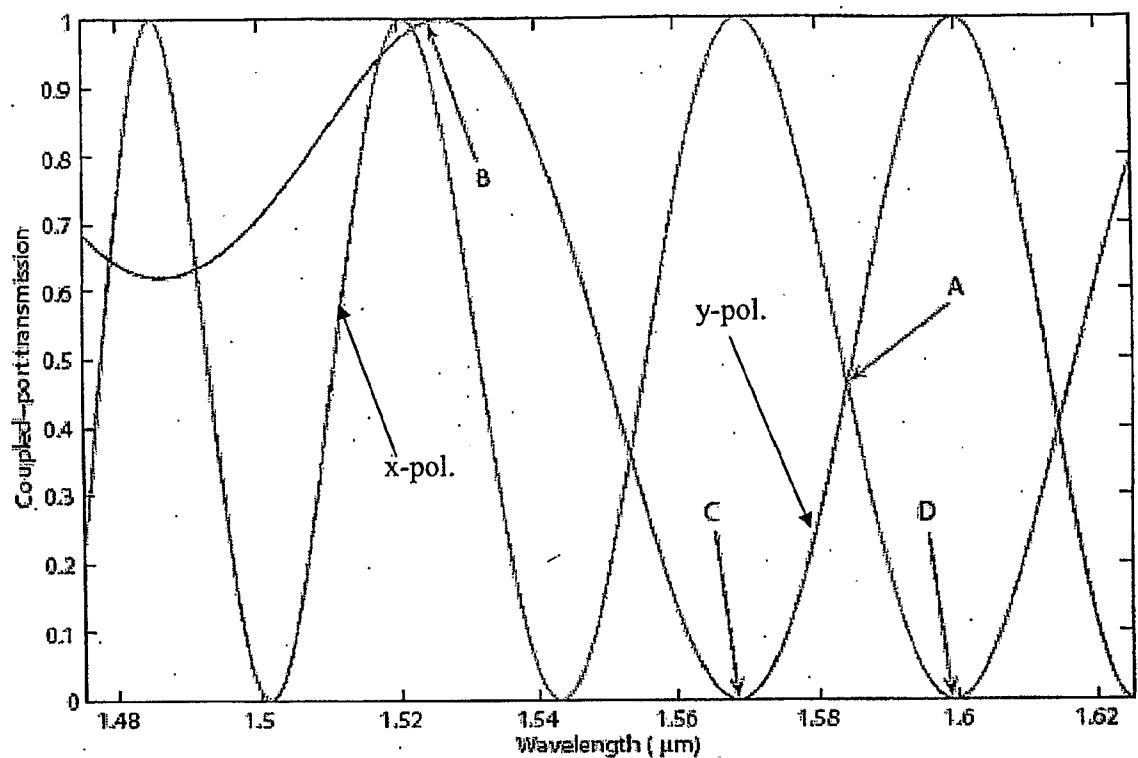


Figure 7B:

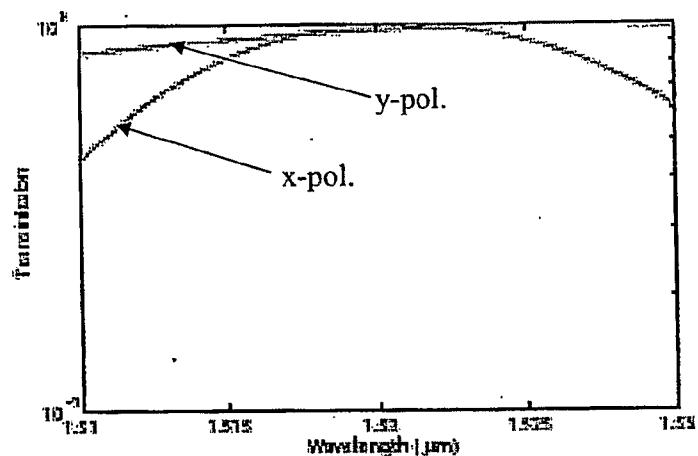


Figure 7C:

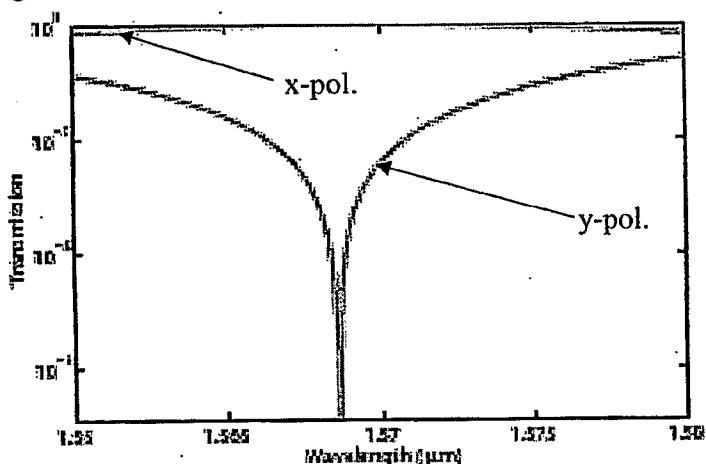


Figure 7D:

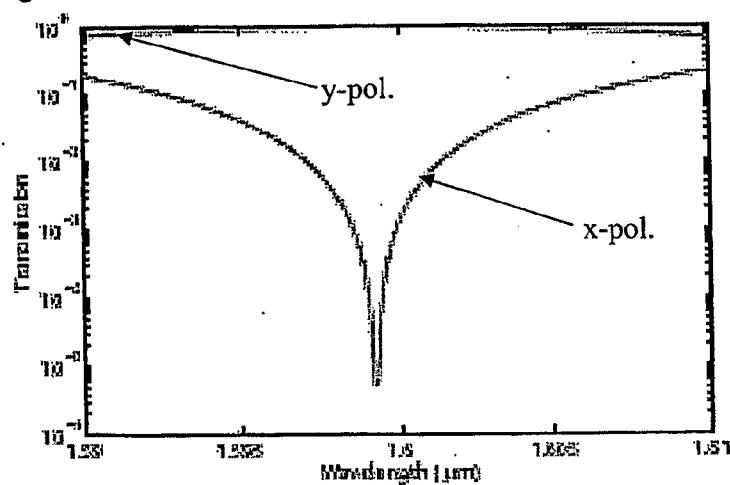


Figure 8A:

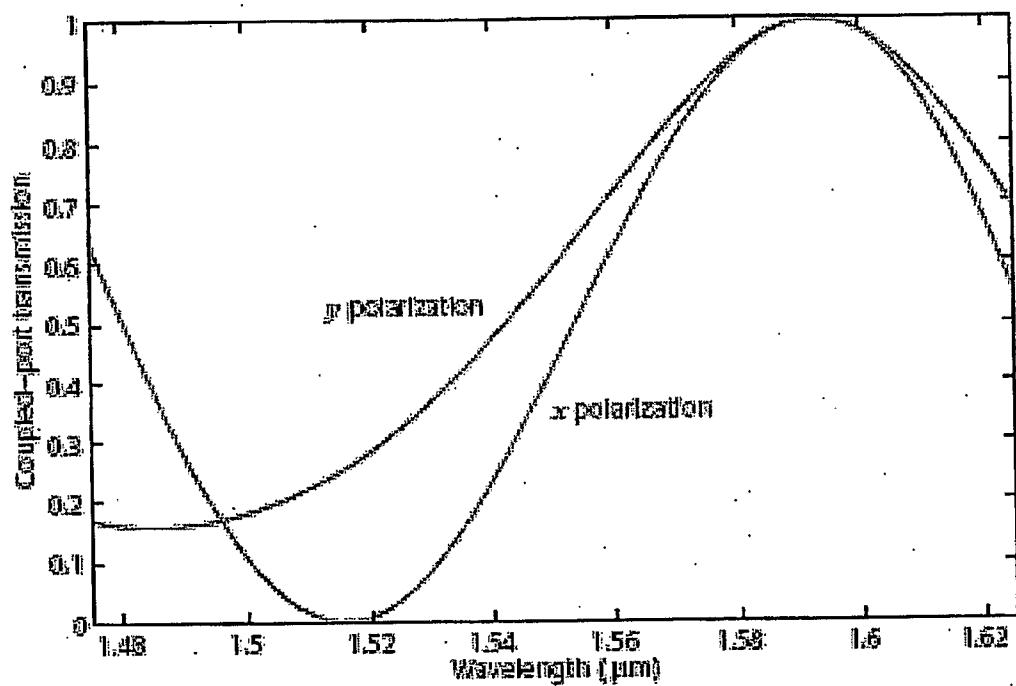


Figure 8B:

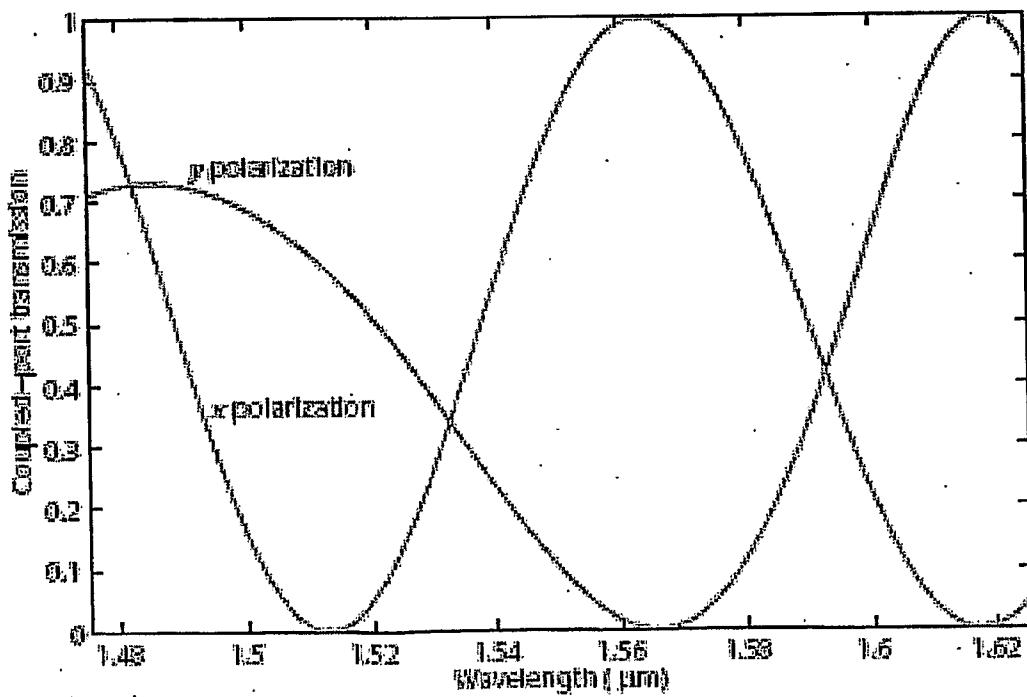


Figure 9:

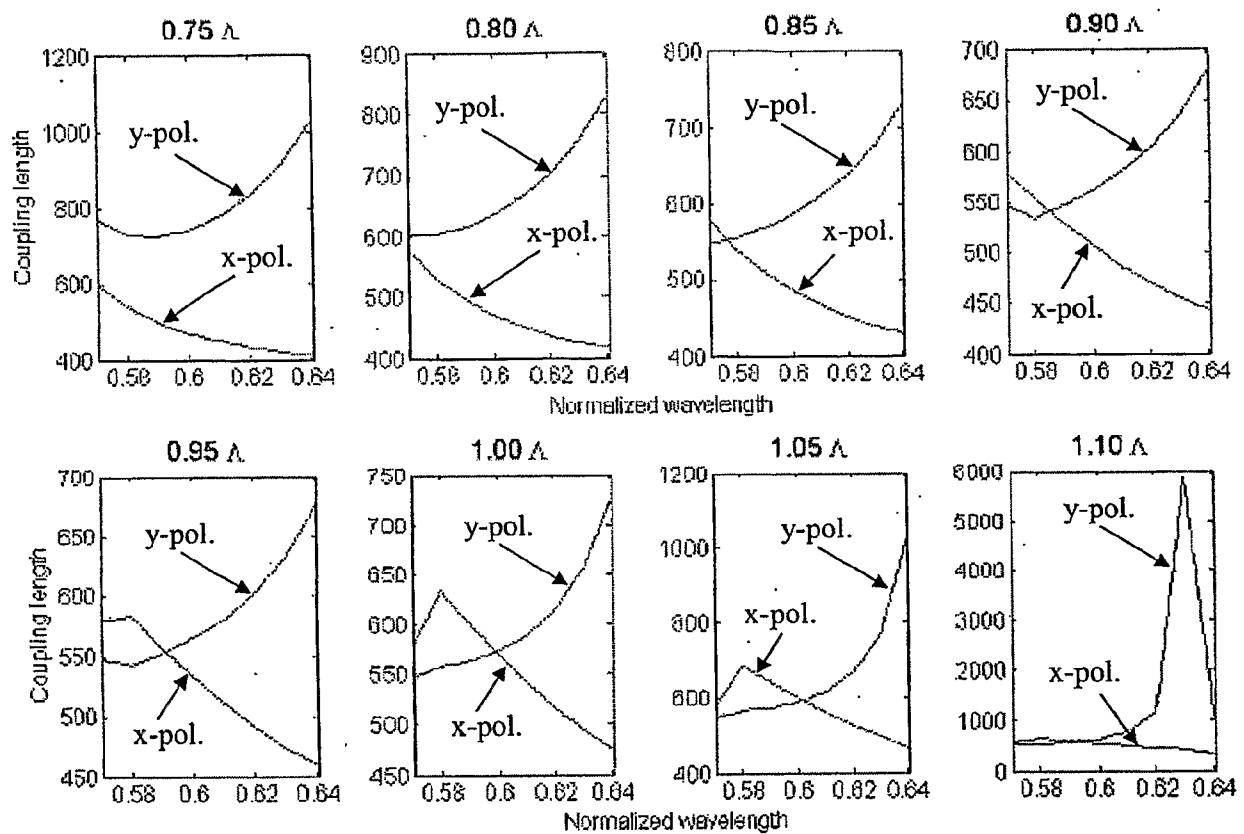


Figure 10A:

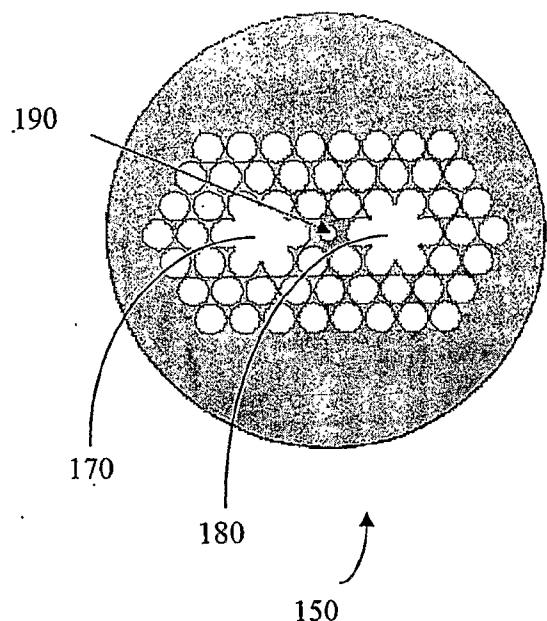


Figure 10B:

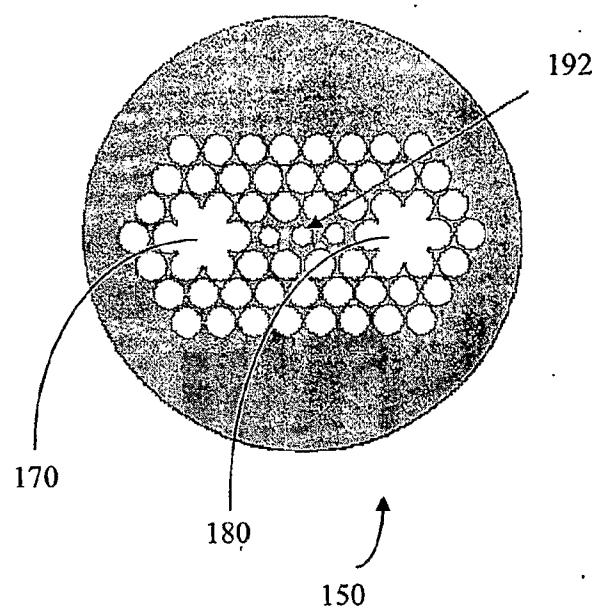


Figure 11:

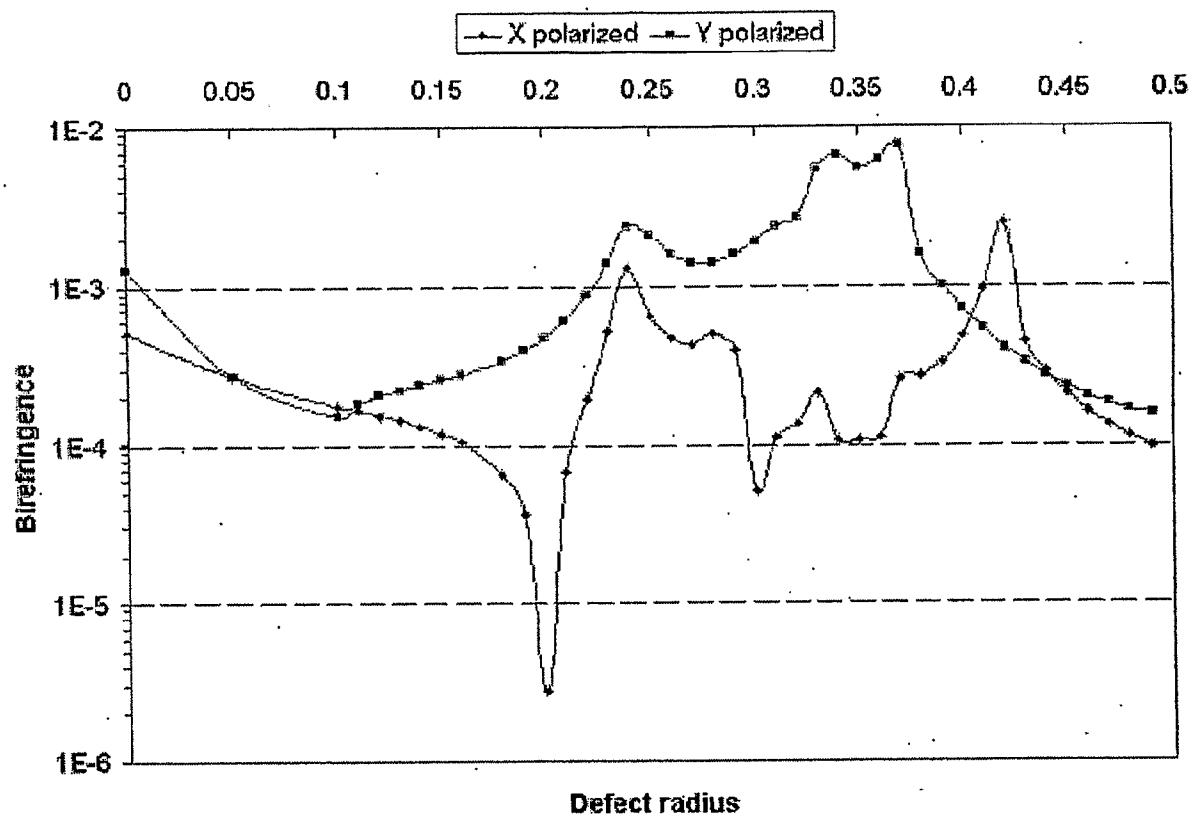


Figure 12:


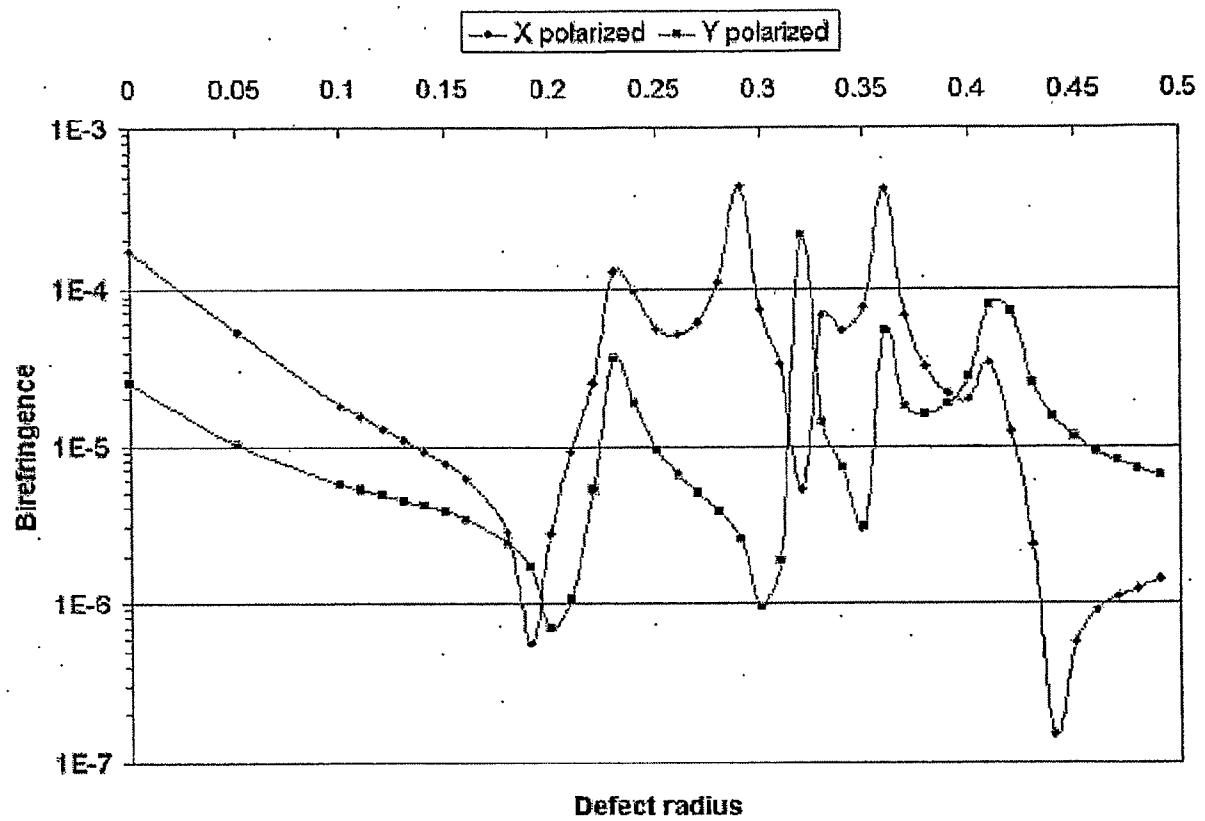


Figure 13:

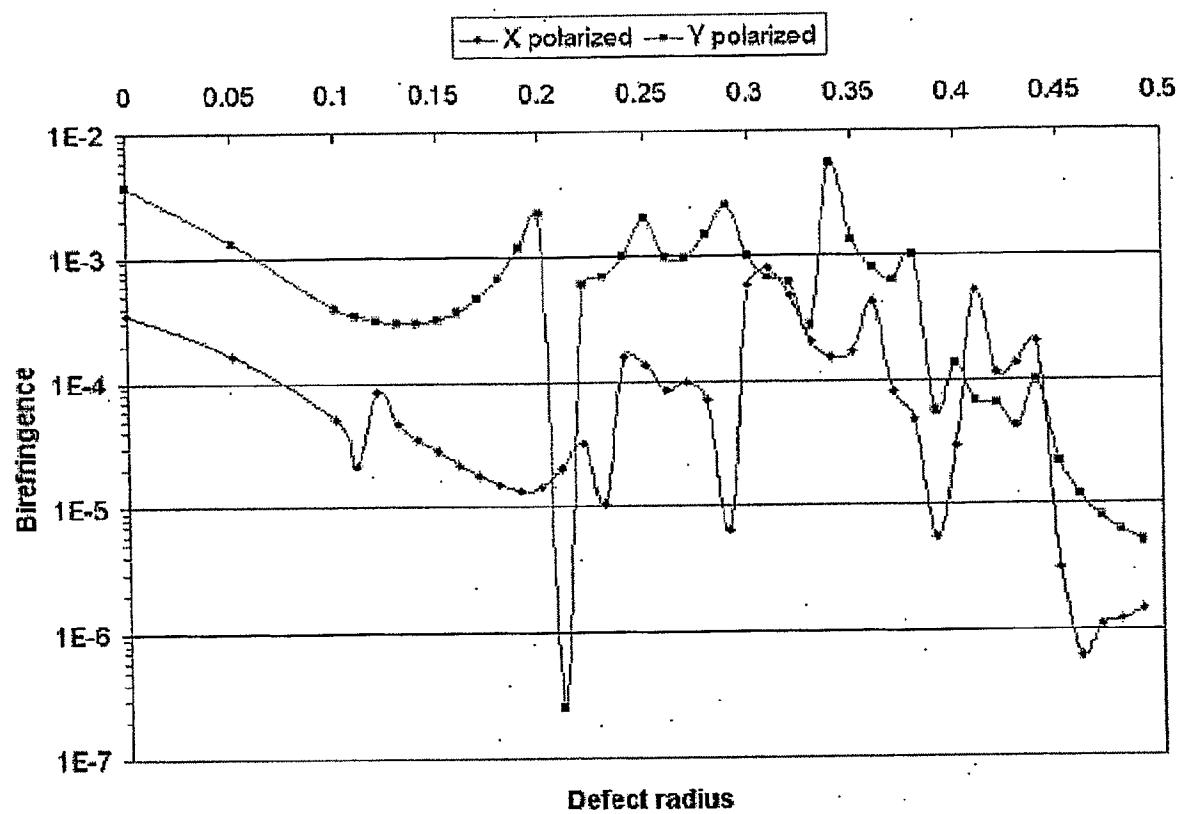

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2007/005535

A. CLASSIFICATION OF SUBJECT MATTER
INV. G02B6/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
G02B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, INSPEC, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>LAEGSGAARD J ET AL: "Photonic crystal fiber design for broadband directional coupling" OPTICS LETTERS OPT. SOC. AMERICA USA, vol. 29, no. 21, 1 November 2004 (2004-11-01), pages 2473-2475, XP002439213 ISSN: 0146-9592 the whole document</p> <p>-----</p> <p style="text-align: center;">-/-</p>	1-5, 15

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

27 June 2007

Date of mailing of the international search report

05/07/2007

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, TX. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Moroz, Alexander

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2007/005535

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	BUCZYNSKI R ET AL: "Double-core photonic crystal fiber with square lattice" PROCEEDINGS OF THE SPIE - THE INTERNATIONAL SOCIETY FOR OPTICAL ENGINEERING SPIE-INT. SOC. OPT. ENG USA, vol. 5450, no. 1, 2004, pages 223-230, XP002439214 ISSN: 0277-786X page 224 - page 230 figures 1-8 -----	1-20
X	PADDEN W E P ET AL: "Coupling in a twin-core microstructured polymer optical fiber" 8 March 2004 (2004-03-08), APPLIED PHYSICS LETTERS, AIP, AMERICAN INSTITUTE OF PHYSICS, MELVILLE, NY, US, PAGE(S) 1689-1691, XP012060713 ISSN: 0003-6951 the whole document -----	1-5, 15
X	SAITO K ET AL: "Coupling characteristics of dual-core photonic crystal fiber couplers" OPTICS EXPRESS OPT. SOC. AMERICA USA, vol. 11, no. 24, 1 December 2003 (2003-12-01), pages 3188-3195, XP002439215 ISSN: 1094-4087 the whole document -----	1-5, 8-11, 15-20
X	CHREMmos I D ET AL: "Modeling of a highly nonlinear chalcogenide dual-core photonic crystal fiber coupler" OPTICS COMMUNICATIONS, NORTH-HOLLAND PUBLISHING CO. AMSTERDAM, NL, vol. 251, no. 4-6, 15 July 2005 (2005-07-15), pages 339-345, XP004953514 ISSN: 0030-4018 the whole document -----	1-5, 8, 9, 20
A	US 6 301 420 B1 (GREENAWAY ALAN H [GB] ET AL) 9 October 2001 (2001-10-09) abstract column 4, line 45 - column 5, line 3 column 5, line 22 - line 65 figures 1,2,5 ----- -/-	1-20

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2007/005535

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	SCHIFFNER G; SCHNEIDER H; SCHONER G: "Double-core single-mode optical fiber as directional coupler" APPLIED PHYSICS, SPRINGER VERLAG. HEIDELBERG, DE, vol. 23, no. 1, September 1980 (1980-09), pages 41-45, XP008076519 the whole document -----	1-20

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No
PCT/US2007/005535

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6301420	B1 09-10-2001	NONE	