



(12) **DEMANDE DE BREVET CANADIEN**
CANADIAN PATENT APPLICATION


(13) **A1**

(86) Date de dépôt PCT/PCT Filing Date: 2018/01/31
(87) Date publication PCT/PCT Publication Date: 2018/08/09
(85) Entrée phase nationale/National Entry: 2019/07/25
(86) N° demande PCT/PCT Application No.: JP 2018/003197
(87) N° publication PCT/PCT Publication No.: 2018/143268
(30) Priorité/Priority: 2017/02/03 (JP2017-018916)

(51) Cl.Int./Int.Cl. *H04N 19/33* (2014.01),
H04N 19/30 (2014.01), *H04N 19/70* (2014.01),
H04N 21/2662 (2011.01), *H04N 21/462* (2011.01)
(71) Demandeur/Applicant:
SONY CORPORATION, JP
(72) Inventeur/Inventor:
TSUKAGOSHI, IKUO, JP
(74) Agent: GOWLING WLG (CANADA) LLP

(54) Titre : DISPOSITIF DE TRANSMISSION, PROCEDE DE TRANSMISSION, DISPOSITIF DE RECEPTION ET
PROCEDE DE RECEPTION
(54) Title: TRANSMISSION DEVICE, TRANSMISSION METHOD, RECEPTION DEVICE, AND RECEPTION METHOD

FIG. 6

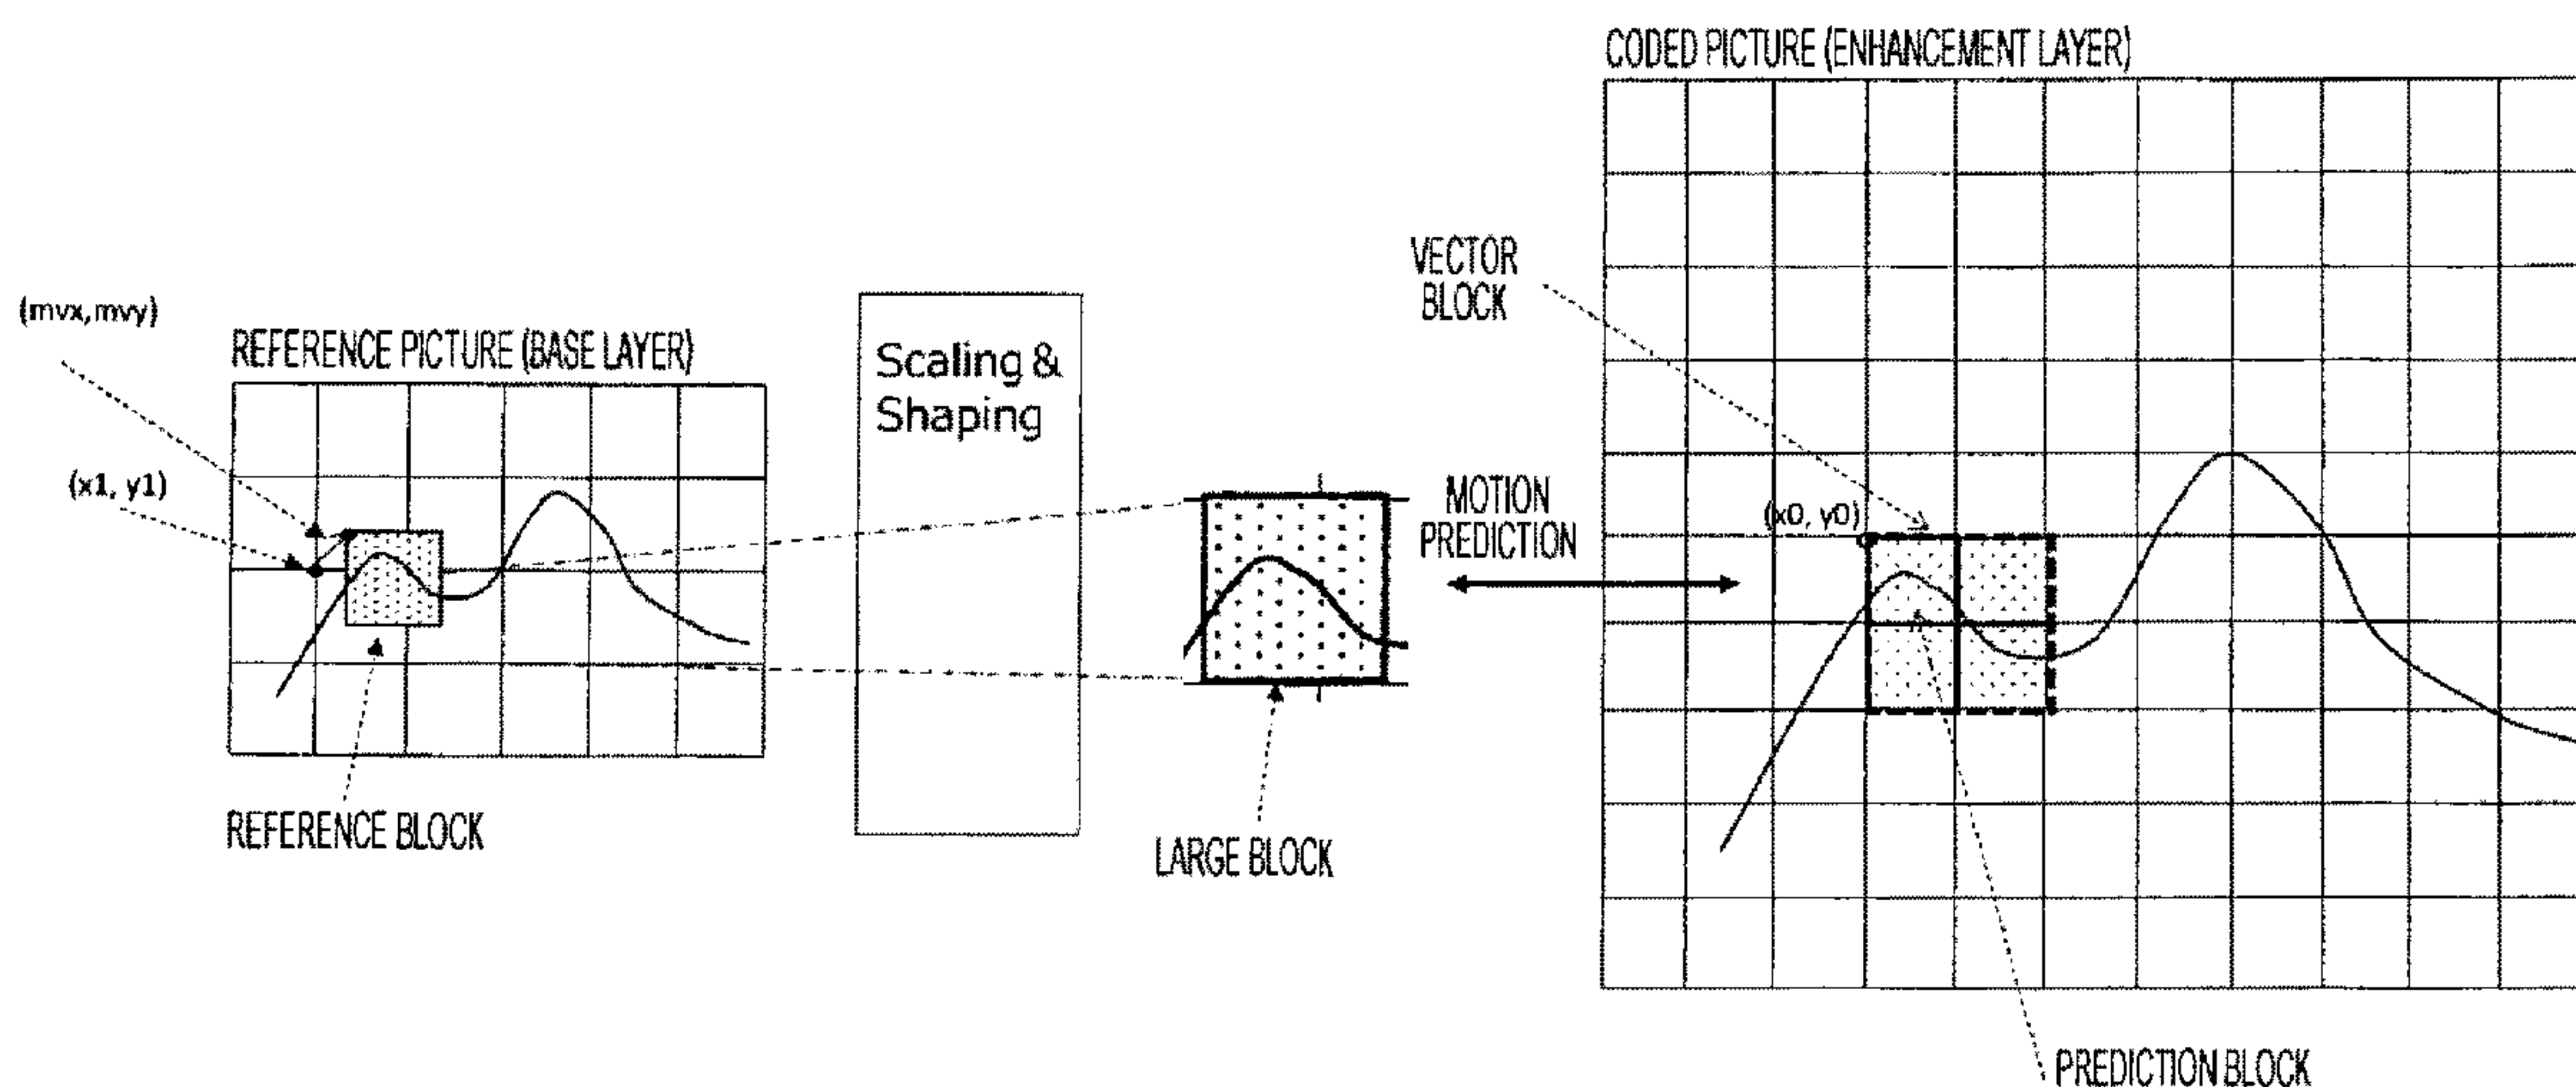

(57) **Abrégé/Abstract:**

The present invention improves encoding efficiency when encoding and transmitting image data of a base layer and an enhancement layer. Image data of each picture of the base layer is encoded to produce a first encoded stream. Image data of each picture of the enhancement layer is encoded to produce a second encoded stream. A container containing these streams is transmitted. When image data of each picture of the enhancement layer is to be encoded, a picture of the base layer can be used as a reference picture, and when a picture of the base layer is used as a reference picture, a reference picture block is subjected to conversion processing to correspond the image data of the base layer to the image data of the enhancement layer, and motion compensation prediction encoding processing is performed.

SP368216WO00

ABSTRACT

To improve coding efficiency in encoding and transmitting image data of a base layer and an enhancement layer.

5 The image data of each picture of the base layer is encoded to generate a first coded stream. The image data of each picture of the enhancement layer is encoded to generate a second coded stream. A container including the streams is transmitted. A picture of the base layer
10 can be used as a reference picture in encoding the image data of each picture of the enhancement layer, and conversion processing for causing the image data of the base layer to correspond to the image data of the enhancement layer is applied to a block of the reference
15 picture to perform motion compensation prediction coding processing when the picture of the base layer is used as the reference picture.

DESCRIPTION

TRANSMISSION DEVICE, TRANSMISSION METHOD, RECEPTION
DEVICE, AND RECEPTION METHOD

5 TECHNICAL FIELD

[0001]

The present technology relates to a transmission device, a transmission method, a reception device, and a reception method, and relates to a transmission device
10 that encodes and transmits image data of a base layer and an enhancement layer, and the like.

BACKGROUND ART

[0002]

15 Conventionally, transmitting high-quality format image data together with basic format image data, and selectively using the basic format image data or the high-quality format image data on a reception side is known. For example, Patent Document 1 describes
20 performing media coding in a scalable manner to generate a coded stream of a base layer for a low-resolution video service and a coded stream of an enhancement layer for a high-resolution video service, and transmitting a container including the coded streams. Note that the
25 high-quality format includes a high dynamic range, a wide color gamut, a high bit length, and the like, in addition to the high resolution.

CITATION LIST

30 PATENT DOCUMENT

[0003]

Patent Document 1: Japanese PCT National Publication No.
2008-543142

SUMMARY OF THE INVENTION

5 PROBLEMS TO BE SOLVED BY THE INVENTION

[0004]

In conventional scalable coding such as scalability
extension of HEVC (SHVC), interlayer prediction is
limited to only between pictures in the same picture
10 order of composition (POC). Moreover, motion
compensation is not applied to the prediction and
corresponds only to interlayer prediction between blocks
at the same spatial relative position of an image.
Therefore, there is a problem that coding efficiency is
15 reduced.

[0005]

An object of the present technology is to improve
coding efficiency in encoding and transmitting image data
of a base layer and an enhancement layer.

20

SOLUTIONS TO PROBLEMS

[0006]

A concept of the present technology resides in
a transmission device including:
25 an image coding unit configured to encode image
data of each picture of a base layer to generate a first
coded stream and encode image data of each picture of an
enhancement layer to generate a second coded stream; and
a transmission unit configured to transmit a
30 container including the first coded stream and the second
coded stream, in which

the image coding unit

is able to use a picture of the base layer as a reference picture in encoding the image data of each picture of the enhancement layer, and

5 applies conversion processing for causing the image data of the base layer to correspond to the image data of the enhancement layer to a block of the reference picture to perform motion compensation prediction coding processing when using the picture of the base layer as
10 the reference picture.

[0007]

In the present technology, the image coding unit encodes the image data of each picture of the base layer to generate the first coded stream and encodes the image
15 data of each picture of the enhancement layer to generate the second coded stream. For example, the image data of each picture of the enhancement layer may include image data of a picture having different display timing from each picture of the base layer. The transmission unit
20 transmits the container including the first coded stream and the second coded stream.

[0008]

The image coding unit can use a picture of the base layer as the reference picture when encoding the image
25 data of each picture of the enhancement layer. Then, when using the picture of the base layer as the reference picture, the image coding unit applies the conversion processing for causing the image data of the base layer to correspond to the image data of the enhancement layer
30 to a block of the reference picture to perform motion compensation prediction coding processing.

[0009]

For example, the image data of the base layer may be image data of a first resolution, and the image data of the enhancement layer may be image data of a second resolution larger than the first resolution, and the image coding unit may perform, as the conversion processing, scaling processing of changing a resolution of a reference block in the reference picture from the first resolution to the second resolution.

10 [0010]

In this case, for example, the image coding unit may further perform, as the conversion processing, shaping processing of correcting a blunt edge of an image, for the scaled image data. By this shaping processing, blurring of the edge of the image due to the scaling processing can be reduced, and the effect of the block matching processing for obtaining a motion vector can be enhanced.

[0011]

20 Furthermore, for example, the first resolution may be an HD resolution and the second resolution may be a UHD resolution. In this case, for example, the UHD resolution is a 4K resolution, and the image coding unit may be configured to perform block matching processing using the scaled reference block, for each vector block configured by two-dimensionally adjacent 2×2 four prediction blocks of a picture of the enhancement layer to determine a first motion vector, and perform block matching processing with each of the four prediction blocks in the scaled reference block to determine a second motion vector corresponding to each of the

25

30

prediction blocks, and performs the motion compensation prediction coding processing. With the configuration, the motion vector corresponding to each prediction block can be obtained with high precision, and the coding efficiency can be improved.

[0012]

Furthermore, for example, the image data of the base layer may be image data of a first dynamic range, and the image data of the enhancement layer may be image data of a second dynamic range wider than the first dynamic range, and the image coding unit may perform, as the conversion processing, processing of converting a pixel value of the block of the reference picture to correspond to a pixel value of the second dynamic range.

[0013]

As described above, in the present technology, when a picture of the base layer is used as the reference picture in encoding the image data of each picture of the enhancement layer, the conversion processing for causing the image data of the base layer to correspond to the image data of the enhancement layer is applied to a block of the reference picture to perform the motion compensation prediction coding processing. Therefore, the reference block can be determined with high precision, and the coding efficiency can be improved.

[0014]

Furthermore, another concept of the present technology resides in

a reception device including:

a reception unit configured to receive a container including a first coded stream obtained by encoding image

data of each picture of a base layer and a second coded stream obtained by encoding image data of each picture of an enhancement layer, in which

5 a picture of the base layer is able to be used as a reference picture in encoding the image data of each picture of the enhancement layer, and conversion processing for causing the image data of the base layer to correspond to the image data of the enhancement layer is applied to a block of the reference picture to perform
10 motion compensation prediction coding processing when the picture of the base layer is used as the reference picture, and

the reception device further includes

a processing unit configured to process the first
15 coded stream, or the first coded stream and the second coded stream, according to display capability, to obtain display image data.

[0015]

In the present technology, the reception unit
20 receives the container including the first coded stream and the second coded stream. The first coded stream is obtained by encoding image data of each picture of a base layer. The second coded stream is obtained by encoding image data of each picture of an enhancement layer.

25 [0016]

A picture of the base layer can be used as the reference picture in encoding the image data of each picture of the enhancement layer, and when the picture of the base layer is used as the reference picture, the
30 conversion processing for causing the image data of the base layer to correspond to the image data of the

enhancement layer is applied to a block of the reference picture to perform the motion compensation prediction coding processing.

[0017]

5 The processing unit processes the first coded stream or the first coded stream and the second coded stream according to display capability to obtain display image data. In this case, decoding processing is applied to the first coded stream to obtain the image data of the
10 base layer, and decoding processing is applied to the second coded stream to obtain the image data of the enhancement layer.

EFFECTS OF THE INVENTION

15 [0018]

 According to the present technology, the coding efficiency in encoding and transmitting image data of a base layer and an enhancement layer can be improved. Note that the effects described here are not necessarily
20 limited, and any of effects described in the present disclosure may be exerted.

BRIEF DESCRIPTION OF DRAWINGS

[0019]

25 Fig. 1 is a block diagram illustrating a configuration example of a transmission/reception system as an embodiment.

 Fig. 2 is a diagram illustrating configuration examples of image data of a base layer and an enhancement
30 layer.

 Fig. 3 is a diagram illustrating other

configuration examples of the image data of the base layer and the enhancement layer.

Fig. 4 is a block diagram illustrating a configuration example of a transmission device.

5 Fig. 5 is a block diagram illustrating a configuration example of main parts of an encoding unit.

Fig. 6 is a diagram for describing motion prediction between layers (first motion prediction) in an interlayer prediction unit.

10 Fig. 7 is a diagram schematically illustrating scaling processing and shaping processing.

Fig. 8 is a diagram for describing motion prediction (second motion prediction) in a large block.

15 Fig. 9 is a diagram illustrating a more specific configuration example of a video encoder.

Fig. 10 is diagrams illustrating a structure example of a NAL unit of a slice that contains coded data and a structure example of a slice segment header.

20 Fig. 11 is a diagram illustrating a structure example of slice segment data.

Fig. 12 is a diagram illustrating a structure example of fields of "vector_prediction_unit()" and "micro_prediction_unit()".

25 Fig. 13 is a diagram illustrating a structure example of a field of "prediction_unit2()".

Fig. 14 is a diagram illustrating content of main information in each structure example.

Fig. 15 is a block diagram illustrating a configuration example of a reception device.

30 Fig. 16 is a block diagram illustrating a configuration example of main parts of a decoding unit.

Fig. 17 is a diagram illustrating a more specific configuration example of a video decoder.

Fig. 18 is a diagram illustrating HDR characteristics and SDR characteristics.

5

MODE FOR CARRYING OUT THE INVENTION

[0020]

Hereinafter, a mode for implementing the present invention (hereinafter referred to as an "embodiment") will be described. Note that the description will be given in the following order.

10

1. Embodiment
2. Modification

[0021]

15

<1. Embodiment>

[Transmission/reception system]

Fig. 1 illustrates a configuration example of a transmission/reception system 10 as an embodiment. The transmission/reception system 10 has a configuration including a transmission device 100 and a reception device 200.

20

[0022]

The transmission device 100 transmits a transport stream TS as a container on a broadcast wave. The transport stream TS includes a first coded stream and a second coded stream. The first coded stream is obtained by encoding image data of each picture of a base layer. The second coded stream is obtained by encoding image data of each picture of an enhancement layer.

25

30 [0023]

In this embodiment, the image data of the base

layer is image data of an HD resolution and 120 fps or
image data of an HD resolution and 60 fps, and the image
data of the enhancement layer is image data of a UHD
resolution (4K resolution, 8K resolution, or the like),
5 here, 4K resolution and 120 fps.

[0024]

Here, the 4K resolution is a resolution of about
4000 horizontal pixels × about 2000 vertical pixels, and
is, for example, 4096 × 2160 or 3840 × 2160. The 8K
10 resolution is a resolution in which the vertical and
horizontal pixels are twice the 4K resolution.
Furthermore, the HD resolution is a resolution in which
the vertical and horizontal pixels are half the 4K
resolution, for example.

15 [0025]

In encoding the image data of each picture of the
enhancement layer, a picture of the base layer can be
used as a reference picture. Then, when the picture of
the base layer is used as the reference picture,
20 conversion processing for causing the image data of the
base layer to correspond to the image data of the
enhancement layer is applied to a block of the reference
picture to perform motion compensation prediction coding.

[0026]

25 In this embodiment, as the conversion processing,
scaling processing of changing a resolution of the block
of the reference picture from the HD resolution to the 4K
resolution is performed. Furthermore, in this embodiment,
as the conversion processing, shaping processing of
30 correcting a blunt edge of an image is further performed
for the scaled image data. By the shaping processing,

blurring of the edge of the image due to the scaling processing is reduced, and precision of block matching processing for obtaining a motion vector is enhanced.

[0027]

5 In the motion compensation prediction coding, block matching processing using the scaled reference block is performed for each vector block configured by two-dimensionally adjacent 2×2 four prediction blocks of a picture of the enhancement layer to determine a first
10 motion vector. Furthermore, block matching processing is performed with each of the four prediction blocks in the scaled reference block to determine a second motion vector (micro vector). Thereby, the motion vector corresponding to each prediction block can be obtained
15 with high precision, and the coding efficiency can be improved.

[0028]

The reception device 200 receives the above-described transport stream TS sent from the transmission
20 device 100 on the broadcast wave. As described above, the transport stream TS includes the first coded stream regarding the image data of the HD resolution and 60 fps and the second coded stream regarding the image data of the 4K resolution and 120 fps.

25 [0029]

The reception device 200 processes the first coded stream to obtain display image data of the HD resolution and 60 fps and displays an image in a case where the reception device 200 has display capability of the HD
30 resolution at 60 fps. Meanwhile, the reception device 200 processes the first coded stream and the second coded

stream to obtain display image data of the 4K resolution and 120 fps and displays an image in a case where the reception device 200 has display capability of the 4K resolution at 120 fps.

5 [0030]

Fig. 2 illustrates configuration examples of image data of the base layer and the enhancement layer. In the illustrated example, the horizontal axis represents a display order (picture order of composition (POC)), and an earlier display time comes to the left side and a later display time comes to the right side. Each rectangular frame represents a picture, and a number represents an encoding order (decoding order on the reception side). Furthermore, an arrow represents an example of a reference relationship of pictures in prediction coding processing, a solid line represents a reference relationship in a layer, and a broken line represents a reference relationship between layers. A target picture changes for each block in both interlayer and intralayer predictions. Furthermore, the direction of the prediction and the number of references are not limited to the illustrated examples. Note that display of a reference relationship in a sublayer is omitted.

10
15
20

[0031]

25 First image data "HD 60 Hz Base" exists as the image data of the base layer. The first image data is image data configuring a sublayer 1 and is image data configuring 60 Hz as a base. Furthermore, second image data "HD +60 Hz HFR" exists as the image data of the base layer. The second image data is image data configuring a sublayer 2 and has scalability in a time direction with

30

respect to the first image data "HD 60 Hz Base".

[0032]

Furthermore, third image data "UHD (4K) 60 Hz" exists as the image data of the enhancement layer. The
5 third image data is image data configuring a sublayer 3 and is image data configuring 60 Hz as a base. The third image data has the scalability in a spatial direction with respect to the first image data "HD 60 Hz Base". Furthermore, fourth image data "UHD (4K) +60 Hz HFR"
10 exists as the image data of the enhancement layer. The fourth image data is image data configuring a sublayer 4 and has scalability in the time direction with respect to the third image data "UHD (4K) 60 Hz" and has scalability in a spatial direction with respect to the second image
15 data "HD +60 Hz HFR".

[0033]

In this configuration example, a high-resolution (HD) image (60 Hz HD image) can be reproduced at a basic frame rate on the basis of the first image data "HD 60 Hz
20 Base". Furthermore, a high-resolution (HD) image (120 Hz HD image) can be reproduced at a high frame rate on the basis of the first image data "HD 60 Hz Base" and the second image data "HD +60 Hz HFR".

[0034]

25 Furthermore, an ultra high-resolution (UHD (4K)) image (60 Hz UHD image) can be reproduced at a basic frame rate on the basis of the first image data "HD 60 Hz Base" and the third image data "UHD (4K) 60 Hz". Furthermore, an ultra high-resolution (UHD (4K)) image
30 (120 Hz UHD image) can be reproduced at a high frame rate on the basis of the first image data "HD 60 Hz Base", the

second image data "HD +60 Hz HFR", the third image data "UHD (4K) 60", and the fourth image data "UHD (4K) +60 Hz HFR".

[0035]

5 Fig. 3 illustrates other configuration examples of the image data of the base layer and the enhancement layer. In the illustrated example, the horizontal axis represents a display order (picture order of composition (POC)), and an earlier display time comes to the left
10 side and a later display time comes to the right side. Each rectangular frame represents a picture, and a number represents an encoding order (decoding order on the reception side). Furthermore, an arrow represents an example of a reference relationship of pictures in
15 prediction coding processing, a solid line represents a reference relationship in a layer, and a broken line represents a reference relationship between layers. A target picture changes for each block in both interlayer and intralayer predictions. Furthermore, the direction
20 of the prediction and the number of references are not limited to the illustrated examples. Note that display of a reference relationship in a sublayer is omitted.

[0036]

 This configuration example is similar to the above-
25 described configuration example in Fig. 2 except that the second image data "HD +60 Hz HFR" does not exist as the image data of the base layer. In this configuration example, a high-resolution (HD) image (60 Hz HD image) can be reproduced at a basic frame rate on the basis of
30 the first image data "HD 60 Hz Base". In this configuration example, the image data of each picture of

the enhancement layer includes image data of a picture having different display timing from each picture of the base layer.

[0037]

5 Furthermore, an ultra high-resolution (UHD (4K)) image (60 Hz UHD image) can be reproduced at a basic frame rate on the basis of the first image data "HD 60 Hz Base" and the third image data "UHD (4K) 60 Hz". Furthermore, an ultra high-resolution (UHD (4K)) image
10 (120 Hz UHD image) can be reproduced at a high frame rate on the basis of the first image data "HD 60 Hz Base", the third image data "UHD (4K) 60", and the fourth image data "UHD (4K) +60 Hz HFR".

[0038]

15 [Configuration of Transmission Device]

Fig. 4 illustrates a configuration example of the transmission device 100. The transmission device 100 includes a control unit 101, a video encoder 102, a system encoder 103, and a transmission unit 104. The
20 control unit 101 includes a central processing unit(CPU), and controls operation of each unit of the transmission device 100 on the basis of a control program.

[0039]

The video encoder 102 inputs the image data of the
25 4K resolution and 120 fps, and outputs the first coded stream BS obtained by encoding the image data of each picture of the base layer and outputs the second coded stream ES obtained by encoding the image data of each picture of the enhancement layer. Here, the image data
30 of the 4K resolution and 120 fps includes the third image data "UHD 60 Hz" and the fourth image data "UHD +60 Hz

HFR" described above, and configures the image data of the enhancement layer.

[0040]

The video encoder 102 includes a scaling unit 102a,
5 an encoding unit 102b, and an encoding unit 102e. The scaling unit 102a applies scaling processing to the image data of the 4K resolution to obtain the image data of the base layer.

[0041]

10 Here, in a case where the configuration of the base layer is the configuration example illustrated in Fig. 2, the scaling unit 102a applies scaling processing in the spatial direction to the image data of the UHD resolution to obtain the image data of the HD resolution and 120 fps.
15 This image data of the HD resolution and 120 fps includes the first image data "HD 60 Hz Base" and the second image data "HD +60 Hz HFR" described above.

[0042]

Meanwhile, in a case where the configuration of the
20 base layer is the configuration example illustrated in Fig. 3, the scaling unit 102a applies scaling processing in the in the spatial direction and the temporal direction to the image data of the UHD resolution to obtain the image data of the HD resolution and 60 fps.
25 This image data of the HD resolution and 60 fps includes the first image data "HD 60 Hz Base" described above.

[0043]

The encoding unit 102b applies motion compensation prediction coding processing such as H.264/AVC or
30 H.265/HEVC to the image data of the base layer obtained in the scaling unit 102a to obtain coded image data and

generates the first coded stream BS having the coded image data.

[0044]

The encoding unit 102e performs intralayer and
5 interlayer motion compensation prediction coding
processing such as H.264/AVC, H.265/HEVC to the image
data of the UHD resolution and 120 fps, that is, the
image data of the enhancement layer, to obtain coded
image data, and generates the second coded stream ES
10 having the coded image data.

[0045]

In this case, the encoding unit 102e can use a
picture of the base layer as the reference picture in
encoding the image data of each picture of the
15 enhancement layer. In this case, the encoding unit 102e
selectively performs prediction in the enhancement layer
or prediction between the enhancement layer and the base
layer for each prediction block (coded block) to reduce a
prediction residual.

20 [0046]

When using a picture of the base layer as the
reference picture, the encoding unit 102e performs
conversion processing of causing the image data of the
base layer to correspond to the image data of the
25 enhancement layer, to the reference block in the
reference picture to perform the motion compensation
prediction coding processing.

[0047]

The conversion processing is scaling processing of
30 changing the resolution of a block of the reference
picture from the HD resolution to the UHD resolution.

Note that, in this embodiment, the conversion processing further includes shaping processing of correcting a blunt edge of an image, for the scaled image data. By this shaping processing, blurring of the edge of the image due to the scaling processing can be reduced, and the effect of the block matching processing for obtaining a motion vector can be enhanced.

[0048]

Fig. 5 illustrates a configuration example of main parts of the encoding unit 102e. The encoding unit 102e includes an intralayer prediction unit 151, an interlayer prediction unit 152, a conversion processing unit 153, a selection unit 154, and an encoding function unit 155.

[0049]

The intralayer prediction unit 151 performs prediction in image data V1 of the enhancement layer (intralayer prediction) for the image data V1 to obtain prediction residual data. The interlayer prediction unit 152 performs prediction for the image data V1 of the enhancement layer with image data V2 of the base layer (interlayer prediction) to obtain prediction residual data.

[0050]

The conversion processing unit 153 performs the above-described conversion processing (scaling processing and shaping processing) in order to efficiently perform the interlayer motion prediction in the interlayer prediction unit 152.

[0051]

Fig. 6 illustrates a concept of motion prediction between layers (first motion prediction) in the

interlayer prediction unit 152. One of two-dimensionally adjacent 2×2 four prediction blocks, of prediction blocks of a coded picture (a picture of the enhancement layer), is one vector block.

5 [0052]

The interlayer prediction unit 152 performs, for each vector block, the block matching processing using the large block obtained by applying the scaling processing and the shaping processing to the reference
10 block in the reference picture (a picture of the base layer). The interlayer prediction unit 152 performs a search such that residual component power (a sum of residual power components of the four prediction blocks) becomes minimum within a search range of the reference
15 picture to determine an interlayer vector (first motion vector).

[0053]

In this case, top-left origin coordinates of the vector block are (x_0, y_0) . Then, a position of (x_0, y_0)
20 converted into resolution coordinates of the reference picture is (x_1, y_1) , and a two-dimensional vector (mvx, mvy) indicating the distance from (x_1, y_1) to the reference block with a value including the subpixel precision and based on the resolution of the reference
25 picture is an interlayer motion vector.

[0054]

Fig. 7 schematically illustrates the scaling processing and the shaping processing. The scaling processing is applied with a desired filter to an $M \times N$
30 block (reference block) read from the reference picture. Next, the shaping processing such as edge enhancement for

preventing blurring of texture is applied to the scaled block (large block).

[0055]

Furthermore, the interlayer prediction unit 152
5 further performs motion prediction in the large block (second motion prediction) with a micro vector, for each prediction block configuring the vector block of the enhancement layer, as illustrated in Fig. 8. In this case, the interlayer prediction unit 152 performs the
10 block matching processing with each of the four prediction blocks configuring the vector block in the large block obtained by applying the scaling processing and the shaping processing to the reference block specified in the interlayer motion vector (first motion
15 vector), to determine the micro vector (second motion vector) indicating a position where the prediction residual power becomes minimum in the large block, the position corresponding to each prediction block. This micro vector (second motion vector) is a two-dimensional
20 interlayer motion vector based on the resolution of the coded picture and indicated by a value including the subpixel precision.

[0056]

The interlayer prediction unit 152 performs the
25 motion compensation prediction coding processing for each prediction block on the basis of results of the motion prediction between layers (first motion prediction) and the motion prediction in the large block (second motion prediction) described above. In this case, there are two
30 pieces of motion vector information: the interlayer motion vector (first motion vector) and the micro vector

(second motion vector).

[0057]

Referring back to Fig. 4, the system encoder 103 performs PES packetization and TS packetization for the first coded stream BS and the second coded stream ES generated in the video encoder 102 to generate a transport stream TS. Then, the transmission unit 104 transmits the transport stream TS to the reception device 200, placing the transport stream TS on a broadcast wave or a net packet.

[0058]

Fig. 9 illustrates a more specific configuration example of the video encoder 102. The video encoder 102 includes the scaling unit 102a, a blocking circuit 121, a subtractor circuit 122, a motion prediction/motion compensation circuit 123, an integer conversion/quantization circuit 124, an inverse quantization/inverse integer conversion circuit 125, an adder circuit 126, a loop filter 127, a memory 128, and an entropy coding circuit 129. Here, the blocking circuit 121 to the entropy coding circuit 129 configure the encoding unit 102b (see Fig. 4).

[0059]

Furthermore, the video encoder 102 includes a blocking circuit 131, a subtractor circuit 132, a motion prediction/motion compensation circuit 133, a switching circuit 134, an integer conversion/quantization circuit 136, an inverse quantization/inverse integer conversion circuit 137, an adder circuit 138, a loop filter 139, a memory 140, an entropy coding circuit 141, and a conversion processing unit 153. Here, the blocking

circuit 131 to the entropy coding circuit 141, and the conversion processing unit 153 configure the encoding unit 102e (see Fig. 4).

[0060]

5 The image data of the UHD resolution and 120 fps input to the video encoder 102 is supplied to the scaling unit 102a. The scaling unit 102a applies the scaling processing to the image data of the UHD resolution and 120 fps to obtain the image data of the base layer. This
10 image data of the base layer is the image data of the HD resolution and 120 fps (see Fig. 2) or the image data of the HD resolution and 60 fps (see Fig. 3).

[0061]

 The image data of the base layer obtained by the
15 scaling unit 102a is supplied to the blocking circuit 121. In the blocking circuit 121, the image data of each picture of the base layer is divided into blocks (macroblocks (MBs)) in units of coding processing. Each block is sequentially supplied to the subtractor circuit
20 122. The motion prediction/motion compensation circuit 123 obtains a motion-compensated prediction reference block for each block on the basis of the image data of the reference picture stored in the memory 128.

[0062]

25 Each prediction reference block obtained by the motion prediction/motion compensation circuit 123 is sequentially supplied to the subtractor circuit 122. The subtractor circuit 122 performs subtraction processing for each block obtained in the blocking circuit 121
30 between the block and the prediction reference block to obtain a prediction error. The prediction error for each

block is quantized after being integer-converted (for example, DCT-converted) by the integer conversion/quantization circuit 124.

[0063]

5 Quantization data for each block obtained by the integer conversion/quantization circuit 124 is supplied to the inverse quantization/inverse integer conversion circuit 125. The inverse quantization/inverse integer conversion circuit 125 applies inverse quantization to
10 the quantization data and further applies inverse integer conversion to obtain a prediction residual. The prediction error is supplied to the adder circuit 126.

[0064]

 The adder circuit 126 adds the motion-compensated
15 prediction reference block to the prediction residual to obtain a block. This block is stored in the memory 128 after quantization noise is removed by the loop filter 127.

[0065]

20 Furthermore, the quantization data for each block obtained by the integer conversion/quantization circuit 124 is supplied to the entropy coding circuit 129 where entropy coding is performed, and the first coded stream BS is obtained. Note that information such as the motion
25 vector in each block is added to the first coded stream BS as MB header information for decoding on the reception side.

[0066]

 Furthermore, the image data of the UHD resolution
30 and 120 fps input to the video encoder 102 is supplied to the blocking circuit 131 as the image data of the

enhancement layer. In the blocking circuit 131, the image data of each picture of the enhancement layer is divided into blocks (macroblocks (MBs)) in units of coding processing. Each block is sequentially supplied
5 to the subtractor circuit 132.

[0067]

In the motion prediction/motion compensation circuit 133, the image data of the reference picture of the enhancement layer stored in the memory 140 is
10 supplied through the switching circuit 134 in a case of performing intralayer prediction, and the prediction reference block for motion-compensated intralayer prediction is obtained by the block matching processing. "Motion vector 1" indicates the motion vector determined
15 at this time.

[0068]

Furthermore, in the motion prediction/motion compensation circuit 133, the image data of the reference picture of the base layer stored in the memory 128 is
20 supplied through the conversion processing unit 153 and the switching circuit 134 in a case of performing interlayer prediction, and the prediction reference block for motion-compensated interlayer prediction is obtained by the block matching processing. The conversion
25 processing unit 153 performs the scaling processing and the shaping processing as described above (see Figs. 6 and 7). "Motion vector 2" indicates the motion vector determined at this time, and includes two vectors of the interlayer vector (first motion vector) and the micro
30 vector (second motion vector).

[0069]

Each prediction reference block obtained by the motion prediction/motion compensation circuit 133 is sequentially supplied to the subtractor circuit 132. The subtractor circuit 132 performs subtraction processing
5 for each block obtained in the blocking circuit 131 between the block and the prediction reference block to obtain a prediction error. The prediction error for each block is quantized after being integer-converted (for example, DCT-converted) by the integer
10 conversion/quantization circuit 136.
[0070]

Quantization data for each block obtained by the integer conversion/quantization circuit 136 is supplied to the inverse quantization/inverse integer conversion
15 circuit 137. The inverse quantization/inverse integer conversion circuit 137 applies inverse quantization to the quantization data and further applies inverse integer conversion to obtain a prediction residual. The prediction error for each block is supplied to the adder
20 circuit 138.
[0071]

The adder circuit 138 adds the motion-compensated prediction reference block to the prediction residual to obtain a block. This block is stored in the memory 140
25 after quantization noise is removed by the loop filter 139.
[0072]

Furthermore, the quantization data for each block obtained by the integer conversion/quantization circuit
30 136 is supplied to the entropy coding circuit 141 where entropy coding is performed, and the second coded stream

ES is obtained. Note that information such as the motion vector in each block is added to the second coded stream ES as MB header information for decoding on the reception side.

5 [0073]

Fig. 10(a) illustrates a structure example of a NAL unit of a slice that contains coded data. This NAL unit includes a slice segment header (`slice_segment_header()`) and slice segment data (`slice_segment_data()`).

10 Hereinafter, structure examples of the slice segment header and the slice segment data will be described. Note that Fig. 14 illustrates content (semantics) of main information in each structure example.

[0074]

15 Fig. 10 (b) illustrates a structure example of the slice segment header. The field of "self_layer" indicates a layer to which a coded slice belongs. For example, the base layer is "0" and the enhancement layer is "1".

20 [0075]

Fig. 11 illustrates a structure example of the slice segment data. The field of "number_of_referencing" indicates the number of prediction references. Information of the motion vectors and the like exists by the number. The field of "ref_pic_layer_id" indicates an identification number assigned to the layer of the reference picture. For example, the base layer is "0" and the enhancement layer is "1". The field of "ref_idx_li" indicates an index of the reference picture.

30 [0076]

In a case where "self_layer" and "ref_pic_layer_id"

are different, fields of "ref_pic_resolution",
 "ref_pic_scaling_ratio",
 "vector_prediction_unit(cod_blc_x, cod_blc_y,
 interlayer_mvx, interlayer_mvy)", and
 5 "micro_prediction_unit(cod_blc_x, cod_blc_y, microvec_x,
 microvec_y)" exist. The field of "ref_pic_resolution"
 indicates the resolution of the reference picture. The
 field of "ref_pic_scaling_ratio" indicates a scaling
 ratio of the reference picture.

10 [0077]

Fig. 12 illustrates a structure example of fields
 of "vector_prediction_unit(cod_blc_x, cod_blc_y,
 interlayer_mvx, interlayer_mvy)" and
 "micro_prediction_unit(cod_blc_x, cod_blc_y, microvec_x,
 15 microvec_y)". Here, "cod_blc_x" indicates an "x"
 position of the coded block (prediction block).
 Furthermore, "cod_blc_y" indicates a "y" position of the
 coded block (prediction block).

[0078]

20 In the field of "vector_prediction_unit(cod_blc_x,
 cod_blc_y, interlayer_mvx, interlayer_mvy)", fields of
 "scale_fil_horiz_type", "scale_fil_vert_type",
 "shape_horiz_type", "shape_vert_type",
 "vector_prediction_unit_size", "prediction_unit_size",
 25 "interlayer_mvx", and "interlayer_mvy" exist.

[0079]

The field of "scale_fil_horiz_type" indicates a
 type of a horizontal direction scaling filter. The field
 of "scale_fil_vert_type" indicates a type of a vertical
 30 direction scaling filter. The field of
 "shape_horiz_type" indicates horizontal direction filter

function and table for deblurring. The field of "shape_vert_type" indicates vertical direction filter function and table for deblurring.

[0080]

5 The field of "vector_prediction_unit_size" indicates a size of the vector block (see Fig. 6). The field of "prediction_unit_size" indicates a size of the prediction block (see Fig. 6). The field "interlayer_mv_x" indicates a motion vector including the
10 subpixel precision based on a horizontal direction reference picture resolution. The field "interlayer_mv_y" indicates a motion vector including the sub-pixel precision based on a vertical direction reference picture resolution.

15 [0081]

 In the fields of "micro_prediction_unit(cod_blc_x, cod_blc_y, microvec_x, microvec_y)", fields of "microvec_x" and "microvec_y" exist. The field of "microvec_x" indicates a position offset vector in the
20 horizontal direction including the subpixel precision based on the coded picture resolution in the large block. The field of "microvec_y" indicates a position offset vector in the vertical direction including the subpixel precision based on the coded picture resolution in the
25 large block.

[0082]

 Referring back to Fig. 11, in a case where "self_layer" and "ref_pic_layer_id" are the same, a field of "prediction_unit(cod_blc_x, cod_blc_y, intralayer_mv_x, intralayer_mv_y)" exists. Fig. 13 illustrates a structure
30 example of a field of "prediction_unit(cod_blc_x,

cod_blc_y, intralayer_mvx, intralayer_mvy)". The field of "prediction_unit_size" indicates a size of the prediction block. The field of "intralayer_mvx" indicates a motion vector including the subpixel precision based on a horizontal direction coded picture resolution. The field of "intralayer_mvy" indicates a motion vector including the sub-pixel precision based on a vertical direction coded picture resolution.

[0083]

10 Referring back to Fig. 11, in the field of "residual_coding(cod_blc_x, cod_blc_y, transform_size)", coded data obtained by integer conversion of the residual component obtained by motion prediction/motion compensation for each prediction block of the coded picture is arranged. The "transform_size" indicates a block size of conversion processing.

[0084]

Note that, as described above, the vector precision is based on the assumption of subpixels and is described as one vector element. However, the vector of subpixels may be directly expressed by this vector and may be alternatively expressed as a pair of a vector of integer precision and a vector of decimal precision. Target elements are "interlayer_mvx", "interlayer_mvy", "intralayer_mvx", "intralayer_mvy", "microvec_x", and "microvec_y".

[0085]

An operation of the transmission device 100 illustrated in Fig. 4 will be briefly described. The image data of the UHD resolution and 120 fps input to the video encoder 102 is supplied to the scaling unit 102a.

The scaling unit 102a applies the scaling processing to the image data of the UHD resolution and 120 fps to obtain the image data of the base layer. This image data of the base layer is the image data of the HD resolution and 120 fps or the image data of the HD resolution and 60 fps.

[0086]

The image data of the base layer obtained by the scaling unit 102a is supplied to the encoding unit 102b. The encoding unit 102b applies the motion compensation prediction coding processing such as H.264/AVC or H.265/HEVC to the image data of the base layer to obtain coded image data and generates the first coded stream BS having the coded image data.

[0087]

Furthermore, the image data of the UHD resolution and 120 fps input to the video encoder 102, that is, the image data of the enhancement layer, is supplied to the encoding unit 102e. The encoding unit 102e applies the intralayer and interlayer motion compensation prediction coding processing such as H.264/AVC or H.265/HEVC to the image data of the enhancement layer to obtain coded image data and generates the second coded stream ES having the coded image data.

[0088]

In this case, the encoding unit 102e can use a picture of the base layer as the reference picture in encoding the image data of each picture of the enhancement layer. In this case, when the picture of the base layer is used as the reference picture, conversion processing (the scaling processing and the shaping

processing) for causing the image data of the base layer to correspond to the image data of the enhancement layer is applied to the reference block of the reference picture to perform the motion compensation prediction coding processing.

5 [0089]

The first coded stream BS obtained by the encoding unit 102b and the second coded stream ES obtained by the encoding unit 102e are supplied to the system encoder 103.

10 The system encoder 103 performs the PES packetization and TS packetization for the first coded stream BS and the second coded stream ES generated in the video encoder 102 to generate the transport stream TS. Then, the transmission unit 104 transmits the transport stream TS

15 to the reception device 200, placing the transport stream TS on a broadcast wave or a net packet.

[0090]

[Configuration of Reception Device]

Fig. 15 illustrates a configuration example of the reception device 200. The reception device 200 corresponds to the configuration example of the transmission device 100 in Fig. 4. The reception device 200 includes a control unit 201, a reception unit 202, a system decoder 203, a video decoder 204, and a display

20 unit 205.

25 [0091]

The control unit 201 includes a central processing unit (CPU), and controls operation of each unit of the reception device 200 on the basis of a control program.

30 The reception unit 202 receives the transport stream TS sent on the broadcast wave or the packet from the

transmission device 100. The system decoder 203 extracts the first coded stream BS and the second coded stream ES from this transport stream TS.

[0092]

5 The video decoder 204 includes a decoding unit 204b and a decoding unit 204e. The decoding unit 204b applies decoding processing to the first coded stream BS to obtain the image data of the base layer. The decoding unit 204b performs prediction compensation in the base
10 layer when decoding the image data of each picture of the base layer.

[0093]

 Here, in a case where the configuration of the base layer is illustrated in the configuration example in Fig.
15 2, the image data of the HD resolution and 120 fps can be obtained as the image data of the base layer. Meanwhile, in a case where the configuration of the base layer is illustrated in the configuration example in Fig. 3, the image data of the HD resolution and 60 fps is obtained as
20 the image data of the base layer.

[0094]

 The decoding unit 204e applies decoding processing to the second coded stream BS to obtain the image data of the 4K resolution and 120 fps as the image data of the
25 enhancement layer. When decoding the image data of each picture of the enhancement layer, the decoding unit 204e selectively performs prediction compensation in the enhancement layer or prediction compensation between the enhancement layer and the base layer.

30 [0095]

Fig. 16 illustrates a configuration example of main

parts of the decoding unit 204e. The decoding unit 204e performs processing reverse to the processing of the encoding unit 102e in Fig. 4. The decoding unit 204e includes a decoding function unit 251, an intralayer prediction compensation unit 252, an interlayer prediction compensation unit 253, a conversion processing unit 254, and a selection unit 255.

[0096]

The decoding function unit 251 performs decoding processing other than prediction compensation for coded image data CV to obtain prediction residual data. The intralayer prediction compensation unit 252 performs prediction compensation in the image data V1 of the enhancement layer (intralayer prediction compensation) for the prediction residual data to obtain the image data V1. The interlayer prediction compensation unit 253 performs prediction compensation for the prediction residual data with the image data V2 of the base layer to be referred (interlayer prediction compensation) to obtain the image data V1.

[0097]

The conversion processing unit 254 performs the scaling processing and the shaping processing similarly to the conversion processing unit 153 of the encoding unit 102e in Fig. 5 although detailed description is omitted. These characteristics are set similarly to the transmission side by characteristic information (see Fig. 12) added to and sent with the coded image data CV. The selection unit 255 selectively takes out and outputs the image data V1 obtained by the intralayer prediction compensation unit 252 or the image data V1 obtained in

the interlayer prediction compensation unit 253 for each coded block (prediction block) corresponding to the prediction at the time of encoding.

[0098]

5 Referring back to Fig. 15, the display unit 205 is configured by, for example, a liquid crystal display (LCD), an organic electro-luminescence (EL) panel, or the like. The display unit 205 displays an image based on the image data of the base layer obtained by the decoding
10 unit 204b or an image based on the image data of the enhancement layer obtained by the decoding unit 204e according to display capability.

[0099]

Note that, in the reception device 200 having the
15 display capability corresponding to the image data of the base layer, configuration in which the system decoder 203 extracts only the first coded stream BS and the video decoder 204 performs only the decoding processing for the first coded stream BS can be considered.

20 [0100]

Fig. 17 illustrates a more specific configuration example of the video decoder 204. The video decoder 204 includes an entropy decoding circuit 221, an inverse quantization/inverse integer conversion circuit 222, a
25 motion compensation circuit 223, an adder circuit 224, a loop filter 225, and a memory 226. Here, the entropy decoding circuit 221 to the memory 226 configure the decoding unit 204b (see Fig. 15).

[0101]

30 Furthermore, the video decoder 204 includes an entropy decoding circuit 231, an inverse

quantization/inverse integer conversion circuit 232, a motion compensation circuit 233, switching circuits 234 and 235, an adder circuit 236, a loop filter 237, a memory 238, and a conversion processing unit 254. Here, 5 the entropy decoding circuit 231 to the memory 238 and the conversion processing unit 254 configure the decoding unit 204e (see Fig. 15).

[0102]

The entropy decoding circuit 221 applies entropy 10 decoding to the first coded stream BS to obtain quantization data for each block of the base layer. This quantization data is supplied to the inverse quantization/inverse integer conversion circuit 222. The 15 222 applies inverse quantization to the quantization data and further applies inverse integer conversion to obtain a prediction residual. The prediction error for each block is supplied to the adder circuit 224.

[0103]

20 The motion compensation circuit 223 obtains a motion-compensated compensation reference block on the basis of the image data of the reference picture stored in the memory 226. Here, motion compensation is performed using the motion vector included as the MB 25 header information. In the adder circuit 224, the compensation reference block is added to the prediction residual to obtain a block configuring the image data of each picture of the base layer.

[0104]

30 The block obtained by the adder circuit 224 in this manner is accumulated in the memory 226 after

quantization noise is removed by the loop filter 225.
Then, by reading the accumulated data from the memory 226,
the image data of the HD resolution and 120 fps or the
image data of the HD resolution and 60 fps can be
5 obtained as the image data of the base layer.
[0105]

Furthermore, the entropy decoding circuit 231
applies entropy decoding to the second coded stream ES to
obtain quantization data for each block of the
10 enhancement layer. This quantization data is supplied to
the inverse quantization/inverse integer conversion
circuit 232. The inverse quantization/inverse integer
conversion circuit 232 applies inverse quantization to
the quantization data and further applies inverse integer
15 conversion to obtain a prediction residual. The
prediction error for each block is supplied to the adder
circuit 236.
[0106]

The motion compensation circuit 233 selectively
20 performs prediction compensation in the enhancement layer
or prediction compensation between the enhancement layer
and the base layer. When the prediction compensation in
the enhancement layer is performed, the motion
compensation circuit 233 obtains motion-compensated
25 compensation reference block for intralayer compensation
on the basis of the "motion vector 1" extracted from the
MB header information by the entropy decoding circuit 231
and the image data of the reference picture stored in the
memory 238. In this case, the "motion vector 1" is
30 supplied from the entropy decoding circuit 231 to the
motion compensation circuit 233 through the switching

circuit 234, and the image data of the reference picture is supplied from the memory 238 to the motion compensation circuit 233 through the switching circuit 235.

5 [0107]

Meanwhile, when the prediction compensation between the enhancement layer and the base layer is performed, the motion compensation circuit 233 obtains motion-compensated compensation reference block for interlayer
10 compensation on the basis of the "motion vector 2" extracted from the MB header information by the entropy decoding circuit 231 and the image data of the reference picture stored in the memory 226. As described above, the "motion vector 2" includes the two motion vectors:
15 the interlayer motion vector (first motion vector) and the micro vector (second motion vector).
[0108]

In this case, the "motion vector 2" is supplied from the entropy decoding circuit 231 to the motion
20 compensation circuit 233 through the switching circuit 234, and the image data of the reference picture is supplied from the memory 226 to the motion compensation circuit 233 through the conversion processing unit 254 and the switching circuit 235. The conversion processing
25 unit 254 performs the scaling processing and the shaping processing similarly to the conversion processing unit 153 (see Fig. 9) in the encoder 102, as described above.
[0109]

In the adder circuit 236, the compensation
30 reference block obtained by the motion compensation circuit 233 is added to the prediction residual to obtain

a block configuring the image data of each picture of the enhancement layer. This block is stored in the memory 238 after quantization noise is removed by the loop filter 237. Then, by reading the accumulated data from the memory 238, the image data of the UHD resolution and 120 fps can be obtained as the image data of the enhancement layer.

[0110]

An operation of the reception device 200 illustrated in Fig. 15 will be briefly described. The reception unit 202 receives the transport stream TS sent on the broadcast wave or the packet from the transmission device 100. The transport stream TS is supplied to the system decoder 203.

[0111]

The system decoder 203 extracts the first coded stream BS and the second coded stream ES from the transport stream TS. The first coded stream BS is supplied to the decoding unit 204b of the video decoder 204. Furthermore, the second coded stream ES is supplied to the decoding unit 204e of the video decoder 204.

[0112]

The decoding unit 204b applies the decoding processing to the first coded stream BS to obtain the image data of the HD resolution and 120 fps or the image data of the HD resolution and 60 fps, as the image data of the base layer. The decoding unit 204b performs prediction compensation in the base layer when decoding the image data of each picture of the base layer.

[0113]

The decoding unit 204e applies the decoding

processing to the second coded stream ES to obtain the image data of the 4K resolution and 120 fps as the image data of the enhancement layer. When decoding the image data of each picture of the enhancement layer, the
5 decoding unit 204e selectively performs prediction compensation in the enhancement layer or prediction compensation between the enhancement layer and the base layer.

[0114]

10 In a case where the display unit 205 can only display an image based on the image data of the base layer, the image data of the base layer obtained by the decoding unit 204b is supplied to the display unit 205, and the image based on the image data is displayed.
15 Meanwhile, in a case where the display unit 205 can display an image based on the image data of the enhancement layer, the image data of the enhancement layer obtained by the decoding unit 204e is supplied to the display unit 205, and a high-quality (high-resolution
20 in this example) image based on the image data is displayed.

[0115]

As described above, in the transmission/reception system 10 illustrated in Fig. 1, when using a picture of
25 the base layer as the reference picture in encoding the image data of each picture of the enhancement layer, the transmission device 100 applies the scaling processing for causing the image data of the base layer to correspond to the image data of the enhancement layer to
30 a block of the reference picture to perform the motion compensation prediction coding processing. Therefore,

the reference block can be determined with high precision, and the coding efficiency can be improved.

[0116]

Furthermore, in the transmission/reception system
5 10 illustrated in Fig. 1, the transmission device 100
further performs the shaping processing of correcting a
blunt edge of the scaled image data. Therefore, blurring
of the edge of the image due to the scaling processing
can be reduced, and the effect of the block matching
10 processing for obtaining a motion vector can be enhanced.
[0117]

Furthermore, in the transmission/reception system
10 illustrated in Fig. 1, the transmission device 100
performs the block matching processing using the scaled
15 reference block for each vector block to determine the
first motion vector, and performs the block matching
processing with each of the prediction blocks in the
scaled reference block to determine the second motion
vector corresponding to each of the prediction blocks,
20 and performs the motion compensation prediction coding
processing. Therefore, the motion vector corresponding
to each prediction block can be obtained with high
precision, and the coding efficiency can be improved.
[0118]

25 <2. Modification>

Note that, in the above-described embodiment, an
example of scalable coding where the image data of the
base layer is the image data of the HD resolution and 60
Hz and the image data of the enhancement layer is the
30 image data of the UHD (4K) resolution and 120 Hz has been
described. However, the present technology is similarly

applicable to another scalable coding.

[0119]

For example, scalable coding where the image data of the base layer is image data of SDR (normal dynamic range) and 60 Hz and the image data of the enhancement layer is image data of HDR (high dynamic range) and 120 Hz may be adopted.

[0120]

In this case, for example, in the encoder 102 in Fig. 9, the scaling unit 102a performs scaling of the dynamic range instead of scaling of the resolution, that is, conversion from the high dynamic range to the normal dynamic range, or conversion to the scaling of the dynamic range in addition to the scaling of the resolution. With the conversion, SDR image data of UHD and 120 Hz, SDR image data of UHD and 60 Hz, SDR image data of HD and 120 Hz, or SDR image data of HD and 60 Hz is obtained from the HDR image data of UHD and 120 Hz input to the encoder 102.

[0121]

Furthermore, the conversion processing unit 153 performs processing of converting a pixel value of a block of the reference picture of the normal dynamic range to correspond to a pixel value of the high dynamic range, instead of the scaling processing and the shaping processing of the resolution in the above-described embodiment.

[0122]

This conversion processing will be further described using a diagram illustrating an HDR characteristic and an SDR characteristic in Fig. 18. The

curve a represents an SDR conversion curve. The curve b represents an HDR conversion curve. In the conversion processing, pixel value conversion is performed for the curve a of SDR coded values to obtain a curve c tracing the curve b of HDR coded values such that luminance levels become equal. This conversion characteristic can be defined by a function $f(x)$ but can also be defined as table information.

[0123]

10 Furthermore, in the above-described embodiment, the transmission/reception system 10 including the transmission device 100 and the reception device 200 has been described. However, a configuration of a transmission/reception system to which the present
15 technology can be applied is not limited to the transmission/reception system 10. For example, the reception device 200 may have a configuration of a set top box and a monitor connected by a digital interface such as high-definition multimedia interface (HDMI).

20 Note that "HDMI" is a registered trademark.

[0124]

Furthermore, in the above-described embodiment, an example in which the container is a transport stream (MPEG-2 TS) has been described. However, the present
25 technology is similarly applicable to a system configured to be distributed to a reception terminal using a network such as the Internet. In the Internet distribution, data is often distributed in containers of MP4 or other formats. That is, the containers correspond to
30 containers of various formats such as transport stream (MPEG-2 TS) or MPEG media transport (MMT) adopted in

digital broadcasting standard, and ISOBMFF (MP4) used in the Internet distribution.

[0125]

Furthermore, the present technology can also have
5 the following configurations.

(1) A transmission device including:

an image coding unit configured to encode image data of each picture of a base layer to generate a first coded stream and encode image data of each picture of an
10 enhancement layer to generate a second coded stream; and
a transmission unit configured to transmit a container including the first coded stream and the second coded stream, in which

the image coding unit
15 is able to use a picture of the base layer as a reference picture in encoding the image data of each picture of the enhancement layer, and

applies conversion processing for causing the image data of the base layer to correspond to the image data of
20 the enhancement layer to a block of the reference picture to perform motion compensation prediction coding processing when using the picture of the base layer as the reference picture.

(2) The transmission device according to (1), in
25 which

the image data of each picture of the enhancement layer includes image data of a picture having different display timing from each picture of the base layer.

(3) The transmission device according to (1) or (2),
30 in which

the image data of the base layer is image data of a

first resolution, and the image data of the enhancement layer is image data of a second resolution larger than the first resolution, and

the image coding unit performs, as the conversion
5 processing, scaling processing of changing a resolution of a reference block in the reference picture from the first resolution to the second resolution.

(4) The transmission device according to (3), in which

10 the image coding unit further performs, as the conversion processing, shaping processing of correcting a blunt edge of an image, for the scaled image data.

(5) The transmission device according to (3) or (4), in which

15 the first resolution is an HD resolution, and the second resolution is a UHD resolution.

(6) The transmission device according to (5), in which

the UHD resolution is a 4K resolution, and
20 the image coding unit performs block matching processing using the scaled reference block, for each vector block configured by two-dimensionally adjacent 2×2 four prediction blocks of a picture of the enhancement layer, to determine a first
25 motion vector, and performs block matching processing with each of the four prediction blocks in the scaled reference block to determine a second motion vector corresponding to each of the prediction blocks, and performs the motion compensation prediction coding
30 processing.

(7) The transmission device according to any one of

(1) to (6), in which

the image data of the base layer is image data of a first dynamic range, and the image data of the enhancement layer is image data of a second dynamic range wider than the first dynamic range, and

the image coding unit performs, as the conversion processing, processing of converting a pixel value of the block of the reference picture to correspond to a pixel value of the second dynamic range.

10 (8) A transmission method including:

an image coding step of, by an image coding unit, encoding image data of each picture of a base layer to generate a first coded stream, and encoding image data of each picture of an enhancement layer to generate a second coded stream; and

15 a transmission step of, by a transmission unit, transmitting a container including the first coded stream and the second coded stream, in which,

in the image coding step,

20 a picture of the base layer is able to be used as a reference picture in encoding the image data of each picture of the enhancement layer, and

conversion processing for causing the image data of the base layer to correspond to the image data of the enhancement layer is applied to a block of the reference picture to perform motion compensation prediction coding processing when the picture of the base layer is used as the reference picture.

(9) A reception device including:

30 a reception unit configured to receive a container including a first coded stream obtained by encoding image

data of each picture of a base layer and a second coded stream obtained by encoding image data of each picture of an enhancement layer, in which

5 a picture of the base layer is able to be used as a reference picture in encoding the image data of each picture of the enhancement layer, and conversion processing for causing the image data of the base layer to correspond to the image data of the enhancement layer is applied to a block of the reference picture to perform
10 motion compensation prediction coding processing when the picture of the base layer is used as the reference picture, and

the reception device further includes

a processing unit configured to process the first
15 coded stream, or the first coded stream and the second coded stream, according to display capability, to obtain display image data.

(10) A reception method including:

a reception step of, by a reception unit, receiving
20 a container including a first coded stream obtained by encoding image data of each picture of a base layer and a second coded stream obtained by encoding image data of each picture of an enhancement layer, in which

a picture of the base layer is able to be used as a
25 reference picture in encoding the image data of each picture of the enhancement layer, and conversion processing for causing the image data of the base layer to correspond to the image data of the enhancement layer is applied to a block of the reference picture to perform
30 motion compensation prediction coding processing when the picture of the base layer is used as the reference

picture, and

the reception method further includes

a processing step of, by a processing unit,

processing the first coded stream, or the first coded

5 stream and the second coded stream, according to display capability, to obtain display image data.

[0126]

A main characteristic of the present technology is, when using a picture of a base layer as a reference

10 picture in encoding image data of each picture of an enhancement layer, to apply conversion processing for causing image data of the base layer to correspond to the image data of the enhancement layer, to a block of the reference picture, to perform motion compensation
15 prediction coding processing, thereby to determine a reference block with high precision and improve the coding efficiency (see Figs. 3 and 6).

REFERENCE SIGNS LIST

20 [0127]

10 Transmission/reception system

100 Transmission device

101 Control unit

102 Video encoder

25 102a Scaling unit

102b, 102e Encoding unit

103 System encoder

104 Transmission unit

121 Blocking circuit

30 122 Subtractor circuit

123 Motion prediction/motion compensation circuit

- 124 Integer conversion/quantization circuit
- 125 Inverse quantization/inverse integer conversion circuit
- 126 Adder circuit
- 5 127 Loop filter
- 128 Memory
- 129 Entropy coding circuit
- 131 Blocking circuit
- 132 Subtractor circuit
- 10 133 Motion prediction/motion compensation circuit
- 134 Switching circuit
- 135 Conversion processing unit
- 136 Integer conversion/quantization circuit
- 137 Inverse quantization/inverse integer conversion circuit
- 15 138 Adder circuit
- 139 Loop filter
- 140 Memory
- 141 Entropy coding circuit
- 20 151 Intralayer prediction unit
- 152 Interlayer prediction unit
- 153 Conversion processing unit
- 154 Selection unit
- 155 Encoding function unit
- 25 200 Reception device
- 201 Control unit
- 202 Reception unit
- 203 System decoder
- 204 Video decoder
- 30 204b Decoding unit
- 204e Decoding unit

- 205 Display unit
- 221 Entropy decoding circuit
- 222 Inverse quantization/inverse integer conversion circuit
- 5 223 Motion compensation circuit
- 224 Adder circuit
- 225 Loop filter
- 226 Memory
- 231 Entropy decoding circuit
- 10 232 Inverse quantization/inverse integer conversion circuit
- 233 Motion compensation circuit
- 234, 235 Switching circuit
- 236 Adder circuit
- 15 237 Loop filter
- 238 Memory
- 251 Decoding function unit
- 252 Intralayer prediction compensation unit
- 253 Interlayer prediction compensation unit
- 20 254 Conversion processing unit
- 255 Selection unit

CLAIMS

1. A transmission device comprising:
an image coding unit configured to encode image
5 data of each picture of a base layer to generate a first
coded stream and encode image data of each picture of an
enhancement layer to generate a second coded stream; and
a transmission unit configured to transmit a
container including the first coded stream and the second
10 coded stream, wherein
the image coding unit
is able to use a picture of the base layer as a
reference picture in encoding the image data of each
picture of the enhancement layer, and
15 applies conversion processing for causing the image
data of the base layer to correspond to the image data of
the enhancement layer to a block of the reference picture
to perform motion compensation prediction coding
processing when using the picture of the base layer as
20 the reference picture.
2. The transmission device according to claim 1,
wherein
the image data of each picture of the enhancement
25 layer includes image data of a picture having different
display timing from each picture of the base layer.
3. The transmission device according to claim 1,
wherein
30 the image data of the base layer is image data of a
first resolution, and the image data of the enhancement

layer is image data of a second resolution larger than the first resolution, and

the image coding unit performs, as the conversion processing, scaling processing of changing a resolution of a reference block in the reference picture from the first resolution to the second resolution.

4. The transmission device according to claim 3, wherein

the image coding unit further performs, as the conversion processing, shaping processing of correcting a blunt edge of an image, for the scaled image data.

5. The transmission device according to claim 3, wherein

the first resolution is an HD resolution, and the second resolution is a UHD resolution.

6. The transmission device according to claim 5, wherein

the UHD resolution is a 4K resolution, and the image coding unit

performs block matching processing using the scaled reference block, for each vector block configured by two-dimensionally adjacent 2×2 four prediction blocks of a picture of the enhancement layer, to determine a first motion vector, and performs block matching processing with each of the four prediction blocks in the scaled reference block to determine a second motion vector corresponding to each of the prediction blocks, and performs the motion compensation prediction coding

processing.

7. The transmission device according to claim 1,
wherein

5 the image data of the base layer is image data of a
first dynamic range, and the image data of the
enhancement layer is image data of a second dynamic range
wider than the first dynamic range, and

the image coding unit performs, as the conversion
10 processing, processing of converting a pixel value of the
block of the reference picture to correspond to a pixel
value of the second dynamic range.

8. A transmission method comprising:

15 an image coding step of, by an image coding unit,
encoding image data of each picture of a base layer to
generate a first coded stream, and encoding image data of
each picture of an enhancement layer to generate a second
coded stream; and

20 a transmission step of, by a transmission unit,
transmitting a container including the first coded stream
and the second coded stream, wherein,

in the image coding step,

a picture of the base layer is able to be used as a
25 reference picture in encoding the image data of each
picture of the enhancement layer, and

conversion processing for causing the image data of
the base layer to correspond to the image data of the
enhancement layer is applied to a block of the reference
30 picture to perform motion compensation prediction coding
processing when the picture of the base layer is used as

the reference picture.

9. A reception device comprising:

a reception unit configured to receive a container
5 including a first coded stream obtained by encoding image
data of each picture of a base layer and a second coded
stream obtained by encoding image data of each picture of
an enhancement layer, wherein

a picture of the base layer is able to be used as a
10 reference picture in encoding the image data of each
picture of the enhancement layer, and conversion
processing for causing the image data of the base layer
to correspond to the image data of the enhancement layer
is applied to a block of the reference picture to perform
15 motion compensation prediction coding processing when the
picture of the base layer is used as the reference
picture, and

the reception device further comprises

a processing unit configured to process the first
20 coded stream, or the first coded stream and the second
coded stream, according to display capability, to obtain
display image data.

10. A reception method comprising:

25 a reception step of, by a reception unit, receiving
a container including a first coded stream obtained by
encoding image data of each picture of a base layer and a
second coded stream obtained by encoding image data of
each picture of an enhancement layer, wherein

30 a picture of the base layer is able to be used as a
reference picture in encoding the image data of each

picture of the enhancement layer, and conversion
processing for causing the image data of the base layer
to correspond to the image data of the enhancement layer
is applied to a block of the reference picture to perform
5 motion compensation prediction coding processing when the
picture of the base layer is used as the reference
picture, and
the reception method further comprises
a processing step of, by a processing unit,
10 processing the first coded stream, or the first coded
stream and the second coded stream, according to display
capability, to obtain display image data.

FIG. 1

10: TRANSMISSION/RECEPTION SYSTEM

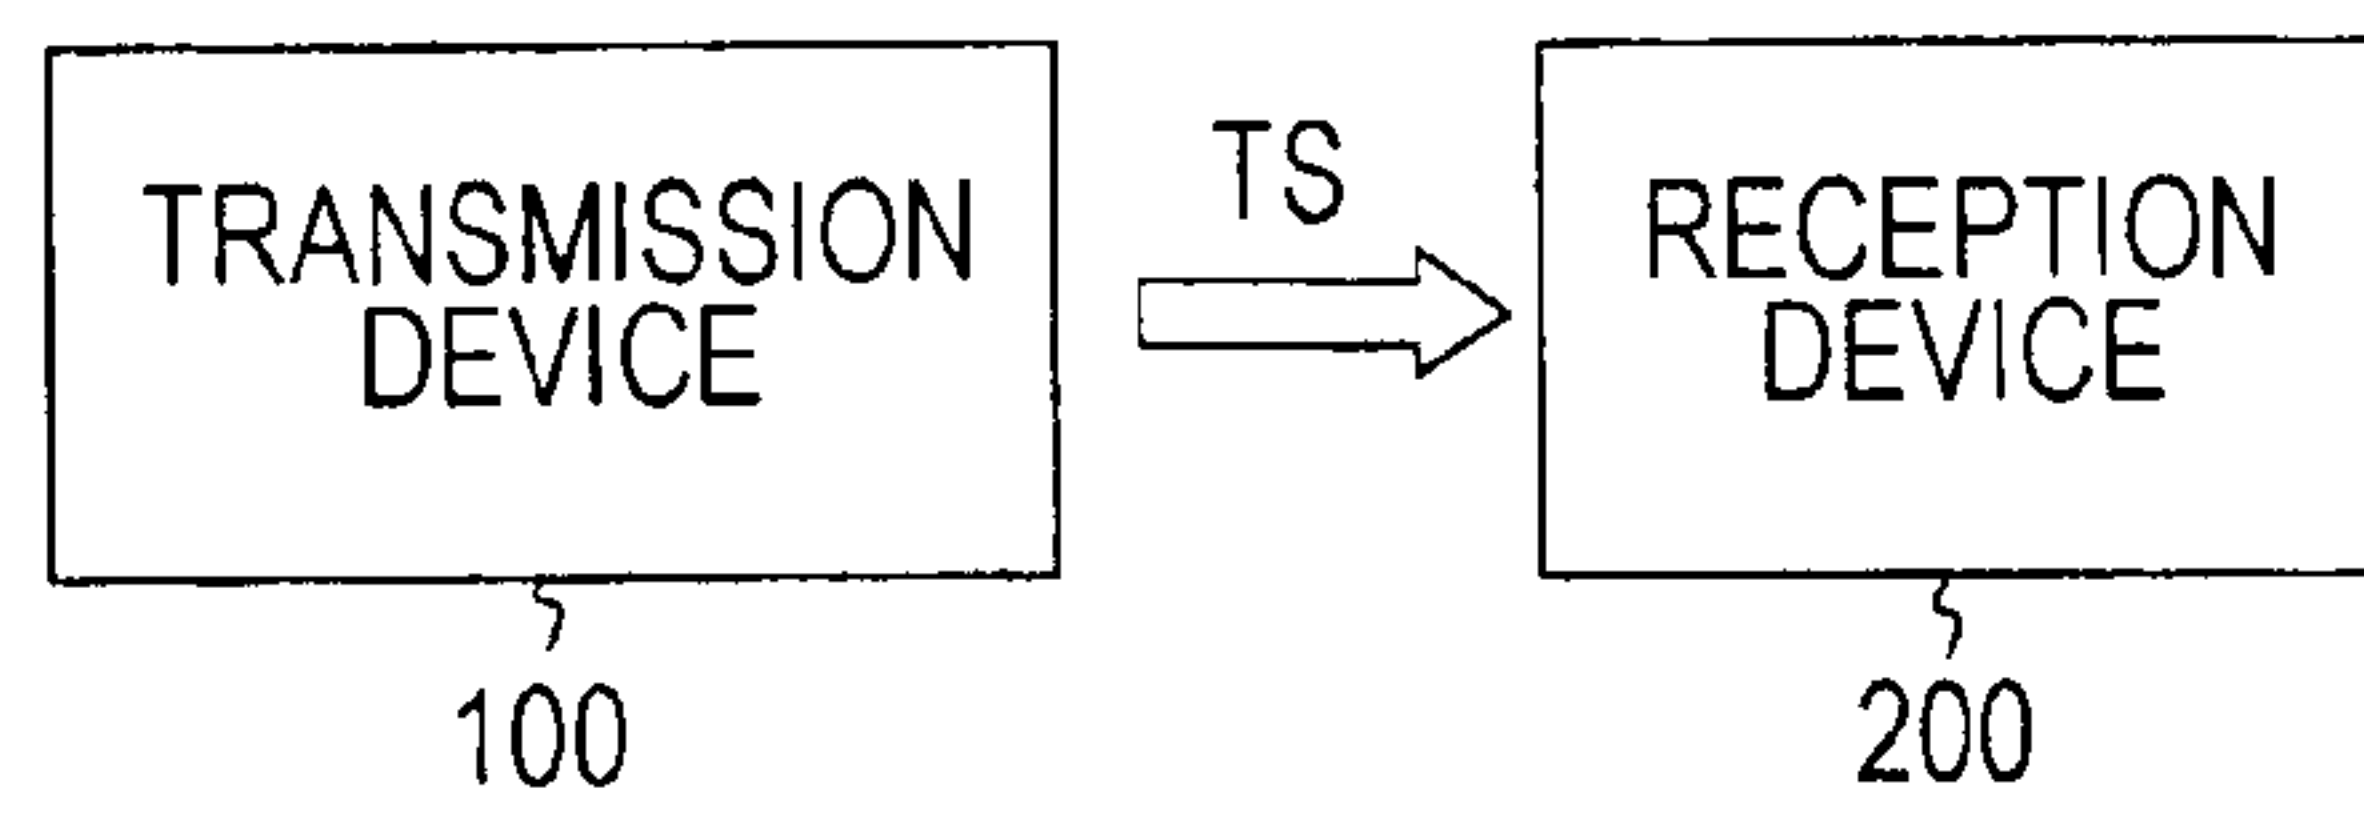


FIG. 2

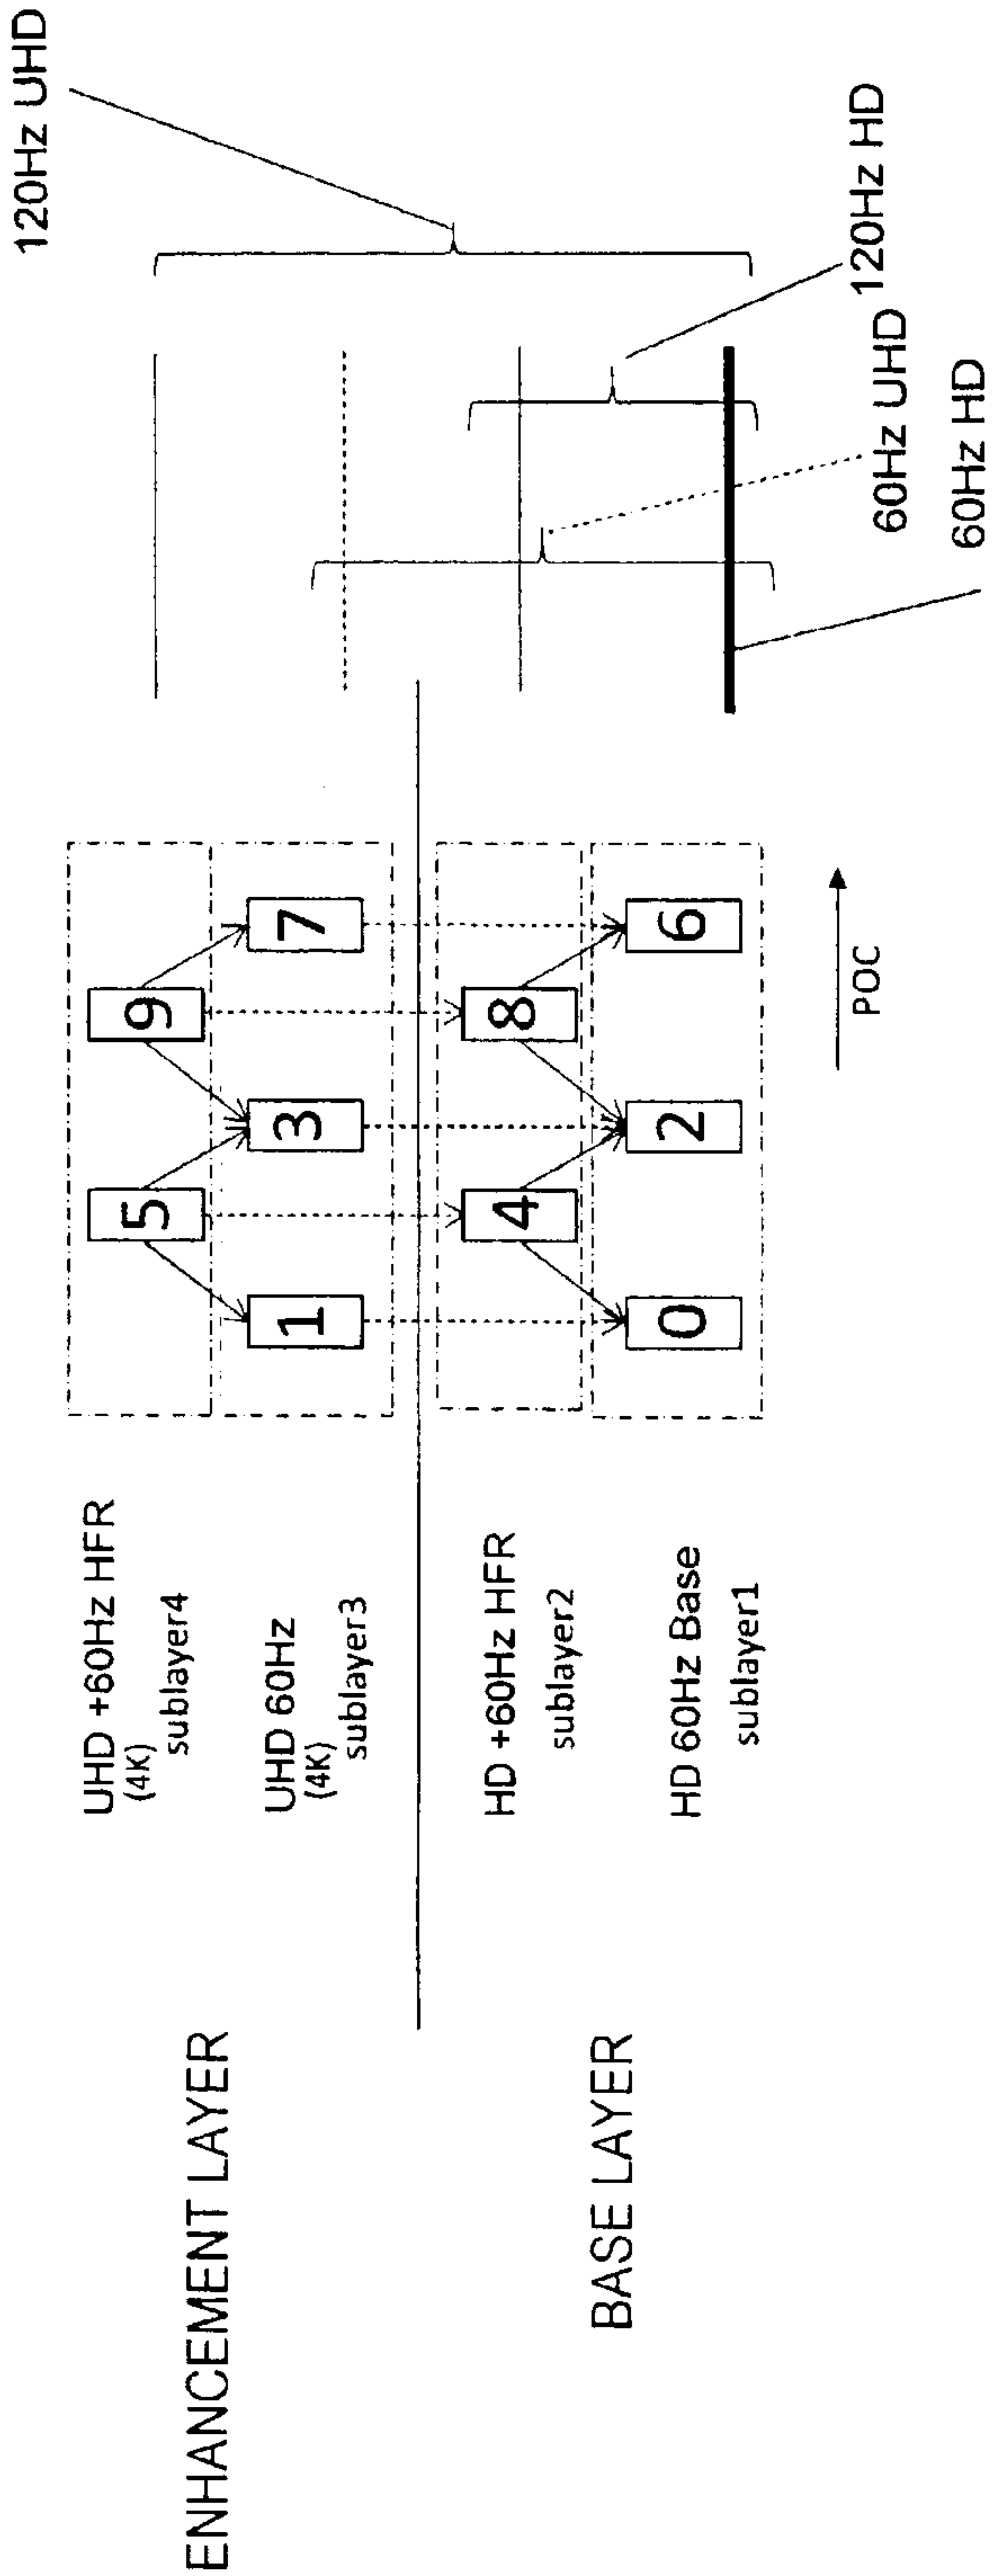


FIG. 3

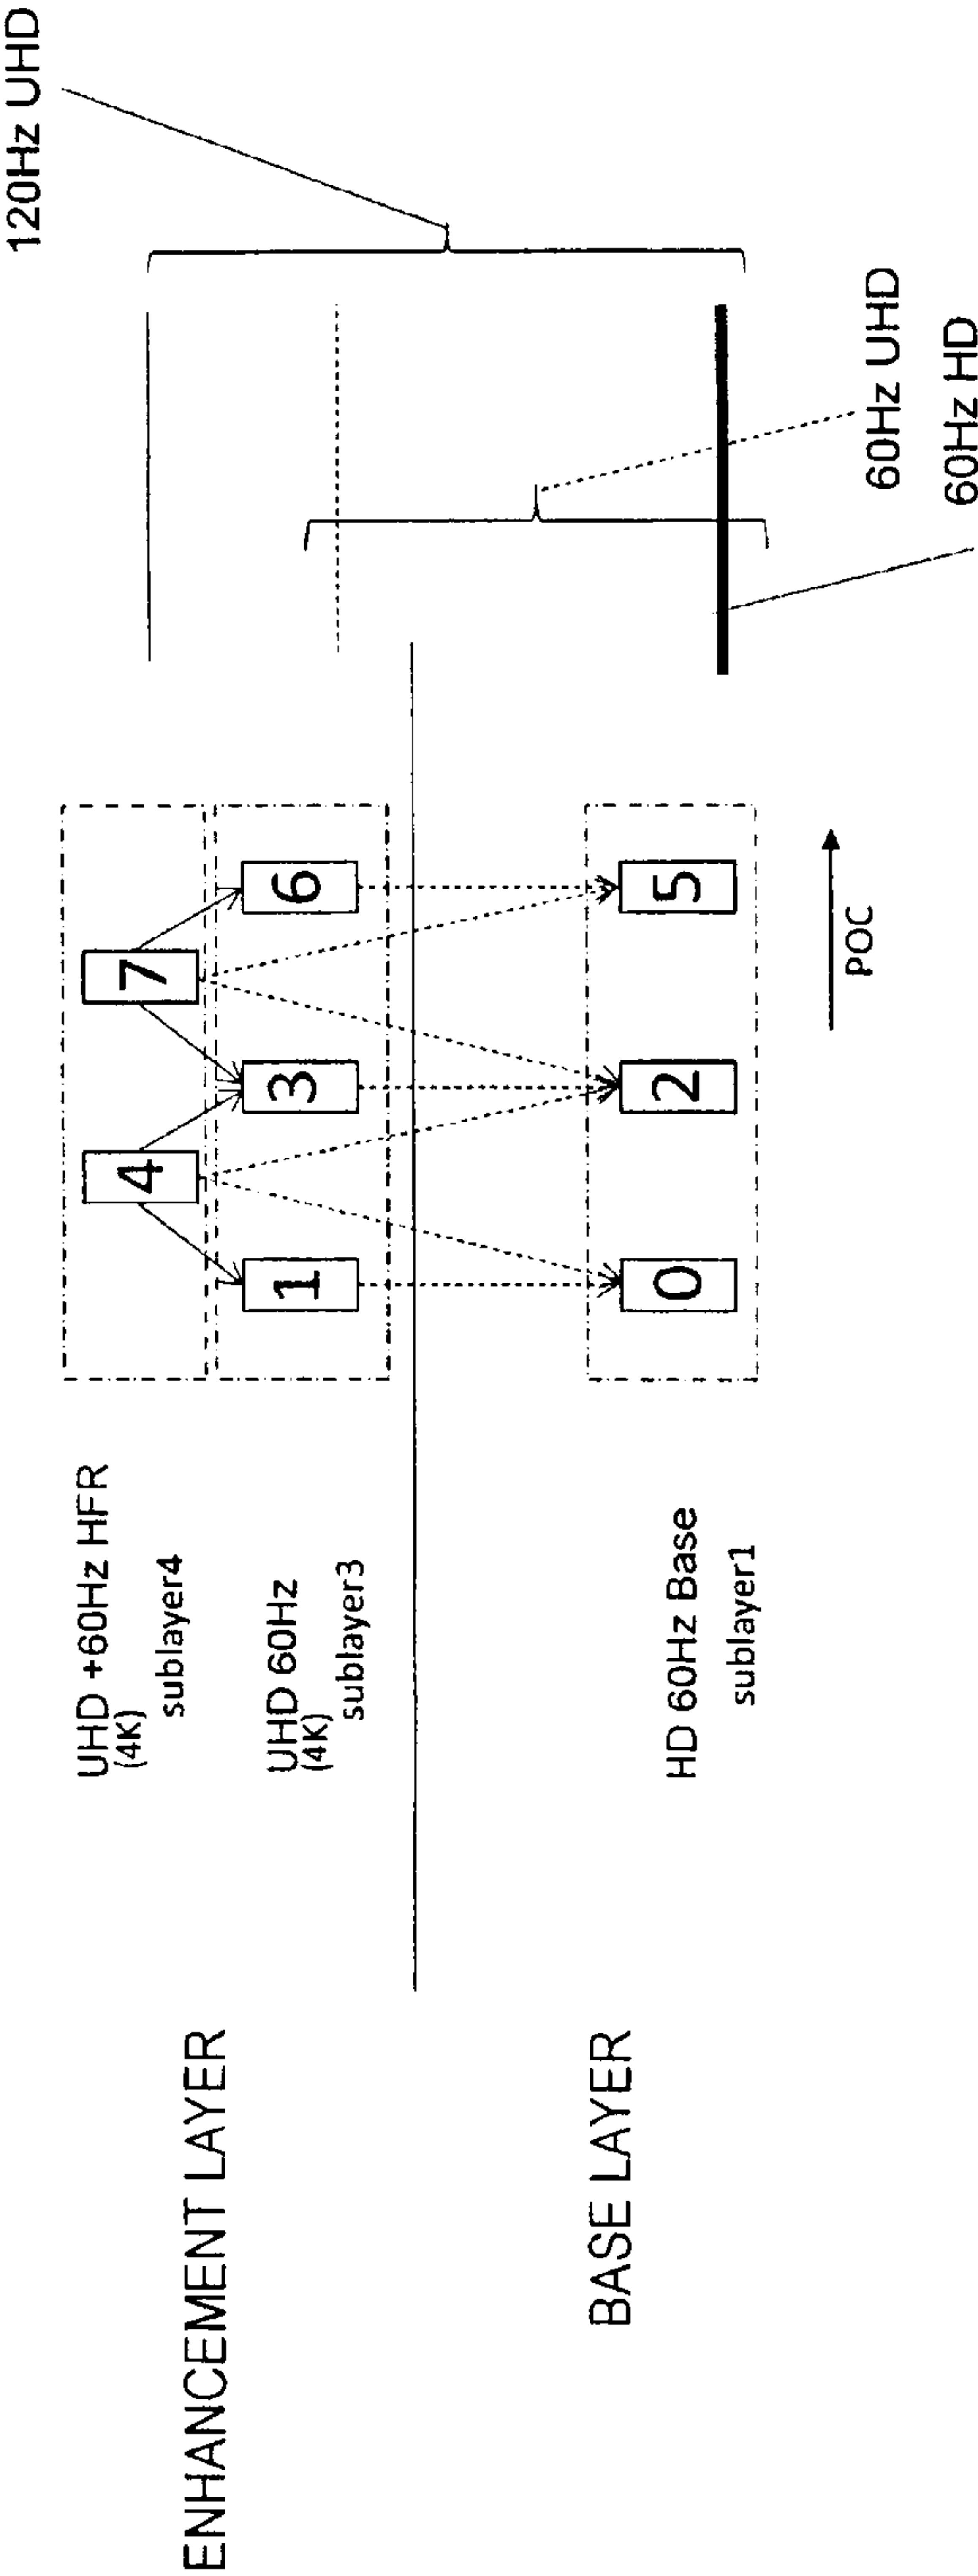


FIG. 4

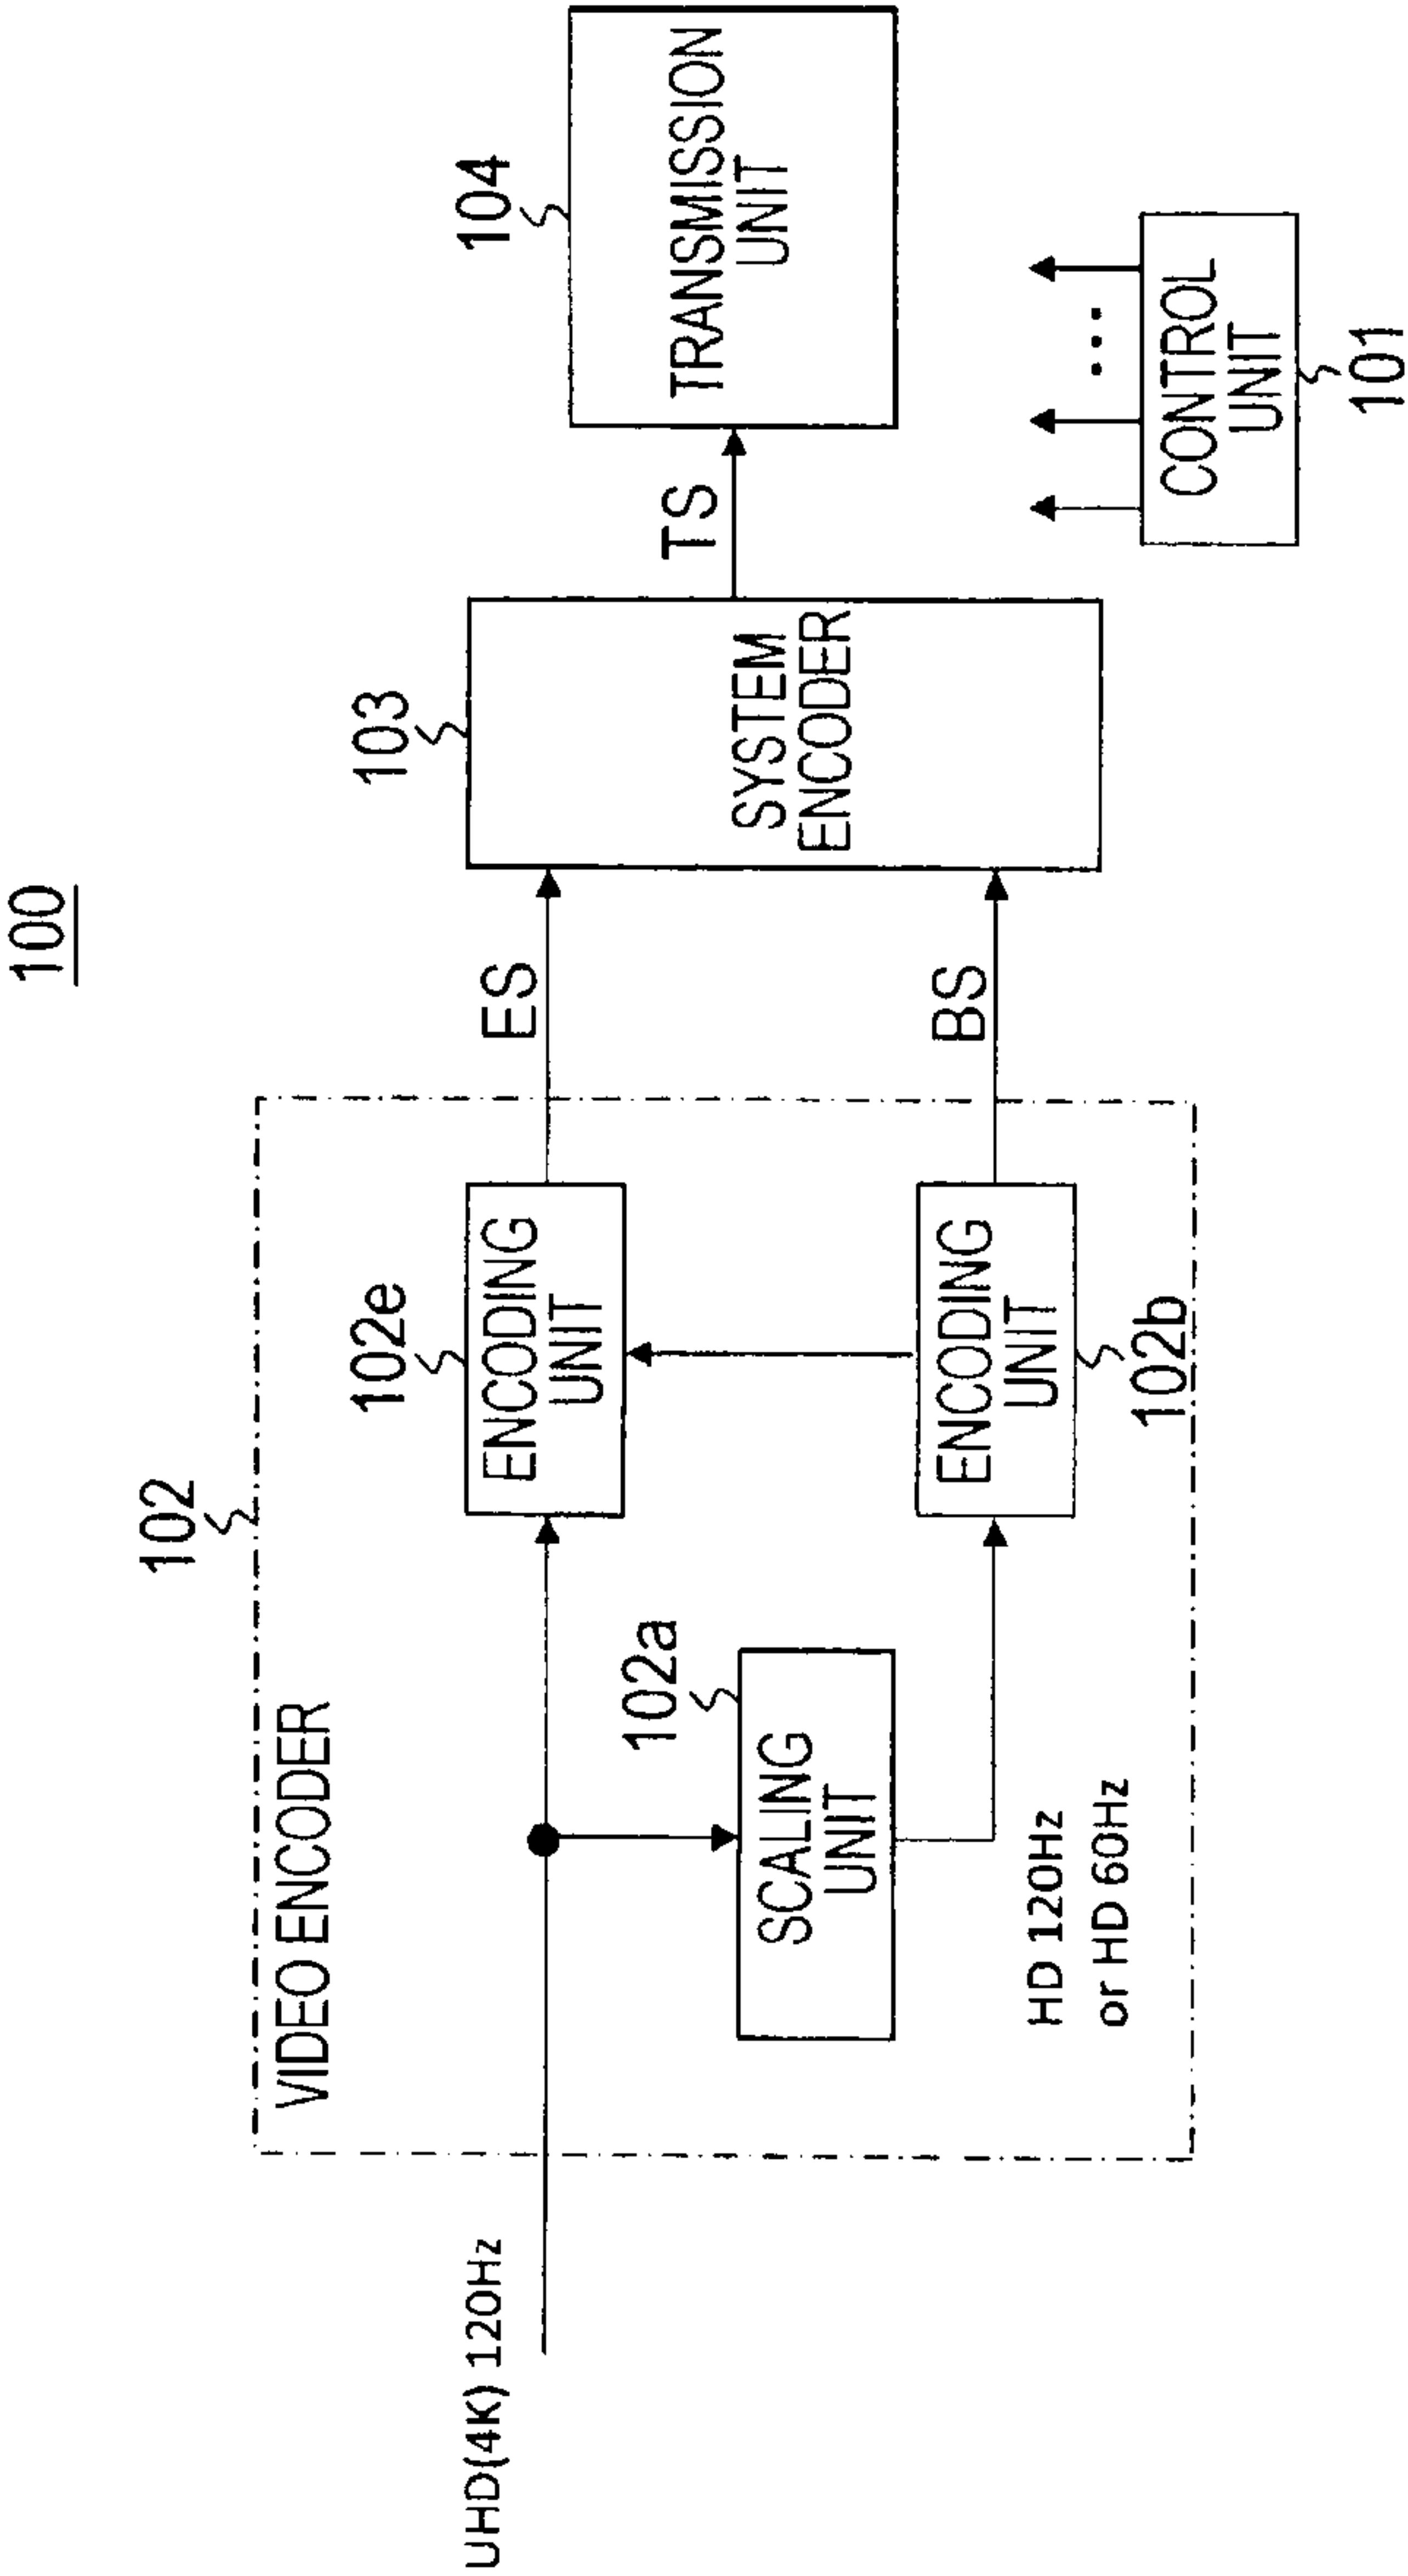


FIG. 5

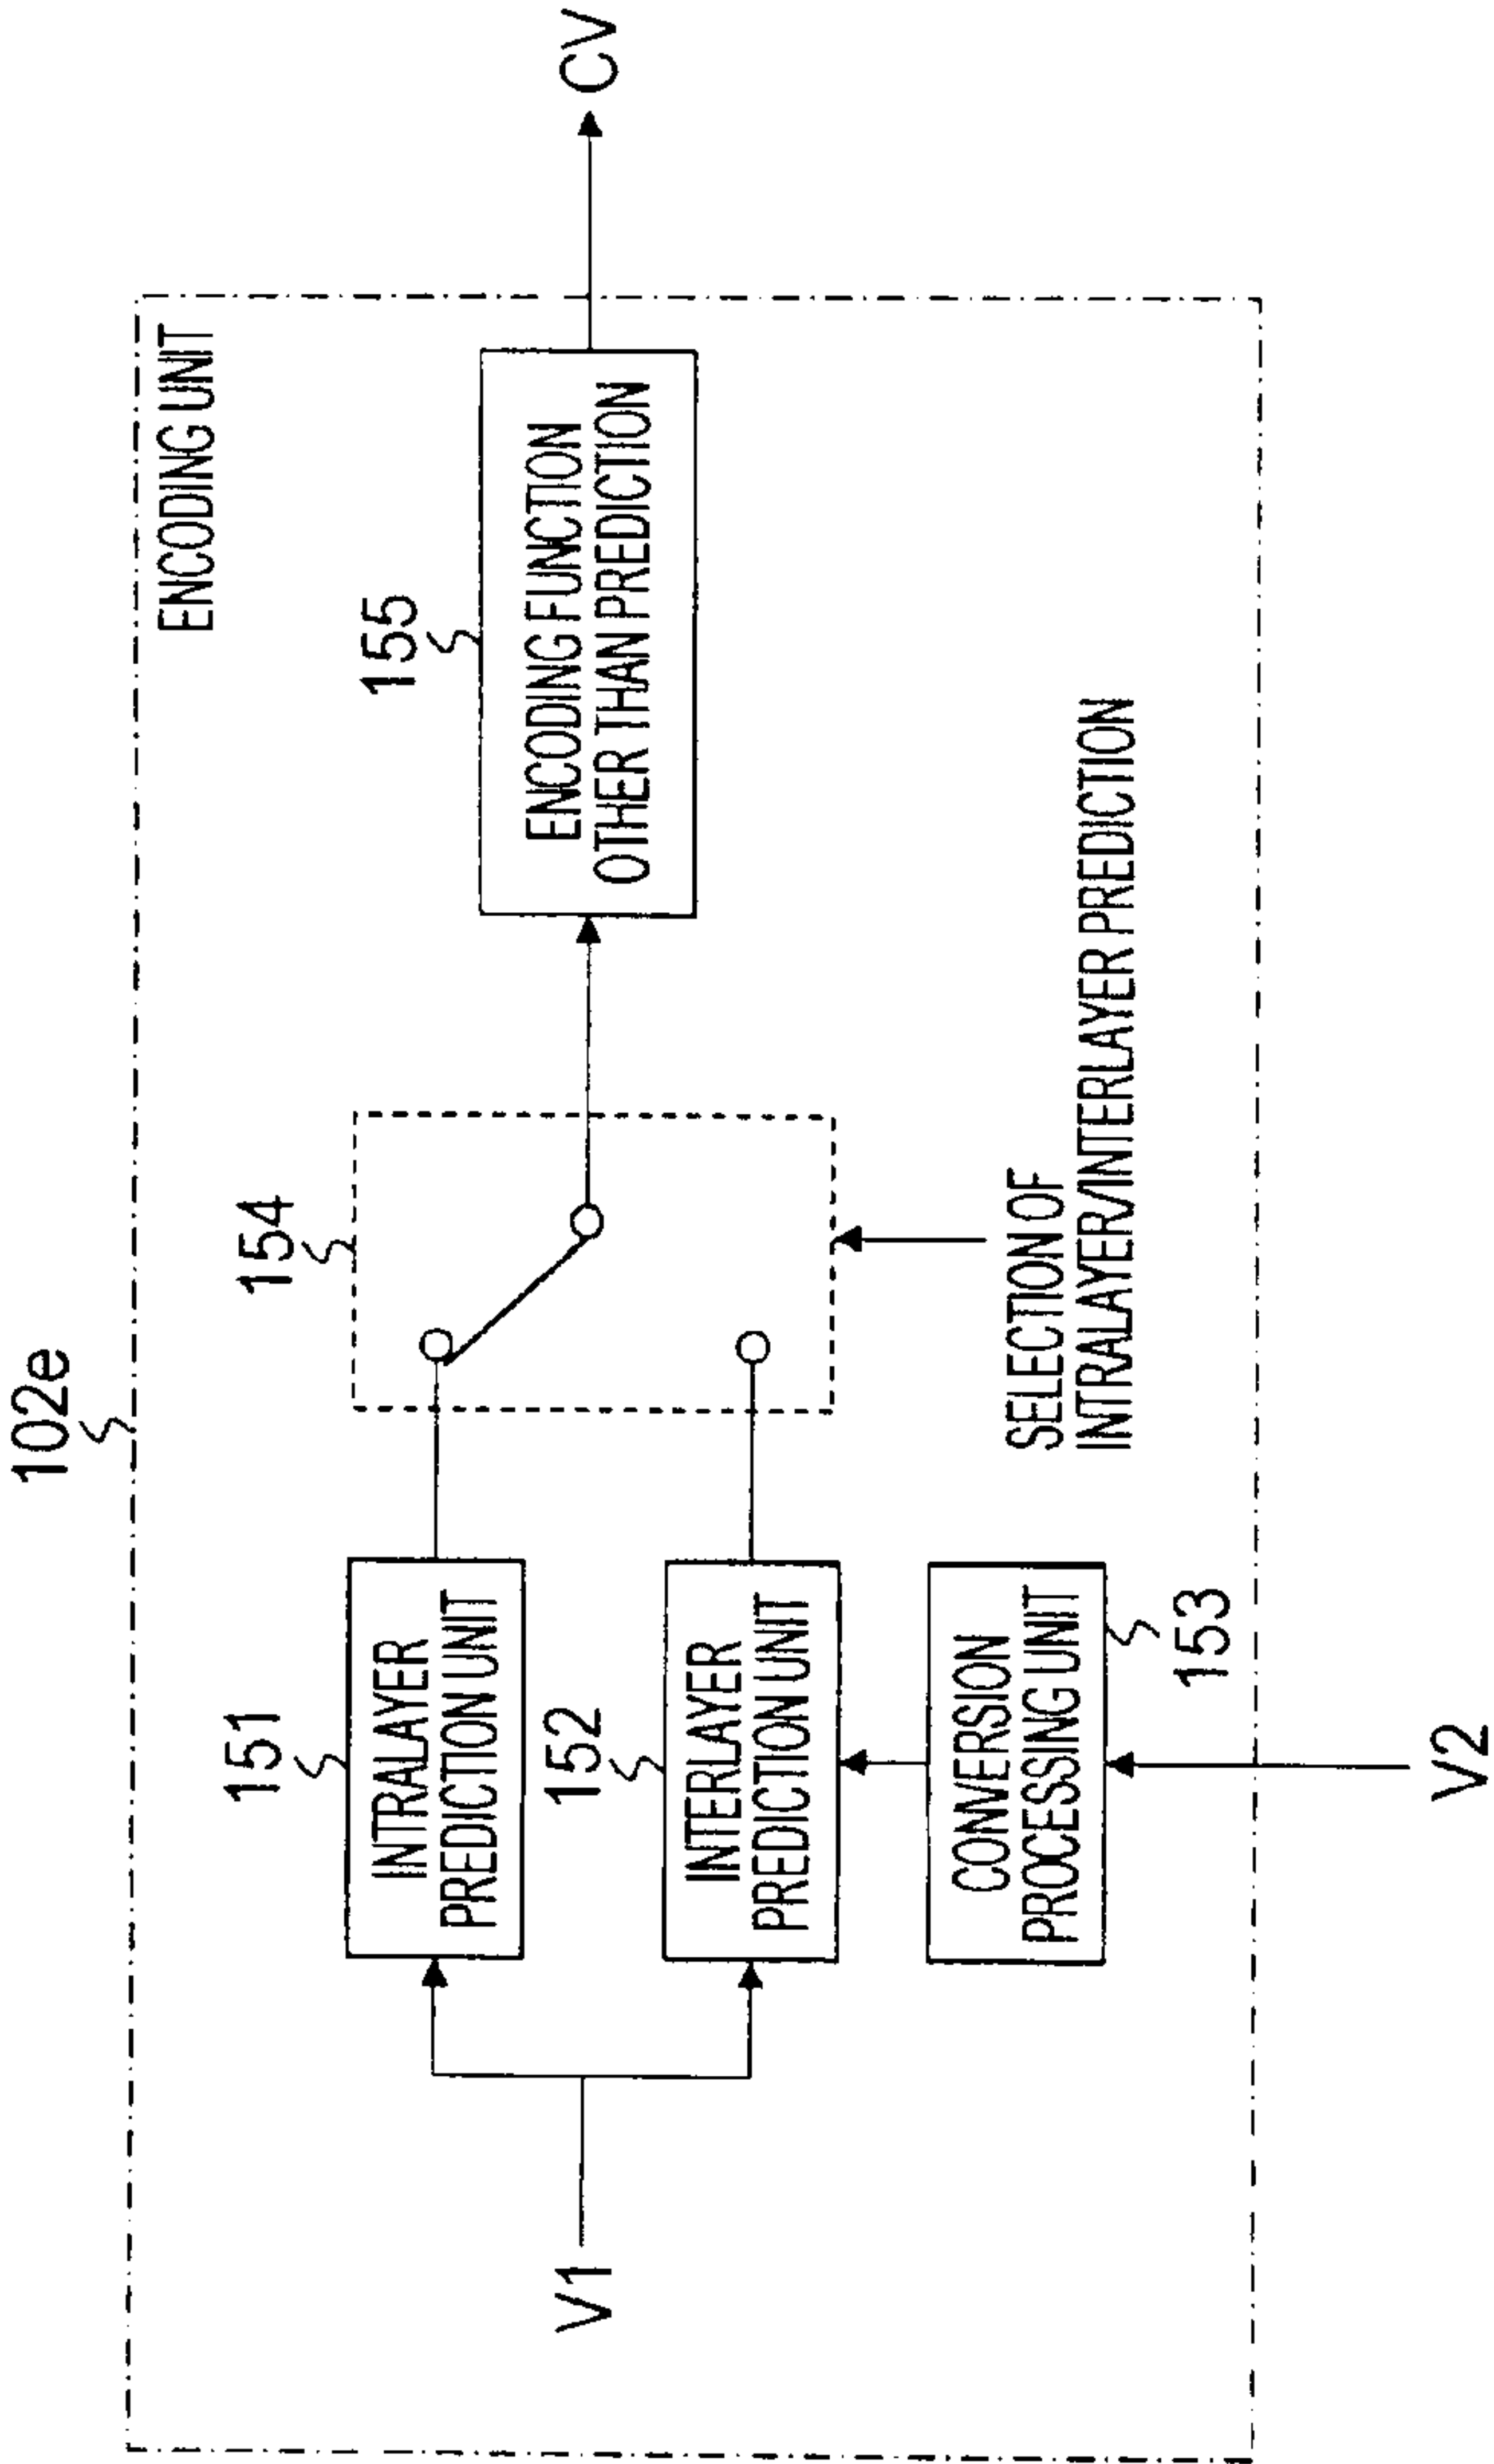


FIG. 6

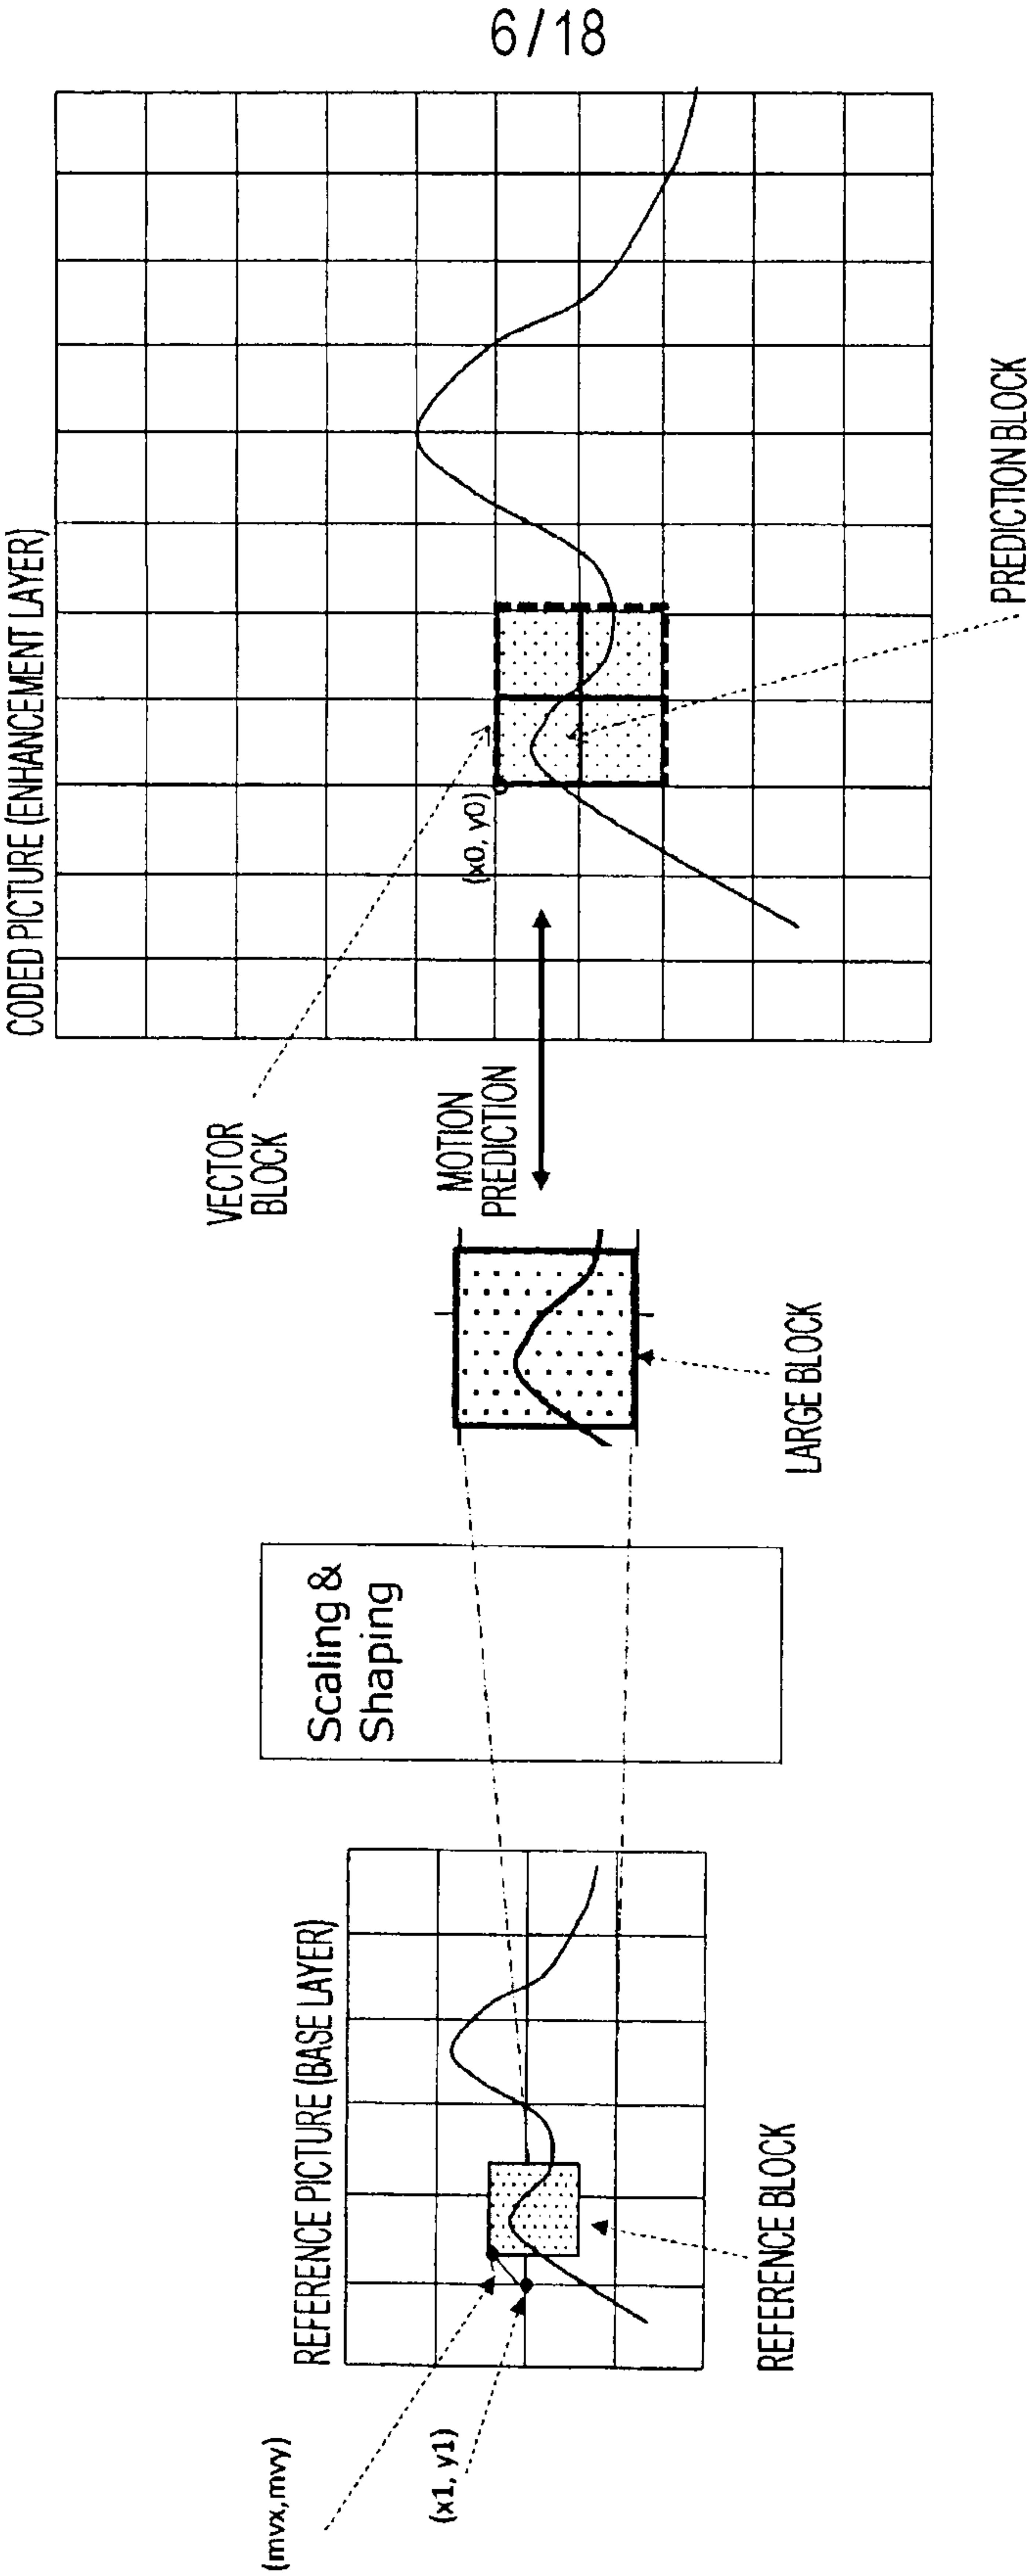


FIG. 7

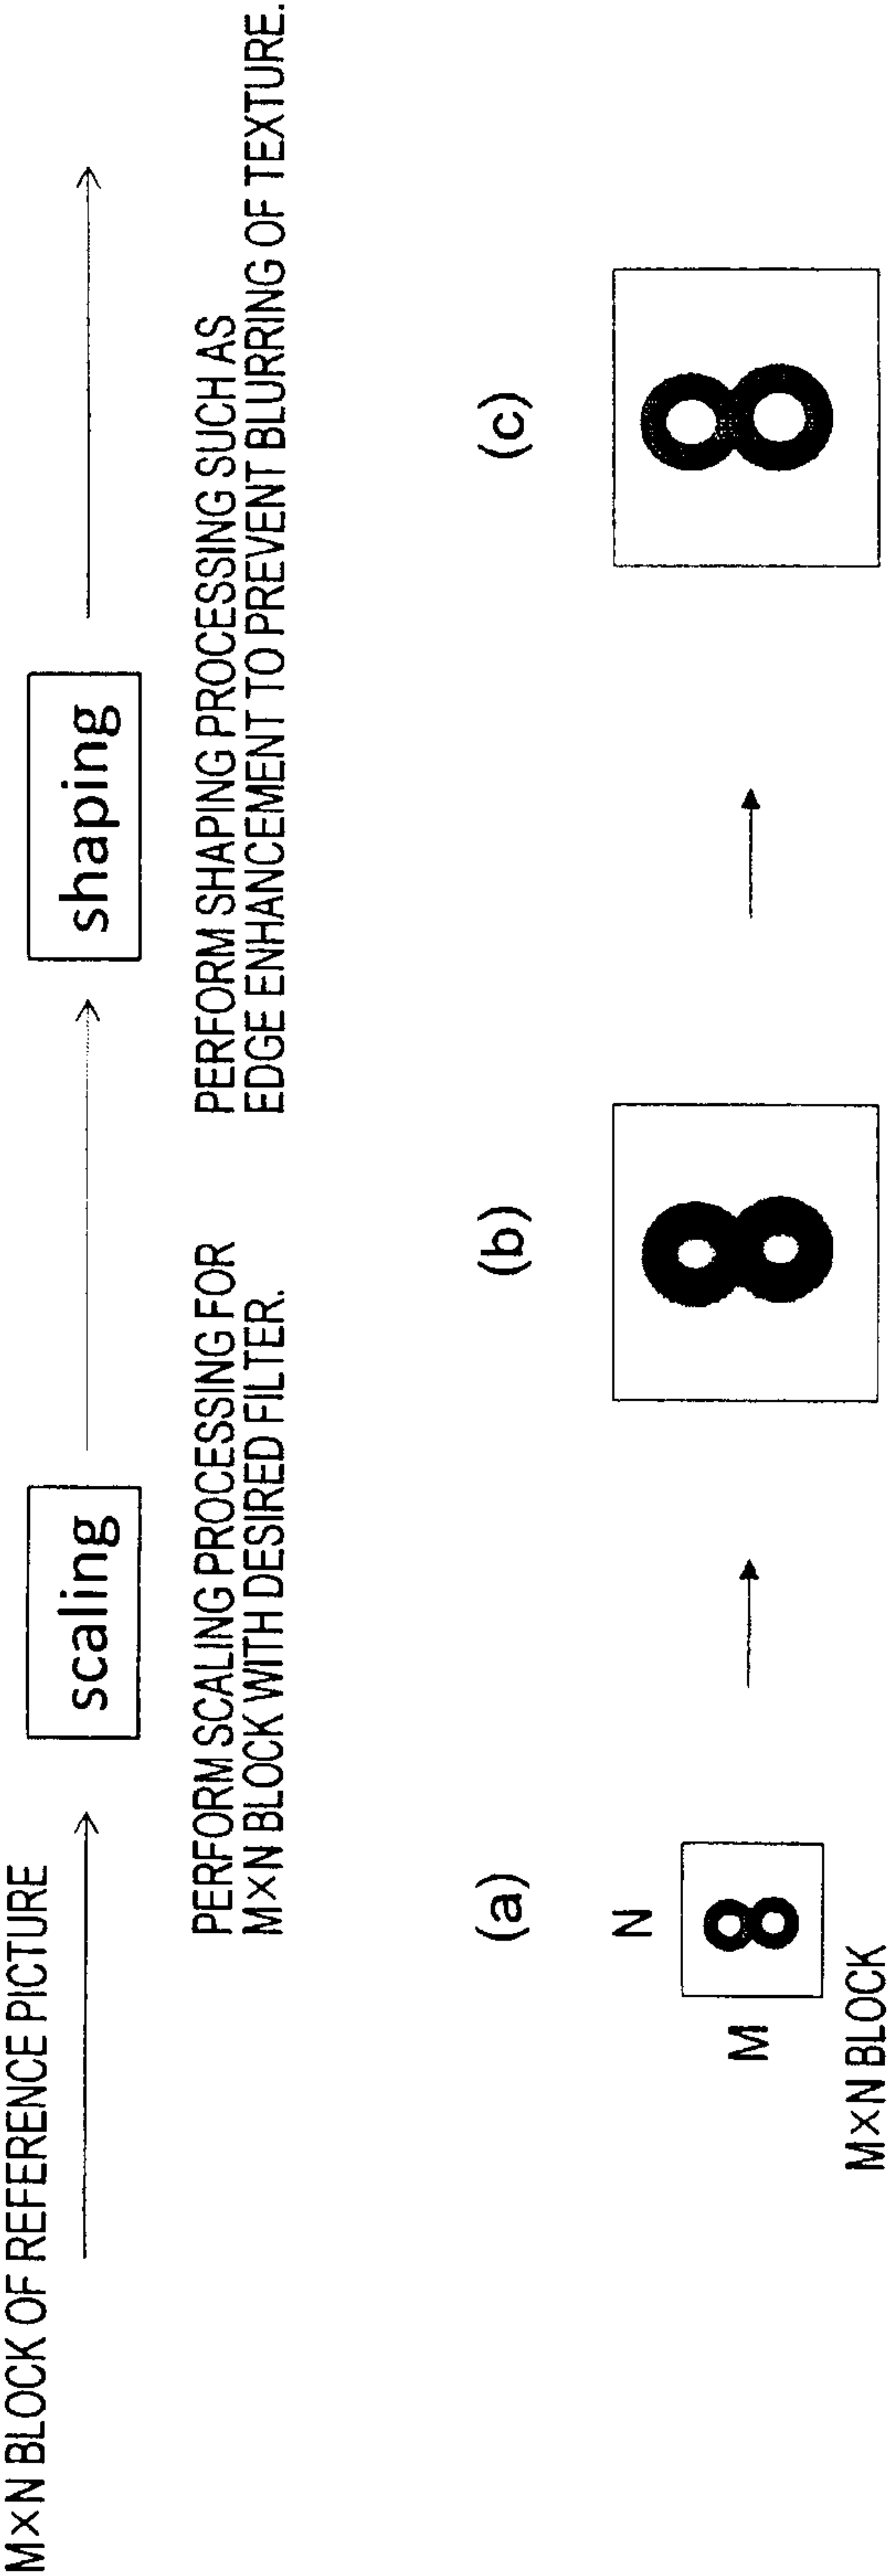
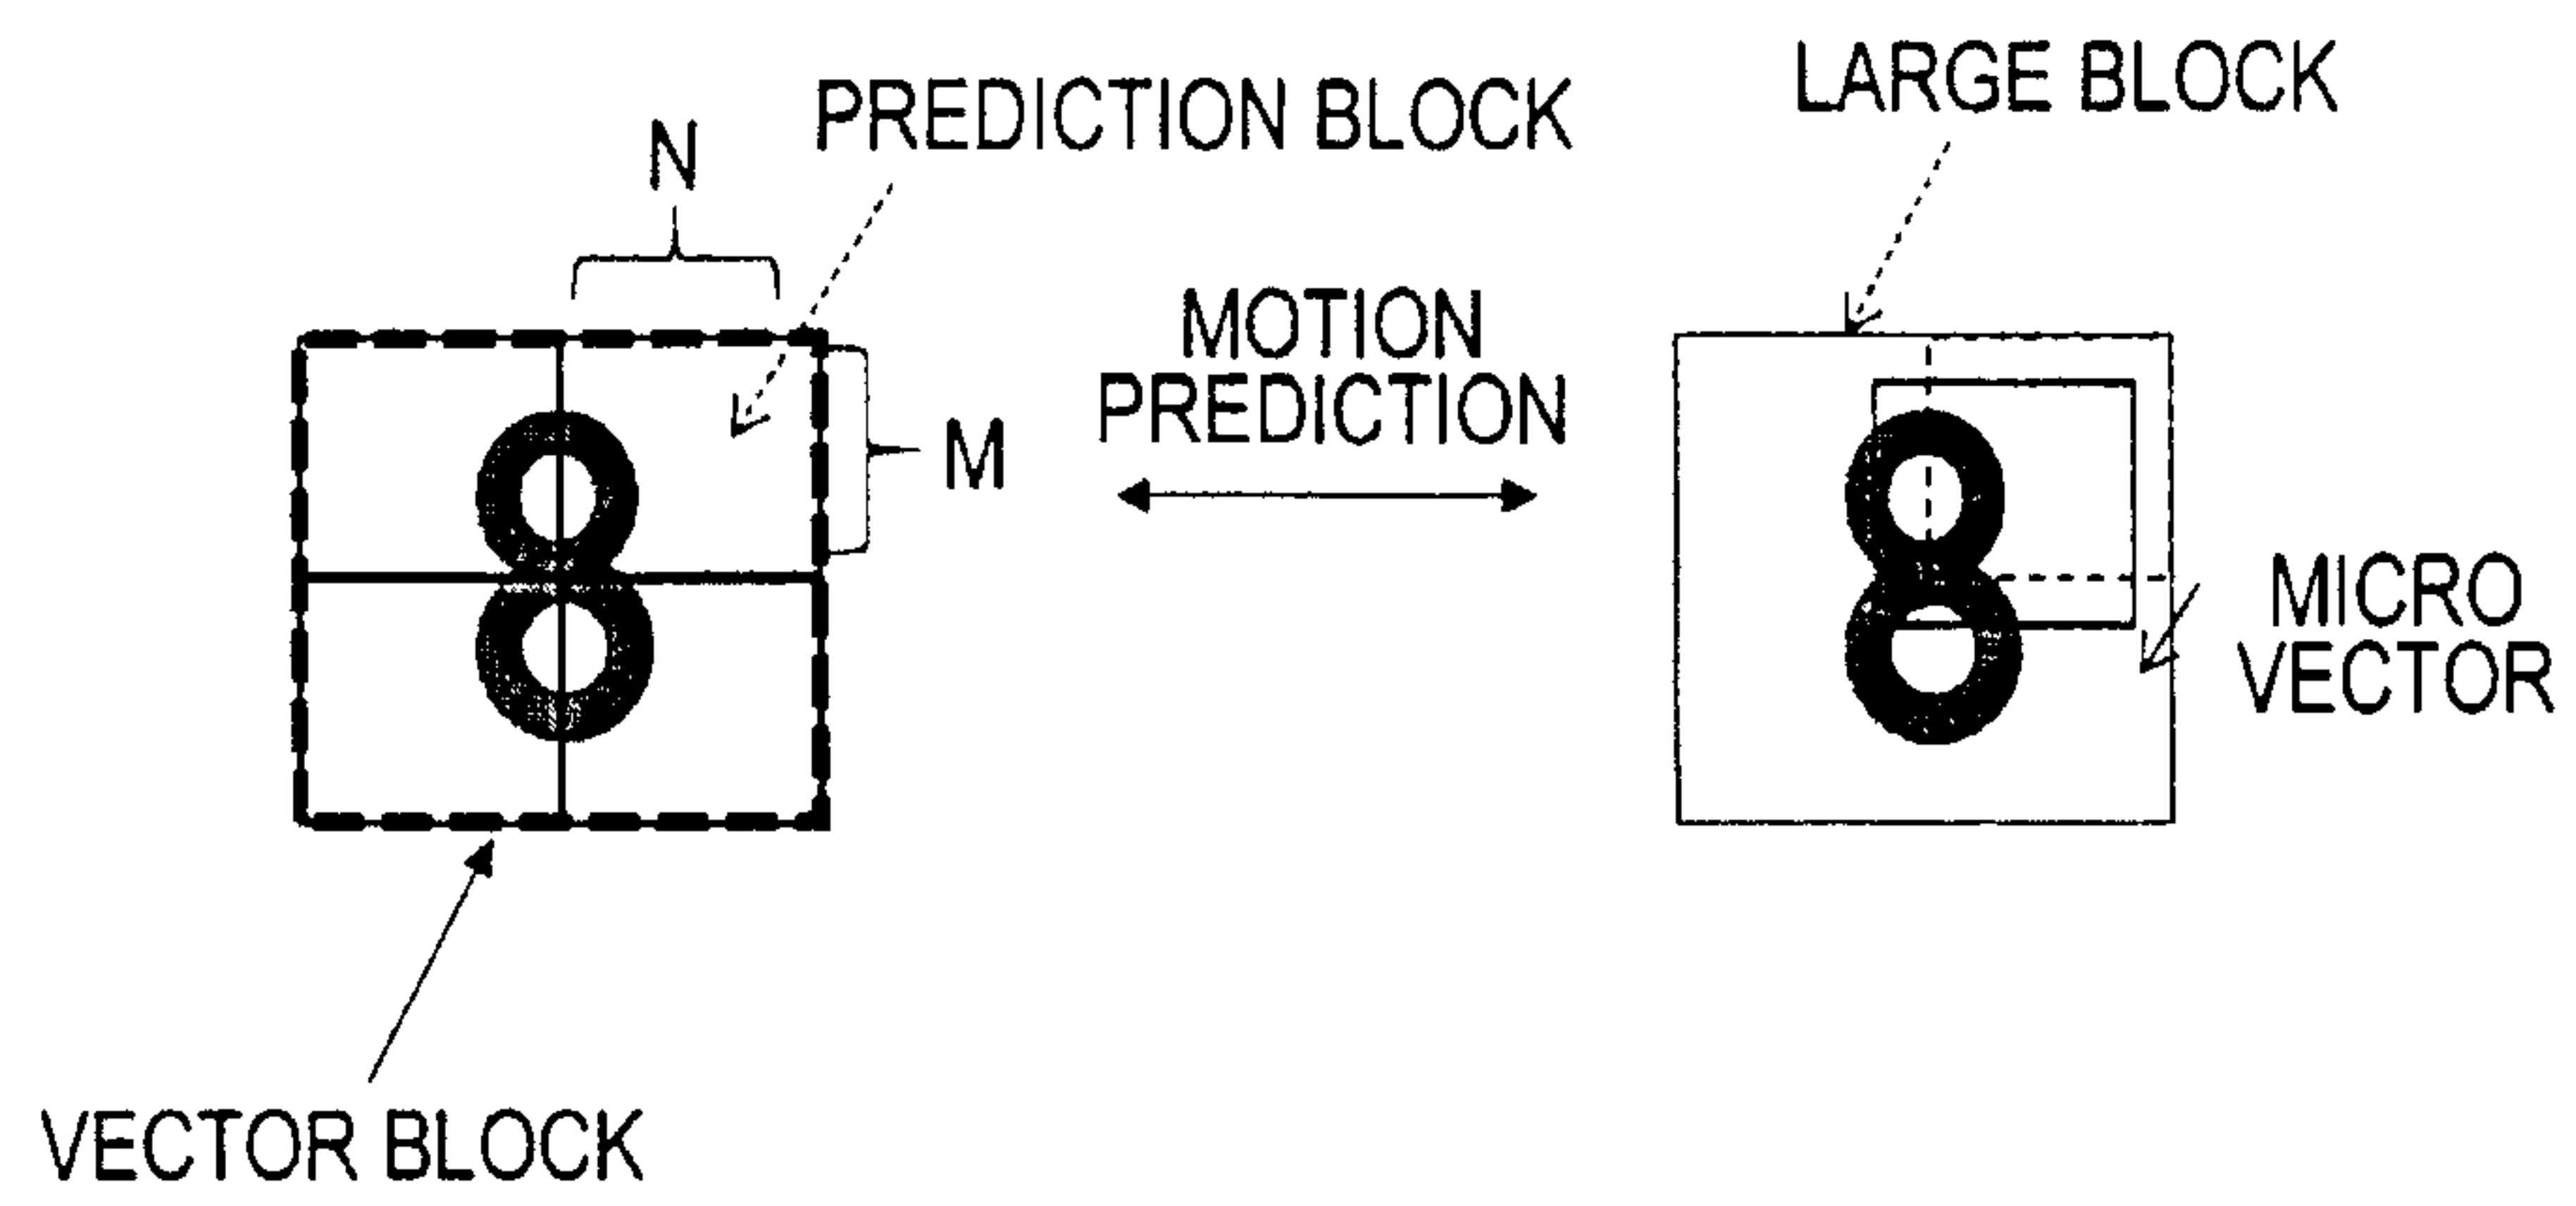


FIG. 8

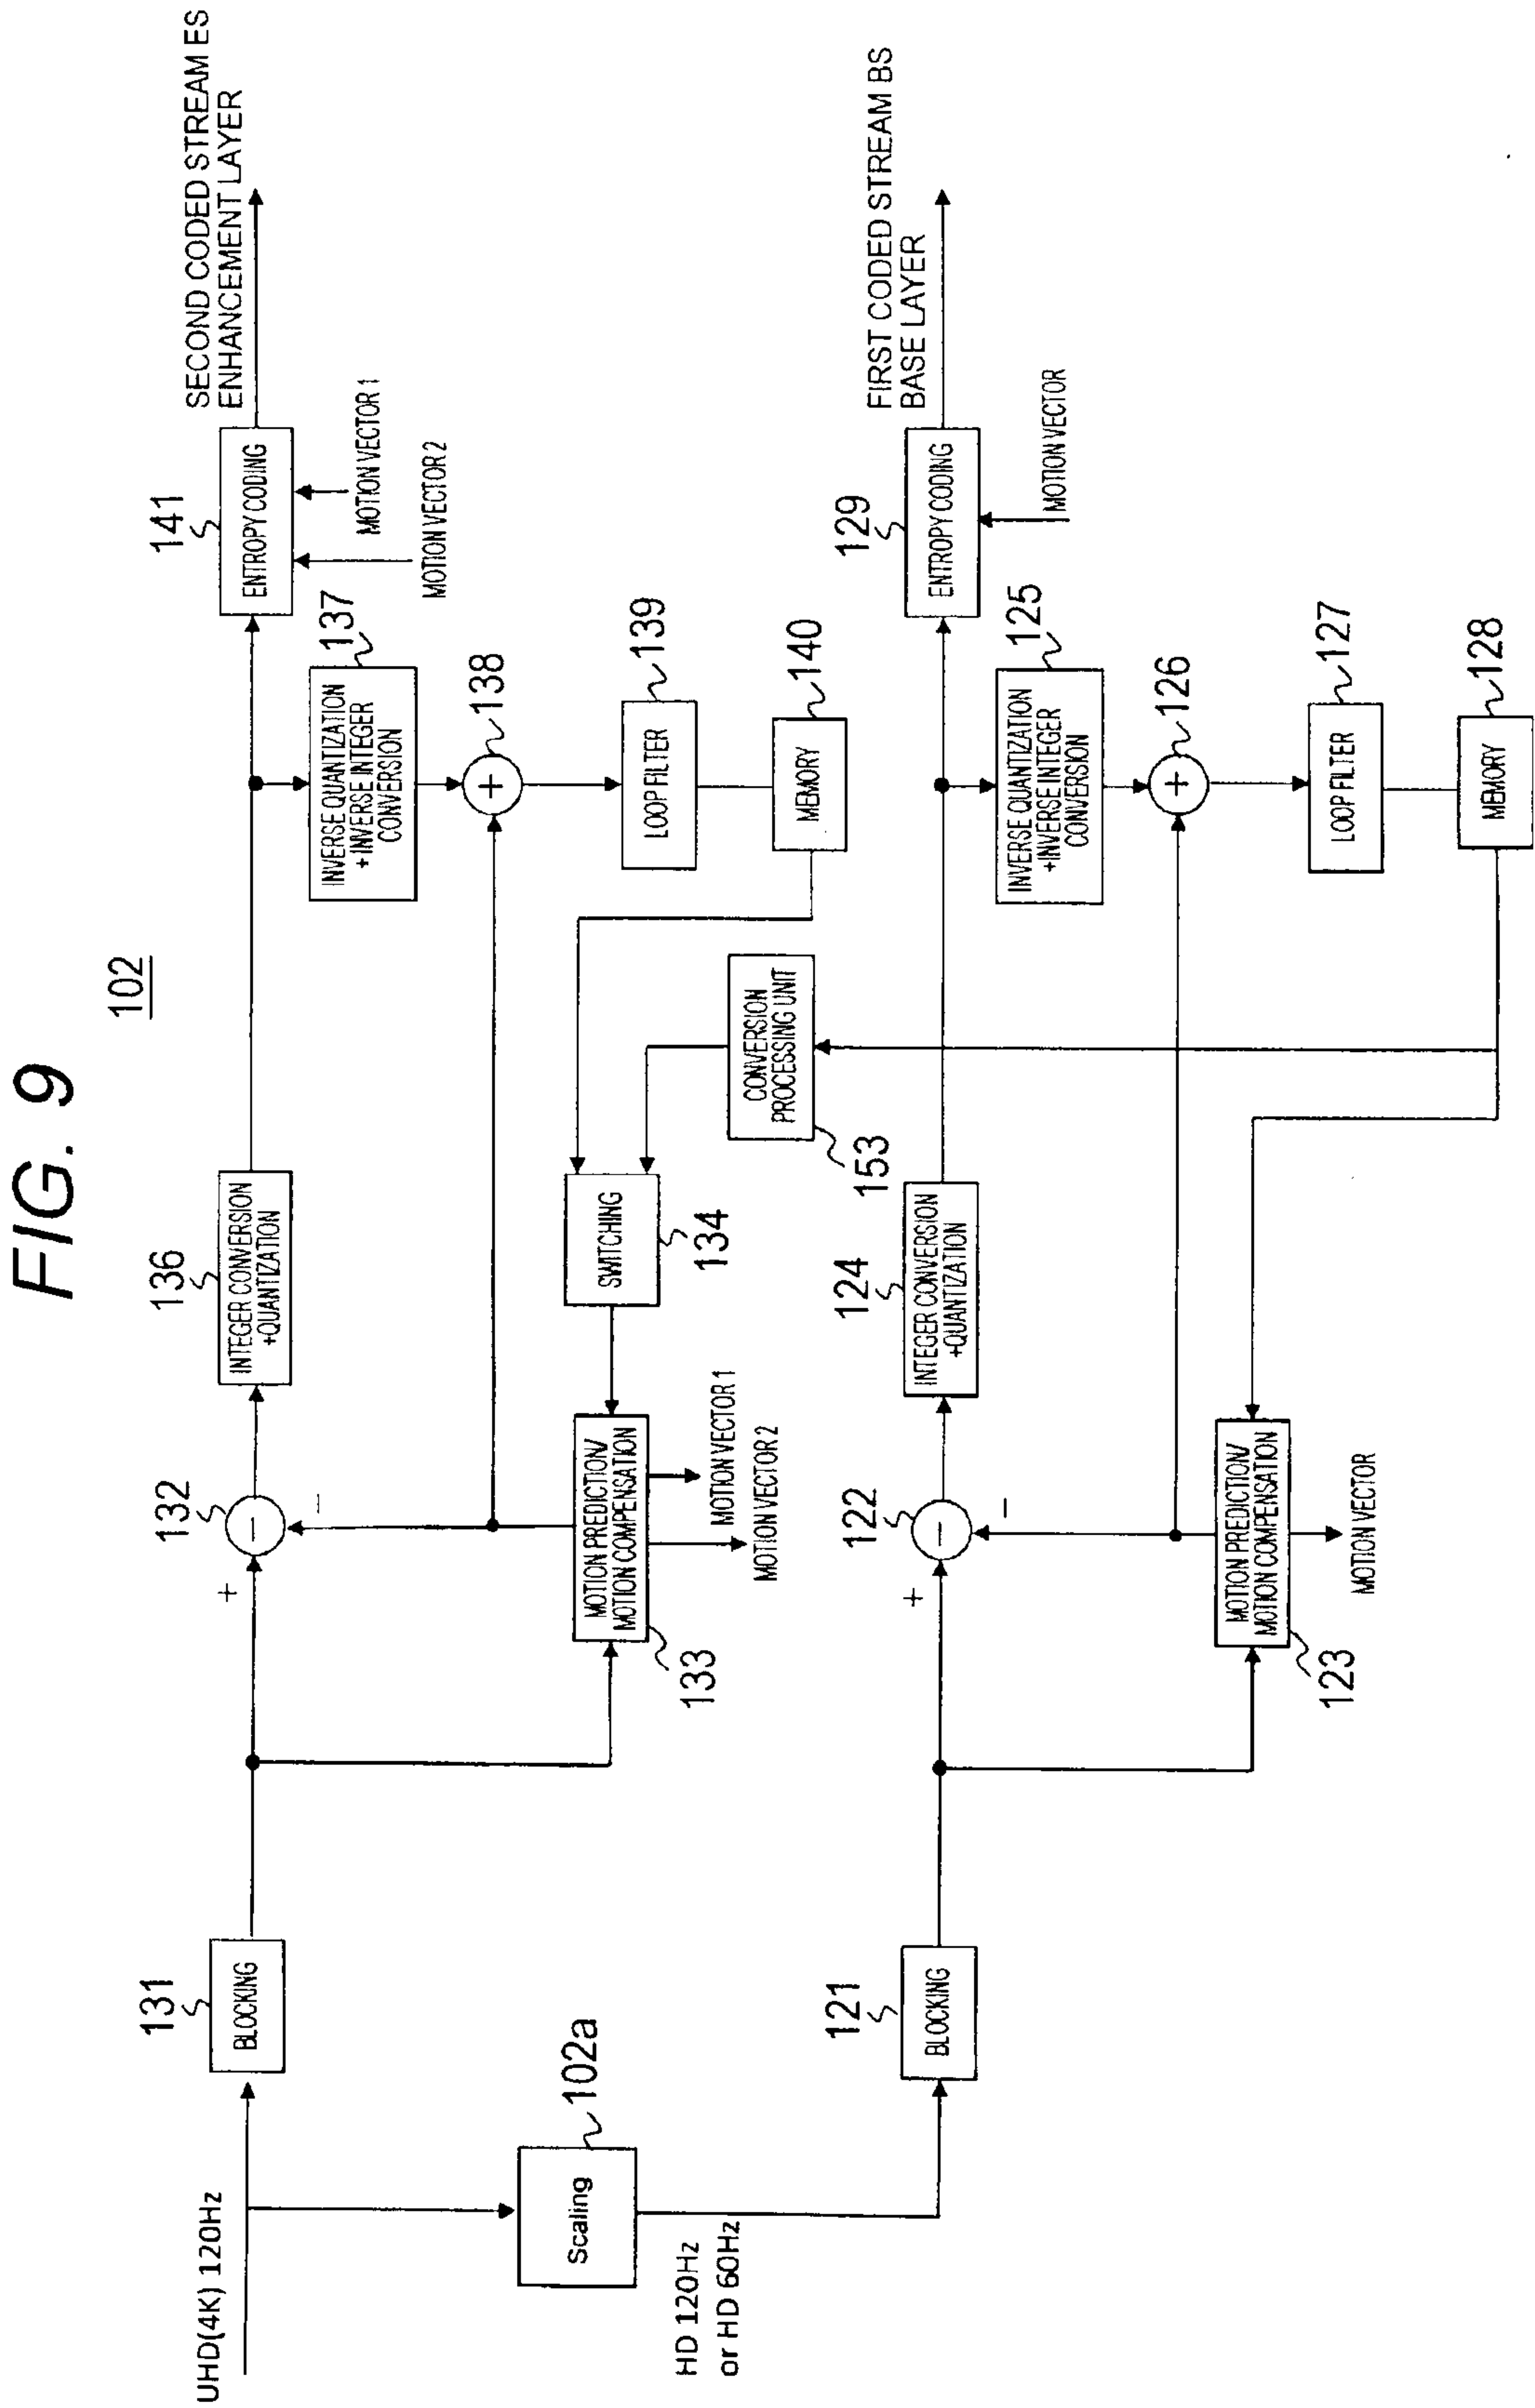


FIG. 10

(a)	Syntax	Type
	slice_segment_header()	
	slice_segment_data()	

(b)	Syntax	Type
	slice_segment_header(){	
	slice_type	
	reference_pic_set_idx	
	ref_list	
	self_layer	ae(v)
	}	

FIG. 11

Syntax
slice_segment_data(){
~LOOP FOR EACH CODED block ~
coding_unit(){
number_of_referencing
for (i = 0 ; i < number_of_referencing ; i++){
ref_pic_layer_id
ref_idx_li
if (ref_pic_layer_id != self_layer) {
ref_pic_resolution
ref_pic_scaling_ratio
vector_prediction_unit(cod_blc_x, cod_blc_y, interlayer_mvx, interlayer_mvy)
micro_prediction_unit(cod_blc_x, cod_blc_y, microvec_x, microvec_y)
}
else ({
prediction_unit(cod_blc_x, cod_blc_y, intralayer_mvx, intralayer_mvy)
}
residual_coding(cod_blc_x, cod_blc_y, transform_size)
}
}

FIG. 12

Syntax
vector_prediction_unit(cod_blc_x, cod_blc_y, interlayer_mvx, interlayer_mvy){
scale_fil_horiz_type
scale_fil_vert_type
shape_horiz_type
shape_vert_type
vector_prediction_unit_size
prediction_unit_size
interlayer_mvx
interlayer_mvy
}
micro_prediction_unit(cod_blc_x, cod_blc_y, microvec_x, microvec_y){
microvec_x
microvec_y
}

FIG. 13

Syntax
prediction_unit(cod_blc_x, cod_blc_y, intralayer_mvx, intralayer_mvy){
prediction_unit_size
intralayer_mvx
intralayer_mvy
}

FIG. 14

SEMANTICS

self_layer	LAYER TO WHICH CODED SLICE BELONGS IS INDICATED. FOR EXAMPLE, BASE LAYER IS "0" AND ENHANCEMENT LAYER IS "1".
ref_pic_layer_id	IDENTIFICATION NUMBER ASSIGNED TO LAYER. FOR EXAMPLE, BASE LAYER IS "0" AND ENHANCEMENT LAYER IS "1".
number_of_referencing	NUMBER OF PREDICTION REFERENCES
ref_idx_li	INDEX OF REFERENCE PICTURE
ref_pic_resolution	RESOLUTION OF REFERENCE PICTURE
ref_pic_scaling_ratio	SCALING RATIO OF REFERENCE PICTURE
cod_blc_x	x position OF CODED BLOCK
cod_blc_y	y position OF CODED BLOCK
scale_fil_horiz_type	TYPE OF HORIZONTAL DIRECTION SCALING FILTER
scale_fil_vert_type	TYPE OF VERTICAL DIRECTION SCALING FILTER
shape_horiz_type	HORIZONTAL DIRECTION FILTER FUNCTION AND TABLE FOR DEBLURRING ARE INDICATED
shape_vert_type	VERTICAL DIRECTION FILTER FUNCTION AND TABLE FOR DEBLURRING ARE INDICATED
vector_prediction_unit_size	SIZE OF vector block IS INDICATED
prediction_unit_size	SIZE OF PREDICTION BLOCK IS INDICATED
interlayer_vector_mvx	MOTION VECTOR IN HORIZONTAL DIRECTION REFERENCE PICTURE RESOLUTION
interlayer_vector_mvy	MOTION VECTOR IN VERTICAL DIRECTION REFERENCE PICTURE RESOLUTION
micro_vector_x	HORIZONTAL DIRECTION POSITION OFFSET VECTOR IN CODED PICTURE RESOLUTION IN large BLOCK
micro_vector_y	VERTICAL DIRECTION POSITION OFFSET VECTOR IN CODED PICTURE RESOLUTION IN large BLOCK
intralayer_vector_mvx	MOTION VECTOR IN HORIZONTAL DIRECTION CODED PICTURE RESOLUTION
intralayer_vector_mvy	MOTION VECTOR IN VERTICAL DIRECTION CODED PICTURE RESOLUTION
transform_size	BLOCK SIZE OF CONVERSION PROCESSING IS INDICATED

FIG. 15

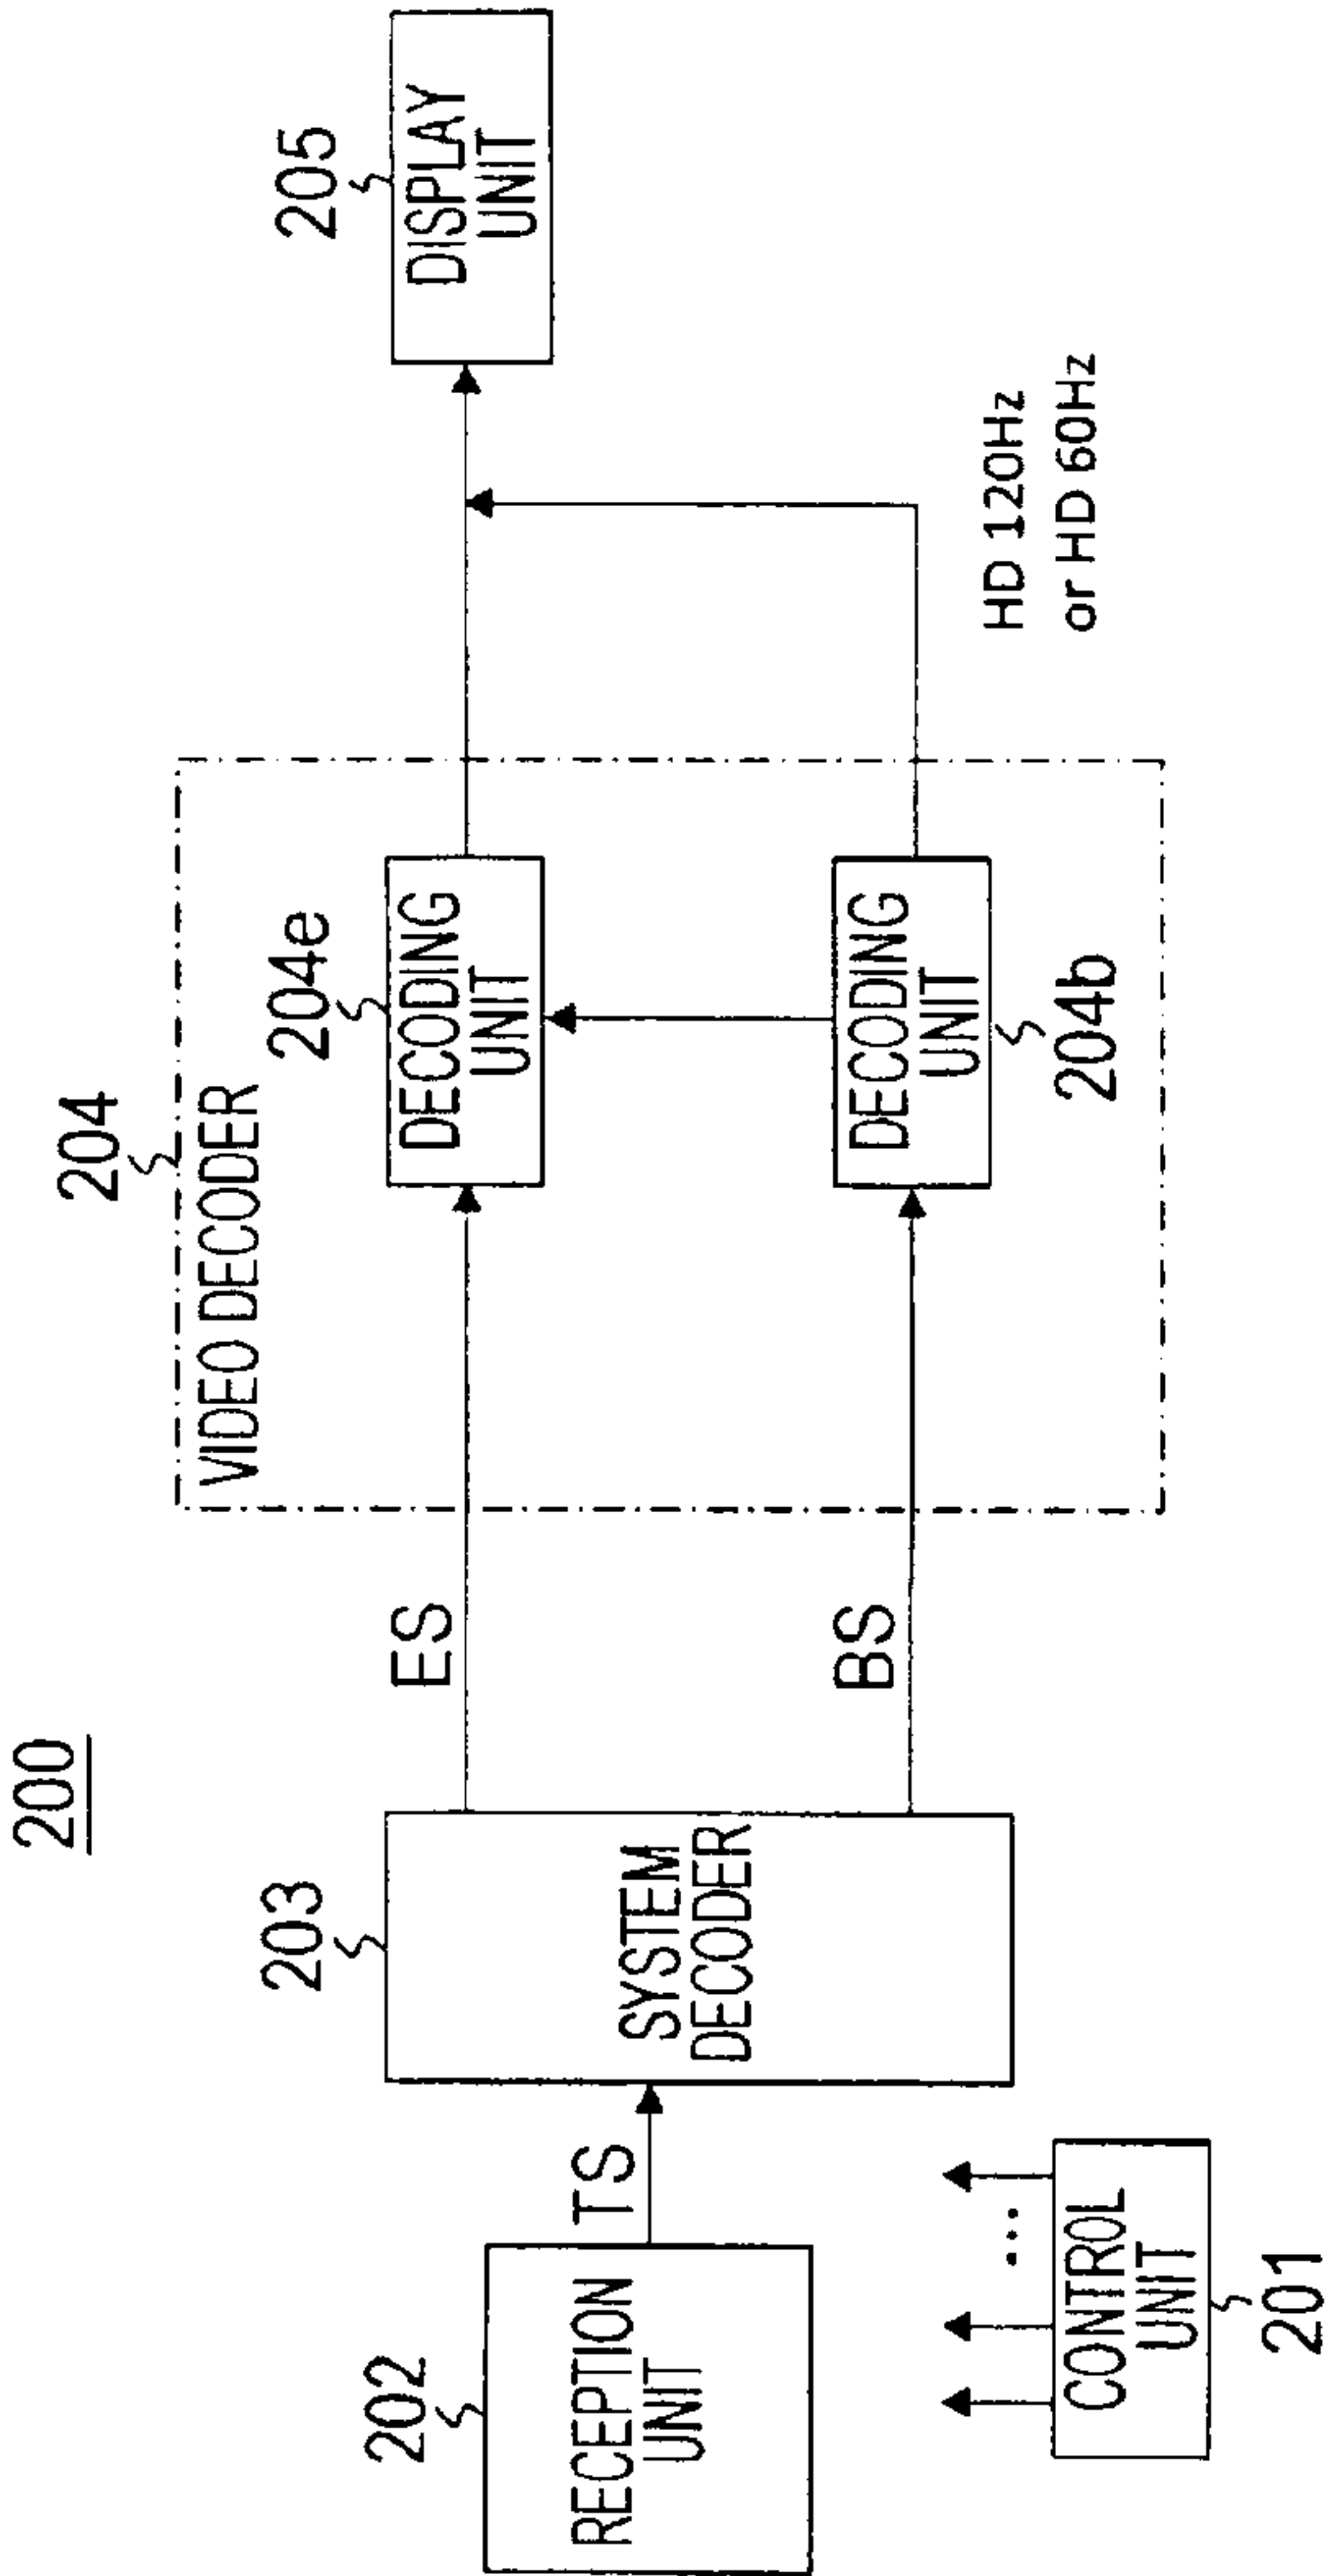


FIG. 16




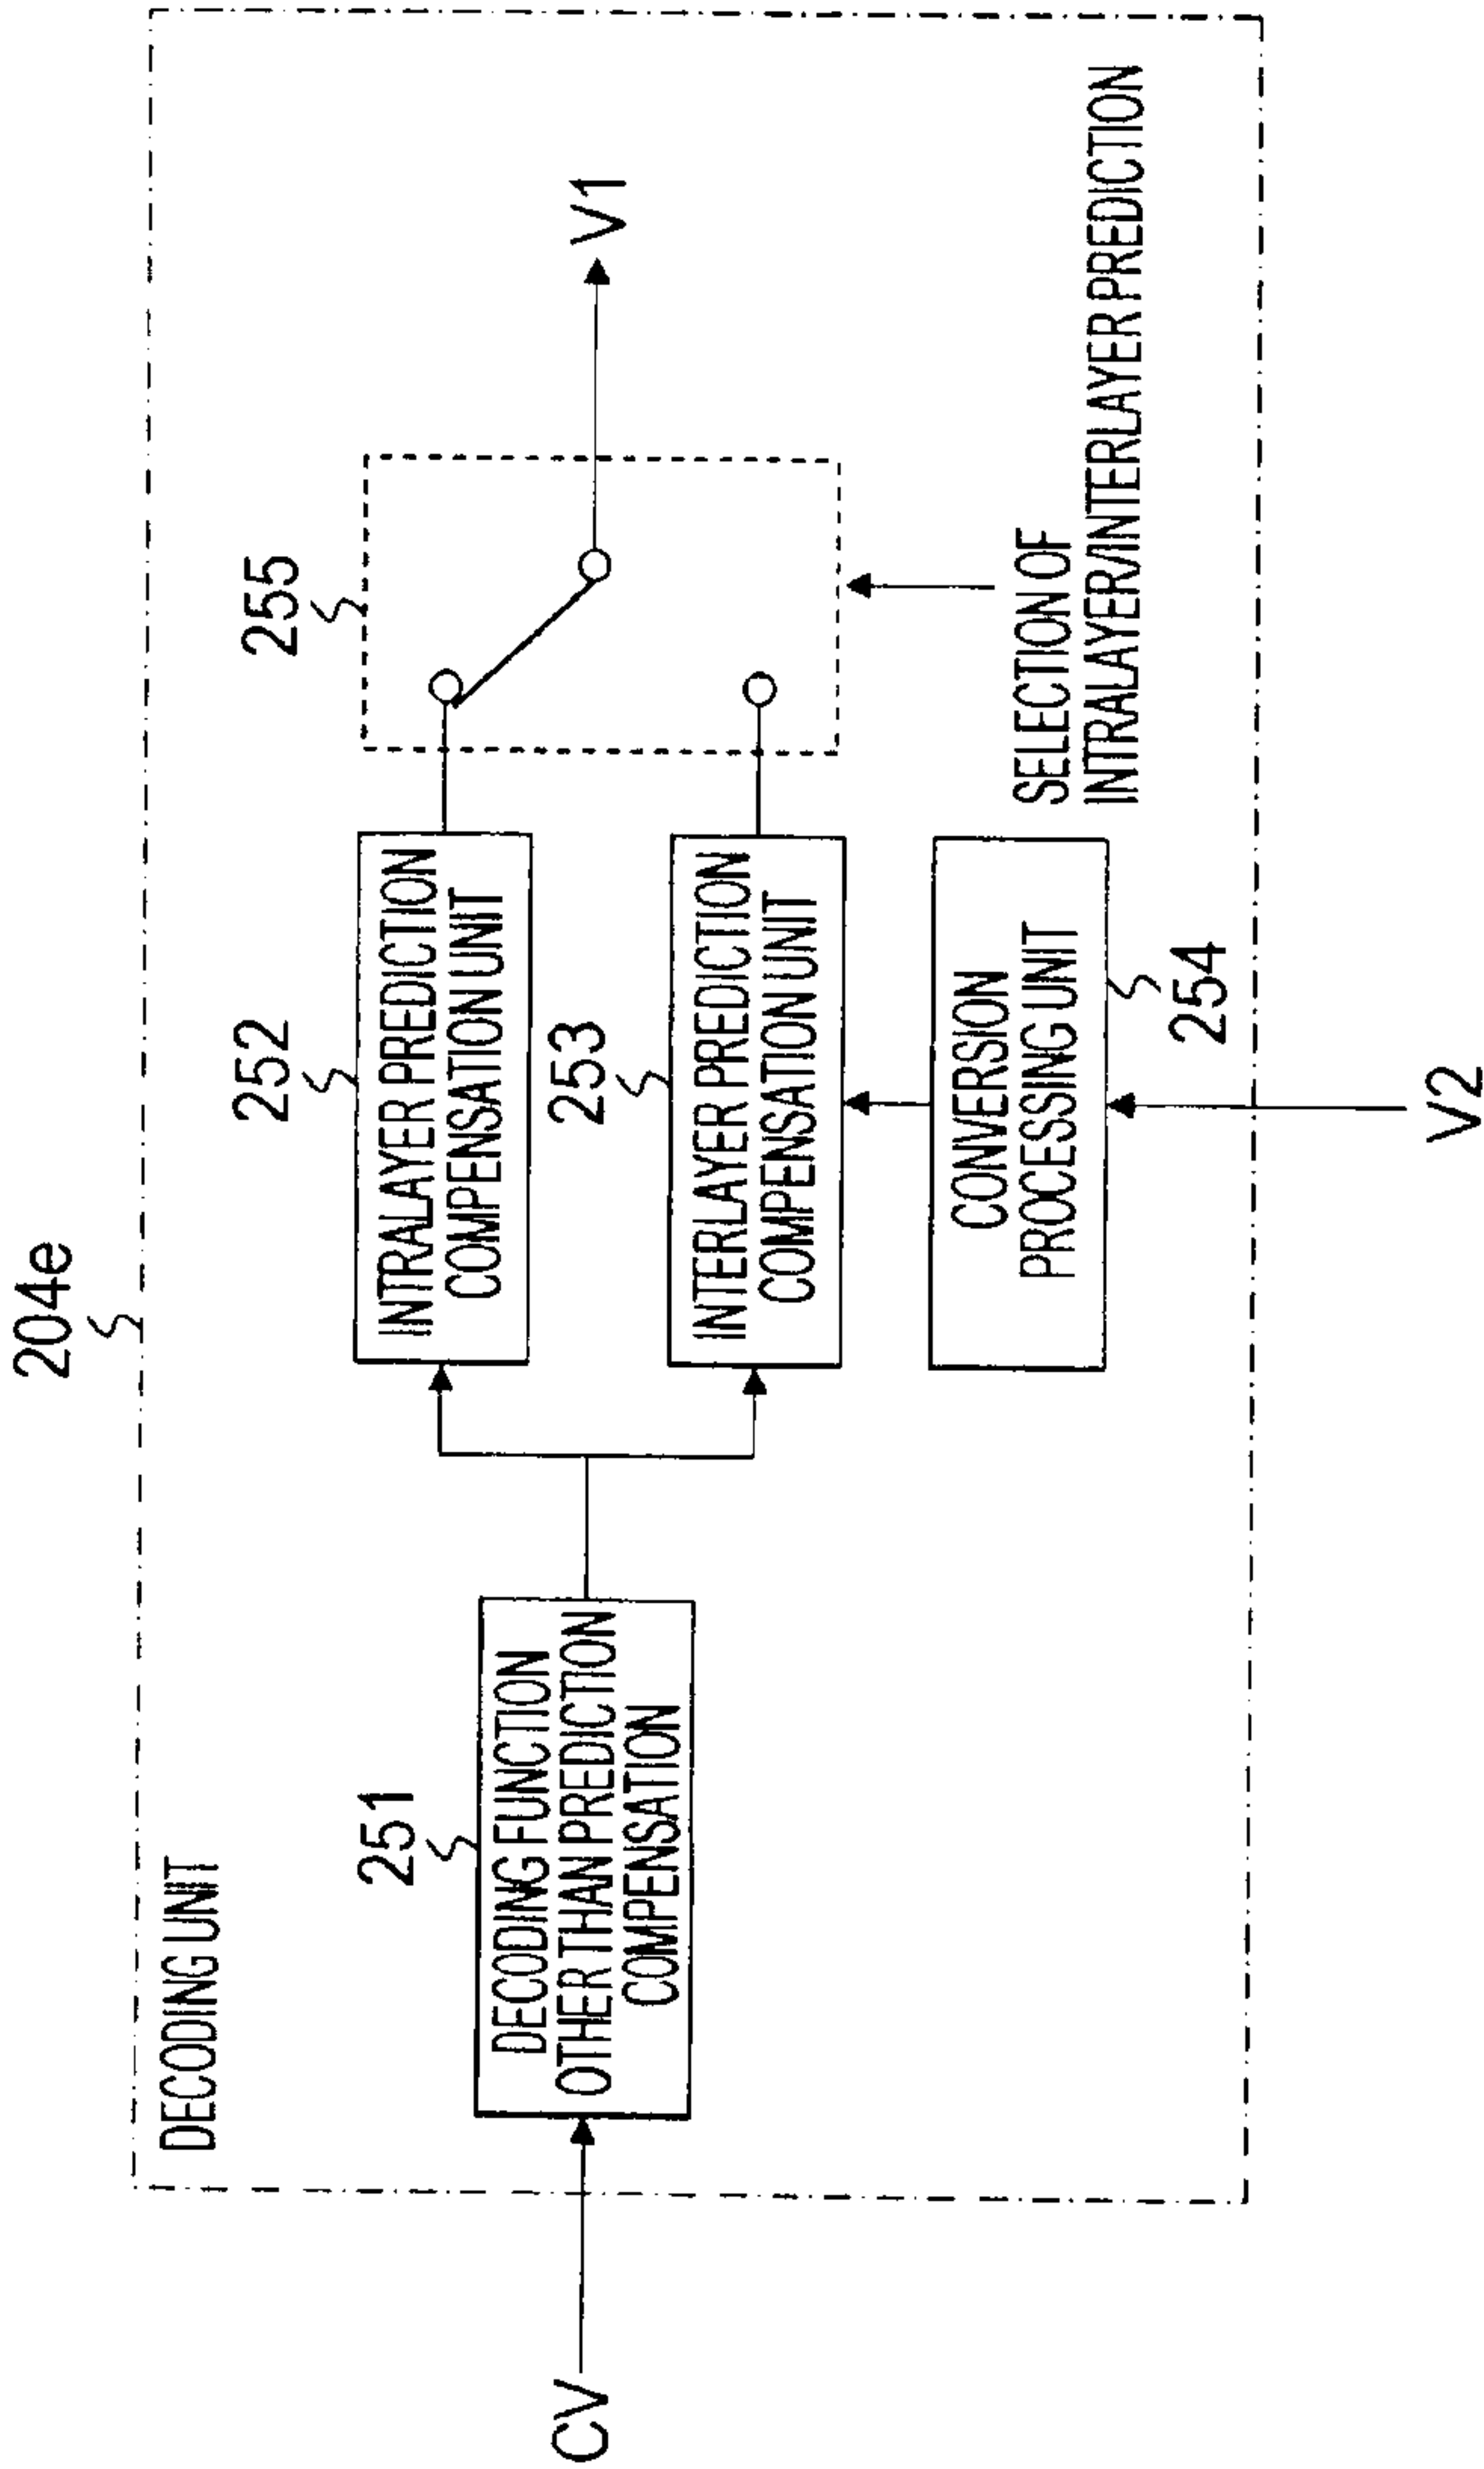


FIG. 17

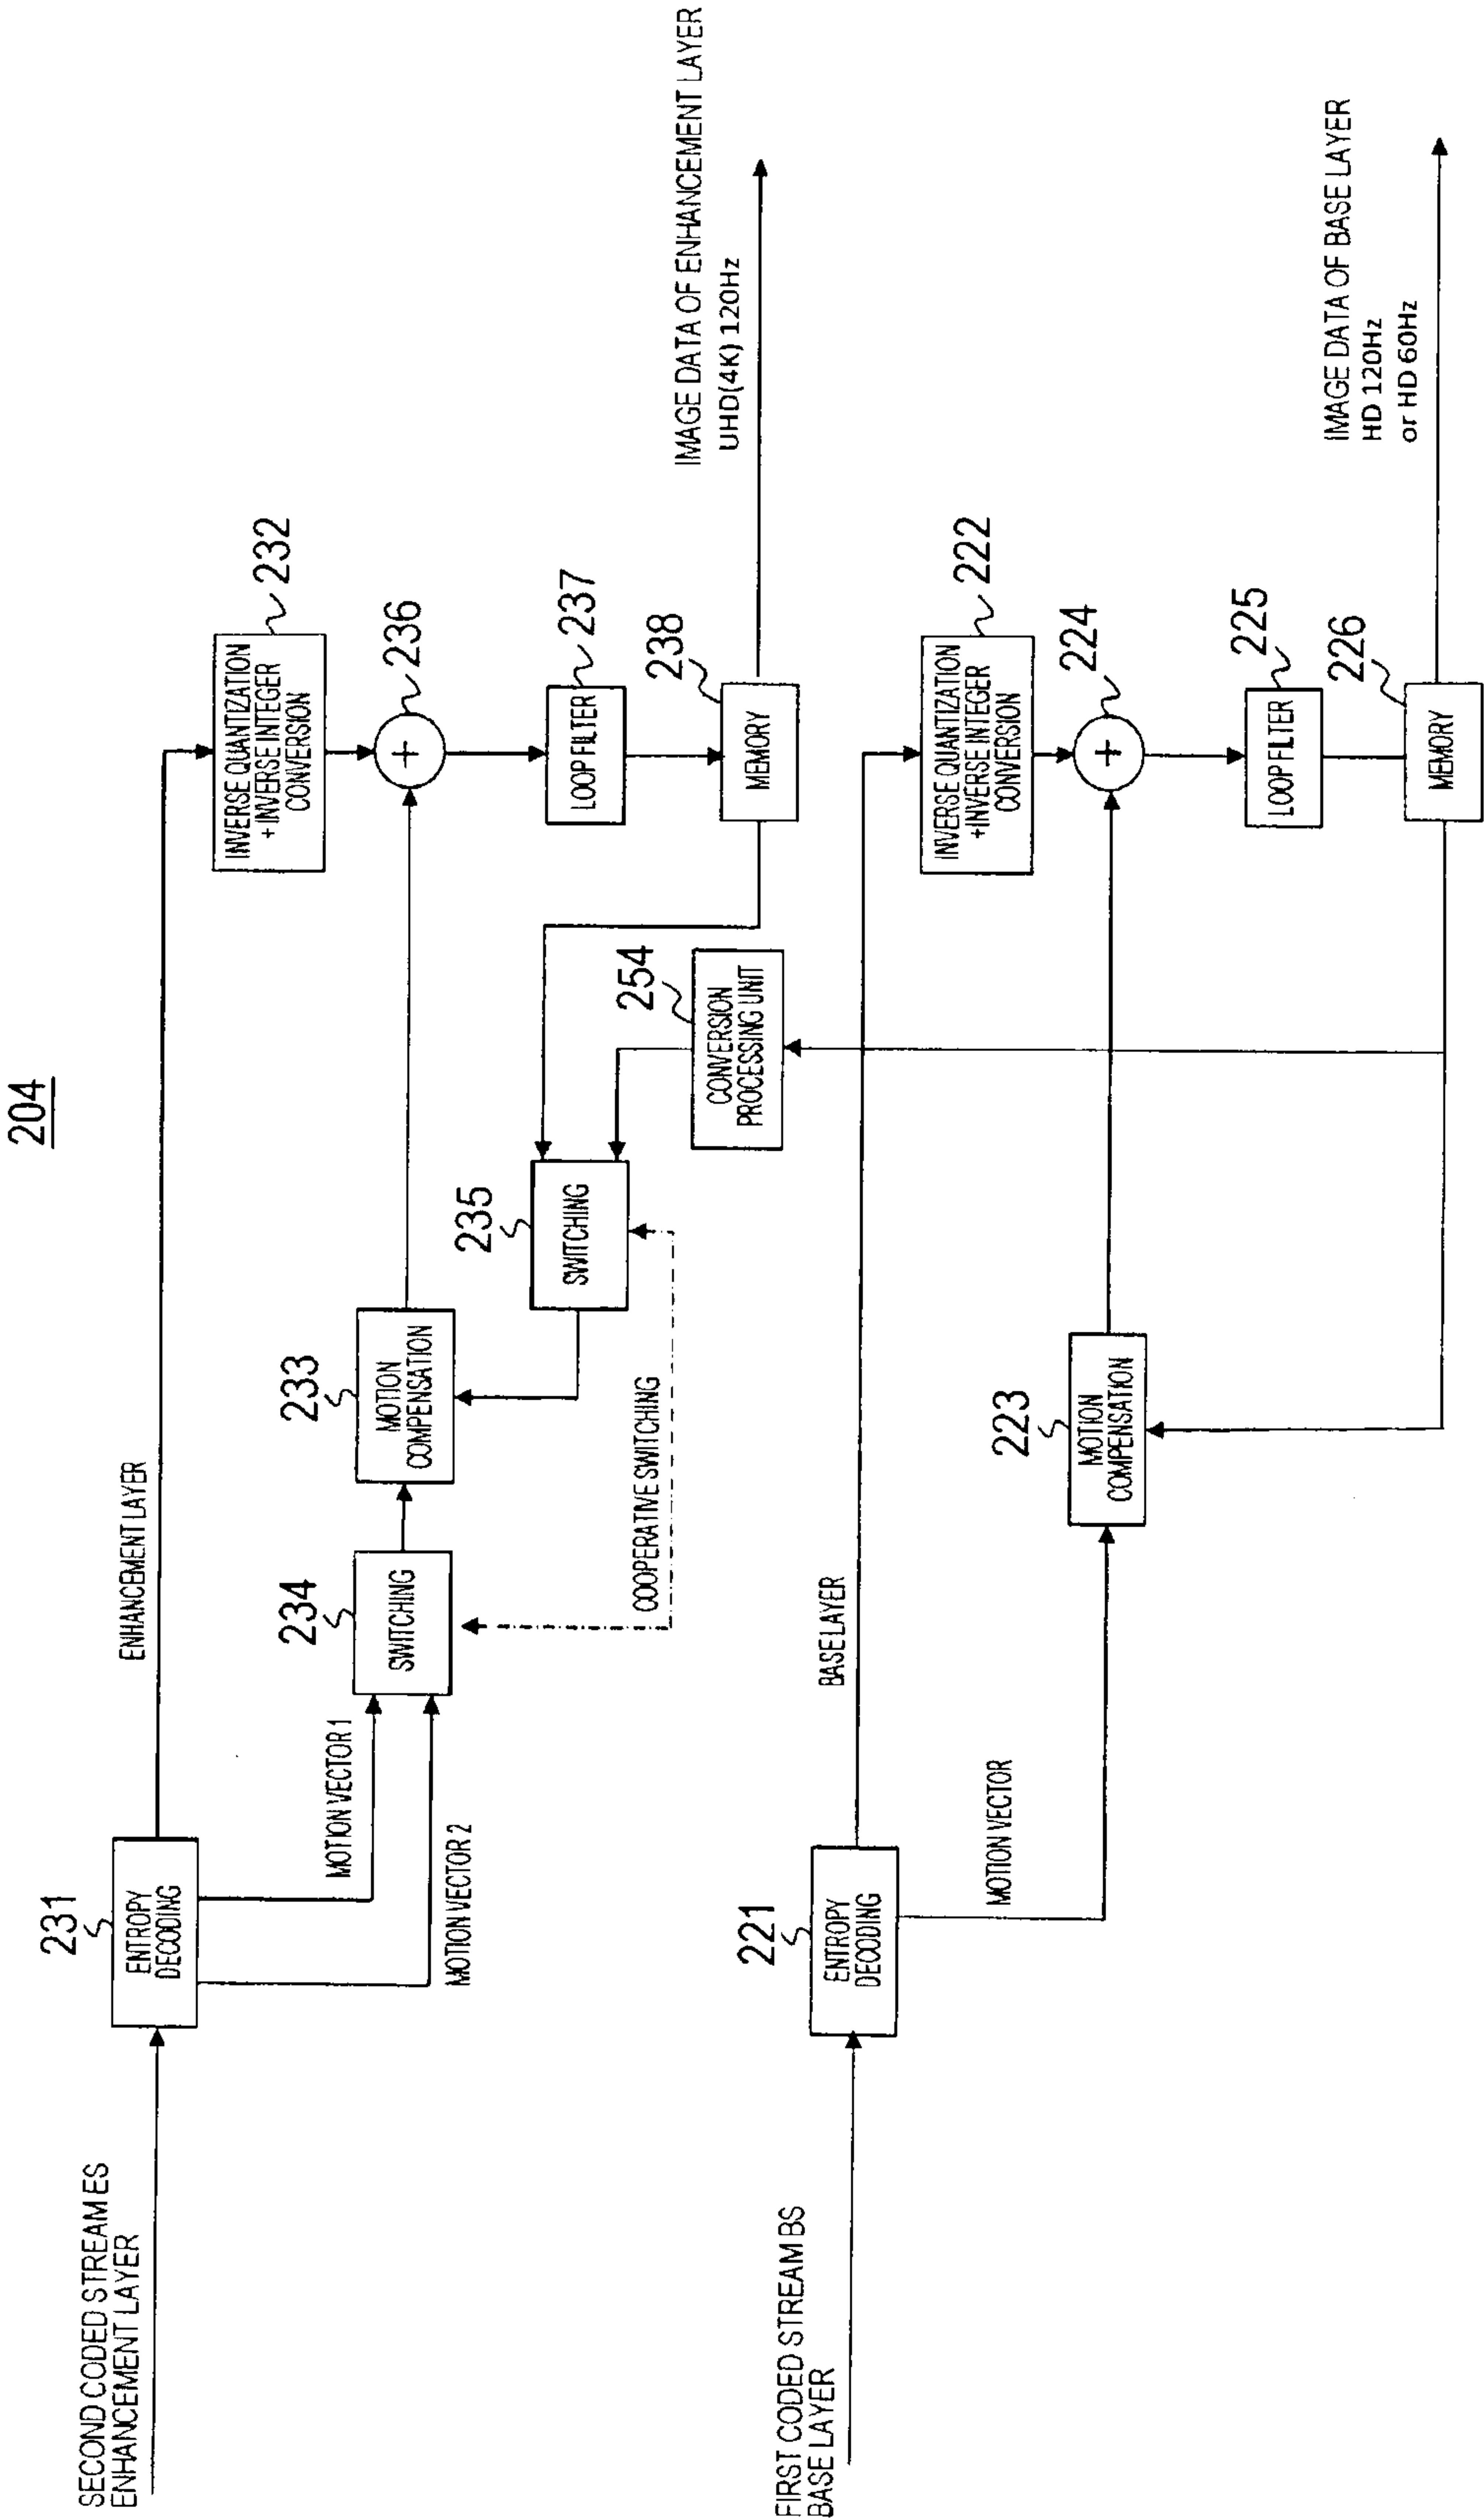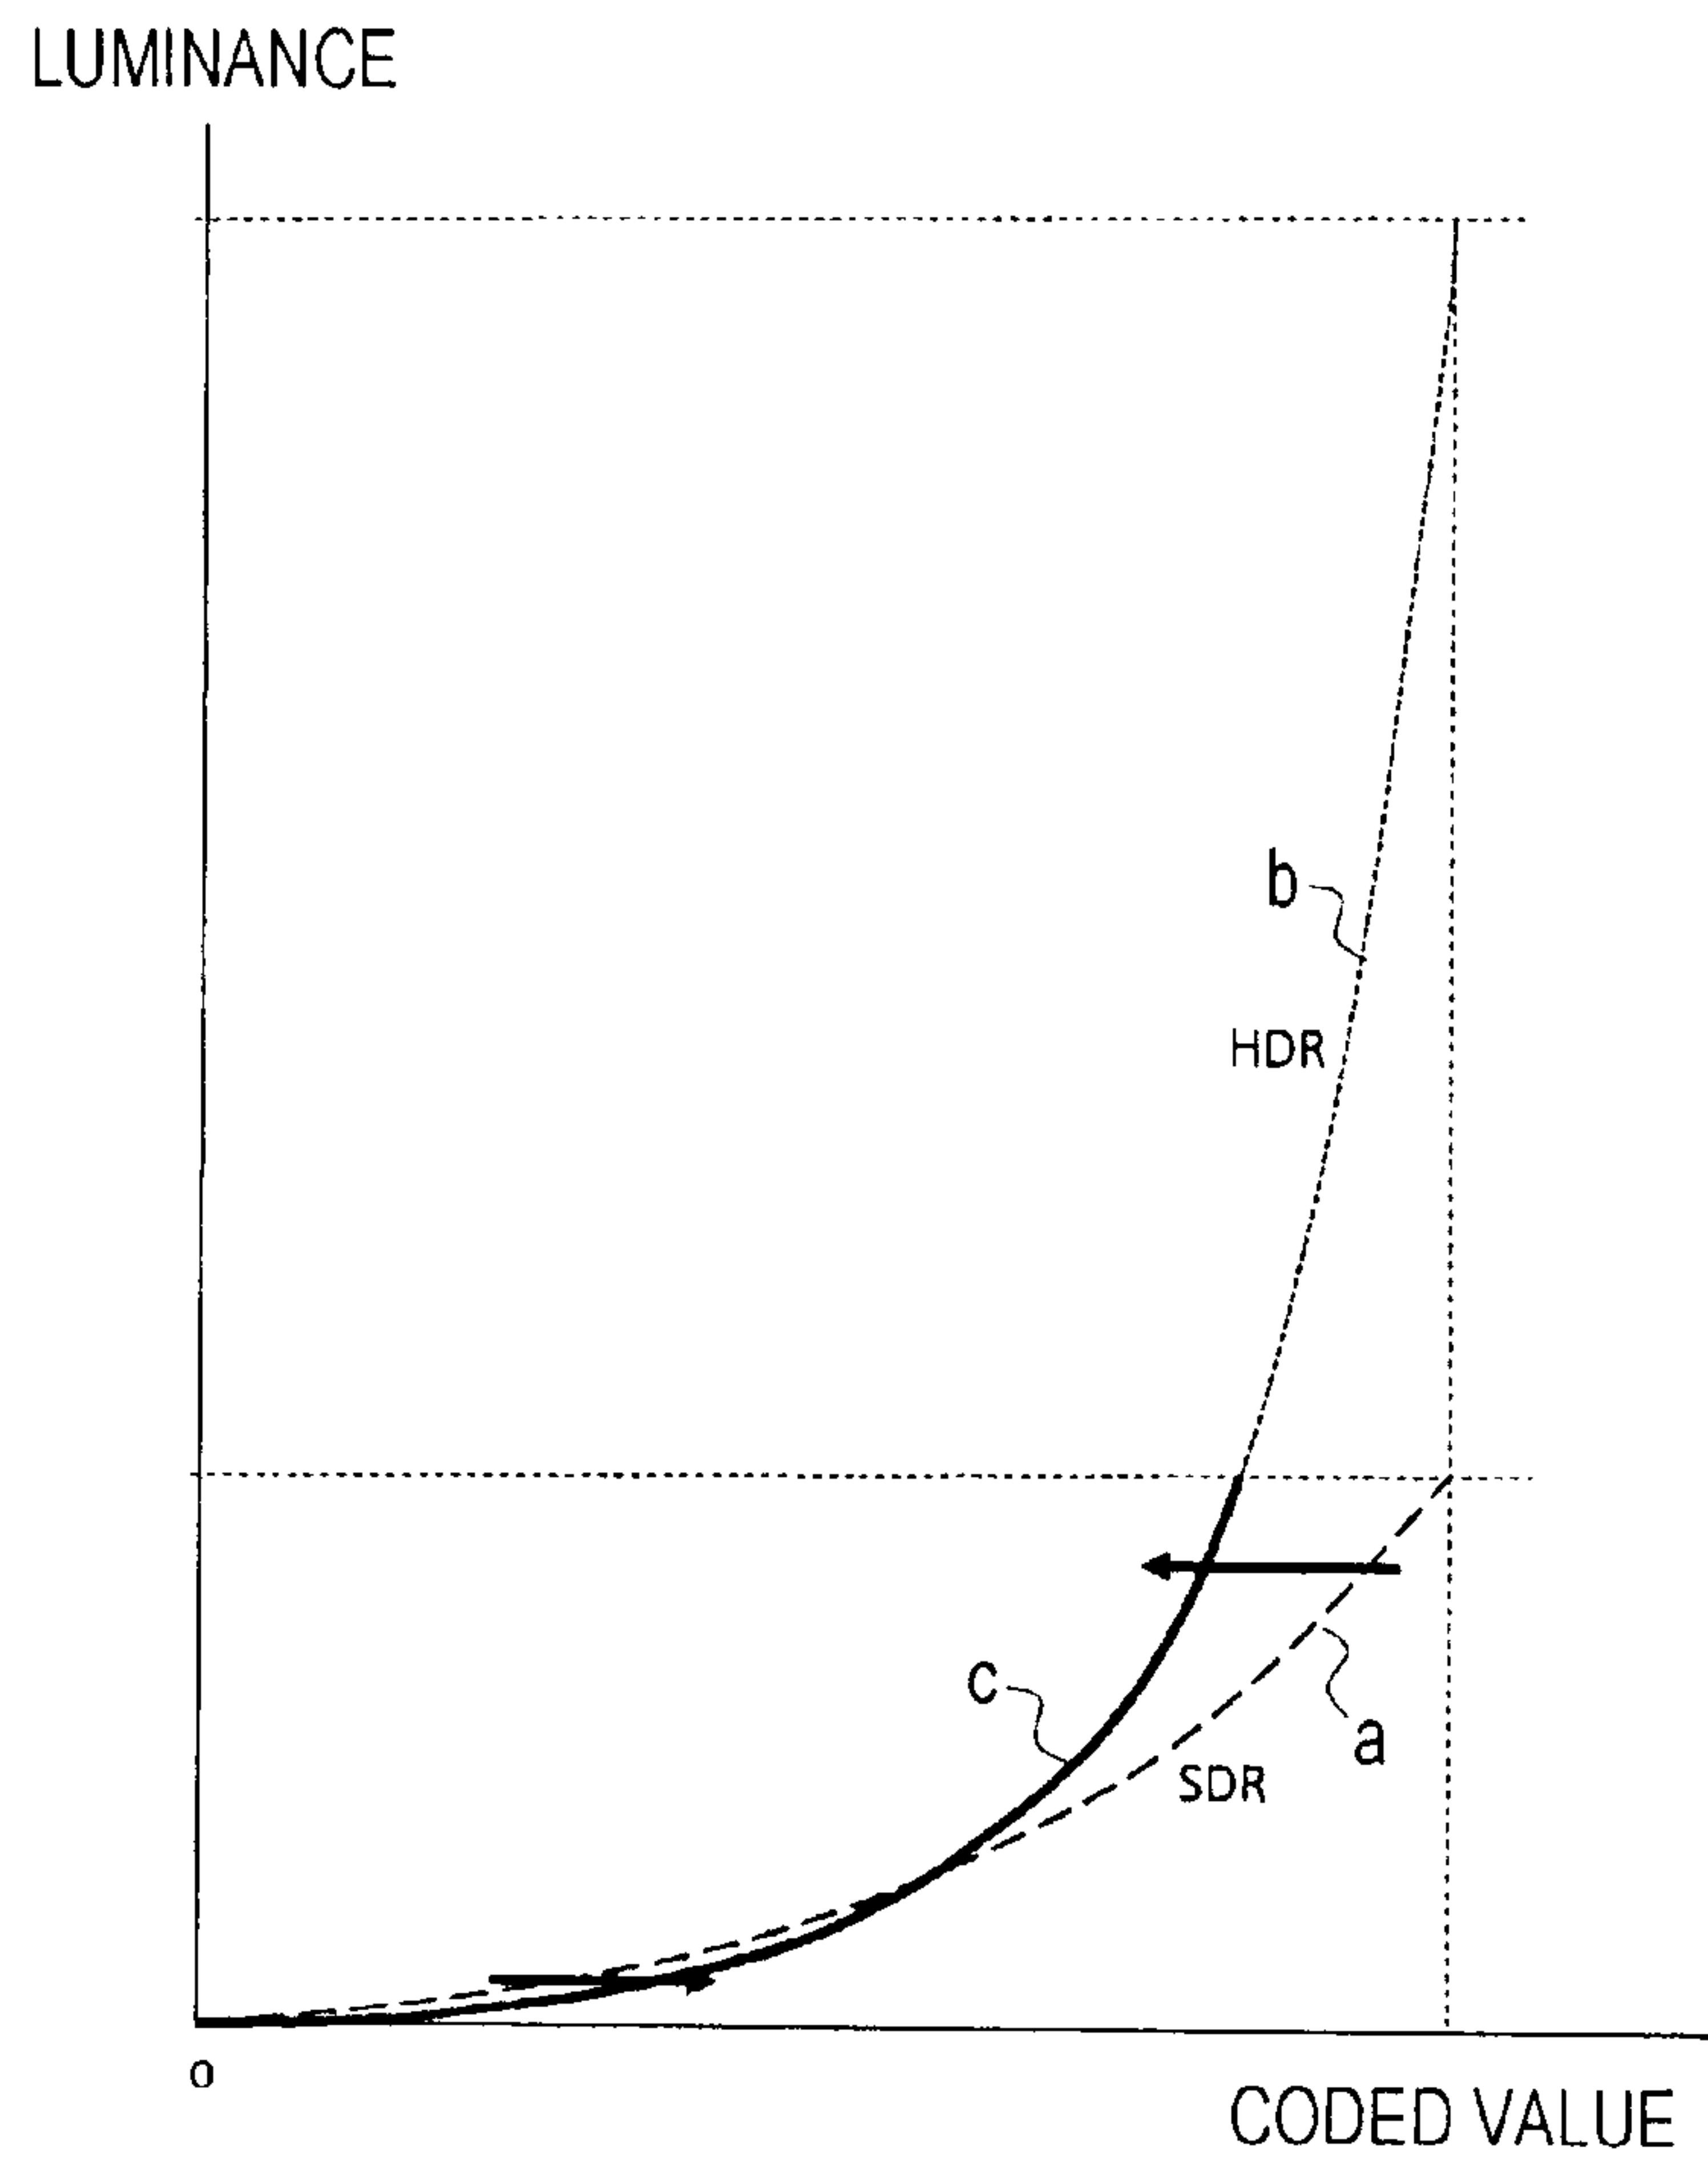

18/18

FIG. 18

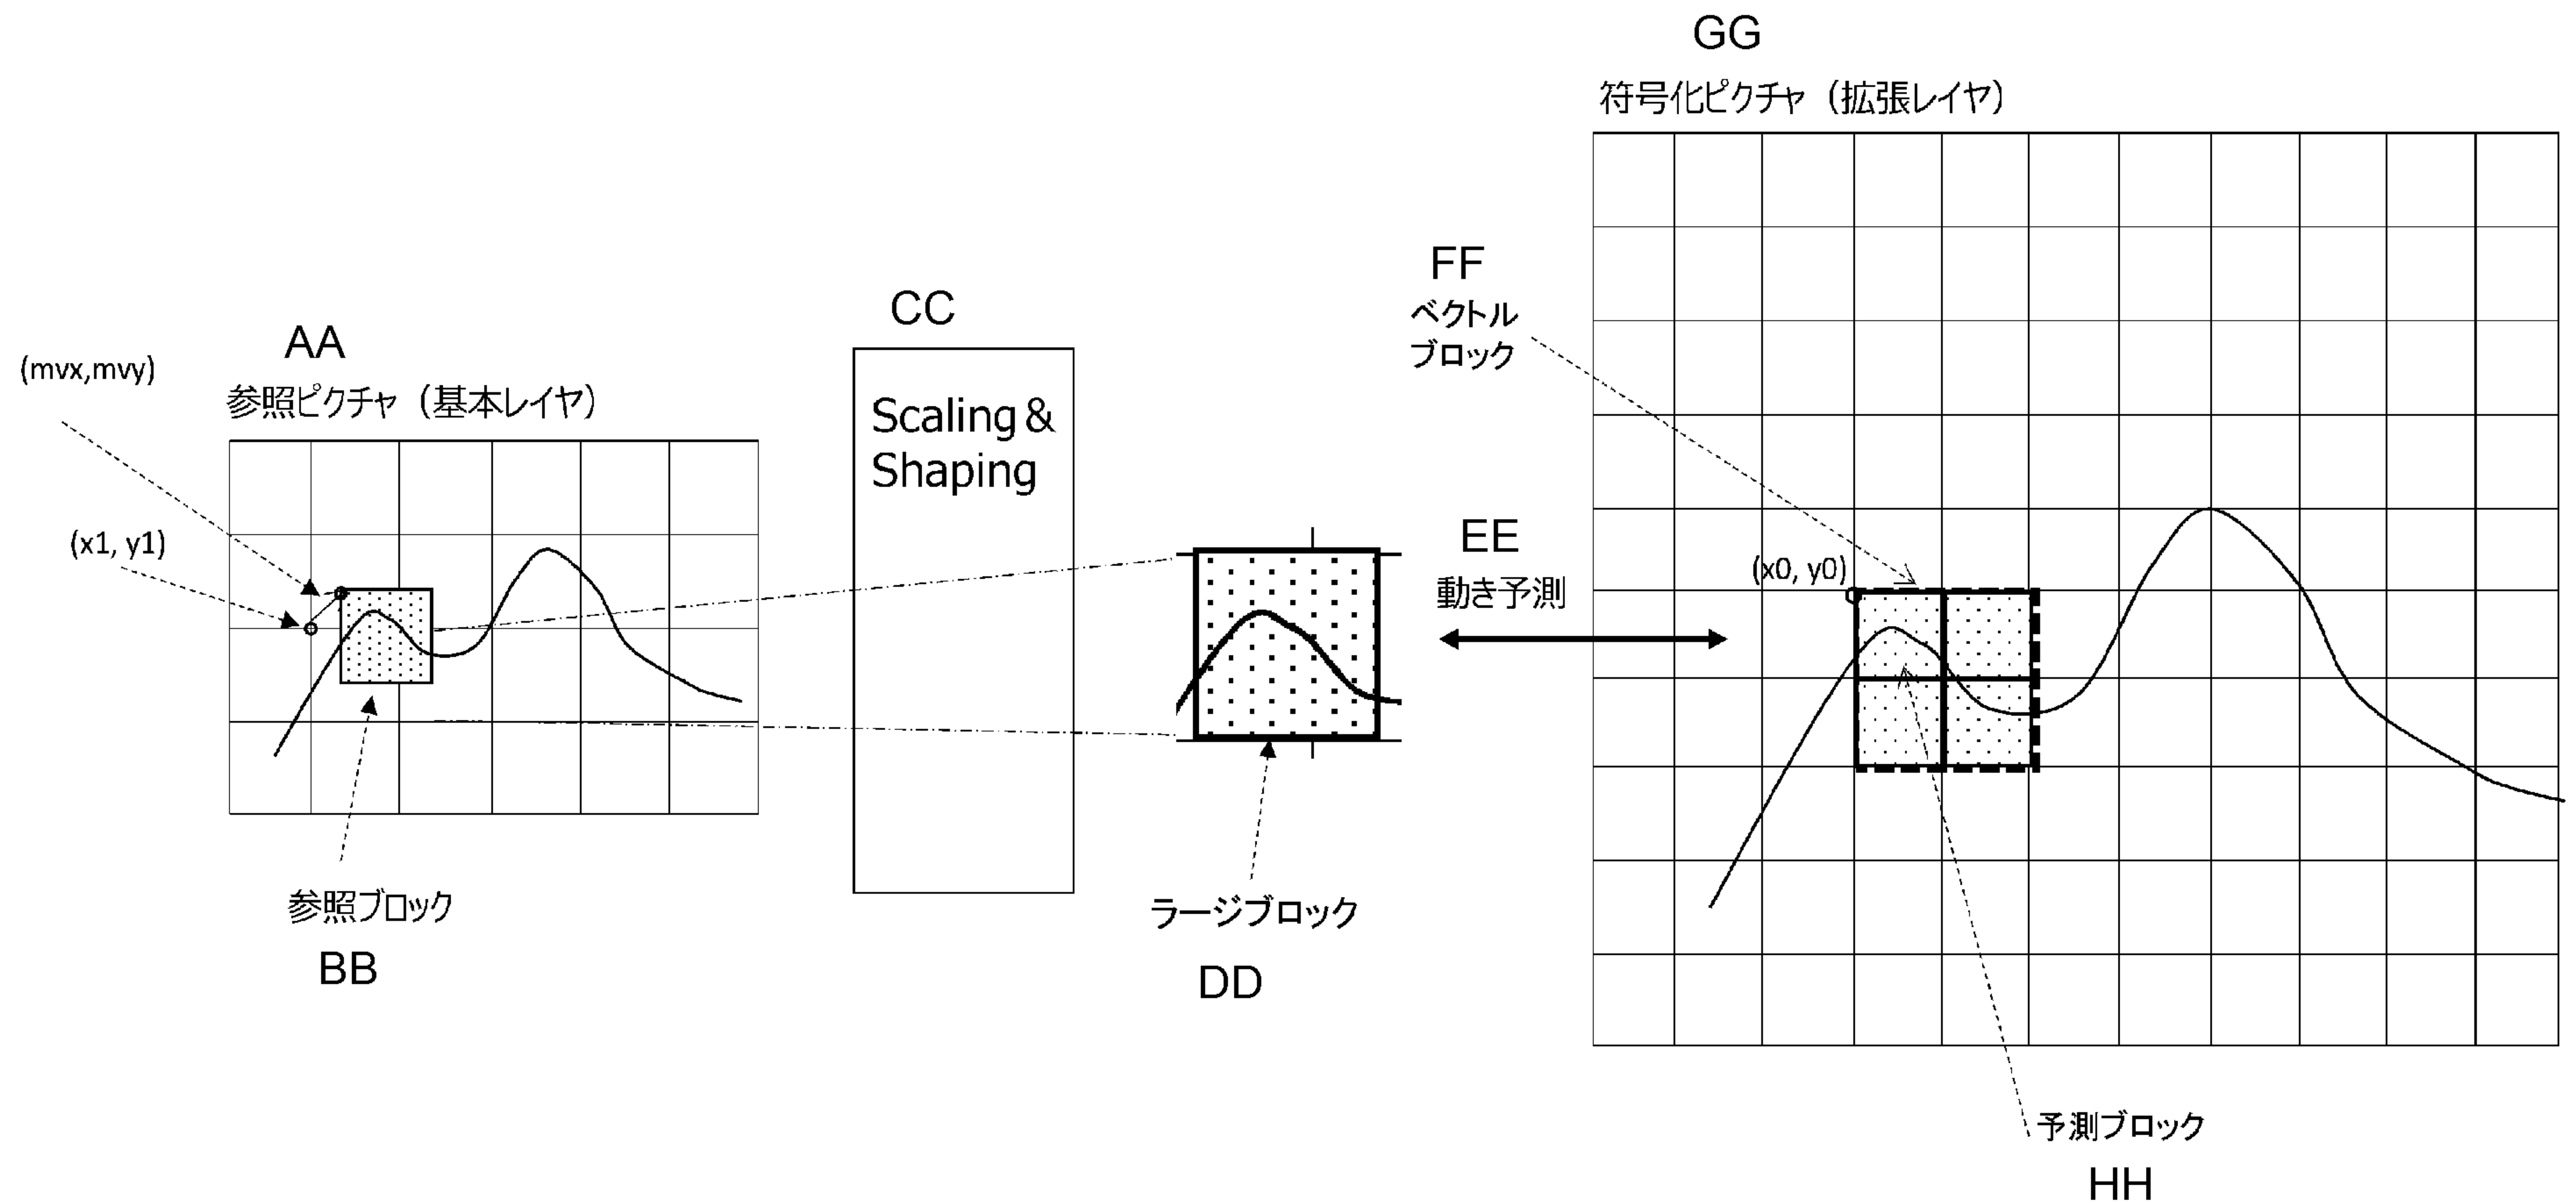

- AA Reference picture (base layer)
- BB Reference block
- CC Scaling & Shaping
- DD Large block
- EE Motion prediction
- FF Vector block
- GG Encoded picture (enhancement layer)
- HH Prediction block