



(86) Date de dépôt PCT/PCT Filing Date: 2008/12/11
(87) Date publication PCT/PCT Publication Date: 2009/07/09
(45) Date de délivrance/Issue Date: 2013/04/09
(85) Entrée phase nationale/National Entry: 2010/06/09
(86) N° demande PCT/PCT Application No.: US 2008/013615
(87) N° publication PCT/PCT Publication No.: 2009/085121
(30) Priorité/Priority: 2007/12/21 (US61/015,848)

(51) Cl.Int./Int.Cl. *C09D 133/00* (2006.01)
(72) Inventeurs/Inventors:
TOMKO, RICHARD F., US;
HO, WAI-KWONG, US
(73) Propriétaire/Owner:
THE SHERWIN-WILLIAMS COMPANY, US
(74) Agent: KIRBY EADES GALE BAKER

(54) Titre : REVETEMENTS ACRYLIQUES MODIFIES PAR DES ALPHA-SILANES A DURCISSEMENT PAR L'HUMIDITE
(54) Title: MOISTURE CURE ALPHA-SILANE MODIFIED ACRYLIC COATINGS

(57) **Abrégé/Abstract:**

An ambient temperature curing coating composition comprising the crosslinked reaction product of: (a) an amino-functional compound, wherein the amino-functional compound is a bis-silylamine of general formula: $(R^2)_b(R^1Y)_aSi - Q^1 - NH - Q^2 - (NH - Q^3)_n - Si(YR^1)_a(R^2)_b$, $n \geq 0$, $a = 3 - b$, $b = 0, 1, 2$ each Y is independently a heteroatom, selected from O, N; if Y is N, then the valency of Y is 2; if Y is O, then the valency of Y is 1; each R^1 is independently a monovalent radical (e.g., hydrogen, hydrocarbon including but not limited to alkyl (linear or brached), cycloalkyl, aryl, allyl, or aralkyl. Preferably, R^1 is an alkyl of 1 -10 carbon atoms. Each R^2 may be the same or different; R is a monovalent radical, and can include heteroatoms (e.g., oxygen, nitrogen, sulfur) not directly bonded to the silicon atom, including but not limited to, alkyl (linear or branched), cycloalkyl, aryl, allyl, or aralkyl. Each R^2 may be the same or different. Q^1 , Q^2 , Q^3 is a divalent bridging group, including but not limited to an alkylene, but preferably is a C_1 - C_{12} alkylene, and can be branched or cyclic; each Q can be the same or different; and (b) an acrylic polymer containing pendant organofunctional α -silane groups.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
9 July 2009 (09.07.2009)

PCT

(10) International Publication Number
WO 2009/085121 A1

(51) International Patent Classification:
C09D 133/00 (2006.01)

(21) International Application Number:
PCT/US2008/013615

(22) International Filing Date:
11 December 2008 (11.12.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/015,848 21 December 2007 (21.12.2007) US

(71) Applicant (for all designated States except US): **THE SHERWIN-WILLIAMS COMPANY** [US/US]; 101 W. Prospect Avenue, Cleveland, OH 44115 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **TOMKO, Richard, F.** [US/US]; 3677 Hunter Drive, North Olmsted, OH 44070 (US). **HO, Wai-kwong** [US/US]; 4632 Carsten Lane, North Olmsted, OH 44070 (US).

(74) Agents: **MCDONALD, Robert, E.** et al.; C/o The Sherwin-williams Company, 101 W. Prospect Avenue, Cleveland, OH 44115 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Declaration under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— with international search report

(54) Title: MOISTURE CURE ALPHA-SILANE MODIFIED ACRYLIC COATINGS

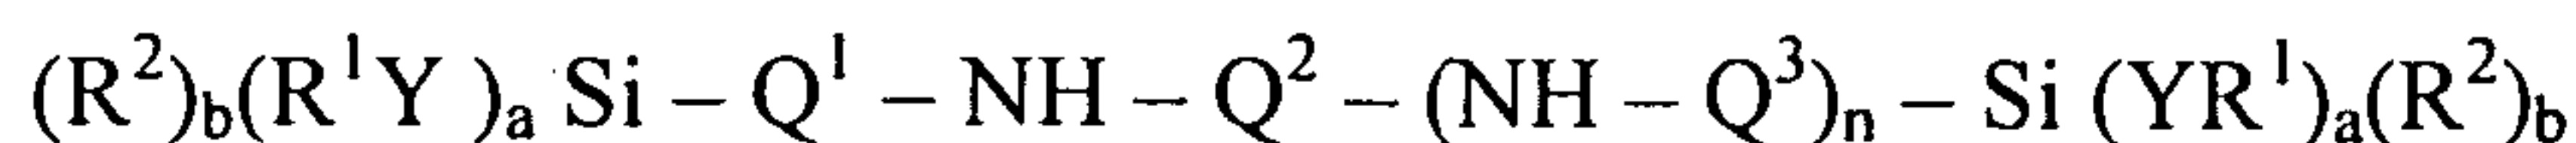

$$n \geq 0$$

$$a = 3-b$$

$$b = 0,1,2$$

(I)

(57) Abstract: An ambient temperature curing coating composition comprising the crosslinked reaction product of: (a) an amino-functional compound, wherein the amino-functional compound is a bis-silylamine of general formula: $(R^2)_b(R^1Y)_a Si - Q^1 - NH - Q^2 - (NH - Q^3)_n - Si (YR^1)_a(R^2)_b$, $n \geq 0$, $a = 3-b$, $b = 0,1,2$, each Y is independently a heteroatom, selected from O, N; if Y is N, then the valency of Y is 2; if Y is O, then the valency of Y is 1; each R^1 is independently a monovalent radical (e.g., hydrogen, hydrocarbon including but not limited to alkyl (linear or branched), cycloalkyl, aryl, allyl, or aralkyl. Preferably, R^1 is an alkyl of 1-10 carbon atoms. Each R^1 may be the same or different; R^2 is a monovalent radical, and can include heteroatoms (e.g., oxygen, nitrogen, sulfur) not directly bonded to the silicon atom, including but not limited to, alkyl (linear or branched), cycloalkyl, aryl, allyl, or aralkyl. Each R^2 may be the same or different. Q^1, Q^2, Q^3 is a divalent bridging group, including but not limited to an alkylene, but preferably is a C_1-C_{12} alkylene, and can be branched or cyclic; each Q can be the same or different; and (b) an acrylic polymer containing pendant organofunctional α -silane groups.

WO 2009/085121 A1

MOISTURE CURE ALPHA-SILANE MODIFIED ACRYLIC COATINGS**[0001]**


[0002] Many high performance, high solids coating compositions in the art are based on polymeric systems comprised of either polyester-based or polyacrylic-based polyols and crosslinking agents thereof. These coatings are generally supplied as two component or "two-pack" systems. In a typical two-pack system, the crosslinking agent is combined shortly before application, with curing being conducted at ambient or elevated temperatures. While two pack systems often provide high performance properties like corrosion resistance, humidity resistance, and resistance to solvents. These properties are notable limitations of one-pack systems. Two-pack systems utilizing isocyanate crosslinkers require special handling and storage operations to prevent premature reaction with moisture and to avoid human exposure. Further, the components of two-pack systems can only be mixed shortly prior to use and once mixed must be used and ultimately be discarded. Another disadvantage of isocyanate-crosslinking systems is that the quality of the coating is compromised by bubble formation during thick film application. A more desirable coating composition is an ambient curing, one component or one-pack system where all of the coating ingredients are combined into a single, storage stable mixture. At the same time the one-pack system should exhibit the same high performance film properties as a two-pack system and be isocyanate free.

[0003] The coating composition of the present invention is a one-pack acrylic system that has the desired film properties of two-pack polyurethane coatings, such as corrosion and humidity resistance, short dry times, chemical resistance, good ultraviolet resistance and high gloss potential. The coating is moisture-curable, isocyanate-free, and VOC compliant, with a high solids content (> 70% by weight) and a low VOC (< 3 pounds per gallon). On exposure to moisture, the applied coating composition of the invention is a crosslinked reaction product of bis-silylamine and an acrylic polymer having pendant organofunctional α -silane groups.

SUMMARY OF THE INVENTION

[0008a] In one particular embodiment there is provided an ambient temperature curing coating composition comprising the crosslinked reaction product of:

(a) an amino-functional compound, wherein the amino-functional compound is a bis-silylamine of general formula:

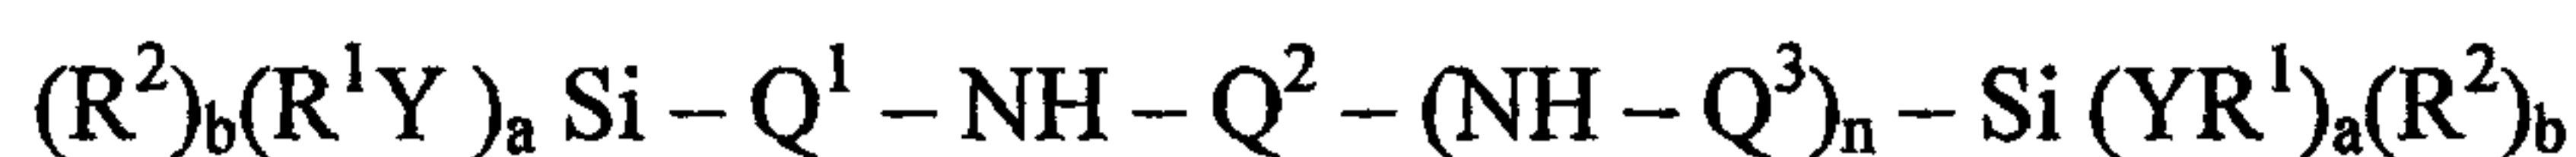

$$n \geq 0$$

$$a = 3-b$$

$$b = 0,1,2$$

each Y is independently a heteroatom, selected from O, N; if Y is N, then the valency of Y is 2; if Y is O, then the valency of Y is 1;

each R^1 is independently selected from: linear C_{1-10} alkyl, branched C_{1-10} alkyl, cycloalkyl, aryl, allyl, and aralkyl;


each R^2 is a monovalent radical, and optionally includes a heteroatom not directly bonded to the silicon atom, each R^2 selected from: linear C_{1-10} alkyl, branched C_{1-10} alkyl, cycloalkyl, aryl, allyl, and aralkyl;

Q^1, Q^2, Q^3 is a divalent bridging group, optionally comprising a C_{1-12} alkylene, and can be branched or cyclic; each Q can be the same or different; and

(b) an acrylic polymer containing pendant organofunctional α -silane groups.

[0008b] In another particular embodiment there is provided a process for the preparation of a coating composition comprising:

(a) providing an amino-functional compound, wherein the amino-functional compound is a bis-silylamine of general formula:

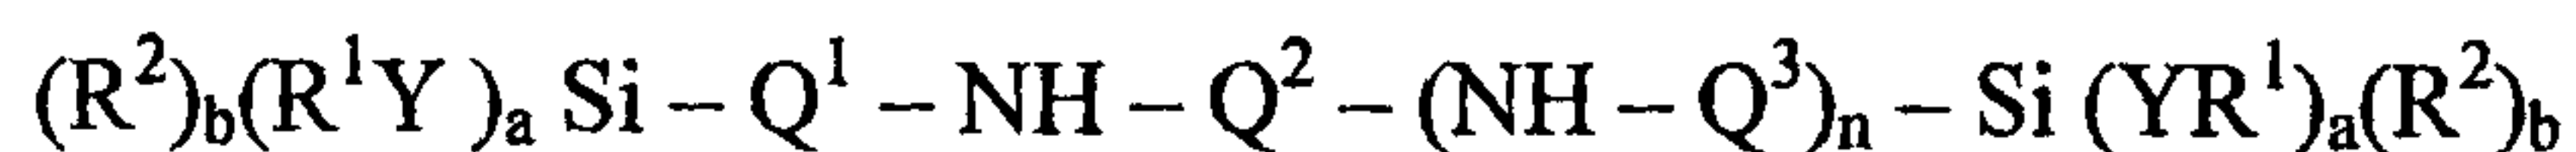

$$n \geq 0$$

$$a = 3-b$$

$$b = 0,1,2$$

each Y is independently a heteroatom, selected from O, N; if Y is N, then the valency of Y is 2; if Y is O, then the valency of Y is 1;

each R^1 is independently selected from: linear C_{1-10} alkyl, branched C_{1-10} alkyl, cycloalkyl, aryl, allyl, and aralkyl;


each R^2 is a monovalent radical, and optionally includes a heteroatom not directly bonded to the silicon atom, each R^2 selected from: linear C_{1-10} alkyl, branched C_{1-10} alkyl, cycloalkyl, aryl, allyl, and aralkyl;

Q^1 , Q^2 , Q^3 is a divalent bridging group, optionally comprising a C_{1-12} alkylene, and can be branched or cyclic; each Q can be the same or different; and

(b) combining the bis-silylamine with an acrylic polymer containing pendant organofunctional α -silane groups.

[0009] An ambient temperature curing coating composition comprising the crosslinked reaction product of:

- (a) an aminosilane-functional compound, wherein the aminosilane-functional compound is a bis-silylamine of general formula:

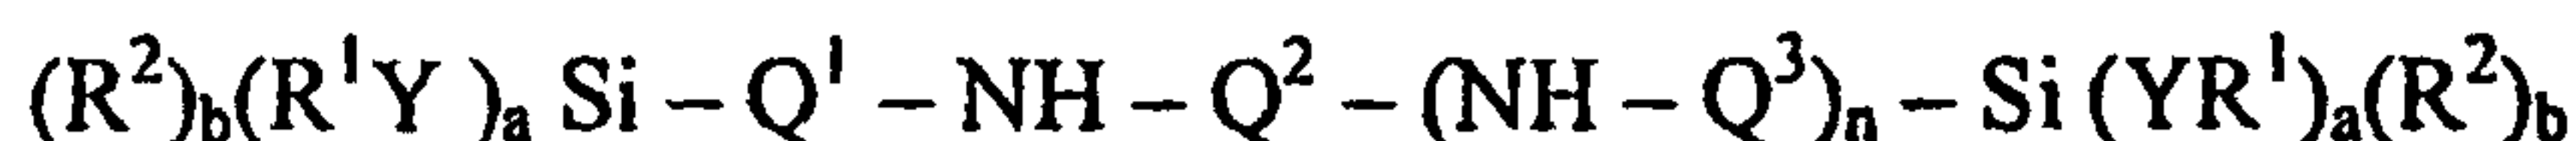

$$n \geq 0$$

$$a = 3-b$$

$$b = 0, 1, 2$$

each Y is independently a heteroatom, selected from O, N; if Y is

N, then the valency of Y is 2; if Y is O, then the valency of Y is 1;

each R¹ is independently a monovalent radical (e.g., hydrogen,

hydrocarbon including but not limited to alkyl (linear or brached),

cycloalkyl, aryl, allyl, or aralkyl. Preferably, R¹ is an alkyl of 1-10

carbon atoms. Each R¹ may be the same or different;

R² is a monovalent radical, and can include heteroatoms (e.g.,

oxygen, nitrogen, sulfur) not directly bonded to the silicon atom,

including but not limited to, alkyl (linear or branched), cycloalkyl,

aryl, allyl, or aralkyl. Each R² may be the same or different.

Q¹, Q², Q³ is a divalent bridging group, including but not limited to

an alkylene, but preferably is a C₁-C₁₂ alkylene, and can be

branched or cyclic; each Q can be the same or different; and

- (b) an acrylic polymer containing pendant organofunctional α-silane groups.

[0010] This invention also relates to articles having the above claimed cured coating compositions on at least one surface thereof.

DETAILED DESCRIPTION OF THE INVENTION

[0011] The one pack moisture curable coating composition of this invention comprises a crosslinked reaction product of a bis-silylamine and an acrylic polymer having pendant α -silane groups.

[0012] The bis-silylamine of this invention generally has the formula:



$$n \geq 0$$

$$a = 3 - b$$

$$b = 0, 1, 2$$

each Y is independently a heteroatom, selected from O, N; if Y is N, then the valency of Y is 2; if Y is O, then the valency of Y is 1;

each R^1 is independently a monovalent radical (e.g., hydrogen, hydrocarbon including but not limited to alkyl (linear or brached), cycloalkyl, aryl, allyl, or aralkyl. Preferably, R^1 is an alkyl of 1-10 carbon atoms. Each R^1 may be the same or different;

R^2 is a monovalent radical, and can include heteroatoms (e.g., oxygen, nitrogen, sulfur) not directly bonded to the silicon atom, including but not limited to, alkyl (linear or branched), cycloalkyl, aryl, allyl, or aralkyl. Each R^2 may be the same or different.

Q^1, Q^2, Q^3 is a divalent bridging group, including but not limited to an alkylene, but preferably is a C_1 - C_{12} alkylene, and can be branched or cyclic; each Q can be the same or different.

[0013] For the purpose of the present invention a bis-silylamine is generally of Formula I described above. For example, in general, a bis-silylamine can be a bis-(trialkoxysilylalkyl)amine. Specific examples of these bis-silylamines are bis-(3-

trimethoxysilylpropyl)amine, bis-(3-triethoxysilylpropyl) amine, bis-(3-trimethoxysilyl 2-methylpropyl) amine, and bis-(3-triisopropoxysilylpropyl) amine. Also included are asymmetrical secondary silylamines such as N-(3-triethoxysilylpropyl)-N-(5-triethoxysilylpentyl)amine. A bis-silylamine, namely bis-(3-trimethoxysilylpropyl) amine, under the trade name SILQUEST® A-1170, is available from Momentive Corporation. This and similar bis-silylamines can be made according to the methods known in the art, e.g., as taught in U.S. Patent No. 4,526,996 (see column 5 line 54 through column 11 line 26) and U.S. Patent No. 5,101,055.


[0014] Other examples of bis-silylamines can include bis-silylamines modified with long chain alcohols, branched alcohols, cyclic alcohols, aralkyl alcohols such as benzyl alcohols. Generally, the alcohol exchange can be accomplished by the reaction of bis-silylamine with an alcohol at elevated temperature in the presence of a suitable catalyst. For example, SILQUEST® A-1170 may accommodate the exchange of up to six moles of alcohol, preferably from one to four moles, most preferably 2.5 moles of alcohol. In a preferred process for producing a modified bis-silylamine, the bis-silylamine, the appropriate alcohol and suitable catalyst are charged to the reactor under nitrogen purge and heated to 80°C. The reaction can be followed by alcohol distillation and/or infrared spectroscopy. The preferred catalyst is sodium methoxide from 0.01% to 0.1% by weight on the total charge.

[0015] The amount of bis-silylamine or modified bis-silylamine present in the binder composition can be about 1% by weight to about 35% by weight based on the total weight of binder solids. Binder solids include the bis-silylamine crosslinker, the acrylic polymer having pendant alkoxysilane groups, and any reactive diluent.

[0016] The bis-silylamines or modified bis-silylamines are blended with an acrylic polymer containing pendant organofunctional α -silane groups. The α -silane acrylic polymers can be prepared by addition polymerization of at least two different ethylenically unsaturated monomers whereby at least one of the monomers is an organofunctional α -silane. Examples of ethylenically unsaturated monomers are acrylic esters such as butyl (meth)acrylate, methyl (meth)acrylate, ethyl (meth)acrylate, propyl (meth)acrylate, n-hexyl (meth)acrylate, isopropyl (meth)acrylate, isobutyl (meth)acrylate, 2-ethylhexyl (meth)acrylate, cyclohexyl (meth)acrylate, 2,2,5-trimethylcyclohexyl

(meth)acrylate, isobornyl (meth)acrylate, lauryl (meth)acrylate, methacrylonitrile, and vinyl compounds such as styrene, acrylonitrile, α -methyl styrene, vinyl toluene, and vinyl acetate, wherein the notation (meth)acrylate means acrylate or methacrylate. Also, monomers containing reactive functional groups such as epoxy-functional monomers like glycidyl methacrylate or silane-functional monomers like 3-((meth)acryloxy)propyltrimethoxysilane (such as Dow Corning® Z-6030) or any other functional monomer would allow a stable coating formulation as can be contemplated by one skilled in the art.

[0017] An organofunctional α -silane, in general, can be any silane with a methylene bridge between the silicon atom and the functional group, generally of the following formula:

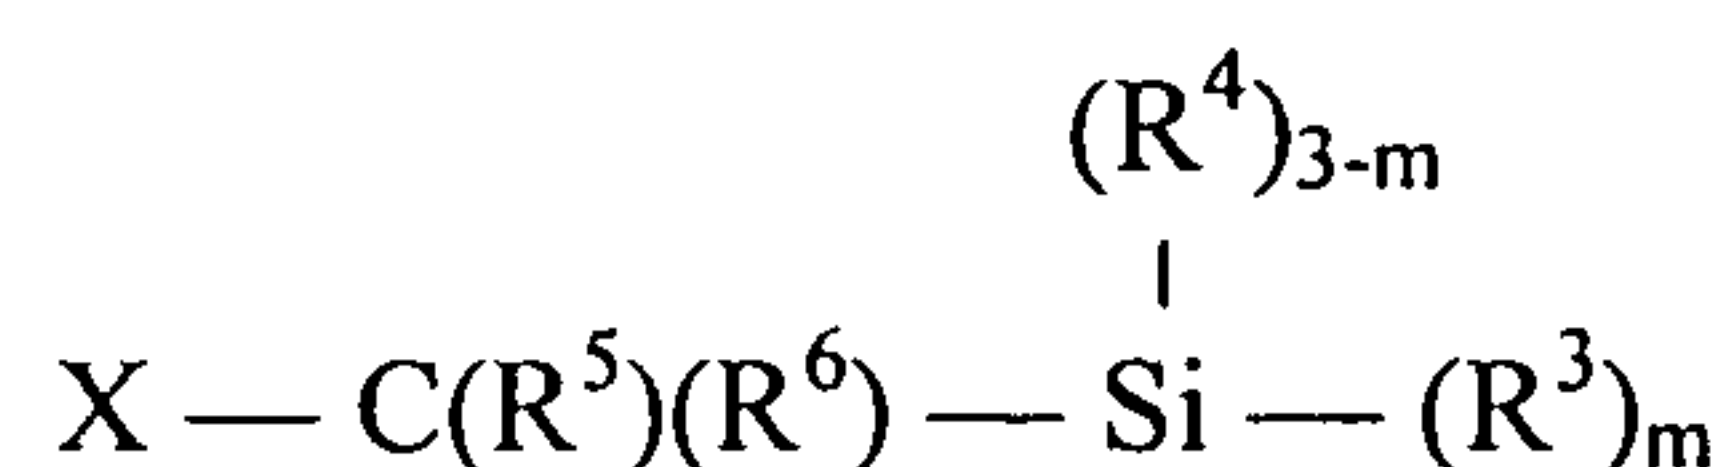

wherein

X = O, N or S, substituted or unsubstituted, and wherein X is a reactive functional group; for example, -X can be an ester linkage such as $-\text{O}-\text{C}(\text{O})-\text{C}(\text{CH}_3)=\text{CH}_2$, -NCO, $-\text{NH}_2$, etc.;

R^3 is a hydrolyzable group;

R^4 is a monovalent hydrocarbon;

R^5 and R^6 are independently hydrogen or alkyl;

m is independently in each occurrence an integer of 1 to 3.

[0018] Examples of organofunctional α -silane monomers for free radical polymerization are (methacryloxymethyl)methyldimethoxysilane, (methacryloxymethyl)trimethoxysilane, (methacryloxymethyl)methyldiethoxysilane, and (methacryloxymethyl)triethoxysilane. As commercial products, GENIOSIL® XL-30 series, such as GENIOSIL® XL-32, XL-33, XL-34 and XL-36, manufactured by Wacker Chemie AG, may be used. In accordance with this invention, as another method of forming an acrylic polymer containing pendant alpha silane groups, the X-functionality of

the organofunctional α -silane reacts with a complementary functionality of the acrylic polymer.

[0019] The amount of organofunctional α -silane present in the acrylic polymer composition can be about 1% to about 50% by weight, preferably 2% to 25% by weight, and most preferably, 5% to 15% by weight, of the total weight of monomers.

[0020] The polymerization or other modification of the acrylic polymer with pendant organofunctional α -silane groups can be carried out in a non-functional volatile solvent, such as xylene, toluene, and other aromatics, t-butyl acetate, n-butyl acetate, and other ester solvents. In general, suitable solvents or reactive diluents include those that will not polymerize with the monomers, and will not react with the bis-silylamine curing agent or organofunctionality of the α -silane. Non-hazardous air pollutants (non-HAPs), non-volatile organic compounds (non-VOC), halogenated aromatic solvents such as Oxsol 100 (Occidental Chemical) can also be used as non-functional volatile solvents.

[0021] As an example, the solvent is charged to the reactor and the monomers, α -silane-containing monomer, initiator and chain transfer agent can be mixed together as one feed, and then polymerized and chased with additional solvent and initiator. For example, the solvent can be heated to a temperature at about 90°C., and the monomers, initiator, and chain transfer agent can be added over a period of 3-4 hours, preferably in 3 hours, while the temperature of the solution is maintained during the addition and for a further period of 0.5 to 4 hours after the addition. The temperature can then be increased to about 100°C, and then a further charge of initiator may be added during this further period to reduce the level of unreacted monomer. However, it is also possible to reduce this level by distillation of the unreacted monomer from the reaction mixture.

[0022] Alternatively, the solvent can be charged in the reactor and heated to a temperature of about 90°C, and the monomers and chain transfer agent can be mixed together as one feed, and the initiator and optional solvent can be added in a separate feed.

[0023] Free radical polymerization is often used in the coatings industry to produce a wide variety of polymers. Resins with narrow molecular weight distributions (polydispersity) are desirable because of the decrease in viscosity due to fewer high

molecular weight chains. Conventional free radical solution polymerization produces resins with polydispersities of 2 or greater because radical termination by chain coupling leads to higher molecular weight chains which broadens the molecular weight distribution and increases the viscosity of the polymer solution. Controlled radical polymerization agents may be used to make resins of lower polydispersity or lower viscosity or block copolymers or polymers where each polymer chain has the same monomer composition. Generally, any of the free radical initiators known to the art can be utilized. Suitable free radical initiators include any of the alkyl peroxides such as tert-amyl and tert-butyl peroxides, di-tert-butyl peroxide, peresters such as tert-butyl perbenzoate, tert-butyl peroxy-3,5,5-trimethylhexanoate, 2,5-bis(2-ethylhexanoyl-peroxy)-2,5-dimethylhexane, or tertiary butyl peroctoate, and any of the various known azo initiators such as 2,2'-azo-bis-isobutyronitrile. Particularly preferred are 2,2'-azo-bis-isobutyronitrile or 2,2'-azo-bis(2-methylbutyronitrile) (Vazo 67 from DuPont). For example, the weight of the free radical initiator used (by weight based on monomers) is generally at least 0.5%. A chain transfer agent, such as a mercaptosilane chain transfer agent (for example, (3-mercaptopropyl)trimethoxysilane, Silquest® A-189 available from Momentive Corporation) can be utilized during the free radical polymerization of the invention. In addition, other chain transfer agents could be used with A-189 such as alkyl thiols (e.g. dodecanthiol) and the like. The amount of chain transfer agent used (by weight based on monomers) is generally at least 0.5%, preferably 1 to 10%, or a level of 0.5 to 7% initiator can be used in conjunction with 1 to 10% chain transfer agent.

[0024] The acrylic polymer containing pendant organofunctional α -silane groups comprises a mixture of (a) 1% to 50% by weight of one or more ethylenically unsaturated monomers, whereby at least one of the unsaturated monomers can be an acrylic ester such as butyl (meth)acrylate, methyl (meth)acrylate, ethyl (meth)acrylate, propyl (meth)acrylate, n-hexyl (meth)acrylate, isopropyl (meth)acrylate, isobutyl (meth)acrylate, 2-ethylhexyl (meth)acrylate, cyclohexyl (meth)acrylate, 2,2,5-trimethylcyclohexyl (meth)acrylate, isobornyl (meth)acrylate, lauryl (meth)acrylate, 3-((meth)acryloyloxy)propyltrimethoxysilane wherein the notation (meth)acrylate means acrylate or methacrylate. Other unsaturated monomers can include vinyl compounds such as styrene, acrylonitrile, α -methyl styrene; and (b) 1% to 50% by weight of an organofunctional α -silane monomer.

[0025] In one embodiment, the acrylic polymer composition comprises from 1% by weight to 35% by weight of the organofunctional α -silane of the total weight of acrylic polymer containing the pendant organofunctional α -silane groups.

[0026] The coating composition produced from the mixture of an acrylic polymer containing pendant organofunctional α -silane groups and bis-silylamine is cured by ambient moisture. A secondary curing agent is not necessary to initiate the curing reaction. The coating compositions of the invention generally cure at ambient temperatures, for example 0°C to 30°C. The coating compositions of the invention alternatively can be cured at elevated temperatures, for example from 30°C to 130°C, to speed up the curing. The VOC for the coatings described in this invention is below 3.0 pounds/gallon or less than 359 grams/liter.

[0027] Depending on the field of application, the coating compositions of the invention may further comprise one or more additional ingredients common to the paint industry. They may comprise one or more pigments, like titanium dioxide, coloring agents such as yellow or red iron oxide or a phthalocyanine pigment, pigment dispersing agents, light stabilizers, thixotropic agents, and/or one or more strengthening pigments such as micaceous iron oxide or crystalline silica and/or one or more anticorrosive pigments such as metallic zinc, zinc phosphate, wollastonite and/or a filler pigment such as barytes, talc or calcium carbonate. The composition may comprise a thickening agent such as fine-particle sized silica, bentonite clay, hydrogenated castor oil, or a polyamide wax.

[0028] The coating compositions of the invention in general can be used as finish coatings and/or primer coatings. Finished coating compositions exhibit high gloss which is retained remarkably well on weathering and UV exposure. They are particularly suitable for coating substrates which are exposed to weather for long periods. The highest levels of gloss may be achieved if the coating composition includes an organic solvent such as xylene. The coating composition may also contain an alcohol, e.g. methanol, ethanol or other alcohols which has the added benefit of improving stability.

[0029] A finish coating according to the invention can be applied over various unprimed or primed coating surfaces. The coating composition can be used as a finished coat on concrete, buildings, steel structures, automobiles, aircraft and other vehicles.

general industrial machinery, plastics and wood. The finished coat can be either pigmented or clear (non-pigmented). The coating composition can also be applied directly to metal substrates like Bonderite, cold rolled steel, galvanized steel, hot dipped steel, blasted steel, and aluminum.

[0030] The coating composition of the invention alternatively can be used as a protective primer coating, particularly on steel surfaces, for example bridges, pipelines, industrial plants or buildings, oil and gas installations, or ships. For this use it is generally pigmented with anticorrosive pigments. Primer coating compositions according to the invention can be used as maintenance and repair coatings on less than perfect surfaces such as aged blasted steel, hand-prepared weathered steel, and aged coatings. These primer coating compositions can be readily topcoated, particularly with the coatings of this invention with good inter-coat adhesion.

[0031] The invention will be elucidated with reference to the following examples. These are intended to illustrate the invention but are not to be construed as limiting in any manner the scope thereof.

EXAMPLES

Resin Examples

[0032] Table 1 illustrates eight α -silane modified acrylic resin binders prepared using the following procedure and weight percents of monomers, based on the total monomer weight, and additives:

Table 1.

	Component	Ex.1	Ex.2	Ex.3	Ex.4	Ex.5	Ex.6	Ex.7	Ex.8
		Wt%	Wt%	Wt%	Wt%	Wt %	Wt %	Wt %	Wt %
Charge	Xylene	25.98	25.39	25.33	25.98	---	---	---	---
	t-Butyl Acetate					25.28	19.58	19.58	19.58

Monomers	Methyl Methacrylate	21.28	21.80	21.74	21.28	20.77	20.77	20.77	20.77
	2-Ethylhexyl acrylate	20.71	21.21	21.16	20.71	20.17	20.17	20.17	20.17
	Styrene	13.39	13.71	13.68	13.39	13.06	13.06	13.06	13.06
	Methacryloxypropyl-trimethoxysilane (Dow Corning® Z-6030)	10.49		5.36	---	---	3.83	3.83	1.92
	(Methacryloxy-methyl)methyl-dimethoxysilane (Genosil® XL32)			4.41		---	---	3.83	5.75
	Methacryloxymethyl-Trimethoxysilane (Genosil® XL-33)	---	9.53	---	---	7.66	3.83	---	---
	Methacryloxymethyl-Triethoxysilane (Genosil® XL-36)			---	10.49	---	---	---	---
Chain Transfer Agent	(3-mercaptopropyl)-trimethoxysilane (Silquest® A189)	2.79	2.86	2.86	2.79	7.66	7.66	7.66	7.66
Initiator	Vazo 67	1.34	1.38	1.37	1.34	1.40	1.40	1.40	1.40
Chase	Vazo 67	0.25	3.86	5.10	0.25	0.43	0.43	0.43	0.43
	Xylene	3.76	0.26	3.85	---	---	---	---	---
	t-Butyl Acetate			---	3.76	3.57	9.28	9.28	9.28
	NVM*	69.2	69.9	69.2	69.4	69.5	69.5	68.5	68.0

*Non-volatile material

[0033] Charge the xylene or t-butyl acetate to the reactor and heat to 90°C under nitrogen. Feed monomers, chain transfer agent and initiator over 3 hours with stirring and hold for one hour. Heat to 95°C and feed chase over 3 hours. Heat to 99°C and hold for one hour. Cool and filter resin through a 150 micron filter bag.

Paint Examples

The following coating compositions were prepared utilizing the resins of Examples 1-8 above. For pigmented paint (examples 9 to 12), the process comprises a grind phase and a letdown phase. In the grind phase, a high shear blade such as Cowles is used. The resin is charged at a pigment:binder ratio of 2 to 2.5 based on resin solids. The pigment dispersant (such as A-1230) is then added and mixed at medium speed for 5 minutes. Titanium dioxide pigment (such as CR-828) is added to the mixture and mixed at high speed for at least 25 minutes until a Hegman grind of 6 is achieved. In the letdown phase, under low agitation with a propeller or turbine blade, the remainder of the resin is added to the grind slurry followed by the bis-silylamine (such as Silquest A-1170). Appropriate amount of solvent (such as xylene) is added as a reducing agent in attaining suitable application viscosity. For clear formulations (as in examples 13 to 16), the process comprises charging all the resin and the bis-silylamine and mixing under low agitation until homogeneous with a propeller blade.

Table 2.

	Ex.9 Wt %	Ex. 10 Wt %	Ex. 11 Wt %	Ex. 12 Wt %	Ex. 13 Wt %	Ex. 13C Wt % (***)	Ex. 14 Wt %	Ex. 15 Wt %	Ex. 16 Wt %
Resin	Ex.1 53.90	Ex.2 52.80	Ex.3 53.69	Ex.4 53.55	Ex.5 89.84	Ex 5 93.17	Ex.6 90.38	Ex.7 90.21	Ex.8 89.82
A-1230*	1.76	1.72	1.75	1.75	---	---	---	---	---
CR-828**	35.15	34.42	35.00	34.92	---	---	---	---	---
bis-(3- trimethoxysilylpropyl) amine (SILQUEST® A1170)	5.37	6.02	5.87	5.12	10.16	---	9.62	9.79	10.18

gamma-Aminopropyl- triethoxy silane (SILQUEST® A1100)	---	---	---	---	---	6.83	---	---	---
Xylene	3.82	5.04	3.69	4.66	---	---	---	---	---

* A-1230 is a pigment dispersant from Momenive Corporation.

** CR-828 is a titanium dioxide pigment from Kerr McGee.

*** A comparative example utilizing the resin of Ex. 5 with an aminosilane.

TESTING

[0034] Cold rolled steel panels (4"x12", 6"x12") are coated with the coating compositions of Examples 9-16 at a 2 micron to 4 micron dry film thickness and dried at ambient temperature. The following gloss and hardness results are obtained from the coating compositions.

Table 3.

	Ex. 9		Ex. 10		Ex. 11		Ex. 12	
	7 days	28 days	7 days	28 days	7 days	28 days	7 days	28 days
Dry film thickness	2.975	2.904	3.04	2.73	3.12	2.69	4.065	
20° gloss	80.1	78.2	43.3	43.7	78.2	76.5	71.1	67.5
60° gloss	89.7	89	73.6	73.1	89.2	87.9	84.4	82.2
Pencil Hardness	H	3H	2H	4H	H	3H	3H	2H
Direct Impact Resistance (inch-pounds)	34	36	36	24	38	40	40	40
Chemical resistance: 24-Hour Chemical Spot Resistance								
Methyl isobutyl ketone (MIBK)	1	5	5	5	1	5	3	5

Ethanol	3	5	5	5	5	5	5	5
Toluene	1	1	5	1	1	1	1	5
Methyl ethyl ketone (MEK)	2	2	5	4	1	5	5	5
Formula 409	5	5	5	5	5	5	5	5
10% H ₂ SO ₄	5	5	5	5	5	5	5	5
10% citric acid	5	5	5	5	5	5	5	5
10% acetic acid	2	2	2	2	2	2	2	2
Brake Fluid	3	3	4	4	5	3	3	3
Butyl acetate	1	2	1	5	1	5	5	5
Methyl amyl ketone (MAK)	1	5	5	5	1	5	5	5
Motor Oil	3	5	5	5	3	5	5	5
Unleaded gas	1	5	3	5	3	5	3	5
25% NaCl	5	5	3	5	3	5	3	3
10% (NH ₄) ₂ SO ₄	5	5	5	5	5	5	5	5
10% NaOH	5	5	3	5	5	5	5	5
10% HNO ₃	5	5	5	5	2	5	5	5

RATINGS KEY TO CHEMICAL SPOT RESISTANCE: 24-hours of contact with chemical, wiped dry and visually rated immediately.

- 1 = Delamination
- 2 = Blistering
- 3 = Discoloration
- 4 = Slight visual change
- 5 = No change.

Table 4.

	Ex. 13	Ex. 13 C	Ex. 14	Ex. 15	Ex. 16
Dry film thickness	1.82	1.675	2.045	1.885	1.58
20° gloss	82.6	70.4	92.3	91.3	91.5
60° gloss	108	110	110	109	111
Dry times (@ ambient temperature):					
Dry to touch	10 min	15 min	30 min	3 hr	2 hr
Tack free	15 min	1 hr	1 hr	4 hr	3.5 hr
Through dry	45 min	4.5 hr	3 hr	9.25 hr	8 hr
Pencil Hardness:					
1 day	B	H	2B	3B	2B
2 days	2H	2H	2H	HB	2H
3 days	3H	2H	3H	HB	2H
4 days	3H	2H	3H	H	H
9 days	3H	3H	3H	3H	2H
10 days	3H	3H	3H	2H	2H
11 days	3H	3H	3H	3H	3H
14 days	4H	3H	3H	3H	3H
22 days	4H	3H	3H	3H	3H
28 days	4H	3H	3H	3H	3H

Comparative viscosities of Examples 13 (with bis-silylamine) and 13C (with aminosilane):

Viscosity: Brookfield #3 Spindle		
	Ex. 13	Ex. 13C
Room temperature:		
Initial (cps)*	230	228
1 hour	254	252
2 hours	262	260
3 hours	262	264
4 hours	262	300
24 hours	230	280
120° F oven:		
9 days	304	460
14 days	380	640
22 days	680	1500
28 days	1174	30,000


* Viscosity measured in centipoises (cps) on LVT Brookfield Viscometer #3 spindle at 30 rpm and 25° C.

Thus, the coatings of this invention have decreased viscosity upon storage, especially at elevated temperatures relative to the coatings utilizing the aminosilane resin.

CLAIMS:

1. An ambient temperature curing coating composition comprising the crosslinked reaction product of:

(a) an amino-functional compound, wherein the amino-functional compound is a bis-silylamine of general formula:

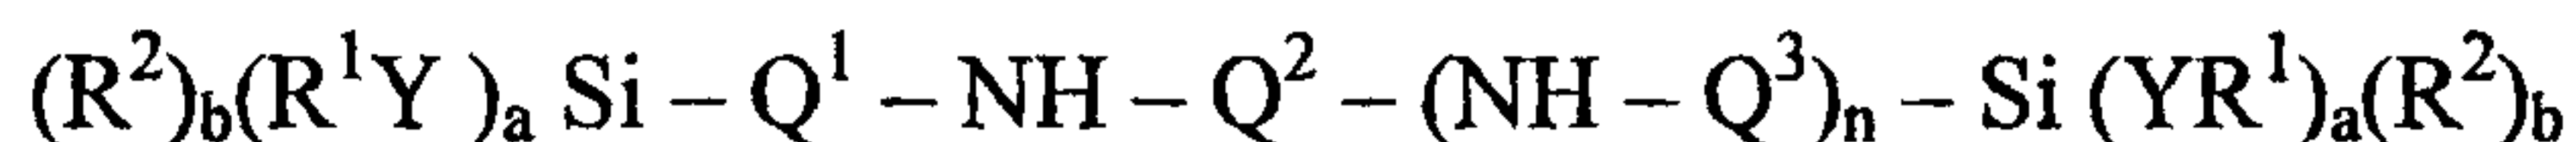

$$n \geq 0$$

$$a = 3-b$$

$$b = 0,1,2$$

each Y is independently a heteroatom, selected from O, N; if Y is N, then the valency of Y is 2; if Y is O, then the valency of Y is 1;

each R^1 is independently selected from: linear C_{1-10} alkyl, branched C_{1-10} alkyl, cycloalkyl, aryl, allyl, and aralkyl;

each R^2 is a monovalent radical, and optionally includes a heteroatom not directly bonded to the silicon atom, each R^2 selected from: linear C_{1-10} alkyl, branched C_{1-10} alkyl, cycloalkyl, aryl, allyl, and aralkyl;


Q^1 , Q^2 , Q^3 is a divalent bridging group, optionally comprising a C_{1-12} alkylene, and can be branched or cyclic; each Q can be the same or different; and

(b) an acrylic polymer containing pendant organofunctional α -silane groups.

2. The coating composition of claim 1 wherein the bis-silylamine is at least one percent by weight of the total coating composition.

3. The coating composition of claim 1 wherein the bis-silylamine is between about 1 percent by weight and about 35 percent by weight of the coating composition.
4. The coating composition of claim 1, wherein the composition comprises from about 1 percent by weight to about 35 percent by weight of the bis-silylamine and from about 25 percent by weight to about 99 percent by weight of the acrylic polymer containing pendant organofunctional α -silane groups.
5. The coating composition of claim 1, wherein the acrylic polymer containing pendant organofunctional α -silane groups comprises from about 1% by weight to about 35% by weight of organofunctional α -silane, based on the total weight of the acrylic polymer containing pendant organofunctional α -silane groups.
6. The coating composition of claim 1, wherein the bis-silylamine is a bis-(trialkoxysilylalkyl)amine.
7. The coating composition of claim 1, wherein the bis-silylamine is selected from the group consisting of bis-(3-trimethoxysilylpropyl)amine, bis-(3-triethoxysilylpropyl) amine, bis-(3-trimethoxysilyl 2-methylpropyl) amine, and bis-(3-triisopropoxysilylpropyl) amine, and N-(3-triethoxysilylpropyl)-N-(5-triethoxysilylpentyl)amine.

8. A process for the preparation of a coating composition comprising:
- (a) providing an amino-functional compound, wherein the amino-functional compound is a bis-silylamine of general formula:

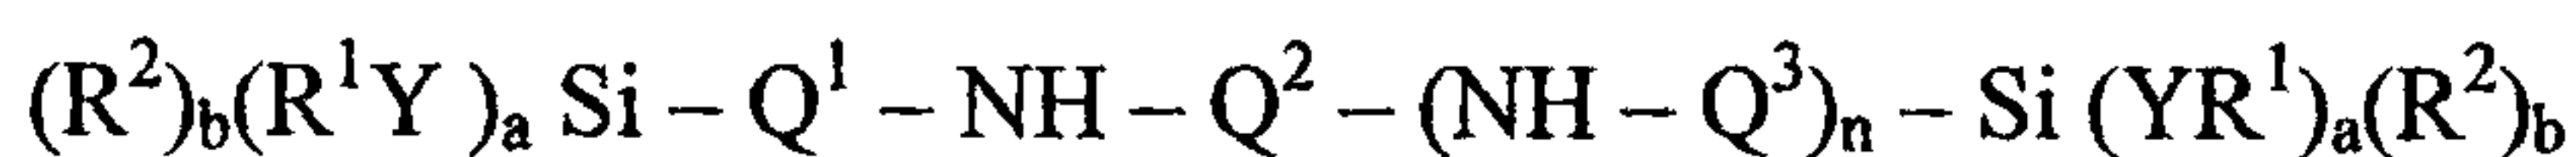

$$n \geq 0$$

$$a = 3-b$$

$$b = 0,1,2$$

each Y is independently a heteroatom, selected from O, N; if Y is N, then the valency of Y is 2; if Y is O, then the valency of Y is 1;

each R^1 is independently selected from: linear C_{1-10} alkyl, branched C_{1-10} alkyl, cycloalkyl, aryl, allyl, and aralkyl;

each R^2 is a monovalent radical, and optionally includes a heteroatom not directly bonded to the silicon atom, each R^2 selected from: linear C_{1-10} alkyl, branched C_{1-10} alkyl, cycloalkyl, aryl, allyl, and aralkyl;

Q^1 , Q^2 , Q^3 is a divalent bridging group, optionally comprising a C_{1-12} alkylene, and can be branched or cyclic; each Q can be the same or different; and

- (b) combining the bis-silylamine with an acrylic polymer containing pendant organofunctional α -silane groups.

9. A coated substrate, said substrate coated with the composition of claim 1.

$$(R^2)_b(R^1Y)_aSi-Q^1-NH-Q^2-(NH-Q^3)_n-Si(YR^1)_a(R^2)_b$$

$$n \geq 0$$

$$a = 3-b$$

(I)

$$b = 0,1,2$$