



(51) International Patent Classification:
B65G 17/24 (2006.01) **B65G 47/68** (2006.01)

(21) International Application Number:
PCT/US2010/041124

(22) International Filing Date:
7 July 2010 (07.07.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/509,207 24 July 2009 (24.07.2009) US

(71) Applicant (for all designated States except US):
LAITRAM, L.L.C. [US/US]; Legal Department, 200
Laitram Lane, Harahan, Louisiana 70123 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **FOURNEY,
Matthew, L.** [US/US]; 8714 Teresa Lane, Laurel, Mary-
land 20723 (US).

(74) Agent: **CRONVICH, James, T.**; Laitram, L.L.C., 200
Laitram Lane, Harahan, Louisiana 70123 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,
ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to the applicant's entitlement to claim the priority of
the earlier application (Rule 4.17(iii))

Published:

— with international search report (Art. 21(3))

(54) Title: ROLLER-BELT SORTER WITH CONTROL GRID

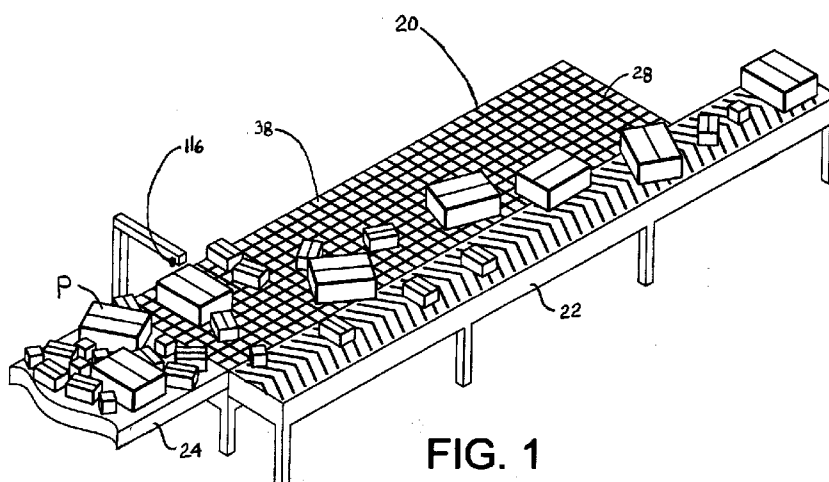


FIG. 1

(57) Abstract: Apparatus and method for sorting a mass flow of articles without collisions between articles (p). The apparatus includes a sorting conveyor (20) having a plurality of article-supporting belt rollers (30) selectively rotatable in a direction transverse to the direction of belt (28) travel. The belt rollers (30) are selectively rotated in individual grid cells (38) formed along the conveyor's (20) carryway. A control system creates an image of the incoming mass flow, computes trajectories along the sorting conveyor for each package, and actuates or deactuates the belt rollers (30) passing through each grid cell according to the trajectories to orderly and rapidly divert articles (p) off the side of the sorting conveyor. (20)

ROLLER-BELT SORTER WITH CONTROL GRID

BACKGROUND

The invention relates generally to power-driven conveyors and, more particularly, to a sorting system using a conveyor belt having article-supporting rollers that are selectively rotated in individual control cells arranged in a grid through which the belt passes.

Shoe sorters, pusher bars, and diverting rails are used to sort packages and other articles on a conveyor. In high-density package flows, it is often necessary to unscramble side-by-side packages before sorting to prevent one package from blocking another's exit off the conveyor. But a conveyor used to unscramble packages before they are diverted takes up space. And unscrambling packages of various sizes and orientation in a mass flow is difficult, especially at high throughput rates.

Thus, there is a need for a sorter that can sort a variety of package sizes at a high throughput rate without taking up too much floor space.

SUMMARY

This need and other needs are addressed by a sorting system embodying features of the invention including a sorting conveyor and a control system. The sorting conveyor includes a conveyor belt that advances in the direction of belt travel. The belt has article-supporting belt rollers that can rotate in a direction transverse to the direction of belt travel. The sorting conveyor also includes control elements arranged in a grid of multiple rows and columns of individually controlled grid cells. The control elements selectively rotate the belt rollers as they pass through the grid cells. A control system includes means for sensing the size and position of each article entering the belt. A trajectory along the conveyor belt is computed for each article based on its size and position on entering the belt by means for computing a trajectory. Each grid cell is selectively controlled according to the trajectories to divert articles transversely across the sorting conveyor along the trajectories.

In another aspect of the invention, a method for sorting a flow of articles comprises: (a) receiving a flow of articles atop belt rollers in a conveyor belt advancing in a direction of belt travel; (b) imaging the articles to determine their sizes and positions on entering the conveyor belt; (c) computing a trajectory for each article from its size and position;

(d) selectively actuating the belt rollers to rotate transverse to the direction of belt travel according to the trajectories. In this way, articles are diverted across the conveyor belt along the trajectories.

Another version of the sorting conveyor includes a sorting conveyor that has rollers arranged in a grid of multiple rows and columns of individually controlled grid cells. A control system determines the size and position of each article entering the sorting conveyor, computes a trajectory for each article along the sorting conveyor from the article's size and position, and selectively controls the rollers in each grid cell according to the trajectories computed for the articles to actuate the rollers to divert articles across the sorting conveyor along the trajectories.

BRIEF DESCRIPTION OF THE DRAWINGS

These features and aspects of the invention, as well as its advantages, are better understood by referring to the following description, appended claims, and accompanying drawings, in which:

FIG. 1 is an isometric pictorial of a sorting system embodying features of the invention;

FIG. 2 is a top plan of the sorting system of FIG. 1;

FIG. 3 is a top plan view of a portion of the sorting conveyor in the sorting system of FIG. 1;

FIG. 4 is a partly exploded top isometric view of an actuation grid for a sorting system as in FIG. 1;

FIG. 5 is a bottom isometric view of the actuation grid of FIG. 4;

FIG. 6 is an enlarged top plan view of a grid cell of the actuation grid of FIG. 4 in a deactuated position;

FIG. 7 is an enlarged bottom view of the grid cell of FIG. 6 in a deactuated position;

FIG. 8 is an enlarged top plan view as in FIG. 6 with the grid cell in an actuated position;

FIG. 9 is an enlarged view as in FIG. 7 with the grid cell in an actuated position;

FIG. 10 is a block diagram of a control system usable in the sorting system of FIG. 1;

FIGS. 11A–11E illustrate the control sequence for one example arrangement of packages on the sorting conveyor in the sorting system of FIG. 1; and

FIG. 12 is a flowchart of one version of control logic usable in the control system of the sorting system of FIG. 1.

5

DETAILED DESCRIPTION

A sorting system embodying features of the invention is shown in FIGS. 1 and 2. An incoming mass flow of a variety of articles, such as boxes or packages P, is sorted in a sorting conveyor 20 and transferred onto an abutting outbound singulating conveyor 22. The mass flow of packages, randomly oriented and positioned, is fed onto the sorting conveyor by an infeed conveyor 24 advancing in a conveying direction 26. The infeed conveyor may be realized as a powered roller conveyor, a flat belt, a modular conveyor belt, a chute, or the like. The sorting conveyor comprises a conveyor belt 28 having package-supporting rollers 30 (FIG. 3) arranged to rotate on axes 31 perpendicular, or transverse, to the direction of belt travel 32, which is in the conveying direction. The package-supporting belt rollers may be actively rotated in the direction of arrow 34 to divert packages toward the singulating conveyor 22.

The transverse rollers in the sorting-conveyor belt 28 are selectively rotated in a grid 36 of individually actuated zones, or grid cells 38, arranged in rows R and columns C along the sorting conveyor's carryway. In one embodiment, the rollers 30 in the sorting-conveyor belt 28 extend through the thickness of the belt so that they can be rotated by rolling contact with bearing surfaces underlying the belt as the belt advances in the direction of belt travel. One example of such a belt is the Intralox® Series 7000 belt manufactured and sold by Intralox, L.L.C. of Harahan, Louisiana, U.S.A.

An exploded view of a portion of the bearing surfaces underlying the belt is shown in FIG. 4. The belt rollers are supported atop an array of control elements—in this example, diverting rollers 40 positioned along the carryway. The peripheral surfaces of the diverting rollers serve as the bearing surfaces.

The diverting rollers are mounted on a carryway pan 42, which is itself mounted in a conveyor frame (not shown). The pan is perforated with a plurality of circular openings 44 arranged in longitudinal columns 46 and lateral, or transverse, rows 47. The columns of

openings are laterally aligned with the lateral positions of the belt rollers. Each opening rotatably receives a cartridge 48 supporting a freely rotatable diverting roller 40, which engages the belt rollers in the corresponding column as the belt advances in the direction of belt travel. The rolling contact between the belt rollers and the diverting rollers causes them
5 both to roll on each other and rotate as long as their axes are oblique to each other.

The diverting roller cartridge 48 includes a retainer ring 50 with diametrically opposite holes 52 supporting the ends of an axle received in a bore in the diverting roller 40. One of the holes can be a through hole through which the axle can be inserted into the cartridge and the diverting roller, and the other hole can have a blind end forming an end
10 stop for the axle. In this way, the diverting roller is retained in the cartridge along a fixed axis with a salient portion of the roller protruding beyond the top of the retainer ring. Extending downward from the retainer ring encircling the diverting roller is an upper journal stem 54 having a cylindrical outer periphery indented inward from the ring to form a shoulder 56 between the peripheries of the ring and the stem. A lower journal stem 58
15 distal from the retainer ring has a smaller diameter than the upper journal stem. The periphery of the lower journal stem is indented inward of the periphery of the upper journal stem. A cartridge gear 60 is disposed between the upper stem and the lower stem. The cartridge gear is preferably a spur gear with peripheral teeth whose tips do not extend past the periphery of the upper journal stem.

20 The cartridges 48 are received in the openings 44 in the carryway pan as shown in FIG. 4. The walls of the openings form bearing surfaces 62 against which the upper journal stems can rotate. Because the diameter of the retainer rings exceeds the diameter of the openings, the ring's shoulder 56 rests atop the carryway pan with the smaller-diameter stems and gear portions suspended below.

25 A plurality of gear plates 64 are movably positioned below the carryway pan. Each gear plate defines one of the individually actuatable grid cells. Actuated gears in the form of rack gears 66 are disposed on the gear plates. Each rack gear is positioned to engage the teeth of one of the cartridge gears to form a rack-and-pinion system that can rotate its cartridges in unison as the gear plate is translated. The gear plate has elongated openings 68
30 bounded on one side by a linear array of teeth 70 forming a rack gear. Each elongated opening 68 is positioned below one of the openings 44 in the carryway pan. The lower

journal stem extends through the elongated openings in the gear plates, which are sandwiched between two other plates: the carryway pan 42 and a bottom plate 72. The bottom plate, which is stationarily affixed to a portion of the conveyor frame, has a plurality of openings 74 vertically aligned with, but having a smaller diameter than, the openings in the carryway pan. The openings 74 are sized to rotatably receive the lower journal stems 58 of the cartridges. This helps align the upper and lower support plates to facilitate assembly of the roller drive mechanism and also confines the rotatable cartridges in rotation on fixed vertical axes.

Confronting spacer pads 76 on the top of the bottom plate 72 and on the bottom of the top plate 42 maintain the proper spacing between the two plates and the movable gear plates 64. Spacers 78, fastened by bolts 80, washers 82, and nuts 84, maintain the spacing between the carryway pan and the bottom plate 72.

Each gear plate 64 is translated by an individual linear actuator 86, such as an air cylinder, an electrical actuator, or a mechanical actuator. As shown in FIG. 5, actuators in each grid cell column are attached at one end to a mounting bracket 88 mounted to the bottom of the bottom plate 72 by a coupling 90. The extension of an extension rod 92 from the other end of the actuator is connected by a coupling 94 to an actuator plate 96. Three internally threaded posts 98 extend upward from the actuator plate through slots 100 in the bottom plate. Three flathead screws 102 extend through the gear plate 64 into the posts to attach the gear plate to the associated actuator plate. The extension rod translates the actuator plate and the gear plate, the rod's extension determining the position of the gear plate and the orientation of the diverting rollers.

The operation of one of the grid cells of the diverting conveyor system is illustrated in FIGS. 6–9. Each gear plate controls an array of 18 diverting rollers. (Three diverting rollers are omitted at the lower left of FIGS. 6 and 8 to illustrate features of the gear plate better.) In FIGS. 6 and 7, the gear plate 64 is shown translated to an intermediate position in which the diverting roller cartridges 48 are positioned in the middle of the elongated slots 68. With the cartridges rotated to this position, the axes of rotation 104 of the diverting rollers in the grid cell are perpendicular, at right angles, to the direction of belt travel 32. As the conveyor belt advances in the direction of belt travel, the diverting rollers in this orientation rotate in the direction of belt travel and the perpendicularly disposed engaged belt rollers ride along the

diverting rollers without rotation. Thus, the belt rollers are deactuated when the diverting rollers are in the orientation of FIGS. 6 and 7. When the gear plate is translated over its range to one extreme with the cartridges positioned at one end of the elongated slots 68 in FIGS. 8 and 9, the axes of rotation 104 of the diverting rollers form an acute angle γ measured clockwise from the direction of belt travel. In this orientation, the diverting rollers rotate in the direction of arrow 106, and the belt rollers rotate in the direction of arrow 108 to push conveyed objects toward the right of FIG. 8, as indicated by the arrow 34 in FIG. 3.

As shown in FIG. 3, the outbound singulating conveyor 22 preferably includes a modular plastic conveyor belt 110 having actuated oblique rollers 112. The rollers on each half of the belt rotate in a direction angled toward the center of the belt as indicated by arrows 114 and 115. Packages conveyed atop the singulating belt are driven to the center of the belt as it advances in the direction of belt travel 32. Preferably, the singulating belt runs faster than the sorting belt to increase the separation between consecutive packages along the center line of the singulating conveyor. Thus, the singulating conveyor aligns the packages in a single file for delivery downstream, as illustrated in FIG. 2. The singulating belt may be constructed of Intralox® Series 400 angled roller modules and supported on bearing surfaces, such as a carryway pan, that actuate the oblique belt rollers along the length of the carryway as the belt advances.

The size and position of each package are sensed by a sensor, such as a digital camera 116 supported above the entrance to the sorting conveyor as shown in FIGS. 1 and 2. Other means for sensing the size and position of each package, such as laser or acoustic systems, may alternatively be used. The video images 117 taken by the camera are fed to a control system 118 including a system controller 119 as shown in FIG. 10. The system controller includes a programmable computer, such as a work station, a desktop computer, a programmable logic controller, or an embedded microcontroller. The system controller uses the video images, which are taken at regular intervals, to produce a table of trajectories 120 for each package that is received on the sorting conveyor. The computed trajectories are used to selectively actuate the belt rollers passing through each grid cell to cause the packages to follow their computed trajectories on the sorting conveyor. The actuators 86 for the individual grid cells are controlled over signal lines 121 by an output module 122. The actuators are labeled A₁₁–A₈₅ in FIG. 10 to indicate a grid of 8 rows by 5 columns, or 40 grid

cells. The output modules, the actuators, and the rack-and-pinion system form means for selectively controlling each grid cell. The speed of the sorting belt is also needed to compute the trajectory. The speed may be sensed by a tachometer 124 or other sensor and reported to the system controller. Alternatively, the speed setting of the sorting conveyor's drive motor
 5 may be used by the controller in computing the trajectories.

The operation of the sorting conveyor is illustrated in FIG. 11A–11E in conjunction with the flowcharts in FIG. 12. A control sequence software routine runs regularly every T seconds, for example, every 0.5 seconds. As indicated in step 124 of the flowchart, the sequence starts by taking a video image of the incoming package flow. If the controller
 10 determines, as in step 126, that a new package, i.e., one not already assigned a trajectory, is entering the sorting conveyor, it determines that package's size, or footprint, and its position on the conveyor as indicated in step 128. The controller then determines the belt speed from a sensor or from a setpoint or a predetermined value as in step 130. From the footprint, position, and speed data, the controller computes a trajectory for each newly entering
 15 package (step 132) and saves it in a trajectory table. Each trajectory defines which grid cells are to be actuated for the associated package during consecutive actuation intervals beginning with the interval during which the package enters the sorting conveyor.

FIGS. 11A–11E provide an example of the operations for two packages P_1 and P_2 .

Each figure represents the actuation status of each grid cell in consecutive intervals

beginning at interval start time T_1 in FIG. 11A. The other start times are: $T_2 = T_1 + T$;
 20 $T_3 = T_2 + T$; $T_4 = T_3 + T$; $T_5 = T_4 + T$, where T is the repetition rate of the control sequence.

During the first interval from T_1 to T_2 (FIG. 11A), only grid cells G_{11} and G_{12} , as indicated by the shaded cells, are actuated to start the package P_1 on its trajectory J_1 . This is indicated by step 134 of the flowchart in FIG. 12, which bids a Grid Control Task to run. The Grid Control
 25 Task uses the trajectories to determine which grid cells to actuate during the time interval (step 136) and sends corresponding actuate/deactuate signals to the cell actuators (step 138).

No grid cells are initially actuated for the package P_2 so that it may continue moving in the direction of belt travel without interfering with the package P_1 . During the next interval, from T_2 to T_3 (FIG. 11B), grid cells G_{11} , G_{21} , G_{22} , and G_{31} are actuated to continue to divert the
 30 package P_1 toward the singulating conveyor along the trajectory J_1 . In the meantime, because the package P_2 is now largely laterally separated enough from P_1 , grid cells G_{33} and G_{34} are

actuated to start to divert P_2 along its trajectory J_2 . During the next interval, T_3 to T_4 (FIG. 11C), only grid cell G_{41} is actuated for P_1 , which is almost entirely transferred off the sorting conveyor. Grid cells G_{42} , G_{52} , and G_{53} are actuated to continue to urge P_2 along its trajectory. During the next interval, T_4 to T_5 (FIG. 11D), grid cells G_{16} and G_{17} are actuated to complete the transfer of P_2 to the singulating conveyor. Because P_1 has already been transferred, no grid cells are actuated for it. Finally, during the final interval shown, T_5 to T_6 (FIG. 11E), no grid cells are actuated because both packages have already been transferred.

As the example suggests, the trajectories for each package may be represented by an indexed array of 5×8 matrices of 1's and 0's, where each matrix element corresponds to one of the grid cells and a "1" indicates actuate and a "0" deactuate. The index of each matrix in the array corresponds to the start of the corresponding time interval. The matrices of all the trajectories are logically or'ed together for each index to determine the overall grid-cell actuation map during each interval. The map defines the actuate/deactuate states of the control lines 121 (FIG. 10) to the actuators.

As indicated by the flowchart in FIG. 12, each interval is initiated by the execution of the control sequence, which first images the incoming flow and bids the Grid Control Task to output the actuation signal according to the trajectories. If no new entering packages are detected, the control sequence bypasses the trajectory computation by following the bypass path 140 in the control sequence and proceeds directly to bid the Grid Control Task to run.

Thus, the control sequence software provides means for computing the trajectory for each article, or package, to achieve a rapid and orderly transfer of packages off the side of the sorting conveyor without collisions between packages.

Although the invention has been described in detail with respect to a single version, other versions are possible. For example, the rollers in the sorting conveyor belt could be selectively actuated by mechanisms or systems other than the array of diverting rollers underlying the belt. As one example, the rollers could be made to be magnetically actuated to selectively rotate in each grid cell by electromagnets forming the control elements for the grid. Or each belt roller could include a rotor selectively rotated by an array of individually controlled stators serving as control elements positioned along the carryway and defining the grid cells. Furthermore, the conveyor belt could be dispensed with and articles directly atop the diverting rollers diverted across the sorting conveyor if the diverting rollers were

motor-driven rollers individually controlled to rotate or change direction. The flowchart represents one example of a routine controlling the actuation of the grid cells according to computed package trajectories. Other software implementations are possible. For example, the visioning step and the grid control step could be performed at different rates. And the trajectory table could be arranged other than as an array of matrices. So, as these few examples suggest, those skilled in the art may make modifications and variations to the disclosed specific embodiments without departing from the scope of the disclosure.

What is claimed is:

CLAIMS

1. A sorting system comprising:

a sorting conveyor including:

a conveyor belt advancing in a direction of belt travel and having a plurality of

5 article-supporting belt rollers rotatable in a direction transverse to the direction of belt travel;

a plurality of control elements arranged in a grid of multiple rows and columns of individually controlled grid cells along the sorting conveyor to selectively rotate the belt rollers passing through the grid cells;

10 a control system including:

means for sensing the size and position of each article entering the conveyor belt;

means for computing a trajectory for each article along the sorting conveyor from the size and position sensed by the means for sensing;

15 means for selectively controlling the control elements in each grid cell according to the trajectories computed for the articles to divert articles transversely across the sorting conveyor along the trajectories.

2. A sorting system as in claim 1 wherein the means for sensing comprises at least one camera providing an image of the articles.

3. A sorting system as in claim 1 wherein the means for computing a trajectory computes
20 non-interfering trajectories for articles entering the conveyor belt side by side.

4. A sorting system as in claim 1 wherein the means for computing a trajectory computes trajectories as a function of belt speed in the direction of belt travel.

5. A sorting system as in claim 1 wherein the control elements comprise diverting rollers.



6. A sorting system as in claim 5 wherein the means for selectively controlling each grid
25 cell comprises an actuator associated with each grid cell that changes the angle of all the diverting rollers in the grid cell with respect to the belt rollers.

7. A sorting system as in claim 6 wherein the belt rollers rotate on axes parallel to the direction of belt travel and the actuators change the angle of all the diverting rollers in the grid cell from an oblique angle causing the belt rollers to rotate by contact to a right
30 angle disabling rotation of the belt rollers.

8. A sorting system as in claim 1 further comprising an outbound conveyor advancing in the direction of belt travel at a greater speed than and abutting the sorting conveyor side by side along a portion of the length of the sorting conveyor to receive articles diverted from the sorting conveyor and accelerate the articles along the outbound conveyor in the direction of belt travel in single file.
9. A method for sorting a flow of articles, comprising:
receiving a flow of articles atop belt rollers in a conveyor belt advancing in a direction of belt travel;
imaging the articles to determine their size and positions on entering the conveyor belt;
computing a trajectory for each article from its size and position;
selectively actuating the belt rollers to rotate transverse to the direction of belt travel according to the trajectories to divert the articles across the conveyor belt along the trajectories.
10. The method of claim 9 further comprising establishing a stationary grid of individually controlled grid cells along the conveyor belt to selectively actuate the belt rollers passing pass through the grid cells.
11. A sorting system comprising:
a sorting conveyor including:
a plurality of selectively rotatable rollers arranged in a grid of multiple rows and columns of individually controlled grid cells along the sorting conveyor;
a control system determining the size and position of each article entering the sorting conveyor, computing a trajectory for each article along the sorting conveyor from the article's size and position, and selectively controlling the rollers in each grid cell according to the trajectories computed for the articles to actuate the rollers to divert articles across the sorting conveyor along the trajectories.
12. A sorting system as in claim 11 wherein the sorting conveyor further includes a conveyor belt advancing in a direction of belt travel and having a plurality of article-supporting belt rollers extending through the thickness of the conveyor belt and rotatable in a direction transverse to the direction of belt travel and wherein the selectively rotatable rollers have bearing surfaces contacting and selectively rotating the belt rollers passing through the grid cells.

13. A sorting system as in claim 12 wherein the control system includes an actuator associated with each grid cell that selectively changes the angle of all the selectively rotatable rollers in the grid cell with respect to the belt rollers.
14. A sorting system as in claim 13 wherein the belt rollers rotate on axes parallel to the
5 direction of belt travel and the actuators change the angle of all the diverting rollers in the grid cell from an oblique angle causing the belt rollers to rotate by contact to a right angle disabling rotation of the belt rollers.
15. A sorting system as in claim 12 further comprising an outbound conveyor advancing in the direction of belt travel at a greater speed than and abutting the sorting conveyor side
10 by side along a portion of the length of the sorting conveyor to receive articles diverted from the sorting conveyor and accelerate the articles along the outbound conveyor in the direction of belt travel in single file.

1/9

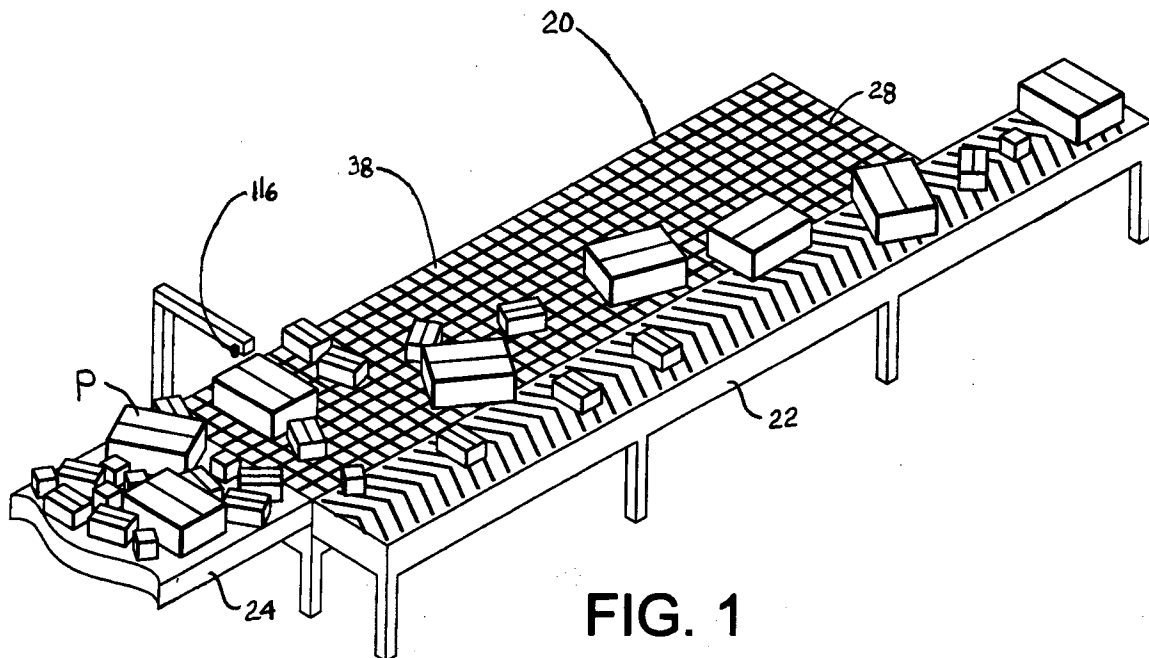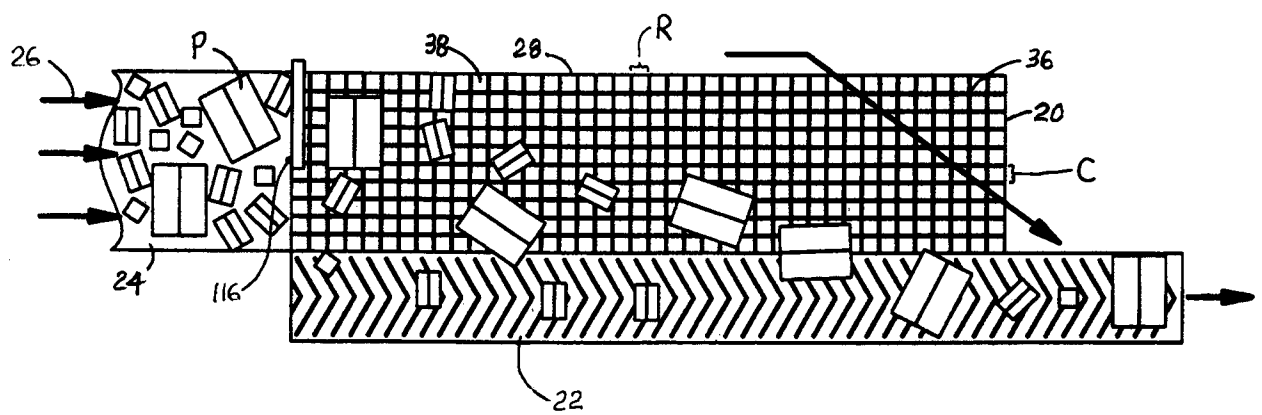

2/9

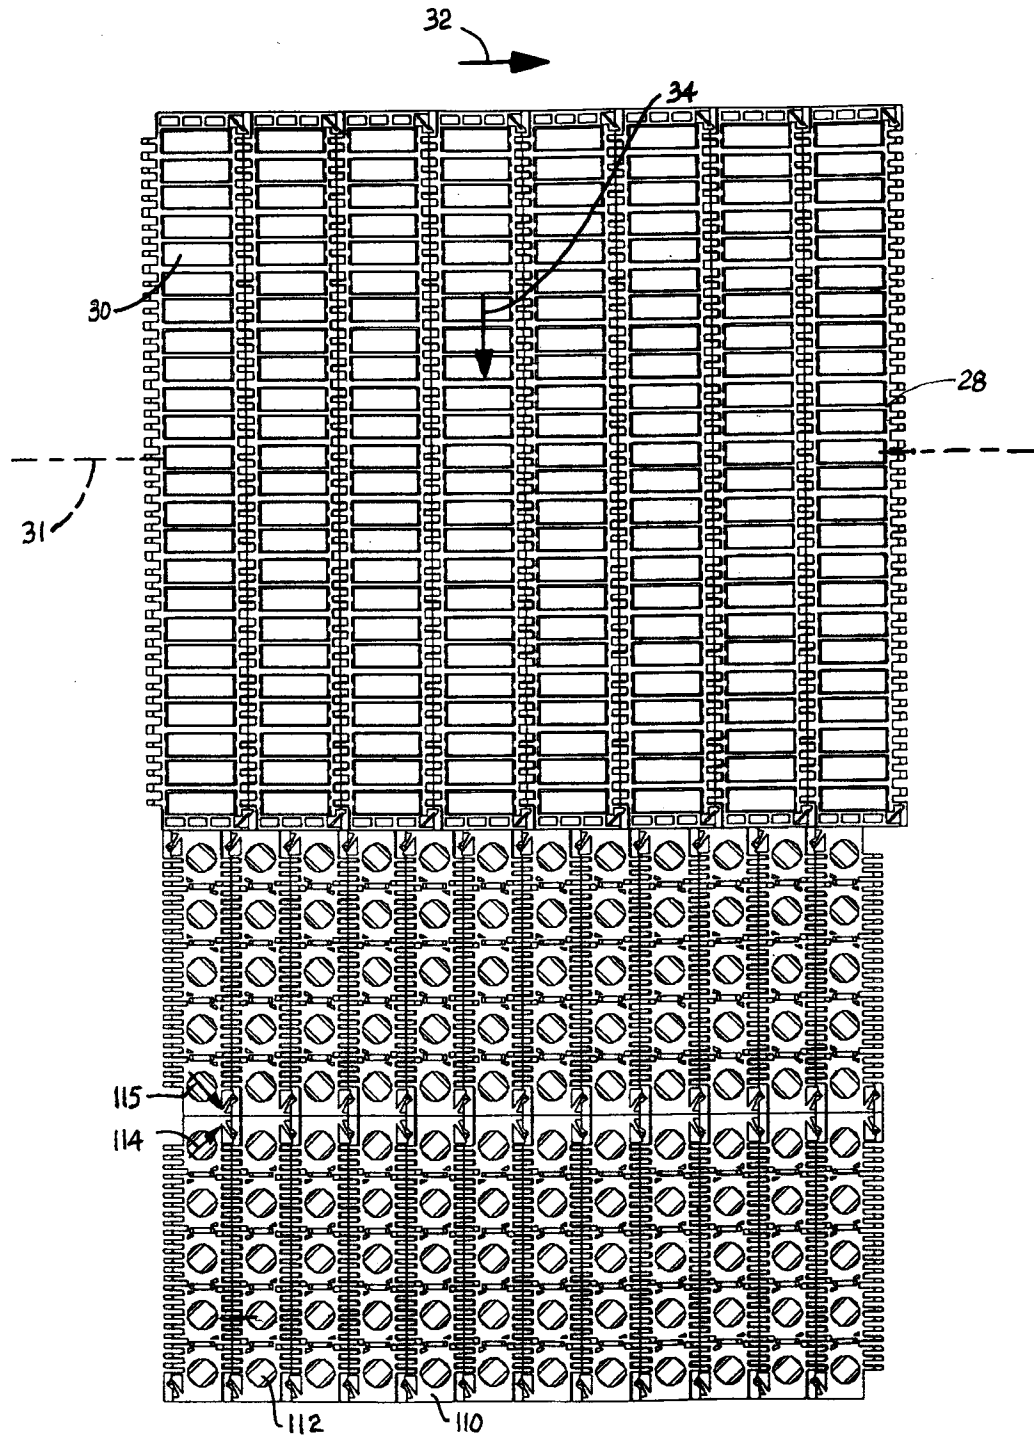


FIG. 3

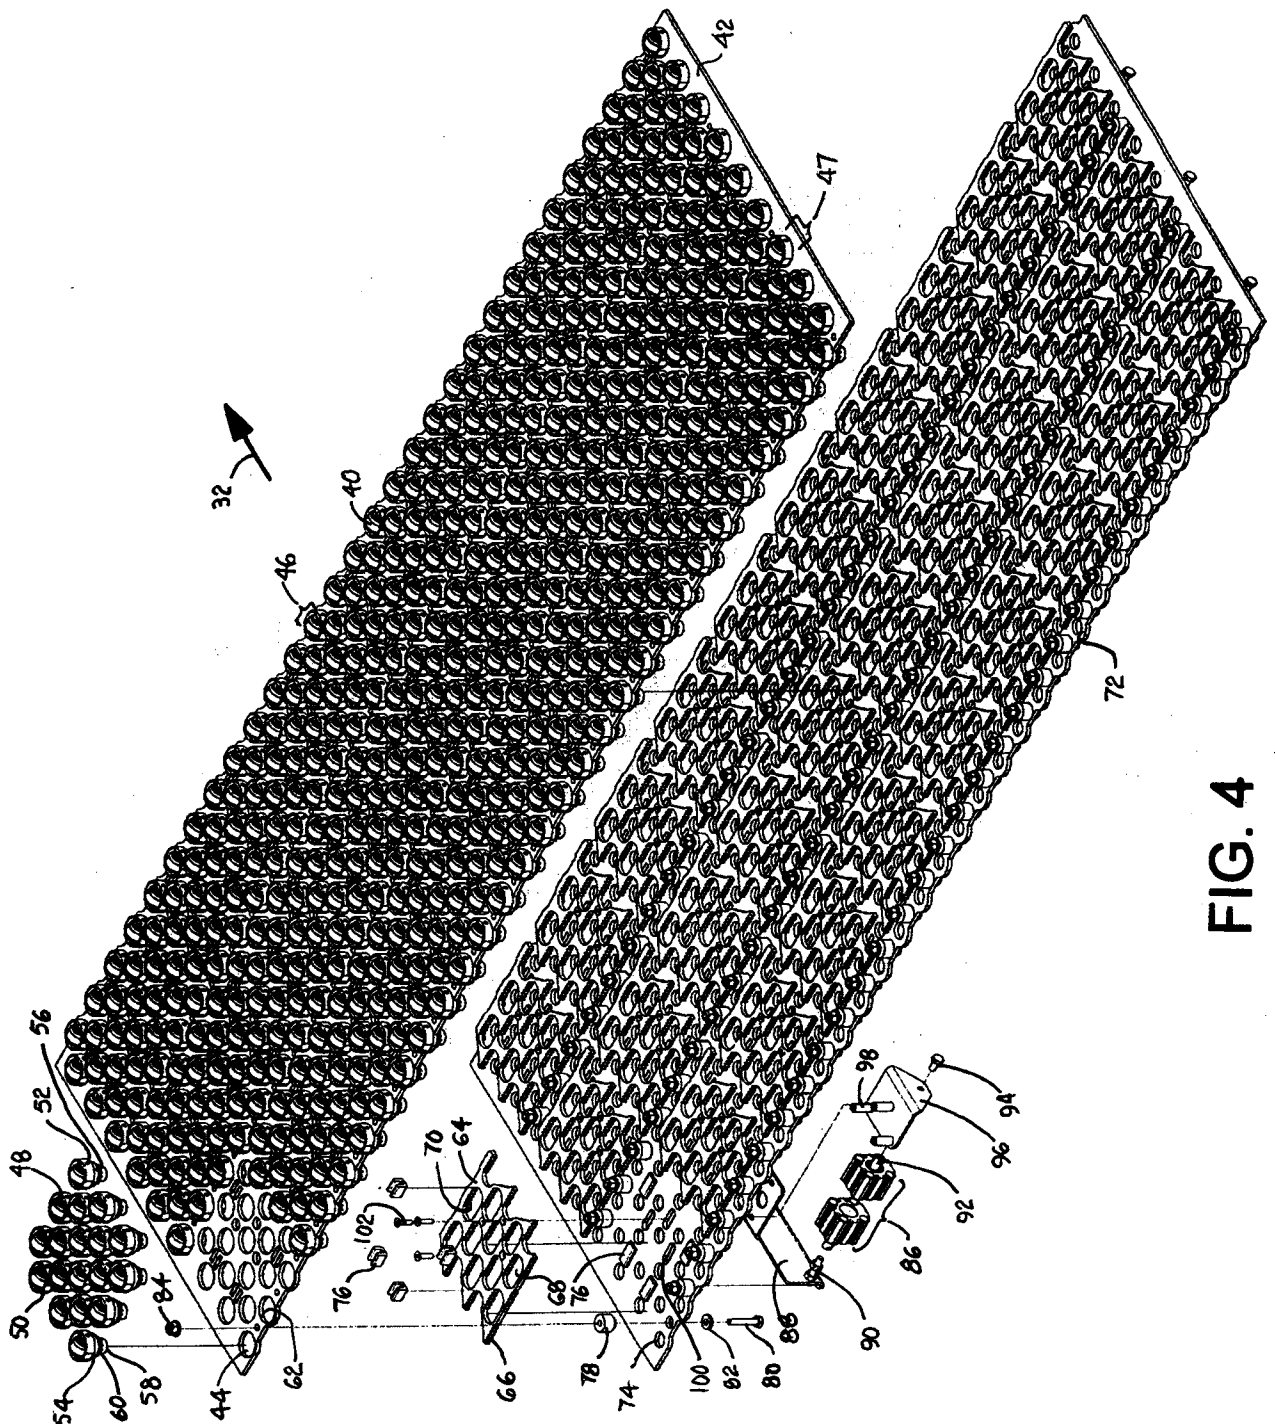


FIG. 4

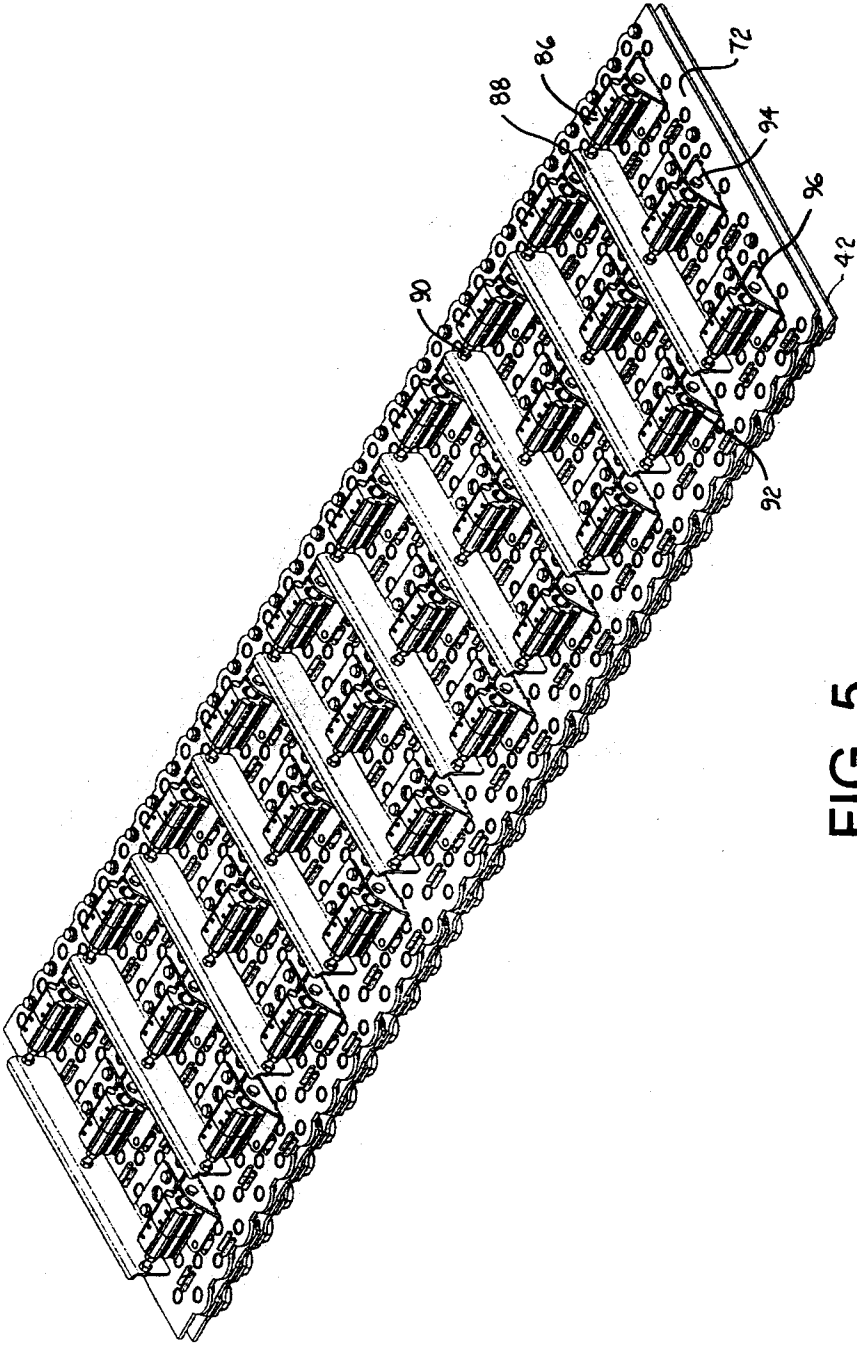


FIG. 5

5/9

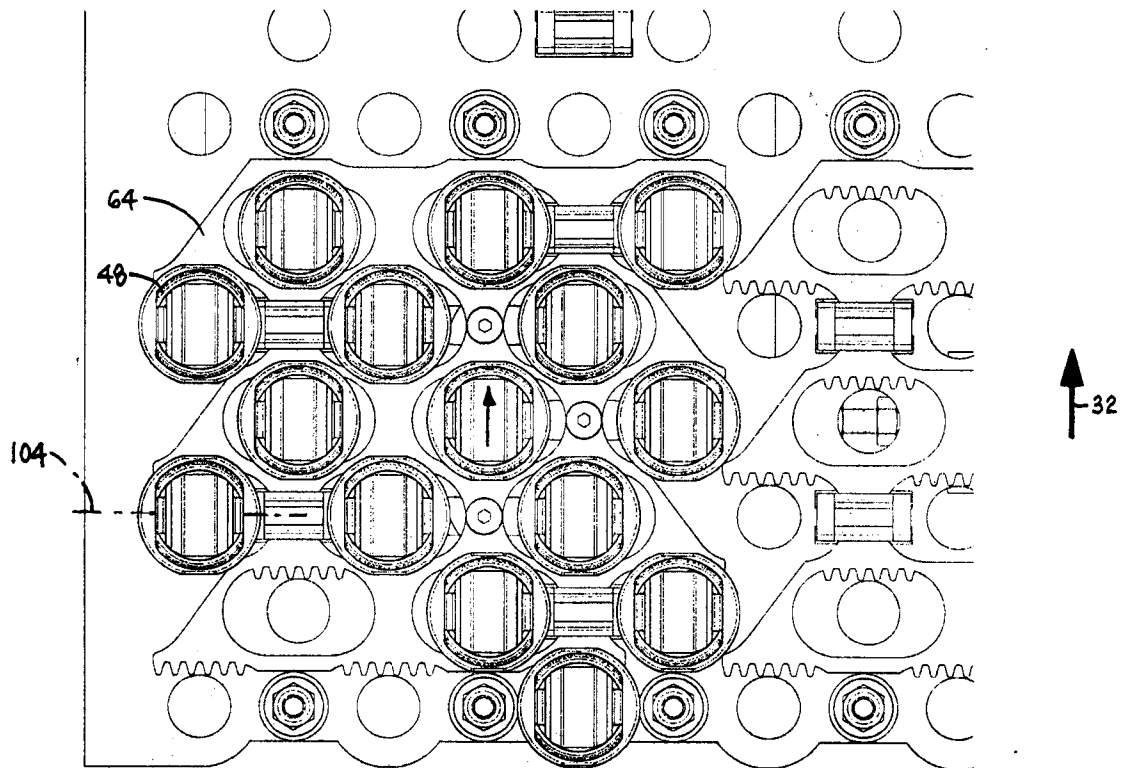


FIG. 6

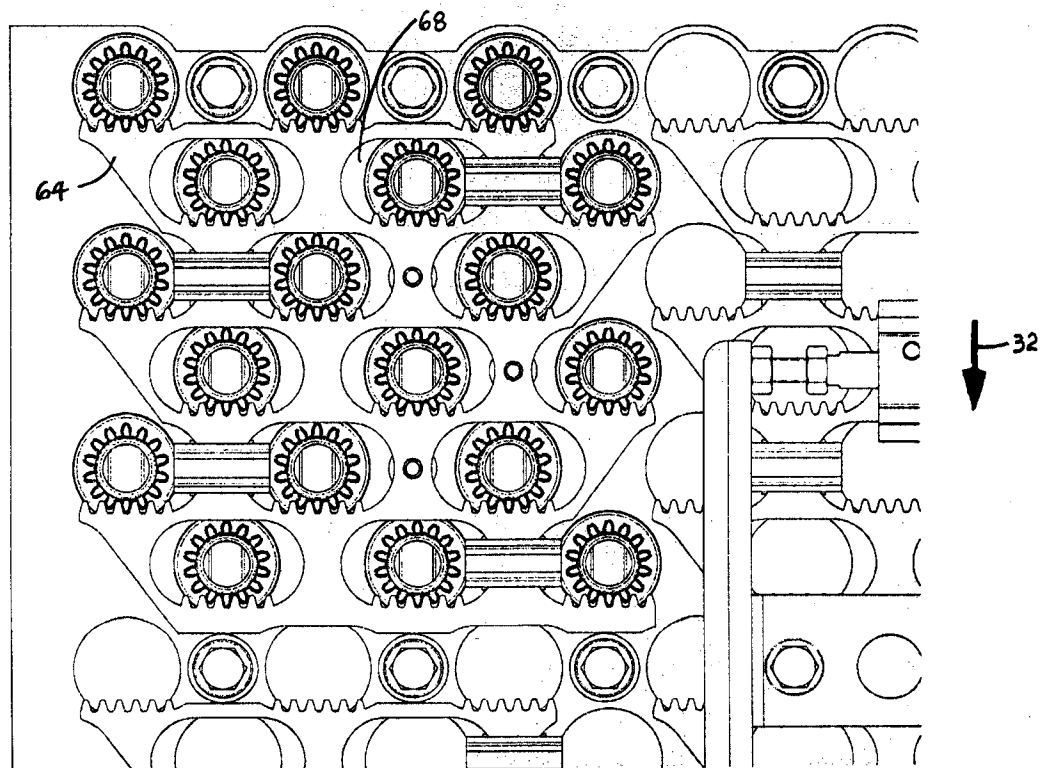


FIG. 7

6/9

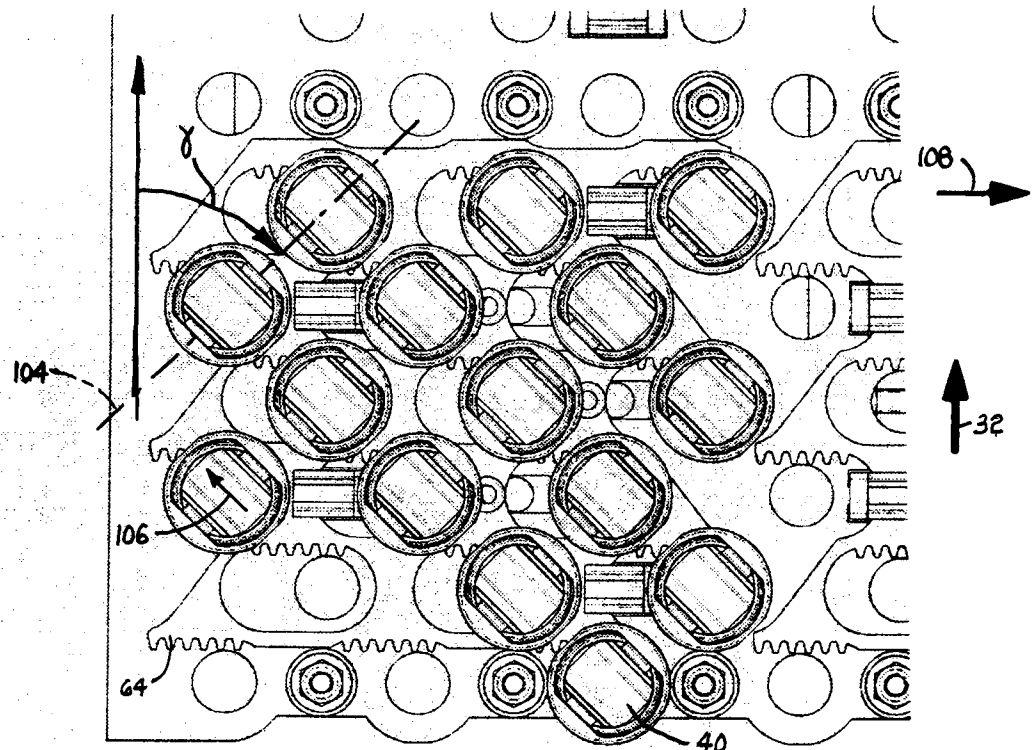


FIG. 8

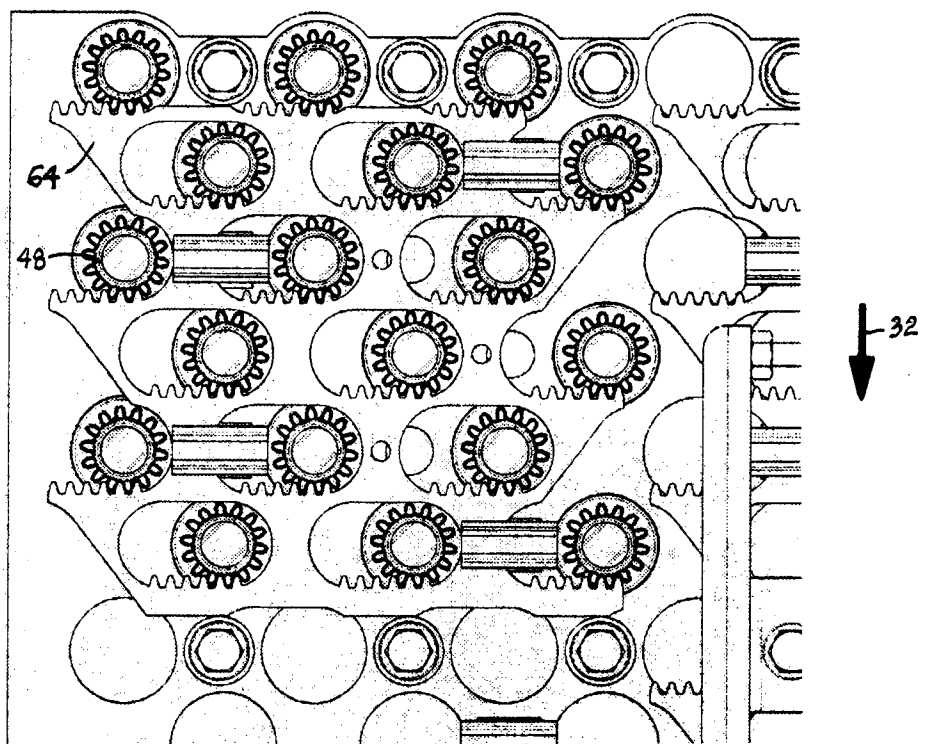


FIG. 9

7/9

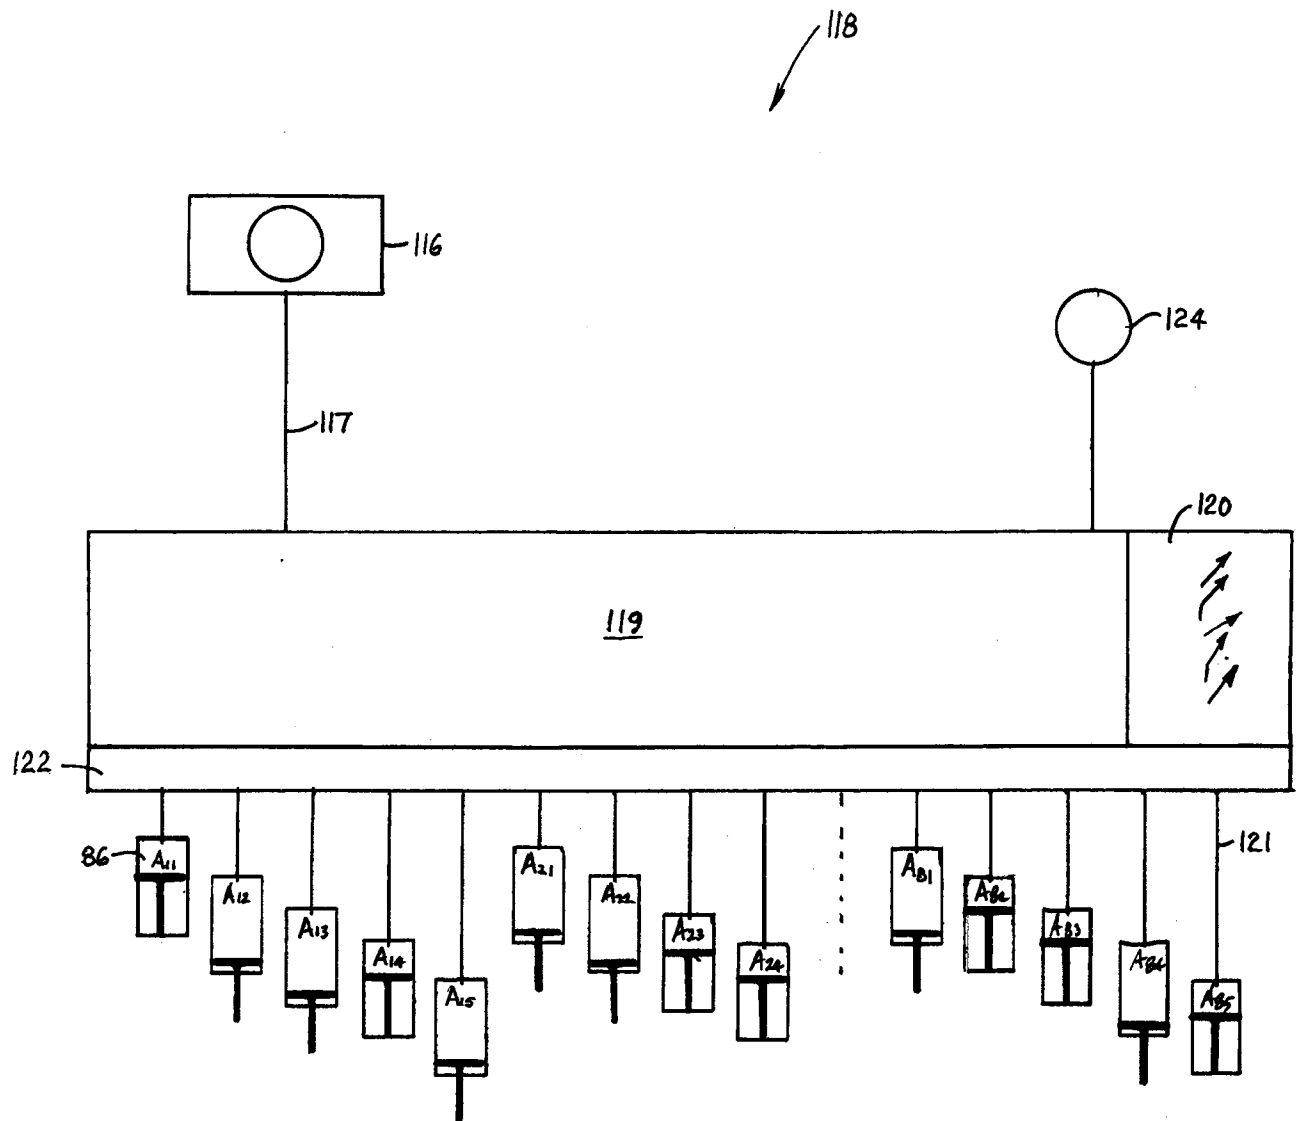


FIG. 10

8/9

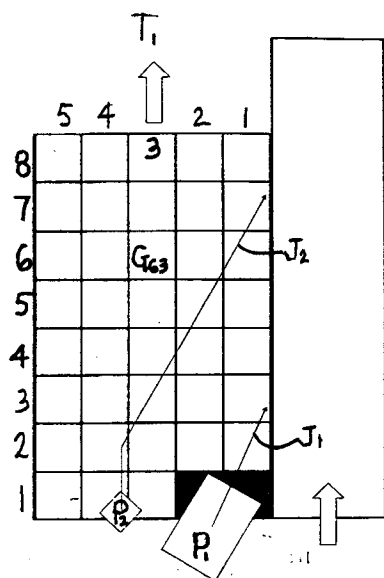


FIG. 11A

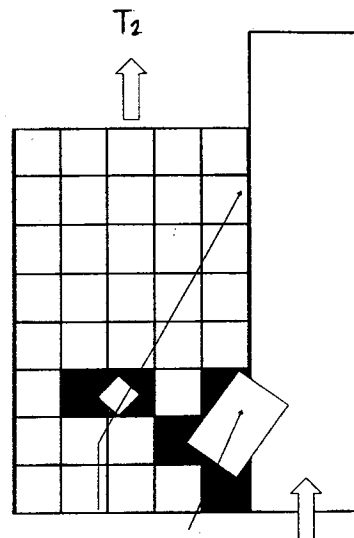


FIG. 11B

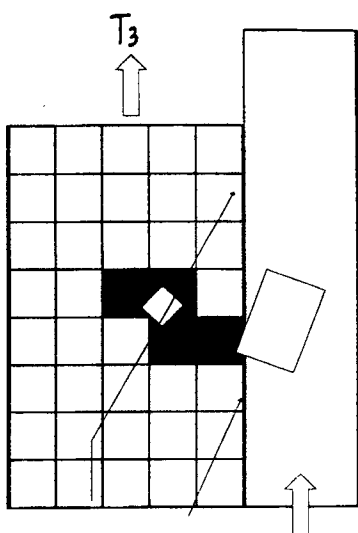


FIG. 11C

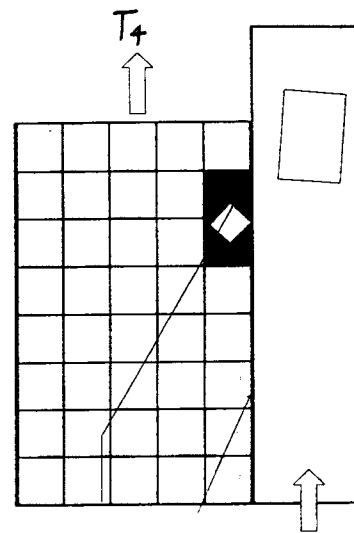


FIG. 11D

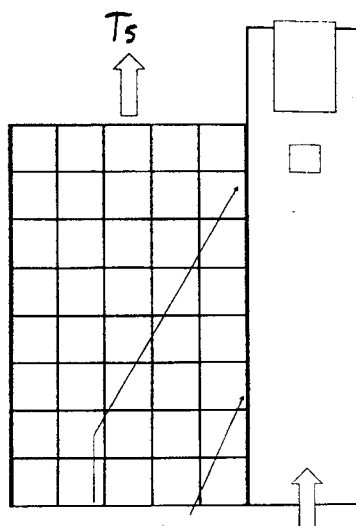


FIG. 11E

9/9

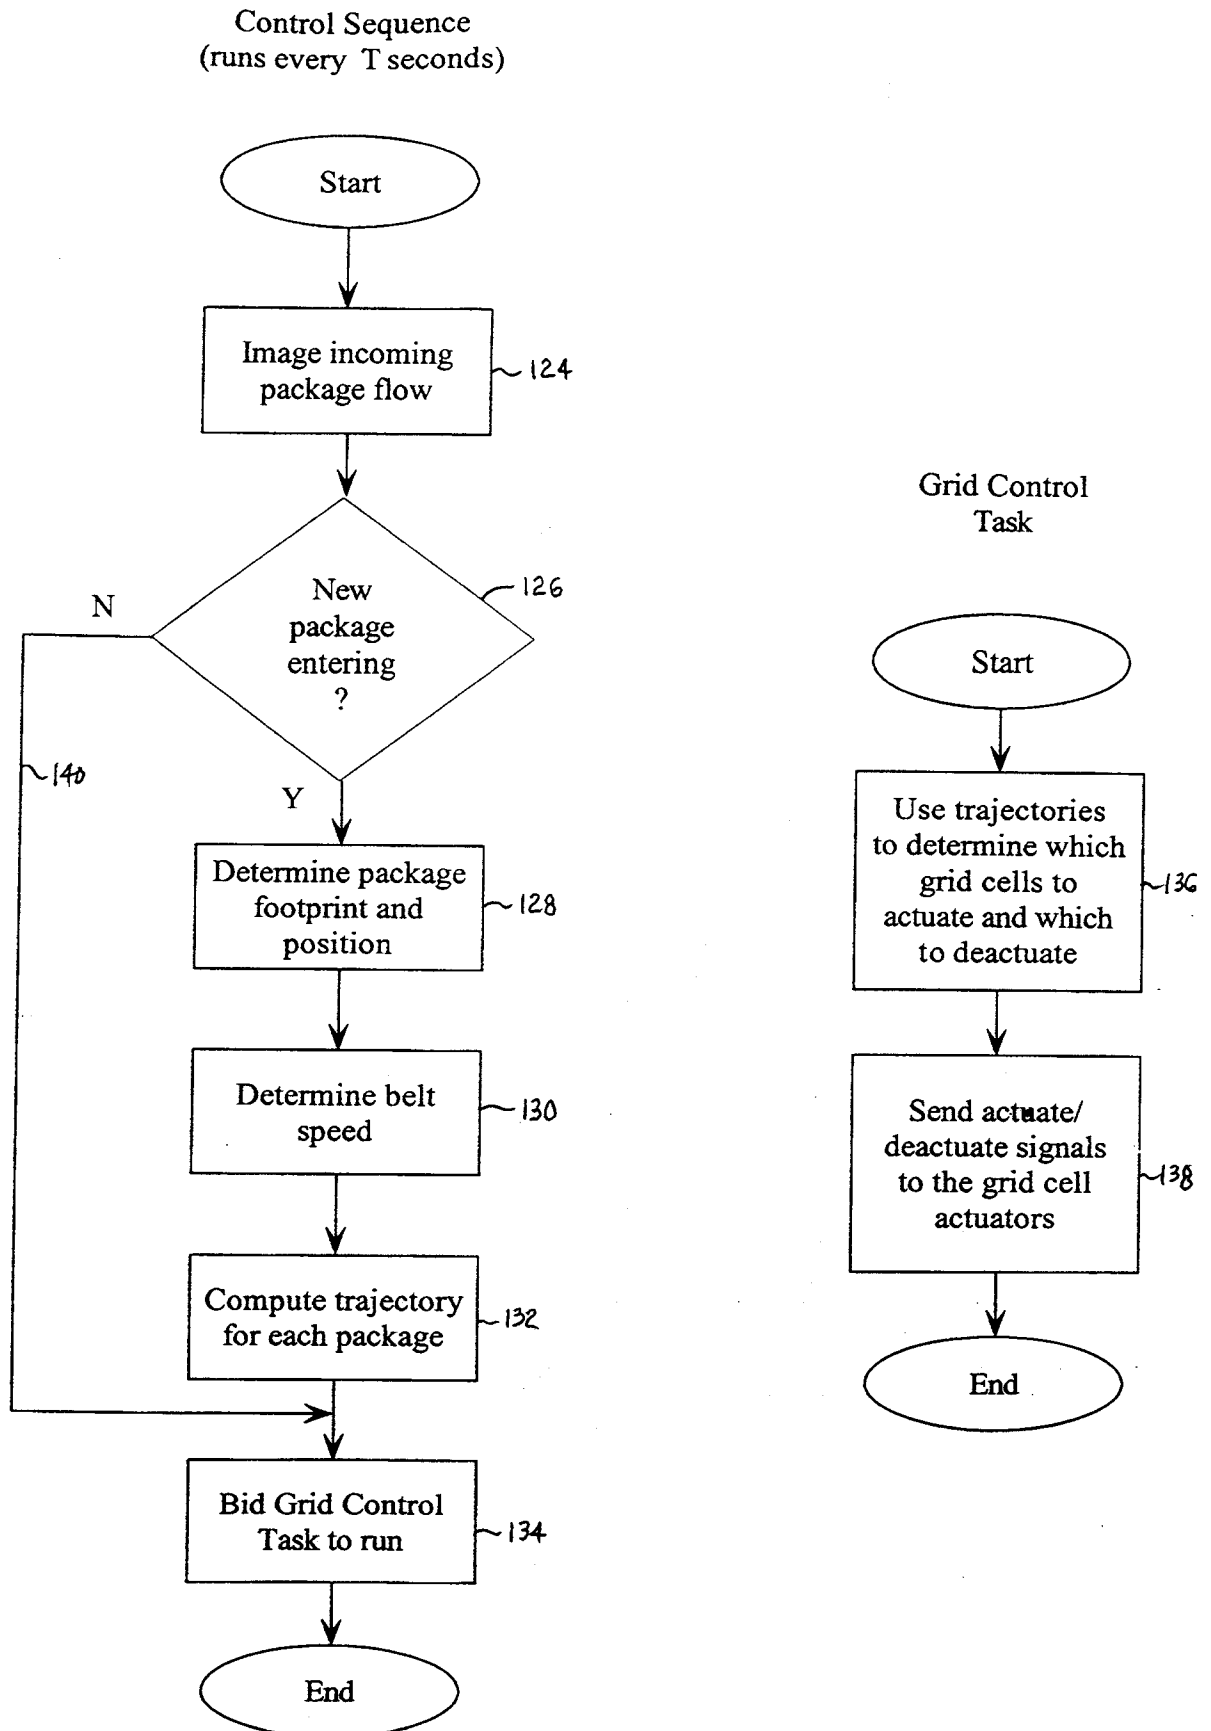


FIG. 12

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2010/041124

A. CLASSIFICATION OF SUBJECT MATTER
INV. B65G17/24 B65G47/68
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
B65G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2008/217138 A1 (FOURNEY MATTHEW L [US]) 11 September 2008 (2008-09-11) pages 1-7; figures 1-16	1-15
Y	US 2004/104100 A1 (SCHIESSER RICARDO N [US] ET AL) 3 June 2004 (2004-06-03) pages 1-12; figures 1-19	1-15
A	US 2006/249355 A1 (COSTANZO MARK [US] ET AL) 9 November 2006 (2006-11-09) pages 1-5; figures 1-12	1, 10
A	US 7 007 792 B1 (BURCH RONALD H [US]) 7 March 2006 (2006-03-07) columns 1-12; figures 1-8	8, 15
	----- -/-- -----	

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

6 October 2010

Date of mailing of the international search report

22/10/2010

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Martin, Benoit

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2010/041124

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 00/76887 A1 (SIEMENS AG [DE]; TANZ TORSTEN [DE]) 21 December 2000 (2000-12-21) pages 1-13; figures 1-14 -----	1,9,11
A	US 2003/141165 A1 (REZNIK DAN [US] ET AL) 31 July 2003 (2003-07-31) pages 1-6; figures 1-12 -----	1,9,11
A	US 2009/173598 A1 (FOURNEY MATTHEW L [US]) 9 July 2009 (2009-07-09) pages 1-7; figures 1-17 -----	4
A	GB 2 434 569 A (HERBERT R J ENG LTD [GB]) 1 August 2007 (2007-08-01) pages 1-16; figures 1-4 -----	1,9,11

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2010/041124

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2008217138 A1	11-09-2008	WO 2009142809 A1	26-11-2009
US 2004104100 A1	03-06-2004	US 2006283689 A1	21-12-2006
US 2006249355 A1	09-11-2006	AT 419200 T	15-01-2009
		AU 2006244531 A1	16-11-2006
		BR PI0611046 A2	10-08-2010
		CA 2609739 A1	16-11-2006
		DK 1877329 T3	11-05-2009
		EP 1877329 A1	16-01-2008
		ES 2317551 T3	16-04-2009
		JP 2008540292 T	20-11-2008
		KR 20080021641 A	07-03-2008
		WO 2006121750 A1	16-11-2006
US 7007792 B1	07-03-2006	EP 1855967 A1	21-11-2007
		JP 2008532887 T	21-08-2008
		WO 2006096292 A1	14-09-2006
WO 0076887 A1	21-12-2000	AT 248113 T	15-09-2003
		AU 5803900 A	02-01-2001
		DE 19927251 A1	25-01-2001
		EP 1185473 A1	13-03-2002
		US 6694220 B1	17-02-2004
US 2003141165 A1	31-07-2003	WO 03064301 A2	07-08-2003
US 2009173598 A1	09-07-2009	WO 2010107823 A1	23-09-2010
GB 2434569 A	01-08-2007	AU 2007209118 A1	02-08-2007
		CA 2640372 A1	02-08-2007
		EP 1979255 A1	15-10-2008
		WO 2007085825 A1	02-08-2007
		US 2010065401 A1	18-03-2010