

(19)



(11)

EP 1 340 621 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
13.02.2008 Bulletin 2008/07

(51) Int Cl.:
B41M 5/00 ^(2006.01) **D06P 5/00** ^(2006.01)

(21) Application number: **03003513.3**

(22) Date of filing: **15.02.2003**

(54) Recording materials

Aufzeichnungsmaterialien

Matériaux d'enregistrement

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PT SE SI SK TR**

(30) Priority: **28.02.2002 GB 0204699**

(43) Date of publication of application:
03.09.2003 Bulletin 2003/36

(73) Proprietor: **ILFORD Imaging Switzerland GmbH
1723 Marly 1 (CH)**

(72) Inventors:
• **Cwykla, Michael Veto
Manchester M8 4JF (GB)**
• **Parsons, Mary
Leigh,
Lancashire WN7 3NE (GB)**
• **Upton, Amanda Mary
Stoke on Trent,
Staffordshire ST8 7NE (GB)**

(56) References cited:
GB-A- 1 500 278 JP-A- 2000 094 829
US-A- 5 659 348

EP 1 340 621 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

DescriptionField of the Invention

[0001] The present invention relates to a recording material for recording using the ink jet printing process.

Background of the Invention

[0002] Ink jet recording is a non-impact printing method wherein droplets of a recording fluid, the ink, are formed by forcing the fluid through a tiny nozzle (or a series of nozzles) under computer control and deposited on a recording material such as paper or transparent film. There are several classes of ink jet printer, for instance thermal drop-on-demand printers, piezo drop-on-demand printers, and continuous ink jet printers. Ink jet recording has been intensively developed in recent years, and has found broad application as output for personal computers in the office and the home because of its low noise characteristic, capability of high speed printing, and facility of multi-colour printing. Ink jet printing techniques, particularly those using mainly aqueous inks, have undergone rapid development both in respect of reliability and the image quality that the printing apparatus can achieve, and in respect of the cost price of the printing apparatus. Consequently, increasingly severe requirements are being set for the recording materials. The recording produced by means of an ink jet processes is required to have, for example, good water and smear resistance, high resolution, high colour density, sufficient ink gradation, and good light fastness.

[0003] One type of recording material commonly used for the ink jet printing process is described as a swelling polymer system, and comprises one or more ink-receptive recording layer formed of one or more water-accepting polymeric binders arranged on a suitable substrate. The polymeric binder may, for example, be gelatine; a cellulose derivative such as hydroxyethyl cellulose, methyl hydroxypropyl cellulose, carboxymethyl cellulose, ethyl hydroxypropyl cellulose, or carboxymethylhydroxyethyl cellulose; a vinyl polymer such as poly (vinyl alcohol) or poly (vinyl pyrrolidone); or a mixture of such binders.

[0004] Optionally, the recording layer also comprises a cationogenic substance in order to bind the dyes from the inks, together with other functional additives such as an absorbent pigment or a surfactant. Suitable cationogenic substances for use in such recording layers are well known, and include, for example, polyvalent metallic ions, quaternary ammonium salts, polyamines and salts thereof, polymeric ammonium compounds, and basic latexes.

[0005] Further, United States Patent 5,457,486 discloses a recording sheet which comprises (a) a base sheet; (b) a material selected from the group consisting of tetrazolium compounds, indolinium compounds, imidazolinium compounds, and mixtures thereof; (c) an optional pigment; and (d) an optional binder; similarly United States Patent 5,441,795 discloses ink jet recording sheets containing pyridinium or piperazinium compounds.

[0006] Such recording materials may provide prints and images of good quality, and are suitable for their intended purposes. However, a need remains for improved recording sheets which exhibit good image quality when printed with aqueous inks, particularly when printing a multi-colour image in which very dark or dense tints are to be reproduced. Due to the greater quantity of ink laid down, the ink can be slow to absorb into the surface of the recording sheet as this absorption depends on swelling of the polymer layer. Further, this slow absorption is becoming more of a problem as printers develop and printing speeds increase, and can lead to visible print deficiencies such as coalescence caused by drops mixing on the print surface before the ink is absorbed.

[0007] United States Patent 5,657,064 discloses ink jet recording sheets containing pyrrole, pyrrolidine, pyridine, piperidine, homopiperidine, quinoline, isoquinoline, quinuclidine, indole, or indazole compounds; United States Patent 5,659,348 discloses recording sheets containing purine, pyrimidine, benzimidazole, imidazolidine, urazole, pyrazole, triazole, benzotriazole, tetrazole, or pyrazine compounds; United States Patent 5,729,266 discloses recording sheets containing oxazole, isoxazole, oxazolidinone, oxazoline salt, morpholine, thiazole, thiazolidine, thiadiazole, and phenothiazine compounds; however these inventions particularly relate to improving the drying performance of recording sheets, and especially to reducing the curl of sheets dried with microwave radiation and not to improving the rate of absorption of the ink.

[0008] Japanese Patent Application 2000-094,829 discloses ink jet recording sheets containing triazolopyrimidines of formula I, wherein Z is hydrogen or CH₂SH. However this invention particularly relates to improving the light fastness of printed recording sheets and not to improving the rate of absorption of the ink.

[0009] Thus there is still a requirement for an improved image receiving material which is rapid to dry without coalescence when printed with heavy ink loads and which provides good quality dense images. We have developed such a material.

Summary of the Invention

[0010] According to this invention there is provided a recording material suitable for ink jet recording comprising a

sheet like substrate and arranged on at least one side of the substrate at least one ink-receptive recording layer comprising:

- gelatine; and
- at least one triazolopyrimidine compound or a salt thereof.


Detailed Description of the Invention

[0011] The supporting substrate for the recording materials of the invention may be any of those known for use in printing and imaging media. Suitable substrates include, for example paper, high wet-strength paper, tracing paper, heavyweight paper, fine art paper, card, board, coated paper such as resin coated, polyethylene coated, and barrier layer coated paper, synthetic papers, canvas, cloth, fabric, metals such as aluminium, and polymeric substrates such as filled plastics, opaque plastics, or transparent materials, for example cellulose acetates, poly(ethylene), poly(propylene), poly(vinyl chloride), poly(ethylene terephthalate) and poly(ethylene naphthalate), polycarbonate, polysulphone, polyether sulphone, poly(arylene sulphone), poly(arylene ether ketone sulphone), cellophane, polyvinyl fluoride, polyimide, and the like. Preferably the supporting substrate is polyethylene coated paper or barrier layer coated paper.

[0012] By barrier layer coated paper is meant a paper coated with a water repellent resin barrier layer provided in the form of a latex comprising fine particles of a film-forming polymer suspended in an aqueous carrier. The latex is allowed to form a film during the coating and drying process. The barrier layer may comprise almost any film-forming latex polymer. The polymer of the barrier layer may preferably have a glass transition point of at least 40° C, more preferably approximately 50° C - 100° C. The polymer of the barrier layer may optionally contain other additives as are known in the art, such as for example, UV absorbers, light stabilisers such as hindered amines, optical brightening agents, or tinting agents. The barrier layer may additionally contain a proportion of an inorganic filler and other additives to improve the operation of the coating process, for example polymeric thickeners, lubricating agents, dispersants, and adhesion promoters.

[0013] The gelatine for the ink-receptive layer of the recording materials of the invention may be any gelatine known for use in imaging materials, for example skin or bone gelatine, treated gelatine such as deionised gelatine, modified gelatine such as phthalated gelatine or phenylcarbamoylated gelatine, or a cationically modified gelatine. A particularly suitable gelatine is a deionised ossein gelatine of high isoelectric point

[0014] Various permutations of the triazolopyrimidine ring system are known, but especially suitable triazolopyrimidine compounds are *s*-triazolo[1,5-*a*]pyrimidine compounds commonly referred to as tetra-aza indene compounds and having the general structure I.

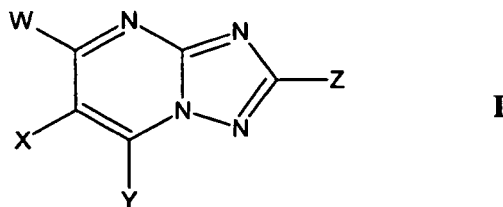

wherein


the substituents W, X and Y, which may be the same or different, are individually R, OR, SR, SOR, SO₂R, NRR', NR(COR'), CO₂R, CONRR', SO₂NRR', NRSO₂R', CN, NO₂, halogen, sulphonic acid, or phosphonic acid, wherein the groups R and R' are independently hydrogen, branched or unbranched C₁ - C₂₀ substituted or unsubstituted, saturated or unsaturated hydrocarbon, e.g., alkyl, alkenyl, alkynyl, cycloalkyl, cycloalkenyl, aryl, heteroaryl, alkylaryl, or arylalkyl; the substituent Z is R, OR, SR, SOR, SO₂R, NRR', NR(COR'), CO₂R, CONRR', SO₂NRR', NRSO₂R', CN, NO₂, halogen, sulphonic acid, or phosphonic acid, wherein the groups R and R' are independently, branched or unbranched C₁ - C₂₀ unsubstituted, saturated or unsaturated hydrocarbon, e.g., alkyl, alkenyl, alkynyl, cycloalkyl, cycloalkenyl, aryl, heteroaryl, alkylaryl, or arylalkyl;

or wherein two or more of the groups W, X, Y, R, and R', may be combined to form a ring system or systems. Preferred substituents W, X and Y include in particular hydrogen, methyl, ethyl, and hydroxy groups. Preferred substituents Z include in particular methyl, ethyl, and hydroxy groups.

[0015] Tetra-aza indene compounds are known compounds or may be prepared by known methods, and in particular by the condensation of an appropriate aminotriazole with a suitable β-dicarbonyl compound.


[0016] An especially preferred class of tetra-aza indene compounds according to formula I are those wherein the group Y is a hydroxy group.

[0017] Another suitable compound is 4-hydroxy-2,6-dimethyl-1,3,3a,7-tetra-aza indene having the structure:

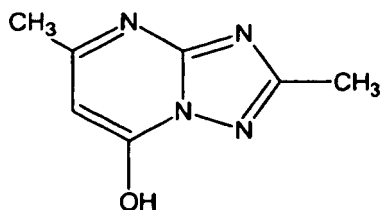


which is hereinafter referred to as compound **2**.

[0018] Another suitable compound is 4-hydroxy-2-methylthio-6-methyl-1,3,3a,7-tetra-aza indene having the structure:

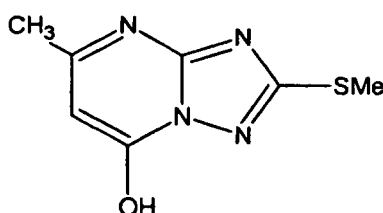

which is hereinafter referred to as compound **3**.

[0019] Another suitable compound is 4-hydroxy-2-isopropylthio-6-methyl-1,3,3a,7-tetra-aza indene having the structure:

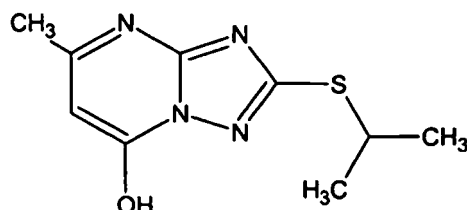

which is hereinafter referred to as compound **6**.

[0020] It is to be understood that many tetra-aza indene compounds are potentially tautomeric and that this invention also includes all relevant tautomers of such compounds. In particular, compounds of formula **I** wherein one of the groups W, X, Y, or Z is a hydroxy group or an NHR group, including the hereinbefore described compounds **2**, **3**, and **6**, may exist as tautomers.

[0021] It is further to be understood that certain tetra-aza indene compounds, particularly those having an ionisable group as a substituent group, may form salts and that this invention also includes relevant salts of such compounds. An ionisable group is one which is capable of forming an anionic group or a cationic group in the medium of use. Suitable ionisable groups include salt forming substituents such as sulphonic acid, carboxylic acid, phosphonic acid, and basic nitrogen containing groups. Further, hydroxy groups located as substituents W or Y of the formula **I** are frequently sufficiently acidic to enable salt formation and therefore salts of such compounds, including the hereinbefore described compounds **2**, **3**, and **6**, may be used in the invention.

[0022] There may also be present in the ink-receptive layer or layers additional water receptive polymeric binders compatible with the gelatine. Suitable binders include poly (vinyl alcohol) and copolymers and derivatives thereof; carbohydrates such as tragacanth gum, sodium alginate, or water-soluble starch derivatives; water-accepting cellulose derivatives such as hydroxyethyl cellulose, methyl hydroxypropyl cellulose, carboxymethyl cellulose, or carboxymethylhydroxyethyl cellulose; polyalkylene oxides such as polyethylene oxide and polypropylene oxide or derivatives thereof; water-accepting acrylate, methacrylate, or maleate polymers and copolymers and derivatives thereof; poly (vinyl pyrrolidone) and copolymers and derivatives thereof; casein; and mixtures of such binders. Preferred additional binders include cellulose derivatives such as hydroxyethyl cellulose, methyl hydroxypropyl cellulose, carboxymethyl cellulose, methyl hydroxyethyl cellulose, or carboxymethylhydroxyethyl cellulose.

[0023] Therefore according to one especially preferred embodiment of the invention there is provided a recording material suitable for ink jet recording comprising a sheet like substrate and arranged on at least one side of the substrate at least one ink-receptive recording layer comprising:

- gelatine;
- a cellulose derivative; and
- at least one triazolopyrimidine compound or a salt thereof;

wherein the substrate, gelatine, and triazolopyrimidine compound are as hereinbefore defined and the cellulose derivative is selected from hydroxyethyl cellulose, methyl hydroxypropyl cellulose, carboxymethyl cellulose, carboxymethylhydroxyethyl cellulose, methyl hydroxyethyl cellulose, or mixtures thereof.

[0024] Further, the ink-receptive recording layer of the recording materials of the present invention may comprise additional components as known in the art for use in recording materials. For instance the ink receptive layer or layers may comprise one or more absorbent filler or pigment. Suitable absorbent fillers or pigments for the ink-receptive recording layer or layers include for example clay, kaolin, talc, silica, calcium carbonate, diatomaceous earth, barium sulphate, titanium dioxide, aluminium oxide, zinc oxide, boehmite, starch, synthetic organic pigments, a blend of calcium fluoride and silica, zinc oxide, blends of zinc sulphide with barium sulphate, satin white, and the like, as well as mixtures of two or more of the above fillers. Preferred fillers include porous synthetic amorphous silica, porous boehmite, porous synthetic alumina, and precipitated calcium carbonate. Fillers may be present in any effective amount, and if present, typically are present in amounts of from about 1 to about 60 percent by weight of the coating composition.

[0025] Further, the ink-receptive recording layer of the recording materials of the present invention may additionally comprise one or more cationogenic substance. Suitable cationogenic substances for the ink-receptive recording layer include quaternary ammonium polymers such as poly (dimethyl diallyl ammonium chloride); quaternary phosphonium polymers; basic polymers such as polyethyleneimine, polyvinylamine and copolymers and derivatives thereof; polymers and copolymers comprising basic monomers such as vinyl pyridine, vinyl imidazole, and amine containing (meth)acrylates; salts and quaternised reaction products from such basic polymers; reaction products of a low molecular weight polyfunctional amine with a compound polyfunctional to amino groups such as epichlorohydrin; cationically modified poly (vinyl alcohols); or a polyvalent metallic cation. The cationogenic substances best known for this purpose are polymeric quaternary ammonium compounds.

[0026] In addition to the components already mentioned, it is to be understood that the ink-receptive layer or layers may advantageously also comprise further auxiliary agents as are known in the art, for example surfactants, plasticisers, lubricants, latexes, cross linking agents, antistatic agents, fungicides, dispersants, antifoams, toning agents, ultraviolet absorbers, and optical brighteners.

[0027] Furthermore there may also be present additional layers in the recording materials of this aspect of the invention. Specifically, the recording material of the invention may comprise two or more ink-receptive layers, any or all of which may comprise the inventive combination of gelatine and a triazolopyrimidine compound as hereinbefore described.

[0028] Preferably, the inventive combination is provided in the upper layer or layers of an ink-receptive system comprising two or more layers according to this aspect of the invention. The lower layer or layers may be any ink receiving system as is known in the art.

[0029] According to a particularly preferred embodiment of the invention there is provided a recording material suitable for ink jet recording comprising in the following order:

- 1) a sheet like substrate;
- 2) at least one lower ink-receptive recording layer; and
- 3) at least one upper ink-receptive recording layer comprising in combination:

- gelatine;
- a cellulose derivative; and
- at least one triazolopyrimidine compound or a salt thereof;

wherein the supporting substrate, gelatine, cellulose derivative, and triazolopyrimidine compound are as hereinbefore defined and the lower ink receptive layer comprises at least one water accepting polymeric binder.

[0030] Preferably, the binder in the lower ink-receptive layer or layers of a recording material according to this aspect of the invention comprises gelatine.

[0031] In addition to the components already mentioned, it is to be understood that any of the ink-receptive layers may advantageously also comprise further auxiliary agents as hereinbefore described, for example additional binders, cationogenic substances, fillers or pigments, surfactants, plasticisers, lubricants, latexes, cross linking agents, antistatic agents, fungicides, dispersants, antifoams, toning agents, ultraviolet absorbers, and optical brighteners.

[0032] The coated amount of the ink-receptive layer or layers may be determined by the printing apparatus, the quantity of ink to be printed, the substrate, and the components used. The total dry coating weight of the ink-receptive layer or layers may be up to about 50 gm⁻², preferably from about 2 gm⁻² to about 10 gm⁻², most preferably from about 5 gm⁻² to about 10 gm⁻². One of the advantages of the recording materials of the present invention comprising a triazolopyrimidine compound as a coalescence-reducing additive is that good image quality may be achieved with a low coating weight of the ink-receptive layer or layers.

[0033] The ratio of the dry coating weight of the gelatine and cellulose derivative of the preferred embodiments is not particularly limited and may vary between about 1:0.1 and about 1:5.

[0034] The triazolopyrimidine compound may be present in any effective amount in the coated ink-receptive recording layer. Typically, the triazolopyrimidine compound is present in an amount of from about 0.001 to about 4 gm⁻² of the substrate surface to which it is applied, and preferably from about 0.01 to about 0.5 gm⁻², although the amount can be outside these ranges depending on the application and compound used. One of the advantages of the preferred tetra-aza indene compounds of the invention is that significant image quality improvements may be realised from the incorporation of only a small quantity of the tetra-aza indene compound as a coalescence-reducing additive.

[0035] The tetra-aza indene compound may be provided to the coating formulation by any convenient means, such as a solution in a suitable solvent or as a dispersion in a suitable carrier. Preferably the compound is provided as an aqueous solution. Therefore preferable compounds include those possessing a water solubilising group such as an ionisable substituent. The preferred compounds 2, 3, and 6 of the invention may be dissolved in aqueous base, such as sodium or potassium carbonate, and provided to the coating formulation as a solution of the salt. Alternatively the preferred compounds may be dissolved in the coating formulation at a suitable pH. Alternatively the tetra-aza indene compounds may also be provided as a dispersion of the solid.

[0036] Another advantage of the invention is that the ink-receptive layer or layers may conveniently be produced as aqueous formulations and coated on to the substrate by any suitable coating means, such as a slide bead coater, a curtain coater, a rod coater, a gravure coater, a blade coater, an air knife coater, or a bar coater. Some of these methods allow for simultaneous coatings of two or more layers, which is preferred from a manufacturing economic perspective.

[0037] If desired, the surface of the support may be treated in order to improve the adhesion of the bottom layer to the support prior to applying the coating layer to the support. Suitable treatments include buffing, corona discharge, or the application of an undercoating or subbing layer to the surface of the support. Such subbing layers are known in the art.

[0038] The back surface of the material may be left uncoated or may have a coating for lay-flat or for write on properties. Additionally, lubricants to promote paper transport in the printing apparatus may be added to the back layer. Alternatively, the ink-receptive layer or layers may be provided on both sides of the substrate.

[0039] According to another aspect of the present invention, there is provided an ink jet recording method comprising the steps of ejecting droplets of an ink composition comprising at least a colorant and a carrier liquid onto the recording medium of the present invention to deposit the ink droplets onto the recording medium in an imagewise pattern, thereby generating images on the recording sheet. Preferably the ink is an aqueous ink, that is to say an ink in which the carrier liquid is predominantly water, but may also comprise one or more water soluble organic cosolvent such as a polyhydric alcohol. Frequently the ink also comprises one or more surfactants. The materials of the invention are suitable for use with inks comprising dyes or pigments as colorants, but are most suitable for use with dyed inks. Such inks are well known in the art. The materials of the invention are suitable for use with any type of ink jet printer, for instance a thermal drop-on-demand printer, a piezo drop-on-demand printer, or a continuous ink jet printer. The printer may be a desk top ink jet printer or a wide format ink jet printer. In a particularly preferred embodiment, the printing apparatus is a desk top drop-on-demand ink jet printer.

[0040] Although the recording materials disclosed herein have been referred to primarily as being useful for aqueous ink jet printers, they may also be used in any other printing or imaging process, such as printing with pen plotters, handwriting with ink pens, and with conventional printing processes such as flexographic printing and the like, provided that the ink employed to form the image is compatible with the ink-receptive layer of the recording sheet.

[0041] The following example will serve to illustrate the invention.

Example 1

[0042] A comparison recording material was prepared as follows:

[0043] Coating formulation **A** was prepared using the components given in Table 1.

Table 1

Component	% by weight
Deionised water	79.4

EP 1 340 621 B1

(continued)

Component	% by weight
Deionised ossein gelatine	11.98
Optical brightener	4.47
Toning agent	0.2
4% sodium hydroxide solution	3.19
Glycerol	0.16
Surfactant A 50% solution	0.6
Total	100

[0044] Surfactant A was Olin 10G commercially available from Olin Chemicals. Glycerol was present as a plasticiser. The toning agent was an 0.25% dispersion of a combination of C.I. Pigment Blue 15:1 and C.I. Pigment Violet 23. The optical brightener was a 3.33% solution of a diaminostilbene optical brightener.

[0045] Coating formulation **B** was prepared using the components given in Table 2.

Table 2

Component	% by weight
Deionised water	84.07
Deionised ossein gelatine	11.98
4% sodium hydroxide solution	3.19
Glycerol	0.16
Surfactant A 50% solution	0.6
Total	100

[0046] 1.9 g of a 1% solution of 1-(N,N-dimethylcarbamoyl)4-(2-sulphoethyl) pyridinium inner salt cross linking agent was added to this formulation before coating as a hardener.

[0047] Coating formulation **C** was prepared using the components given in Table 3.

Table 3

Component	% by weight
Deionised water	91.64
20% Phenol	0.75
Deionised ossein gelatine	2.69
Methyl hydroxypropyl cellulose	2.69
4% sodium hydroxide solution	0.92
Surfactant C	1.2
Surfactant B	0.08
Total	100

[0048] Surfactant B was a 5% solution of a fluorinated surfactant commercially available under the trade name Lodyne S-107 from Ciba. Surfactant C was a 3% solution of an alkyl phenol ethoxylate surfactant commercially available under the trade name Triton X-100 from Union Carbide Chemicals and Plastics Company Inc.

[0049] The comparison recording material was prepared by simultaneously coating four layers onto a barrier coated plain paper base of total substance 160 gm⁻² according to the details given in table 4. The two upper layers were coated separately for ease of coating but comprise the same components.

Table 4

Layer	Formulation	Dry Coating Weight
First coating layer	A	1.71 gm ⁻²
Second coating layer	B	1.69 gm ⁻²
Third coating layer	C	1.53 gm ⁻²
Fourth coating layer	C	1.53 gm ⁻²
Total dry coat weight:		6.46 gm ⁻²

[0050] Formulations for recording materials according to the invention were then prepared by adding tetra-aza indene compounds to samples of the coating formulation **C** using the compounds and quantities shown in table 5 to provide the formulations **D - H** for the invention. Formulation **C** has a pH of approximately 9 and the compounds dissolve to provide a solution of the salt of the tetra-aza indene compound.

Table 5

Formulation	Compound added	Quantity
D	Compound 2	0.5 %
E	Compound 2	1.0 %
F	Compound 3	0.5 %
G	Compound 3	1.0 %
H	Compound 6	0.5 %

[0051] Recording materials wherein the upper ink-receptive layer comprises a combination of gelatine, a cellulose derivative, and a triazolopyrimidine compound according to a preferred embodiment of the present invention were then coated according to the coating assembly shown in table 4 except that formulation **C** for the upper two layers was replaced by tetra-aza indene compound to the formulations for the two upper layers gives a total coating weight for the tetra-aza indene compound of 0.14 gm⁻², an addition of 0.5% gives a coating weight of 0.28 gm⁻², and an addition of 1% gives a coating weight of 0.56 gm⁻².

[0052] The coated samples were printed using dyed inks and a Epson 870 ink jet printer with a test pattern comprising patches of cyan, magenta, yellow, and black inks at an ink loading of 10%, 20%, 30%, 40%, 50%, 60%, 70%, 80%, 90%, and 100%, and blue, green, and red patches made by printing the coloured inks in combination at the same loadings to give a maximum ink loading of 200% (i.e. a 100% blue patch by printing 100% cyan + 100% magenta inks and so on, and similarly with the green patches made by printing cyan + yellow inks, and the red patches by printing magenta + yellow inks). It is expected that coalescence will start to appear when the ink is not absorbed sufficiently rapidly at the higher ink loadings. With each colour, the density of the patch at which coalescence was first observed is given in table 6.

Table 6

Sample Formulation		Ink loading for coalescence						
		Blue	Green	Red	Black	Yellow	Magenta	Cyan
Comparison	C	40%	50%	50%	40%	-	70%	70%
Invention	D	50%	60%	-	60%	-	-	-
Invention	E	-	-	-	-	-	-	-
Invention	F	-	-	-	-	-	-	-
Invention	G	-	-	-	-	-	-	-
Invention	H	-	-	-	-	-	-	-


[0053] In the above table the symbol - means that coalescence was not observed even at the highest ink loading. It

is seen that the comparison sample showed significant coalescence at moderate to high ink loads, that the inventive sample containing formulation **D** comprising the lowest level of compound **2** in the two upper layers showed a significant improvement, and that none of the other inventive samples showed any coalescence at all in this test. This shows the usefulness of the inventive materials.

Claims

1. A recording material suitable for ink jet recording comprising a sheet like substrate and arranged on at least one side of the substrate at least one ink-receptive recording layer, **characterised in that** the recording layer comprises:

- a. gelatine
- and
- b. at least one triazolopyrimidine compound of formula I or a salt thereof,



I

wherein

the substituents W, X and Y, which may be the same or different, are individually R, OR, SR, SOR, SO₂R, NRR', NR(COR'), CO₂R, CONRR', SO₂NRR', NRSO₂R', CN, NO₂, halogen, sulphonic acid, or phosphonic acid, wherein the groups R and R' are independently hydrogen, branched or unbranched C₁ - C₂₀ substituted or unsubstituted, saturated or unsaturated hydrocarbon, e.g., alkyl, alkenyl, alkynyl, cycloalkyl, cycloalkenyl, aryl, heteroaryl, alkylaryl, or arylalkyl;

the substituent Z is R, OR, SR, SOR, SO₂R, NRR', NR(COR'), CO₂R, CONRR', SO₂NRR', NRSO₂R', CN, NO₂, halogen, sulphonic acid, or phosphonic acid, wherein the groups R and R' are independently, branched or unbranched C₁ - C₂₀ unsubstituted, saturated or unsaturated hydrocarbon, e.g., alkyl, alkenyl, alkynyl, cycloalkyl, cycloalkenyl, aryl, heteroaryl, alkylaryl, or arylalkyl;

or wherein two or more of the substituents or groups W, X, Y, R, and R', may be combined to form a ring system or systems.

2. A recording material suitable for ink jet recording according to claim 1, **characterised in that** the recording layer comprises:

- a cellulose derivative.

3. A recording material suitable for ink jet recording according to claim 2 comprising in the following order:

- 1) said sheet like substrate;
- 2) at least one lower ink-receptive recording layer; and
- 3) said at least one ink-receptive recording layer.

4. A recording material according to either of claims 2 or 3 wherein the cellulose derivative is selected from hydroxyethyl cellulose, methylhydroxypropyl cellulose, carboxymethyl cellulose, carboxymethylhydroxyethyl cellulose, methylhydroxyethyl cellulose, and mixtures thereof.

5. A recording material according to any of claims 1 - 4 wherein the substrate is selected from paper, high wet-strength

paper, tracing paper, heavyweight paper, fine art paper, card, board, resin coated paper, polyethylene coated paper, barrier layer coated paper, synthetic paper, canvas, cloth, fabric, cellulose acetates, poly(ethylene), poly(propylene), poly(vinyl chloride), poly(ethylene terephthalate) poly(ethylene naphthalate), polycarbonate, polysulphone, polyether sulphone, poly(arylene sulphone), poly(arylene ether ketone sulphone), cellophane, polyvinyl fluoride, and polyimide.

6. A recording material according to claim 5 wherein the substrate is a coated paper selected from resin coated paper, polyethylene coated paper, and barrier layer coated paper.

7. A recording material according to any of claims 1-3 wherein

the substituent Y of the triazolopyrimidine compound of formula I is hydroxy;
the substituents or groups X, W, Z, R, and R' are as defined in claim 1
and

wherein two or more of the substituents or groups W, X, R, and R' may be combined to form a ring system or systems.

8. A recording material according to claim 7 wherein the triazolopyrimidine compound is 4-hydroxy-2-isopropylthio-6-methyl-1,3,3a,7-tetra-aza indene.


9. An ink jet recording method comprising the steps of ejecting droplets of an aqueous ink composition comprising at least a colorant and a carrier liquid onto a recording material according to any of claims 1 - 8 to deposit the ink droplets onto the recording material in an imagewise pattern, thereby generating images on the recording material.

Patentansprüche

1. Aufzeichnungsmaterial für den Tintenstrahldruck, bestehend aus einem blattförmigen Träger, auf welchen auf mindestens einer Seite mindestens eine Aufzeichnungs- und Tintenaufnahmeschicht aufgebracht worden ist, **dadurch gekennzeichnet, dass** die Aufzeichnungsschicht:

a) Gelatine
und

b) mindestens eine Verbindung eines Triazolpyrimidins oder deren Salz der Formel I,



worin

die Substituenten W, X et Y, welche identisch oder voneinander verschieden sein können, für die Gruppen R, OR, SR, SOR, SO₂R, NRR', NR(COR'), CO₂R, CONRR', SO₂NRR', NRSO₂R', CN, NO₂, ein Halogenatom, Sulfonsäure oder Phosphonsäure, stehen, worin die Reste R und R' unabhängig voneinander Wasserstoff, einen verzweigten oder unverzweigten, substituierten oder unsubstituierten, gesättigten oder ungesättigten Kohlenwasserstoffrest mit 1 bis 20 Kohlenstoffatomen, wie Alkyl, Alkenyl, Alkynyl, Cycloalkyl, Cycloalkenyl, Aryl, Heteroaryl, Alkylaryl oder Arylalkyl bedeuten;
der Substituent Z für die Gruppen R, OR, SR, SOR, SO₂R, NRR', NR(COR'), CO₂R, CONRR', SO₂NRR', NRSO₂R', CN, NO₂, ein Halogenatom, Sulfonsäure oder Phosphonsäure stehen, worin die Reste R und R'

unabhängig voneinander für Wasserstoff, einen verzweigten oder unverzweigten, substituierten oder unsubstituierten, gesättigten oder ungesättigten Kohlenwasserstoffrest mit 1 bis 20 Kohlenstoffatomen, wie Alkyl, Alkynyl, Cycloalkyl, Cycloalkenyl, Aryl, Heteroaryl, Alkylaryl oder Arylalkyl bedeuten oder
 5 zwei oder mehrere der Substituenten oder Gruppen W, X, Y, R und R' zusammen einen Ring oder ein Ringsystem bilden können; enthält.

2. Aufzeichnungsmaterial für den Tintenstrahldruck gemäss Anspruch 1, **dadurch gekennzeichnet, dass** die Aufzeichnungsschicht eine Zelluloseverbindung enthält.

3. Aufzeichnungsmaterial für den Tintenstrahldruck gemäss Anspruch 2, welches in der angegebenen Reihenfolge:

- 1) den besagten blattförmigen Träger;
- 2) mindestens eine untere Aufzeichnungs- und Tintenaufnahmeschicht und
- 3) mindestens eine besagte Aufzeichnungs- und Tintenaufnahmeschicht

aufweist.

4. Aufzeichnungsmaterial gemäss einem der Ansprüche 2 oder 3, **dadurch gekennzeichnet, dass** die Zelluloseverbindung aus Hydroxyethylzellulose, Methylhydroxypropylzellulose, Carboxymethylzellulose, Carboxymethylhydroxyethylzellulose, Methylhydroxyethylzellulose und deren Mischungen ausgewählt wird.

5. Aufzeichnungsmaterial gemäss irgend einem der Ansprüche 1 bis 4, **dadurch gekennzeichnet, dass** der Träger aus Papier, wasserfestem Papier, Pauspapier, Hochgewichtspapier, Kunstdruckpapier, Karton, Pappe, harzbeschichtetem Papier, polyethylenbeschichtetem Papier, mit einer Sperrschicht beschichtetem Papier, synthetischem Papier, Kanvas, Tuch, Geweben, Zelluloseacetaten, Polyethylen, Polypropylen, Polyvinylchlorid, Polyethylenterephthalat, Polyethylenaphthalat, Polycarbonat, Poysulfonen, Polyethersulfonen, Polyarylsulfonen, Polyarylene-therketonesulfonen, Zellophan, Polyvinylfluorid und Polyimiden ausgewählt wird.

6. Aufzeichnungsmaterial gemäss Anspruch 5, **dadurch gekennzeichnet, dass** der Träger ein beschichtetes Papier ist, welches aus harzbeschichtetem Papier, polyethylenbeschichtetem Papier und mit einer Sperrschicht beschichtetem Papier ausgewählt wird.

7. Aufzeichnungsmaterial gemäss irgend einem der Ansprüche 1 bis 3, **dadurch gekennzeichnet, dass** der Substituent Y der Verbindung des Triazolpyrimidins der Formel I ein Hydroxylrest ist; die Substituenten oder Gruppen X, W, Z, R et R' die gleiche Bedeutung wie in Anspruch 1 haben und zwei oder mehrere der Substituenten oder Gruppen W, X, R und R' zusammen einen Ring oder ein Ringsystem bilden können.


8. Aufzeichnungsmaterial gemäss Anspruch 1, **dadurch gekennzeichnet, dass** die Verbindung des Triazolpyrimidins 4-Hydroxy-2-isopropylthio-6-methyl-1,3,3a,7-tetraazainden ist.

9. Verfahren für den Tintenstrahldruck, in welchem Tröpfchen einer wässrigen Tintenzusammensetzung, welche mindestens einen Farbstoff und eine flüssige Trägersubstanz enthält, bildmässig auf ein Aufzeichnungsmaterial gemäss den Ansprüchen 1 bis 8 aufgebracht werden mit dem Ziel, auf dem Aufzeichnungsmaterial ein Bild zu erzeugen.

Revendications

1. Feuille d'enregistrement destinée à l'impression par jet d'encre contenant un substrat en forme de feuilles et, enduite sur au moins un côté du substrat, d'au moins une couche d'enregistrement et réceptrice d'encre, **caractérisée par le fait que** la couche d'enregistrement contient

- a) de la gélatine
- et
- b) au moins un composé de la triazolopyrimidine ou un sel celui-ci de formule I,



dans laquelle

les substituents W, X et Y, lesquelles peuvent être identiques ou différents, représentent individuellement les groupes R, OR, SR, SOR, SO₂R, NRR', NR(COR'), CO₂R, CONRR', SO₂NRR', NRSO₂R', CN, NO₂, un atome d'halogène, l'acide sulfonique ou l'acide phosphonique, où les groupes R et R' représentent indépendamment un atome d'hydrogène, un radical hydrocarboné ramifié ou non ramifié, substitué ou non substitué, saturé ou non saturé, ayant de 1 à 20 atomes de carbone, tels que les radicaux alkyle, alkényle, alkynyle, cycloalkyle, cycloalkényle, aryle, hétéroaryle, alkylaryle ou arylalkyle;

le substituant Z représente un groupe R, OR, SR, SOR, SO₂R, NRR', NR(COR'), CO₂R, CONRR', SO₂NRR', NRSO₂R', CN, NO₂, un atome d'halogène, l'acide sulfonique ou l'acide phosphonique, où les groupes R et R' représentent indépendamment un atome d'hydrogène, un radical hydrocarboné ramifié ou non ramifié, non substitué, saturé ou non saturé, ayant de 1 à 20 atomes de carbone, tels que les radicaux alkyle, alkényle, alkynyle, cycloalkyle, cycloalkényle, aryle, hétéroaryle, alkylaryle ou arylalkyle

ou

où deux ou plusieurs des substituents et groupes W, X, Y, R et R' peuvent être combinés en formant un cycle ou un système de cycles.

2. Feuille d'enregistrement destinée à l'impression par jet d'encre selon la revendication 1, **caractérisée par le fait que** la couche d'enregistrement contient un dérivé de la cellulose.

3. Feuille d'enregistrement destinée à l'impression par jet d'encre selon la revendication 2 qui contient dans l'ordre suivant:

- 1) ledit substrat en forme de feuilles;
- 2) au moins une couche inférieure d'enregistrement et réceptrice d'encre et
- 3) au moins une de ladite couche d'enregistrement et réceptrice d'encre.

4. Feuille d'enregistrement selon une des revendications 2 ou 3, **caractérisée par le fait que** le dérivé de cellulose est choisi parmi la hydroxyéthyle cellulose, la méthylhydroxypropyle cellulose, la carboxyméthyle cellulose, la carboxyméthylhydroxyéthyle cellulose, la méthylhydroxyéthyle cellulose et leurs mélanges.

5. Feuille d'enregistrement selon n'importe laquelle des revendications 1 à 4, **caractérisée par le fait que** le substrat est choisi parmi le papier, le papier résistant à l'état humide, le papier à décalquer, le papier à haut grammage, le papier couché, le carton, le papier enduit de résines, le papier enduit de polyéthylène, le papier enduit d'une couche barrière, le papier synthétique, le canevas, la toile, le tissu, les acétates de cellulose, le polyéthylène, le polypropylène, le chlorure de polyvinyle, le polyéthylènetéréphthalate, le polyéthylènenaphthalate, le polycarbonate, le polysulphone, le polyéthersulphone, le polyarylènesulphone, le polyarylèneéthercétonesulphone, le cellophane, le fluorure de polyvinyle et le polyimide.

6. Feuille d'enregistrement selon la revendication 5, **caractérisée par le fait que** le substrat est un papier enduit choisi parmi le papier enduit de résines, le papier enduit de polyéthylène et le papier enduit d'une couche barrière.

7. Feuille d'enregistrement selon n'importe quelle des revendications 1 à 3, **caractérisée par le fait que**

le substituent Y du composé de triazolo-pyrimidine de formule I est le radical hydroxyle;
les substituents et groupes X, W, R et R' sont définis comme à la revendication 1
et

où deux ou plusieurs des substituants et groupes W, X, Y, R et R' peuvent être combinés en formant un cycle ou un système de cycles.

8. Feuille d'enregistrement selon la revendication 7, **caractérisée par le fait que** le composé de la triazolopyrimidine est la 4-hydroxy-2-isopropylthio-6-méthyl-1,3,3a,7-tetraazaindène.

9. Procédé d'enregistrement par jet d'encre qui comprend l'éjection de gouttelettes d'une composition aqueuse d'encre, qui contient au moins un colorant et un vecteur liquide, sur une feuille d'enregistrement selon une des revendications 1 à 8 dans le but de déposer les gouttelettes d'encre sur la feuille d'enregistrement de telle manière qu'une image soit créée sur la feuille d'enregistrement.

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 5457486 A [0005]
- US 5441795 A [0005]
- US 5657064 A [0007]
- US 5659348 A [0007]
- US 5729266 A [0007]
- JP 2000094829 A [0008]