

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
3 January 2003 (03.01.2003)

PCT

(10) International Publication Number
WO 03/000535 A1

(51) International Patent Classification⁷: **B62D 29/00**,
25/00

(21) International Application Number: PCT/EP02/05224

(22) International Filing Date: 7 May 2002 (07.05.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0111151.7 8 May 2001 (08.05.2001) GB

(71) Applicant (for all designated States except US): **L & L PRODUCTS, INC.** [US/US]; 159 McLean Drive, Romeo, MI 48065 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BUSSEUIL, Dominique** [FR/FR]; 9, rue Ampère, Duttlenheim, F-67129 Molsheim Cedex (FR). **LE GALL, Eric** [FR/FR]; 9, rue Ampère, Duttlenheim, F-67129 Molsheim Cedex (FR).

BOURDIN, Jean-Philippe [FR/FR]; 9, rue Ampère, Duttlenheim, F-67129 Molsheim Cedex (FR). **BIEBER, Serge** [FR/FR]; 9, rue Ampère, Duttlenheim, F-67129 Molsheim Cedex (FR). **LUTZ, Jean-Philippe** [FR/FR]; 9, rue Ampère, Duttlenheim, F-67129 Molsheim Cedex (FR).


(74) Agent: **BAWDEN, Peter, Charles**; Bawden & Associates, 4 The Gatehouse, 2 High Street, Harpenden, Herts AL5 2TH (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR,

[Continued on next page]

(54) Title: IMPROVED STRUCTURAL REINFORCEMENT

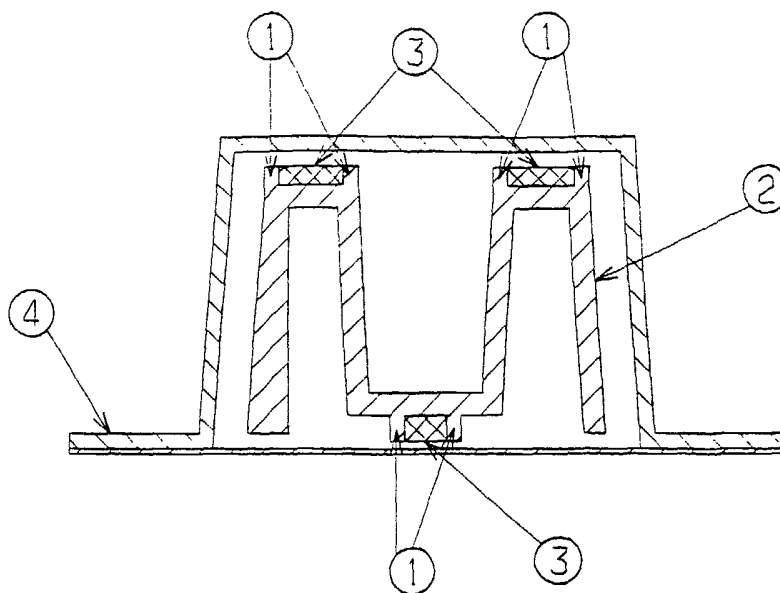

(57) Abstract: A structural reinforcement for a hollow member comprising a rigid reinforcing member having a shape that substantially conforms to the cross section of the hollow member to be reinforced with an expandable adhesive material over at least a portion of the surface of the structural reinforcement having pairs of extensions on its external surface which control and direct the direction in which the adhesive material expands to bond the reinforcing member to the internal surface of the hollow member, some of the extensions also provide improved reinforcement.



WO 03/000535 A1



GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

IMPROVED STRUCTURAL REINFORCEMENT

The present invention relates to reinforcing materials and in particular to reinforcing materials that can be provided in hollow cross-sectional members particularly to provide reinforcement to improve the structural integrity of vehicles. The invention further provides a system whereby reinforcement can be provided whilst ensuring effective provision of an anti-corrosion coating on the inner surface of the hollow cross-sectional member by the electrocoat process. The electrocoat process used in vehicle manufacture is a process in which the vehicle structure is passed through a bath of anticorrosion fluid and the vehicle structure is used as an electrode whereby an anticorrosion coating is deposited from the fluid onto the vehicle structure by electrolysis. The coating is then baked by heating.

The trends in motor vehicle design are towards lighter vehicles to improve fuel consumption. At the same time the safety standards and requirements are becoming more rigorous as indicated by the European Union requirements and the Euro-NCAP impact testing. The use of lighter materials such as aluminum to produce the hollow cross-sectional members that are used as vehicle sub frames has lead to the need for additional reinforcement. There is a need for reinforcement in various locations in the vehicle structure including the sub frame and upper structure, the form of reinforcement required can vary from one location in the vehicle to another and from vehicle to vehicle. The present invention therefore improves the strength of vehicles structures made from existing materials and enables vehicle structures based on lighter materials to contribute to safety requirements.

25

There are five main types of application where structural reinforcement is required in vehicles. Crash protection where the prevention of vehicle body deformation is important to provide protection for the occupants. Energy absorption to enhance

performance after yield. The reduction of mechanical constraints such as compression, shear torsion and flexing, or body movement in the vehicle structure particularly to improve durability and reduce stress cracking and the point mobility problems requiring the reduction of resonance by the provision of stiffening. The
5 need for reinforcement is present irrespective of the materials that are used to produce the vehicle structure and the need varies from material to material and according to the nature of the reinforcement that is being provided. The reinforcing parts can also reduce the noise created by the motion of a vehicle by providing a sound deadening effect as a result of blocking air paths in cavities.

10

It is known to provide foamable plastic mouldings within hollow cross sections of vehicles which can be foamed upon application of heat, such as is provided by the curing step in the electrocoat process, to provide a foamed baffle that fills the cross-section to provide sound adsorption. Such systems are described in European
15 patent applications 0383498 and 0611778. The foam baffle provides sound deadening and vibration resistance. In these systems the entire insert is foamable and it is proposed that the foamable material be chosen so that it will foam during the curing process, which follows the electrocoat process typically used in vehicle manufacture to provide resistance to metal corrosion. The materials of these patents
20 are not however reinforcing materials but are used to provide acoustic baffles and seals.

In the electrocoat process a vehicle structure is immersed in a bath of coating fluid from which an anticorrosion coating is deposited on the metal by electrolysis. The
25 vehicle metal structure is subsequently heated to bake the coating on the metal. The electrocoat process is typically applied to complete vehicle structures in which hollow sections have been capped. Accordingly reinforcing structures are preferably provided within hollow sections prior to the electrocoat. It is therefore important that

the reinforcing structure have minimal impact on the operation and efficiency of the electrocoat process.

Where reinforcing materials have been provided they have either been stuck to the metal structure prior to subjecting the vehicle structure to the electrocoat process or
5 have been provided after the electrocoat process. The former technique has the problem that it is not possible to perform the electrocoat over the entire surface, which can lead to local areas of corrosion. The latter technique is cumbersome and requires the provision of fastening means after electrocoating, which can damage the
10 electrocoat and again lead to local areas of corrosion.

It is also known to provide structural reinforcement inside the structural members of automobile frames by the provision of metallic or plastic reinforcing members that are bonded to the inner surface of the structural member by means of a structural foam.
15 For example, PCT Publications WO 99/61280 and WO 97/43501, European Publication 1122152 and United States Patent 6092864 disclose metallic reinforcing members bonded to the internal surface of an automobile structural member by a structural foam and our co-pending UK Application 0106911.1 and US Applications 09/676335 and 09/502686 disclose moulded plastic, particularly glass reinforced
20 nylon mouldings bonded to the internal surface of an automobile structure by a structural foam.

In the production of these reinforced structural members the metallic or moulded member is coated with an expandable adhesive material. The expandable adhesive
25 material being such that it will expand at temperatures to which the automobile is exposed during manufacture such as in the curing stage of the electrocoat process or in the paint oven. The reinforcing member is therefore placed within the cavity of the vehicle with the coating of the expandable adhesive material being in an unfoamed

state. During the automobile manufacture the expandable adhesive material will be brought to its expansion temperature and will expand to fill the gap between the inner surface of the vehicle structural member and the reinforcing member to bond the reinforcing member to the inner surface of the vehicle structural member. In this way
5 a light and strong structural reinforcement is provided.

Despite these techniques there is a continuing need to provide greater reinforcement and at the same time provide lighter weight vehicles, which in turn requires lighter weight reinforcing members. Accordingly, there is a need to reduce the weight and
10 thus the amount of material used in the reinforcing members. Furthermore, there is an economic need to reduce the amount of expandable adhesive material that is used, consistent with achieving the desired degree of reinforcement.

The present invention is aimed at providing such improved structural reinforcement
15 systems.

The present invention therefore provides a structural reinforcing member for reinforcing a hollow structural member, comprising a reinforcing member having on a portion of the surface thereof an expandable adhesive material wherein the surface
20 of the reinforcing member is provided with two or more pairs of extensions which approach the internal surface of the hollow structural member when the reinforcing member is placed within the hollow structural member, wherein the expandable adhesive material is located within at least two of said pairs of extensions and the surface of the reinforcing member between at least two of said pairs of extensions
25 has no expandable adhesive material thereon, such that the extensions guide the expansion of the expandable adhesive material.

The provision of the extensions on the mouldings according to the present invention can serve a dual function. Some or all of the extensions can provide local areas of the reinforcing member which when in place are closer to the inner surface of the hollow structural member than the remaining bulk of the reinforcing member. In this way the extensions may be located and designed to reduce deformation of the hollow structural member on impact. At least one, preferably at least two, of the pairs of extensions also direct the expansion of the expandable adhesive material to ensure that there is adhesion between the reinforcing member and the internal surface of the structural member where adhesion is required. This in turn enables selective use of the expandable adhesive material and can obviate the need to coat the entire surfaces of the reinforcing member that face the internal surfaces of the hollow structural member with the expandable adhesive material.

The dimensions of the rigid reinforcing member and the thickness and nature of the expandable adhesive material are important to the achievement of the desired structural reinforcement. The exterior shape of the reinforcing member preferably conforms substantially to the cross section of the hollow structural member it is designed to reinforce. The shape may vary along the length of the reinforcing member as the dimensions of the cross section of the hollow structural member change. The size of the reinforcing member including the expandable adhesive material should be such that there is a small clearance between the extremity of the reinforcing member and the interior walls of the hollow structural member to allow for passage of the electrocoat fluid. We also prefer that the reinforcing member have a cellular, honeycomb or ribbed internal structure to provide reinforcement along several different axes at minimum weight.

The extensions that are provided on the external surface of the structural reinforcing member may be ribs, raised embossments or they may be part of a stamped area.

The extensions may be integral with a moulding if the parts are produced by injection moulding or may be stamped or otherwise formed on metal reinforcing members. Alternatively, and less preferred the extensions may be attached subsequent to the formation of the reinforcing member. The positioning of the extensions on the

5 external surface of the reinforcing member will be determined by the shape of the member and the position in which it is to be placed within the hollow structural member which may be determined by the nature of the impact deformation that the reinforcing member is required to resist.

10 In a preferred embodiment the structural reinforcing member is also provided with small lugs, which enable it to stand away from the interior walls of the hollow structural member. In this way fastening devices are not required and the area of contact between the structural reinforcing member and the interior walls of the hollow structural member is minimised. In this preferred embodiment the clearance

15 between the extremity of the foamable adhesive material on the reinforcing member and the interior walls of the structural member can be determined to be wide enough to enable the liquid used in the electrocoat bath to flow between the reinforcing member and the interior walls of the hollow structural member in sufficient quantity to enable an effective anti-corrosion coating to be deposited. On the other hand, the

20 clearance can be determined so as not be too wide since this can result in a lack of rigidity in the structure when the expandable adhesive has expanded to fill the clearance and bond the structural reinforcing member to the interior walls of the structural member. We prefer that the clearance be no more than 1 centimeter and is more preferably 2 to 10 millimeters, preferably 3 to 7 millimeters. A uniform

25 clearance around the whole structure enables a more uniform foam structure to be obtained.

The rigid reinforcing member may be made from any suitable material, for example it may be made of metal or plastic and the material will be chosen according to the preferred fabrication method. The plastic may be thermoplastic or thermosetting. This in turn is driven by economics and the complexity of the cross section to be reinforced. Reinforcing members for simple cross sections may be prepared by extrusion whilst injection moulding may be required for more complex structures. Metal members may be produced by stamping and/or forming. Where extrusion is used the members may be of metal or thermoplastics; where injection moulding is used thermoplastics are preferred, where compression moulding is used thermoplastic or thermosetting material may be used. Polyamides, particularly glass filled or carbon fibre filled polyamides are suitable materials particularly for injection mouldings due to their high strength to weight ratio. Alternatively injection moulding or die casting of metal alloys may be employed. It is preferred that the moulding is provided with means enabling fluid drainage. For example, holes or channels may be provided in the moulding to allow the drainage of water, which may condense in the structure over time.

The invention is particularly useful for the provision of reinforcement in vehicles, particularly to provide crash resistance. The preferred shape and structure of the reinforcing member will depend upon where it is to be located in the vehicle structure and the function it is to perform. For example, if it is to be located in the front longitudinal section of the vehicle it will be designed for crash or impact resistance. On the other hand, it may be designed to reduce point mobility such as for example at the base of side and rear pillars in the vehicle. The reduction of point mobility is particularly important with high-sided vehicles where the reinforcement can reduce or prevent vehicle sway thus reducing metal fatigue. Other applications include the resistance of deformation of the rear longitudinal section, in particular to prevent upward deformation from rear impact, which can prevent the doors from being

opened. Other parts of a vehicle which may be reinforced by the techniques of the present invention include roof structures, pillars, frame cross members such as the engine cradle and window frames particularly rear window frames.

5 The expandable adhesive material serves two main functions, it will expand to fill the space between the reinforcing member and the interior of the hollow member and it will also bond to the interior wall of the hollow member. Accordingly, expandable adhesive material means that the material can be activated to both expand (typically foam) and to act as an adhesive, generally it acts as an adhesive at the conditions,
10 usually temperatures, at which it expands. Activation therefore enables the expandable material to expand and fill a gap between the reinforcing member and the hollow structural member it is designed to reinforce and to bond to the internal surface of the hollow structure. Accordingly the expandable adhesive must expand at the desired temperature and be sufficiently adhesive to firmly bond the reinforcing
15 member to the interior surface of the hollow structural member. The expanded product should be sufficiently strong that it does not contribute any weakness to the overall reinforcing effect provided.

Whilst it is not essential it is preferred that prior to activation, the expandable
20 adhesive material is dry and not tacky to the touch. It is preferred that the expandable material is not tacky to the touch since this facilitates shipping and handling of the structural reinforcing member and prevents contamination. Examples of preferred expandable adhesive materials include foamable epoxy-base resins and examples of such materials are the products L5206, L5207, L5208 and L5209, which
25 are commercially available from L & L Products of Romeo Michigan USA, and the Betacore Products BC 5204, 5206, 5207, 5208 and 5214 available from Core Products, Strasbourg, France. The expandable adhesive material should be chosen according to the rate of expansion and foam densities required. It is further preferred

that it expand at the temperatures experienced in the electrocoat oven, typically 130°C-200°C. Alternatively the material may be expanded by infrared high frequency, microwave or induction heating which are particularly useful in systems which do not employ the electrocoat process.

5

The expandable adhesive material is applied to the surface of the reinforcing member at locations where its direction of expansion is controlled by at least two pairs of the extensions formed on the surface of the reinforcing member. In a preferred embodiment the reinforcing member is provided with two or more sets of

10 pairs of ribs and the expandable adhesive material is provided between the ribs in the sets. In this way the reinforcing member may be located within the hollow structural member so that the extremities of the ribs are close to the inner surface of the hollow structural member so increasing the resistance to deformation of the hollow structural member. At the same time pairs of the ribs direct the expansion of

15 the expandable adhesive material through the channel formed between the ribs towards the inner surface of the hollow structural member. In this way an effective bond between the rigid reinforcing member and the hollow structural member may be achieved with a reduced amount of expandable adhesive material since it is not necessary that the expandable material cover the entire surface of the reinforcing

20 member.

In a preferred embodiment a series of pairs of ribs may be provided along one or more of the surfaces of the reinforcing member and the expandable adhesive material may be located between the ribs of one or more pairs. In this way upon

25 expansion bonds may be formed between the reinforcing member and the inner surface of the hollow structural member at different positions along the length and/or width of the reinforcing member. The preferred number of bond points and their

location will depend on the size and shape of the reinforcing member and the forces which it is designed to withstand.

- In yet a further embodiment a single extension may be provided and the expandable material located close to the single extension so that its expansion in one direction is controlled by the extension. In this embodiment the size and shape of the cavity between the hollow structural member and the reinforcing member may be such that it controls the expansion of the expandable adhesive material in another direction.
- 10 The expandable adhesive material should be applied to at least a portion of the surface of the rigid reinforcing member that will be adjacent to an interior surface of the hollow structure that is to be reinforced. This optimum location of the expandable adhesive will depend upon the shape of the hollow structure to be reinforced but it is preferably present so that it provides adhesion to two non-parallel surfaces to give
- 15 rigidity in at least two dimensions. It is preferred that the expandable adhesive material be applied over at least part of each of the top and bottom and the sides of the reinforcing member. In this way when the material expands it can expand into the gap around the entire surface of the reinforcing member that is adjacent to the interior walls of the hollow structure. The expandable adhesive material may be
- 20 applied to the rigid reinforcing member by bonding a strip of the material to the member, by for example extrusion coating or by injection moulding. Where the reinforcing member is made by injection moulding the expandable adhesive material may be applied by over-moulding or two shot injection moulding. The material should however be applied under conditions such that no expansion takes place.

25

It is preferred that the reinforcing member with the expandable adhesive material thereon is located within the hollow structural member that it is designed to reinforce in a manner that provides a clearance between the external surface of the coated

member and the internal surface of the hollow structural member. This allows for the passage of the electrocoat fluid between the hollow structural member and the internal surface and also enables a uniform expansion of the foam around the member to provide more uniform reinforcement.

5

Accordingly in a preferred process for providing reinforcement within a hollow structural member such as a vehicle frame, moulded reinforcing members provided with pairs of extensions and with a layer of expandable adhesive material thereon between the extensions that make up the pair extensions are installed during
10 assembly of the vehicle frame. Locating lugs are preferably moulded into the reinforcing member or the expandable adhesive material so that the reinforcing member sits within the hollow structural member leaving a space between the member and the interior walls of the hollow structural member to be reinforced, in this way there is no need for fastening or bonding means to attach the member to the
15 interior walls of the hollow structural member. The assembled structure is then subjected to the electrocoat process in which it is passed through a bath of coating material and a corrosion resistant coating is deposited onto the structure by electrolysis. The vehicle structure is then dried in an oven to cure the coating; the expandable adhesive is preferably chosen so that it is activated to expand and
20 develop adhesive properties by the conditions used in the oven employed to cure the coating. The expandable adhesive material will therefore expand under the curing conditions to provide both a foam that fills the space between the member and the interior walls of the hollow structural member and a strong bond between the reinforcing member and the interior wall of the hollow structural member. Typically
25 the coated structure is cured at around 165°C for about 20 minutes and accordingly the expandable adhesive material should be activated under these conditions. The automobile industry is however looking to use lower curing temperatures and shorter drying times and this may influence the choice of expandable adhesive materials.

If other components for example bolts are to pass through the reinforcing members during subsequent assembly it may be necessary to take care to ensure that holes formed in the reinforcing member for the passage of the bolts are not blocked by the
5 expansion of the expandable adhesive material.

The techniques of the present invention may be used for the reinforcement of any construction that is based on a hollow frame structure. They may for instance be used in the construction industry, in boats, in aircraft, and in railroad applications.
10 The techniques are however particularly useful to provide reinforcement in automobiles including cars, trucks, buses, caravans and the like. The techniques are particularly useful in the current trend towards using lighter and sometimes weaker materials in the production of automobile sub frames where there is a greater need for reinforcement to compensate for the reduction in strength of the basic material
15 and contribute to satisfy the safety requirements. This is particularly the case with the use of aluminum for the production of hollow sub frames of automobiles.

The present invention is illustrated by reference to the accompanying drawings in which Figures 1A and 2A illustrate a reinforcement according to the prior art, Figure
20 1A shows the system prior to activation of the expandable adhesive material and Figure 2A shows the system after activation.

Figures 3A and 4A illustrate a reinforcement according to the present invention. Figure 3A shows the system prior to activation of the expandable adhesive material
25 and Figure 4A shows the system after activation.

Figures 1B and 2B illustrate another form of a conventional reinforcement, Figure 1B shows the system prior to activation of the expandable adhesive material and Figure 2B shows the system after activation.

- 5 Figures 3B and 4B illustrate a reinforcement according to the present invention, Figure 3B shows the system prior to activation of the expandable adhesive material and Figure 4B shows the system after activation.

- Figure 5A illustrates the potential deformation of the reinforcing system of Figure 2A
10 when subject to a force in the direction showing by arrow 'A' and Figure 5B illustrates the potential deformation of the system of Figure 4A when subjected to the same force.

- Figure 6A illustrates the potential deformation of the reinforcing system of Figure 2B
15 when subject to a force in the direction shown by arrow 'A' and Figure 6B illustrates the potential deformation of the reinforcing system of Figure 4B when subjected to the same force.

- Figure 7 shows a moulded structural reinforcing member provided with a plurality of
20 pairs of ribs between which the expandable adhesive material may be located.

- Figure 1A shows a cross section of a hollow vehicle structural member (4) in which is positioned a reinforcing member (2) with an 'M' shaped cross section for example at XX' on Figure 7B. An expandable adhesive material (3) is provided on the surface of
25 (2) adjacent the inner surface of the structural member (4). Figure 2A shows the same cross section as Figure 1A but after expansion of the expandable adhesive (3) as may be accomplished by the curing step in the electrocoat process. Figure 2A shows how the adhesive (3) expands between the reinforcing member (2) and the

structural member (4) to provide a foam which bonds the reinforcing member and the structural member together.

Figure 3A shows the same cross section of the hollow vehicle structural member (4) containing an 'M' shaped reinforcing member (2). In this instance the reinforcing member is provided with a pair of ribs (1) at the three positions where the expandable adhesive is provided. These pairs of ribs form grooves which contain the expandable adhesive (3). Figure 4A shows how the expansion of the expandable adhesive is controlled by the ribs (1) to enable adequate adhesion between the structural member (2) and the reinforcing member (4) with a smaller amount of expandable adhesive than that required in the system of Figure 1A. Comparison of Figures 5A and 5B show how the provision of the ribs (1) on the reinforcing member (2) (as in Figure 5B) reduces the deformation of the reinforced structure when compared to the deformation of the system without the ribs of this invention which is shown in Figure 5A.

Figures 1B and 2B show an automobile structural member (4) of similar cross section to that in the previous figures. In this instance the structural member contains a 'U' shaped reinforcing member (2). In Figure 1B the structural reinforcing member (2) is provided with expandable adhesive (3) at the corners of the 'U' shape. Figure 2B shows how the expandable adhesive can expand across the cavity between the structural member (4) and the reinforcing member (2) in order to bond the two together.

Figure 3B shows a system of the present invention in which a longitudinal protrusion (1) is formed in the base of the 'U' shaped member (2) and the expandable adhesive is provided to abut up against the protrusion (1). Figure 4B shows the system of Figure 3B after expansion of the expandable adhesive.

Figures 6A and 6B, show the deformation of the structural member (4) which occurs when the systems illustrated in Figure 2B and Figure 4B respectively are subjected to the same compression strength in the direction of the arrow A.

5

Figure 7 shows a reinforcing member moulded from glass reinforced nylon employing the system illustrated in Figures 1B and 2B. The member consists of a structural reinforced component (5) provided with a labyrinth of reinforcing internal ribs (6). A series of pairs of ribs (7, 7); (8, 8); (9, 9) etc are moulded into the external surface of the moulding. Expandable adhesive material (not shown) may then be deposited in the grooves formed between the pairs of ribs according to the present invention the expandable adhesive material may also be located in channels 10 so that its expansion in a transverse direction is controlled by the ribs as shown by reference 3 in Figure 4A. The moulding may then be used to provide structural reinforcement within a vehicle sub frame in the manner described herein.

The invention accordingly provides both ribbed mouldings containing unfoamed expandable adhesive and the reinforced hollow member containing the ribbed moulding bonded to the internal surface of the hollow structural member by the expanded adhesive.

20

As illustrated the systems of the present invention enable improved or comparable reinforcement to be achieved whilst using a smaller amount of expandable adhesive material.

25

CLAIMS

1. A structural reinforcing member for reinforcing a hollow structural member, comprising a reinforcing member having on a portion of the surface thereof an expandable adhesive material wherein the surface of the reinforcing member is provided with two or more pairs of extensions which approach the internal surface of the hollow structural member when the reinforcing member is placed within the hollow structural member, wherein the expandable adhesive material is located within at least two of said pairs of extensions and the surface of the reinforcing member between at least two of said pairs of extensions has no expandable adhesive material thereon, such that the extensions guide the expansion of the expandable adhesive material.
2. A structural reinforcing member according to Claim 1, in which the exterior shape of the reinforcing member conforms substantially to the cross section of the hollow structural member.
3. A structural reinforcing member according to Claim 1 or Claim 2, in which the size of the reinforcing member including the expandable adhesive material is such that there is a small clearance between the extremity of the reinforcing member and the interior walls of the hollow structural member.
4. A structural reinforcing member according to any of the preceding Claims, in which the reinforcing member has a cellular, honeycomb or ribbed internal structure.

5. A structural reinforcing member according to any of the preceding Claims, in which the extensions are ribs, raised embossments or are part of a stamped area.
- 5 6. A structural reinforcing member according to any of the preceding Claims in which the extensions are integral with the moulding.
7. A structural reinforcing member according to any of the preceding Claims, provided with small lugs which enable the structural reinforcing member to stand away from the interior walls of the hollow structural member.
- 10 8. A structural reinforcing material according to any of Claims 3 to 7 in which the clearance is no more than 1 centimeter.
- 15 9. A structural reinforcing member according to any of the preceding Claims made from filled polyamide.
10. A structural reinforcing member according to Claim 9 in which the filler is glass fibre.
- 20 11. A structural reinforcing member according to Claim 9 in which the filler is carbon fibre.
12. A structural member according to any of Claims 1 to 8 made from a thermosetting resin.
- 25

13. A structural reinforcing member according to any of the preceding Claims, in which the expandable adhesive material can be activated to both expand and to act as an adhesive when heated.
- 5 14. A structural reinforcing member according to Claim 13, in which the expandable adhesive can be activated at the temperature of the curing step in the electrocoat process.
- 10 15. A structural reinforcing member according to any of the preceding Claims, in which prior to activation, the expandable adhesive material is dry to the touch.
16. A structural reinforcing member according to any of the preceding Claims, in which the expandable adhesive material is a foamable epoxy-base resin.
- 15 17. A structural reinforcing material according to any of the preceding Claims, in which the expandable adhesive material is applied to at least a portion of the surfaces of the rigid reinforcing member that will be adjacent to two non-parallel surfaces of the interior surface of the hollow structural member.
- 20 18. A structural reinforcing member according to Claim 17, in which the expandable adhesive material is applied over part of each of the top and bottom and the sides of the reinforcing member.
- 25 19. A structural reinforcing material according to any of the preceding Claims, in which a series of pairs of ribs are provided along one or more of the surfaces of the reinforcing member.

20. The use of a structural reinforcing member according to any of the preceding Claims to provide reinforcement in a vehicle.
21. The use according to Claim 20 to reduce point mobility.
- 5 22. The use according to Claim 20 to provide reinforcement of the front longitudinal section of a vehicle.
- 10 23. The use according to Claim 20 to provide resistance of deformation of the rear longitudinal section.
24. The use according to Claim 20 to reinforce pillars, frame cross members and window frames.
- 15 25. A process for providing reinforcement within hollow structures in which a structural reinforcing member according to any of Claims 1 to 19 is installed during assembly of a vehicle frame, and the system is heated whereby the expandable adhesive material expands to provide a foam between the structural reinforcing member and the interior walls of the hollow structural member and bonds the structural reinforcing member to the interior wall of the structural hollow member.
- 20 26. A process according to Claim 25 in which the heating takes place in the electrocoating curing process.
- 25 27. A process according to Claim 26 in which the heating is by infrared, high frequency, microwave or induction heating.

28. A process according to any of Claims 25 to 27 in which the heating is between 130°C and 200°C.

FIG. 1A

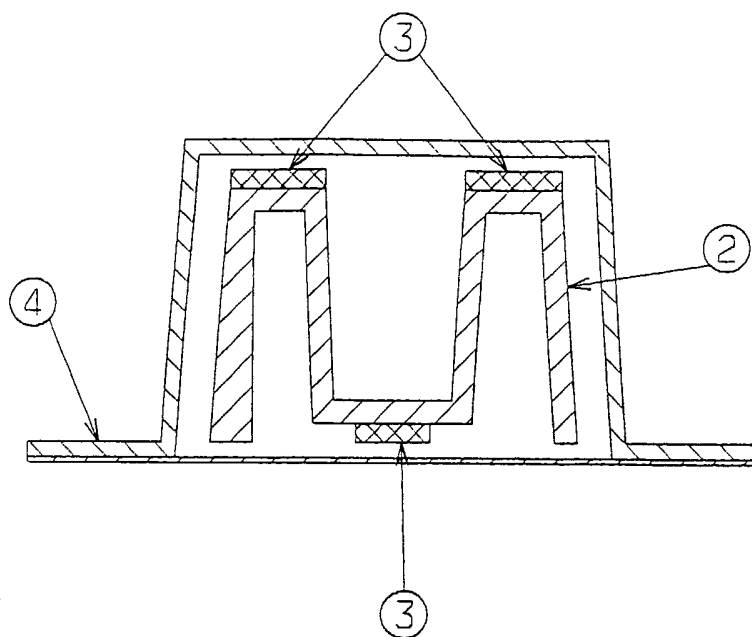


FIG. 2A

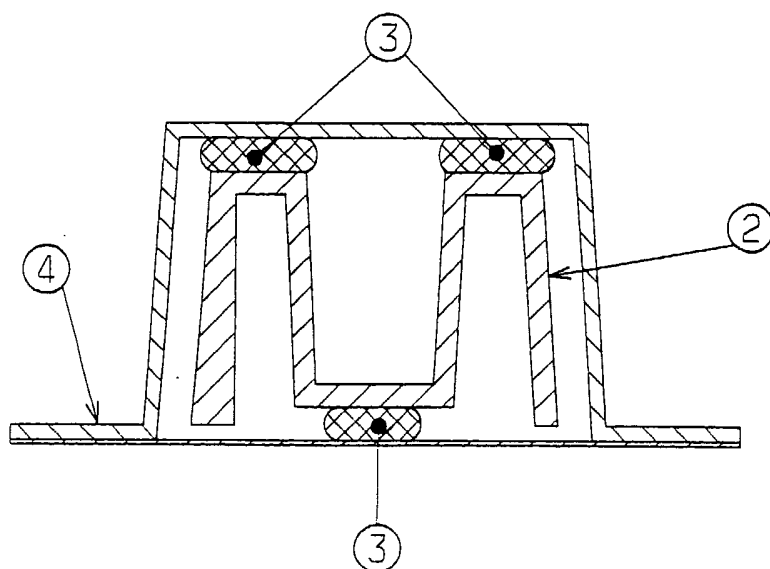


FIG. 3A

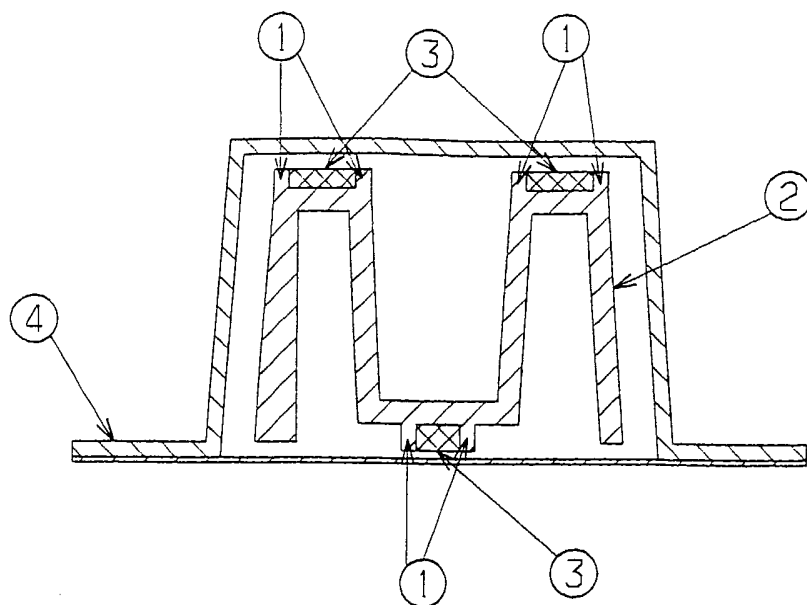


FIG. 4A

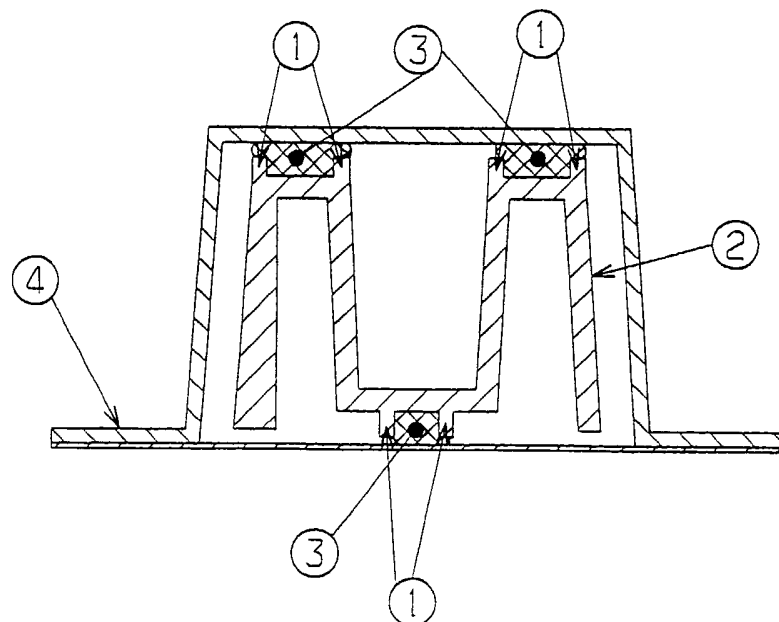


FIG. 1B

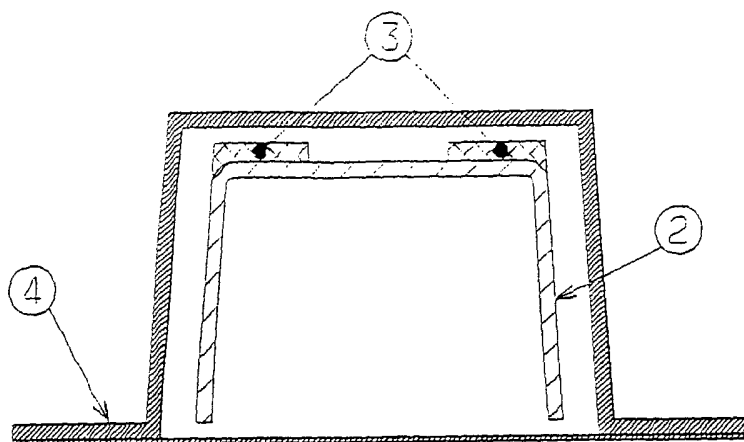


FIG. 2B

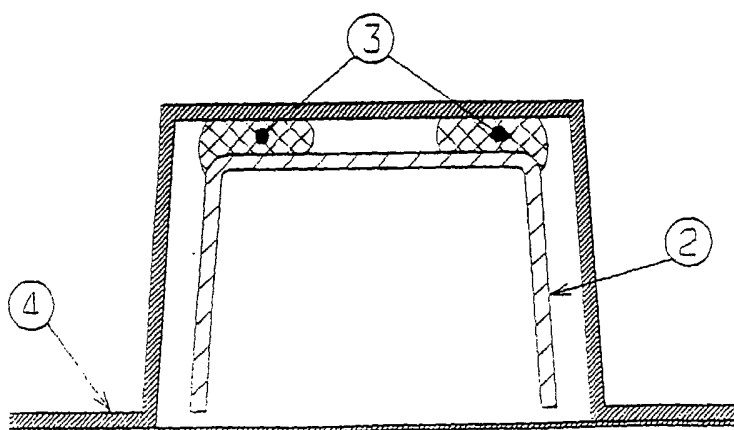


FIG. 3B

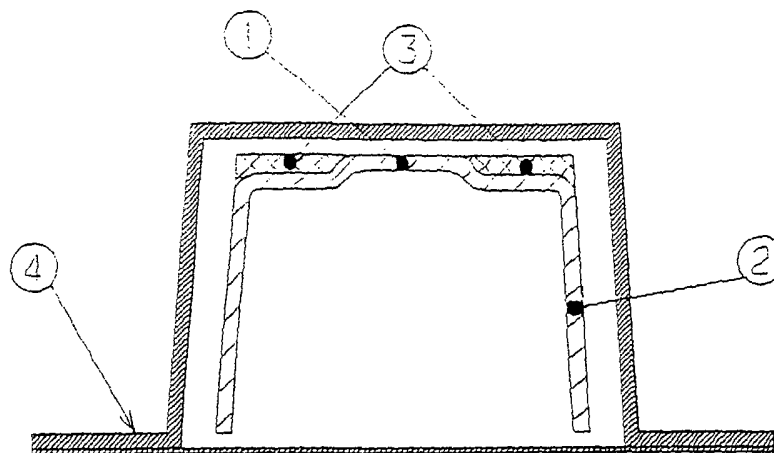
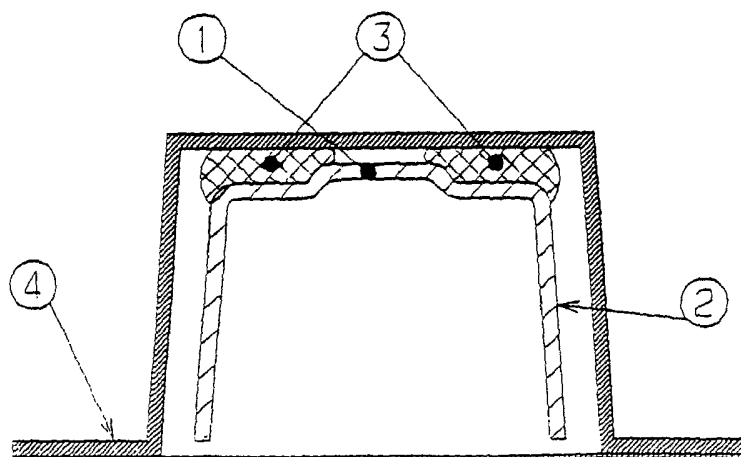
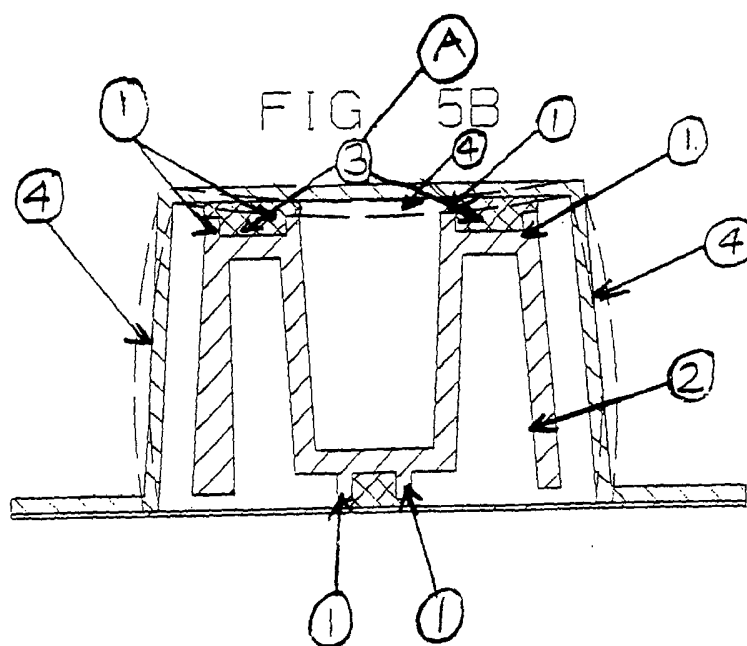
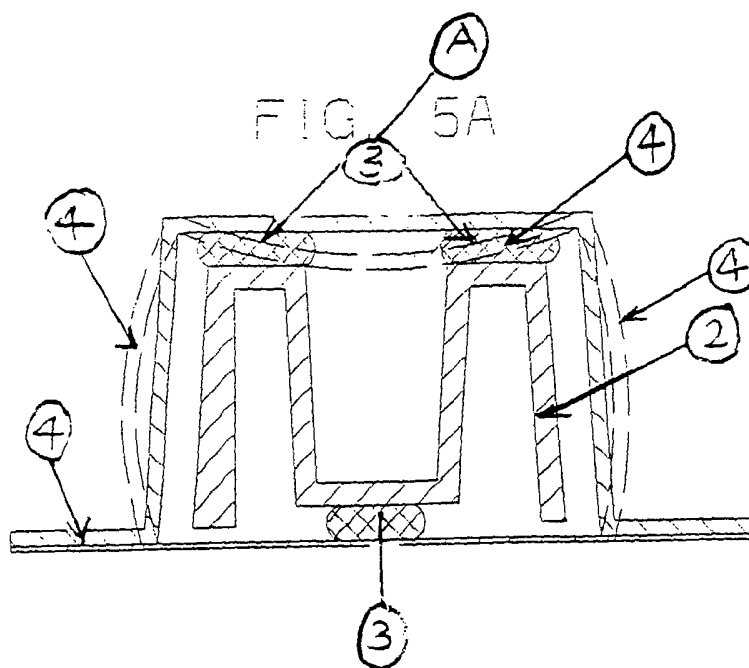


FIG. 4B







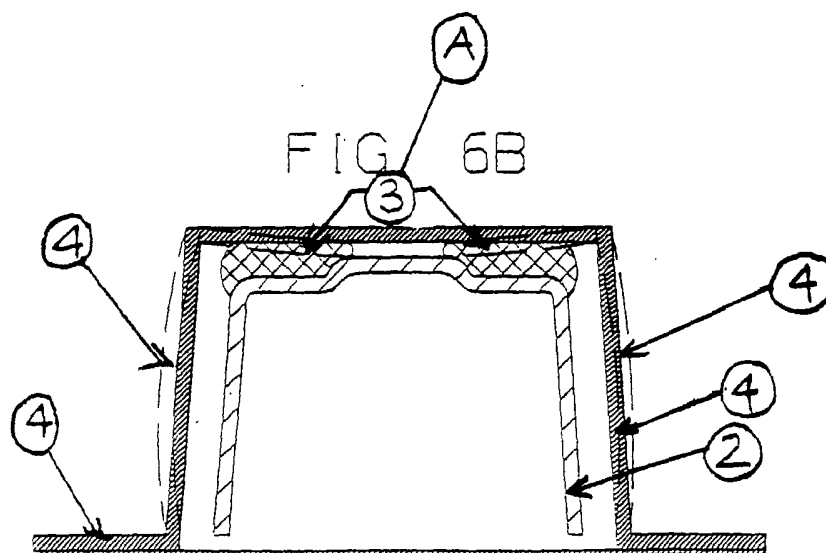


FIG. 7

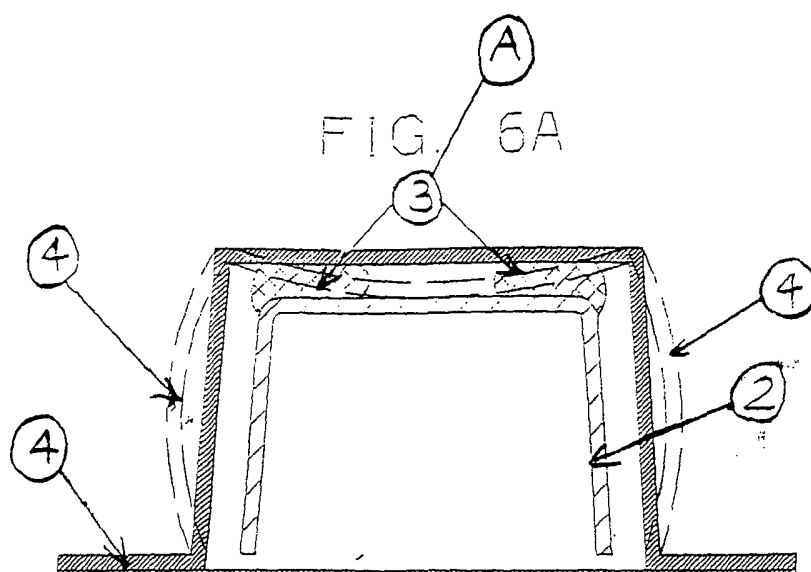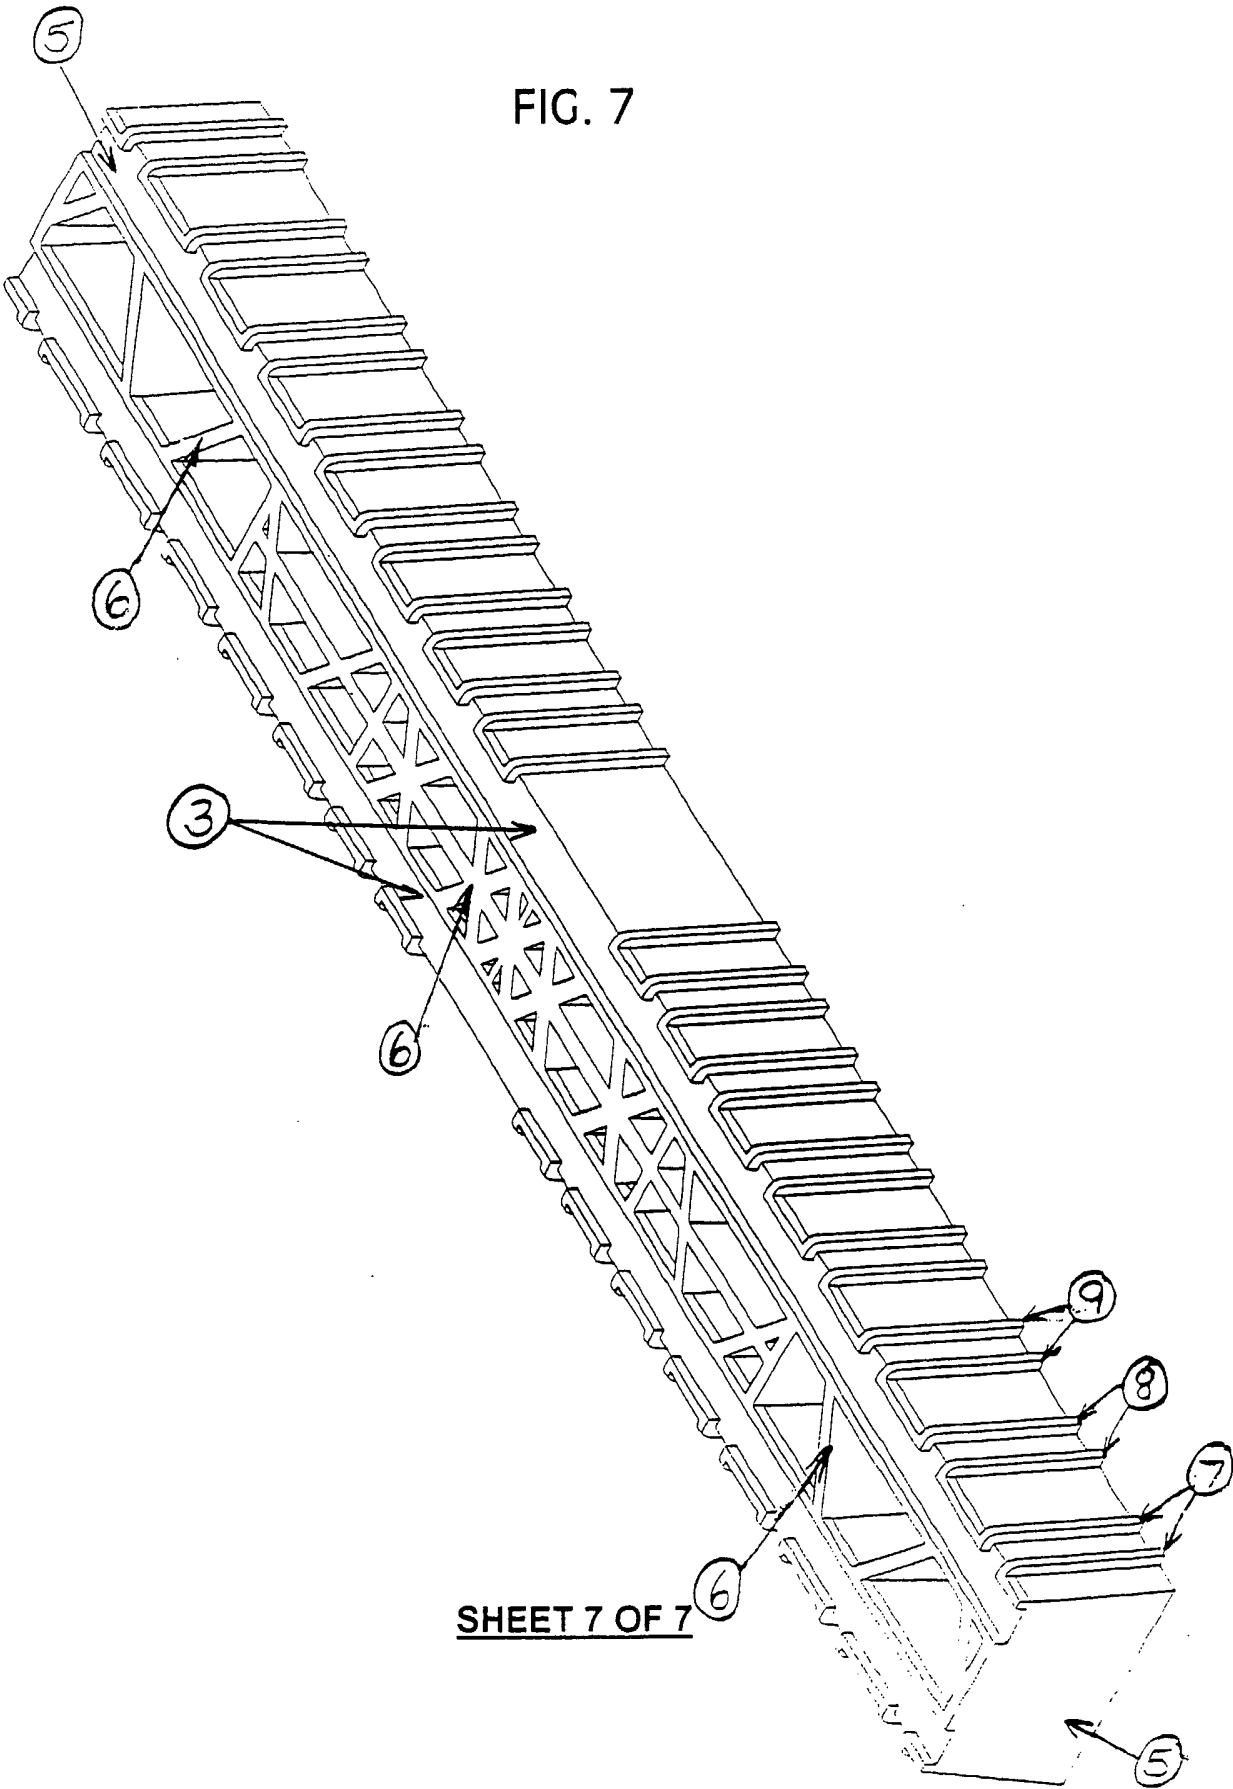

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 02/05224

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B62D29/00 B62D25/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B62D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P, Y	EP 1 122 152 A (SIKA CORP) 8 August 2001 (2001-08-08) cited in the application figures 6,8 column 5, paragraph 9 -column 8, paragraph 19 column 13, paragraph 30 ---	1-3,5,6, 12,13, 16,20, 25,26
Y	US 6 165 588 A (WYCECH JOSEPH S) 26 December 2000 (2000-12-26) figures 1,3 column 3, line 1 -column 4, line 6 column 5, line 44 -column 6, line 42 --- -/--	1-3,5,6, 12,13, 16,20, 25,26



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

° Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- * & * document member of the same patent family

Date of the actual completion of the international search

27 August 2002

Date of mailing of the international search report

02/09/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Deraymaeker, D

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 02/05224

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 198 58 903 A (OPEL ADAM AG) 21 June 2000 (2000-06-21) figures 1-3 column 1, line 67 -column 5, line 64	20-26, 28
A		1, 3, 7, 9, 13, 14, 17, 18
P, A	--- US 2001/020794 A1 (ISHIKAWA MASAHIRO) 13 September 2001 (2001-09-13) figures 2, 5, 6 column 3, paragraph 57 -column 3, paragraph 59 column 3, paragraph 64	1, 4, 10, 13, 19-26
A	--- EP 1 084 816 A (BASF AG) 21 March 2001 (2001-03-21) figure 1 column 4, paragraph 19 -column 5, paragraph 20 -----	11

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 02/05224

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1122152	A	08-08-2001	US 6305136 B1	23-10-2001
			AU 3453101 A	07-08-2001
			EP 1122152 A2	08-08-2001
			WO 0155523 A1	02-08-2001

US 6165588	A	26-12-2000	AU 9296698 A	27-03-2000
			EP 1135243 A1	26-09-2001
			WO 0013876 A1	16-03-2000
			ZA 9905534 A	27-03-2000

DE 19858903	A	21-06-2000	DE 19858903 A1	21-06-2000
			AU 2277700 A	12-07-2000
			WO 0037302 A1	29-06-2000

US 2001020794	A1	13-09-2001	JP 2001191947 A	17-07-2001
			DE 10100325 A1	19-07-2001

EP 1084816	A	21-03-2001	EP 1084816 A2	21-03-2001
			JP 2001129884 A	15-05-2001
			US 6421979 B1	23-07-2002
