

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
24 August 2006 (24.08.2006)

PCT

(10) International Publication Number
WO 2006/088412 A1

(51) International Patent Classification:
A61F 2/42 (2006.01) A61F 2/46 (2006.01)

(21) International Application Number:
PCT/SE2006/000189

(22) International Filing Date:
13 February 2006 (13.02.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0500353-8 16 February 2005 (16.02.2005) SE

(71) Applicant (for all designated States except US):
SWEMAC ORTHOPAEDICS AB [SE/SE]; Indust-
rigatan 11, S-582 77 Linköping (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **REIGSTAD, Astor**
[NO/NO]; Grinda 15A, N-0861 Oslo (NO). **ÖSTER, Lars**
[SE/SE]; Finnebodavägen 28, S-531 58 Lidköping (SE).

(74) Agents: **WAGNER, Heinz** et al.; Wagner Zacco AB,
Norra Vallgatan 72, S-211 22 Malmö (SE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV,
LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI,
NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG,
SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US,
UZ, VC, VN, YU, ZA, ZM, ZW.



(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT,
RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- with amended claims

[Continued on next page]

(54) Title: JOINT PROSTHESIS AND USE OF SCREW TOOL FOR POSITIONING MEMBERS THEREOF

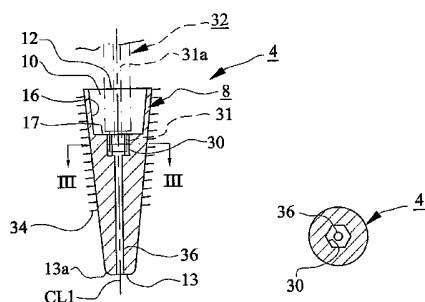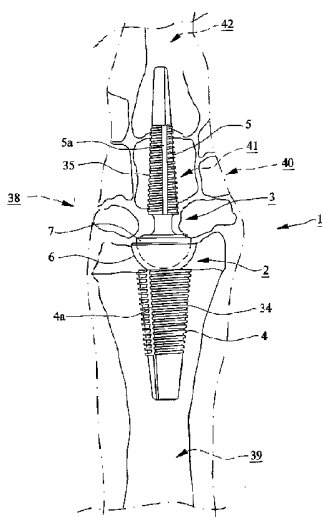

(57) Abstract: The present invention relates to a joint prosthesis, comprising two prosthesis members (2, 3) which are adapted to be positioned at different bones (39; 41, 42) at a joint (38), wherein each prosthesis member (2, 3) includes a first and a second screw-like member (4, 5) respectively, which are adapted to be screwed onto the respective bone (39; 41, 42). One prosthesis member (2) includes a member (6) having a socket and the other prosthesis member (3) a member (7) having a head, whereby the socket member (6) has a mounting pin (22) which is insertable into a first hole (10) in the first screw-like member (4) for positioning or locating the socket member (6) thereto and whereby the head member (7) has a mounting pin (27) which is insertable into a first hole (11) in the second screw-like member (5) for positioning or locating said head member (7) thereto. In the first as well as in the second screw-like member (4, 5) there is provided at least one inner second hole (30 and 33 respectively) which is designed to permit insertion thereinto of a rod (31) of a screw tool (32) in order to secure by screwing the first and second screw-like member (4, 5) respectively, at the respective bone (39; 41, 42). The second hole (30 and 33 respectively) is provided in a bottom (17 and 19 respectively) of the first hole (10 and 11 respectively).



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Joint prosthesis and use of screw tool for positioning members thereof.

The present invention relates to a joint prosthesis, comprising two prosthesis members which are adapted to be positioned at different bones at a joint, each prosthesis member including a first and a second screw-like member respectively, which are adapted to be screwed onto the respective bone. One of the prosthesis members includes a member having a socket and the other prosthesis member a member having a head. The socket member has a mounting pin which is insertable into a first hole in the first screw-like member for positioning or locating the socket member thereto and the head member has a mounting pin which is insertable into a first hole in the second screw-like member for positioning or locating said head member thereto. The invention also relates to a screw tool for positioning members of the joint prosthesis.

In the publication US 5 147 386 there is described a joint prosthesis having two screw-like members which are mounted or attached to the respective bones to be connected by the prosthesis. The joint consists of a socket and a head, whereby the end of the head member is attached to one of the screw-like members by a press fit. To secure the screw-like members by screwing, there are grooves for a screw tool in outer end surfaces thereof, which means that the grooves will form sharp edges that might harm adjacent tissue, which of course is utterly inappropriate.

The object of the present invention is to eliminate the problem that the screw-like members of the prosthesis members have outer grooves defining sharp edges. This is arrived at while the prosthesis is provided with the characterizing features of primarily subsequent claim 1.

Since the screw-like members of the prosthesis, within the hole therein for socket and head members respectively, are provided with inner holes which are designed particularly for a screw tool, it is possible to insert the screw tool in the hole in order to attach by screwing the screw-like members to the bone in question and avoid the outer grooves with sharp edges which can cause damages. Since the holes for the screw tool are inner holes, they will be completely covered by the socket and head members of the prosthesis when these members are mounted.

The invention will be described in more detail below with reference to the accompanying drawings, in which

fig. 1 is a side view of a wrist prosthesis according to the invention as an implant in a wrist;

fig. 2 is a section of a first screw-like member forming part of the wrist prosthesis of fig. 1;

fig. 3 is a section along the line III-III of the first screw-like member of fig. 2;

fig. 4 is a section of a second screw-like member forming part of the wrist prosthesis of fig. 1;

fig. 5 is a section along the line V-V of the first screw-like member of fig. 4;

fig. 6 is a side view of a socket member forming part of the wrist prosthesis of fig. 1;

5 fig. 7 is a side view of a head member forming part of the wrist prosthesis of fig. 1;
and

figs. 8-12 illustrate various moments during the positioning of screw-like members forming part of the wrist prosthesis of fig. 1.

In the drawings, a wrist prosthesis 1 is shown comprising a first prosthesis member
10 2 and a second prosthesis member 3. The first prosthesis member 2 includes a first screw-like member 4 and the second prosthesis member 3 a second screw-like member 5. The first prosthesis member 2 further includes a member 6 having a socket and the second prosthesis member 3 a member 7 with a head. Each first and second screw-like member 4, 5 respectively, has a mounting portion 8 and 9 respectively, which at the illustrated
15 embodiment is provided with a first hole 10 and 11 respectively. The first hole 10 in the first screw-like member 4 extends as a depression at a first end edge 12 at which said member 4 has the largest diameter in an axial direction towards a second end edge 13 of said member 4 at which the member 4 has its smallest diameter. The first hole 10 is preferably centered with a geometric center line CL1 extending in the axial direction of the member 4.

20 The first hole 11 in the second screw-like member 5 extends as a depression at a first end edge 14 at which said member 5 has the largest diameter in an axial direction towards a second end edge 15 of said member 5 at which the member 5 has the smallest diameter. The first hole 11 is centered with a geometric center line CL2 extending in the axial direction of the member 5.

25 The first hole 10 in the first screw-like member 4 has its largest diameter at the first end edge 12 and its side walls 16 are conical, whereby its smallest diameter is at the bottom 17 of the hole 10, i.e. the first hole 10 tapers conically towards its bottom 17.

The first hole 11 in the second screw-like member 5 has its largest diameter at the first end edge 14 and its side walls 18 are conical, whereby its smallest diameter is at the
30 bottom 19 of the hole 11, i.e. the hole 11 tapers conically towards its bottom 19.

The socket member 7 has a socket 20 which defines a concave joint surface 21. From the outer side of the socket 20, a mounting pin 22 extends in an axial direction. The mounting pin 22 has an axial outer side 24 which tapers conically towards its end edge 23. The shape and dimension of the mounting pin 22 and the shape and dimension of the first
35 hole 10 in the first screw-like member 4 are chosen such that they can form a press fit by compression in an axial direction, i.e. a connection which through compression permits attachment of the socket member 6 and the first screw-like member 4 to each other.

The head member 7 has a substantially spherical head 25 which forms a convex joint surface 26 of such shape that it fits into the joint surface 21 of the socket member 20 such that said joint surfaces 21, 26 can glide against each other and make the joint flexible. A mounting pin 27 protrudes from the head 25 in an axial direction and this mounting pin 27
5 has an outer side 29 which tapers conically in an axial direction towards its end edge 28. The shape and dimension of the mounting pin 27 and the shape and dimension of the first hole 11 in the second screw-like member 5 are chosen such that they can form a press fit by compression in an axial direction, i.e. a connection which through compression permits attachment of the head member 7 and the second screw-like member 5 to each other.

10 The first screw-like member 4 has at least one second hole 30 which is designed to permit insertion of the rod 31 of a screw tool 32, e.g. a screw driver, into said hole 30 for securing the first screw-like member 4 to the bone in question. The second screw-like member 5 has at least one second hole 33 which is designed to permit insertion of the rod 31 of the screw tool 32 into said hole 33 for securing the second screw-like member 5 to the
15 bone in question.

Each second hole 30 and 33 respectively, is preferably provided within the first hole 10 and 11 respectively, of each first and second screw-like member 4, 5 respectively. The rod 31 of the screw tool 32 is designed such that it can be inserted into and engage the second hole 30 and 33 respectively, by passing said rod through the first hole 10 and 11
20 respectively, without damaging the side walls 16 and 18 respectively, of said holes 10, 11.

As is illustrated in figs. 2 and 4, each second hole 30 and 33 respectively, may e.g. be located at the bottom 17 and 19 respectively, of the respective first hole 10, 11.

Each second hole 30 and 33 respectively, is preferably, as is the first hole 10 and 11 respectively, centered with the respective center line CL1, CL2. Furthermore, the second
25 hole 30 and 33 respectively, may be a non-round hole, e.g. a polygonal hole, such as a hexagonal hole or similar. The rod 31 of the screw tool 32 is of course adapted to the shape of the second hole 30 and 33 respectively, such that one can turn the respective screw-like member 4, 5 by turning the screw tool 32 for screwing said screw-like members into the respective bone.

30 Each first and second screw-like member 4, 5 respectively, is on the outer side preferably tapering conically from the first end edge 12 and 14 respectively, in a direction towards the second end edge 13 and 15 respectively. The conical shape extends preferably, but not necessarily, the entire way between said first and second end edges 12, 14 and 13, 15 respectively. Each first and second screw-like member 4, 5 respectively, is also provided
35 with outer threads 34 and 35 respectively, which preferably are self-tapping.

As is illustrated in the drawings, the outer threads 34 and 35 respectively, may start at the first end edge 12 and 14 respectively, and end a distance from the second end edge

13 and 15 respectively, such that the pointed end of the first and second screw-like member 4, 5 respectively, has no threads.

Each first and second screw-like member 4, 5 respectively, may be without threads at elongated parts 4a and 5a respectively, which extend in axial direction along the first and second screw-like member 4, 5 respectively, in order to divide the outer threads 34 and 35 respectively, into several, e.g. four, threaded sections.

Each first and second screw-like member 4, 5 respectively, may have an axial through hole 36 and 37 respectively, which is centered with the center line CL1 and CL2 respectively, and which is intended to permit threading of said member 4 and 5 respectively, onto a guide wire 43 which is intended to be provided at the respective bone and which is intended to guide the first and second screw-like member 4, 5 respectively, when said member shall be screwed into the respective bone.

The illustrated wrist prosthesis can be located in a wrist 38. The bones therein and in the arm and the hand are shown schematically in fig. 1 with broken lines and these bones may be the radius 39 in the arm, one or more bones in the carpus 40, e.g. the capitate 41 and one metacarpal bone 42, e.g. metacarpal III, in the metacarpus. As is apparent from the figure, the first screw-like member 4 has been screwed into the radius 39 and this member 4 has therefore been made thicker but shorter than the second screw-like member 5 and has a larger first hole 10 than the first hole 11 of the second screw-like member 5. The second screw-like member 5 is, at the illustrated wrist 38, secured by screwing to the capitate 41 and the metacarpal bone 42.

In figs. 8-12, examples of how the first and second screw-like members 4, 5 can be positioned or located in the respective bone 39, 41 and 42 are shown.

As is illustrated in fig. 8, a guide wire 43 which is attached to a drill 44 is bored through the capitate 41 and into the metacarpal bone 42. Then, the drill 44 is removed while the guide wire 43 is left.

As is shown in fig. 9, a conical drill steel 45 and a tubular bracket 46 through which the drill steel 45 is provided on a drill 47, is then threaded onto the guide wire 43 and conical holes are drilled in the capitate 41 and the metacarpal bone 42.

Fig. 10 illustrates how the second screw-like member 5 then is threaded onto the guide wire 43. Thereafter, the rod 31 of the screw driver 32, which is cannulated, i.e. has an elongated hole 31a, is threaded onto the guide wire 43 and into the second hole 33 of the second screw-like member 5, whereafter the screw driver 32 is turned for securing the second screw-like member 5 in the holes in the capitate 41 and the metacarpal bone 42. Then, the screw driver 32 and the guide wire 43 are removed.

As is apparent from figs. 11 and 12, the procedure is the same for positioning the first screw-like member 4 at the radius 39. Thus, it is apparent from fig. 11 that a guide wire

43 has been secured in the radius 39, that a conical drill steel 45 (which in this case is larger than the drill steel 45 of fig. 9) has been threaded onto the guide wire 43 and that a conical hole has been bored or drilled in the radius 39 by means of the drill steel 45. In fig. 12 it is shown that by means of the screw driver 32, the first screw-like member 4 has been secured
5 by screwing to the radius 39, whereafter the guide wire 43 is removed therefrom.

The first and second screw-like members 4, 5 respectively, may consist of at least one material and the socket and head members 6, 7 of at least one other material. Thus, each first and second screw-like member 4, 5 respectively, may have a core of metallic material and an exterior layer of a material which is dissoluble when the first and second
10 screw-like members 4, 5 respectively, are implanted.

Said core may preferably consist of a titanium alloy, while the dissoluble material may be or contain calcium phosphate.

The socket and head members 6, 7 may consist of a chromium-cobalt alloy.

Except for that the joint prosthesis described above is simple and easy to position, it
15 permits rotation of the joint inter alia because the ulna can be left intact. Also, the operation can be kept small because one has to cut off only small parts of the respective bone 39; 41, 42 for attaching or securing the screw-like members 4, 5. By using the joint prosthesis instead of an arthrodesis plate, the joint can be kept movable instead of fusing the joint. If complications should occur after use of the joint prosthesis, it can be replaced by an
20 arthrodesis plate as a secondary operation. It is also possible to screw the screw-like members 4, 5 completely or only partly into the respective bone 39; 41, 42.

The invention is not limited to the embodiment described above, but may vary within the scope of the subsequent claims. Thus, the prosthesis members can be used for other smaller joints than wrists 38, e.g. for interphalangeal joints, thumb joints, cubital joints or
25 hallux joints. The design of the prosthesis members 2, 3 may also vary. Thus, the first holes 10, 11 in the screw-like members 4, 5 may be partly conical or eventually have another shape than conical shape and the socket and head members 6, 7 are naturally adapted thereto. The described press fit may instead be another type of coupling device, the second holes 30, 33 may have another suitable shape than described and be located in another
30 suitable way than described. The socket and the head of the socket and head members 6, 7 may have another shape than shown and the end edges 13, 15 of the screw-like members 4, 5 may have rounded corners 13a, 13b. Finally, it should be mentioned that the screw tool 32 may be of another suitable type of screw tool than a screw driver.

Claims:

1. Joint prosthesis, comprising two prosthesis members (2, 3) which are adapted to be positioned at different bones (39; 41, 42) at a joint (38),

5 wherein each prosthesis member (2, 3) includes a first and a second screw-like member (4, 5) respectively, which are adapted to be screwed onto the respective bone (39; 41, 42),

wherein one prosthesis member (2) includes a member (6) having a socket and the other prosthesis member (3) a member (7) having a head,

10 wherein the socket member (6) has a mounting pin (22) which is insertable into a first hole (10) in the first screw-like member (4) for positioning or locating the socket member (6) thereto, and

wherein the head member (7) has a mounting pin (27) which is insertable into a first hole (11) in the second screw-like member (5) for positioning or locating said head member (7) thereto,

15 **characterized in**

that in the first as well as in the second screw-like member (4, 5) there is provided at least one inner second hole (30 and 33 respectively) which is designed to permit insertion thereinto of a rod (31) of a screw tool (32) in order to secure by screwing the first and second screw-like member (4, 5) respectively, at the respective bone (39; 41, 42), and

20 that the second hole (30 and 33 respectively) is provided in a bottom (17 and 19 respectively) of the first hole (10 and 11 respectively).

2. Joint prosthesis according to claim 1, **characterized in** that the second hole (30 and 33 respectively) is provided close to the first hole (10 and 11 respectively) of the first and second screw-like member (4, 5) respectively.

3. Joint prosthesis according to claim 1 or 2, **characterized in**

that the second hole (30 and 33 respectively) in the first and second screw-like member (4, 5) respectively, is provided within the first hole (10 and 11 respectively) of the first and second screw-like members (4, 5) respectively, and

30 that said rod (31) can be inserted into said second hole (30 and 33 respectively) by passing it through the first hole (10 and 11 respectively) of the first and second screw-like members (4, 5) respectively.

4. Joint prosthesis according to any preceding claim, **characterized in** that the second hole (30 and 33 respectively) is a non-round hole.

35 5. Joint prosthesis according to claim 4, **characterized in** that the second hole (30 and 33 respectively) is a polygonal hole.

6. Joint prosthesis according to claim 5, **characterized in** that the second hole (30 and 33 respectively) is a hexagonal hole.

5 7. Joint prosthesis according to any preceding claim, **characterized in** that the second hole (30 and 33 respectively) and the first hole (10 and 11 respectively) are centered or substantially centered with a common geometric center line (CL1 and CL2 respectively) extending through the first and second screw-like members (4, 5) respectively.

10 8. Joint prosthesis according to any preceding claim, **characterized in** that the first hole (10 and 11 respectively) in the first and second screw-like member (4, 5) respectively, and the mounting pin (22 and 27 respectively) of the socket and head members (6, 7) respectively, are designed such that the first and second screw-like members (4, 5) respectively, and the socket and head members (6, 7) respectively, are provided to define a press fit permitting the first screw-like member (4) and the socket member (6), through compression, to attach to each other, and the second screw-like member (5) and the head member (7), through compression, to attach to each other.

15 9. Joint prosthesis according to claim 8, **characterized in** that the first hole (10 and 11 respectively) in each first and second screw-like member (4, 5) and the mounting pins (22 and 27 respectively) of the socket and head members (6, 7) respectively, are conical.

20 10. Joint prosthesis according to any preceding claim, **characterized in** that the first and second screw-like members (4, 5) respectively, have an exteriorly conical shape and are provided with outer threads (34 and 35 respectively).

25 11. Joint prosthesis according to claim 10, **characterized in** that the outer threads (34 and 35 respectively) of each first and second screw-like member (4, 5) respectively, begin at a first end edge (12 and 14 respectively) thereof and end a distance within a second end edge (13 and 15 respectively) thereof such that each first and second screw-like member (4, 5) respectively, has a pointed end without threads.

12. Joint prosthesis according to claim 10 or 11, **characterized in** that the outer threads (34 and 35 respectively) of each first and second screw-like member (4, 5) respectively, are self-tapping.

30 13. Joint prosthesis according to any of claims 10-12, **characterized in** that each first and second screw-like member (4, 5) respectively, has no threads at elongated parts (4a and 5a respectively) thereof, which extend in an axial direction along the first and second screw-like member (4, 5) respectively, in order to divide the outer threads (34 and 35 respectively) into several threaded sections.

35 14. Joint prosthesis according to any preceding claim, **characterized in** that each first and second screw-like member (4, 5) respectively, has a through hole (36 and 37 respectively) which extends therethrough in axial direction in order to permit threading of said

first and second screw-like members (4, 5) respectively, onto a guide wire (43) which is attached to the respective bone (39; 41, 42).

15 15. Joint prosthesis according to claim 14, **characterized in** that the guide wire (43) is designed for guiding a conical drill steel (45) for drilling or boring a hole in the respective bone (39; 41, 42) for the first and second screw-like member (4, 5) respectively.

16. Joint prosthesis according to any preceding claim, **characterized in** that the head (25) of the head member (7) is spherical and that the socket member (6) has a socket (20) fitting thereto.

10 17. Joint prosthesis according to any preceding claim, **characterized in** that each first and second screw-like member (4, 5) respectively, consists of at least one material and that each socket and head member (6, 7) consists of at least one other material.

15 18. Joint prosthesis according to any preceding claim, **characterized in** that each first and second screw-like member (4, 5) respectively, has a core of metallic material and at least one exterior layer of material which is dissolved when the first and second screw-like members (4, 5) respectively, are implanted.

19. Joint prosthesis according to claim 18, **characterized in** that the metallic material in the core is a titanium alloy and that the dissolvable material is or contains calcium phosphate.

20 20. Joint prosthesis according to any preceding claim, **characterized in** that the socket and head members (6, 7) consists of a chromium-cobalt alloy.

21. Joint prosthesis according to any preceding claim, **characterized in** that the prosthesis members (2, 3) are designed to be used at wrists (38).

25 22. Joint prosthesis according to claim 21, **characterized in** that the first screw-like member (4) is designed to be screwed onto the radius (39) of the arm and the second screw-like member (5) onto at least one of the bones of the carpus (40), e.g. the capitate (41) and one metacarpal bone (42), e.g. metacarpal III, in the metacarpus.

23. Joint prosthesis according to claim 21 or 22, **characterized in** that the first screw-like member (4) is thicker, shorter and has a larger first hole (10) than the second screw-like member (5).

30 24. Joint prosthesis according to any of claims 1-20, **characterized in** that the prosthesis members (2, 3) are designed to be used at interphalangeal joints, thumb joints, cubital joints, hallux joints or other smaller joints than wrists.

35 25. Use of a screw tool at a joint prosthesis according to the preceding claims for securing by screwing the first and second screw-like members (4, 5) onto different bones (39; 41, 42), **characterized in** that a rod (31) of the screw tool (32) is inserted into a second hole (30 and 33 respectively) in the first and second screw-like members (4, 5) respectively, such that these members can be screwed into the respective bone (39; 41, 42).

26. Use according to claim 25, **characterized in** that the rod (31) is threaded onto a guide wire (43) in order to permit securing by screwing a first and second screw-like member (4, 5) respectively, which is threaded onto the guide wire (43), into the respective bone (39; 41, 42) by means of the screw tool (32).

5 27. Use according to claim 25 or 26, **characterized in** that a screw driver is used as screw tool (32).

10

15

20

25

30

35

**Amended claims received by the International Bureau on 09 Jun
2006 (09.06.2006)**

1. Joint prosthesis, comprising two prosthesis members (2, 3) which are adapted to be positioned at different bones (39; 41, 42) at a joint (38),

5 wherein each prosthesis member (2, 3) includes a first and a second screw-like member (4, 5) respectively, which are adapted to be screwed onto the respective bone (39; 41, 42),

 wherein one prosthesis member (2) includes a member (6) having a socket and the other prosthesis member (3) a member (7) having a head,

10 wherein the socket member (6) has a mounting pin (22) which is insertable into a first hole (10) in the first screw-like member (4) for positioning or locating the socket member (6) thereto, and

 wherein the head member (7) has a mounting pin (27) which is insertable into a first hole (11) in the second screw-like member (5) for positioning or locating said head member (7) thereto,

15 **characterized in**

 that in the first as well as in the second screw-like member (4, 5) there is provided at least one inner second hole (30 and 33 respectively) which is designed to permit insertion thereinto of a rod (31) of a screw tool (32) in order to secure by screwing the first and second screw-like member (4, 5) respectively, at the respective bone (39; 41, 42),

20 that the second hole (30 and 33 respectively) is provided in a bottom (17 and 19 respectively) of the first hole (10 and 11 respectively), and

 that each first and second screw-like member (4, 5) respectively, has a through hole (36 and 37 respectively) which extends therethrough in axial direction in order to permit threading of said first and second screw-like members (4, 5) respectively, onto a guide wire (43) which could be attached to the respective bone (39; 41, 42).

2. Joint prosthesis according to claim 1, **characterized in** that the second hole (30 and 33 respectively) is provided close to the first hole (10 and 11 respectively) of the first and second screw-like member (4, 5) respectively.

30 3. Joint prosthesis according to claim 1 or 2, **characterized in**

 that the second hole (30 and 33 respectively) in the first and second screw-like member (4, 5) respectively, is provided within the first hole (10 and 11 respectively) of the first and second screw-like members (4, 5) respectively, and

 that said rod (31) can be inserted into said second hole (30 and 33 respectively) by passing it through the first hole (10 and 11 respectively) of the first and second screw-like members (4, 5) respectively.

4. Joint prosthesis according to any preceding claim, **characterized in** that the second hole (30 and 33 respectively) is a non-round hole.

5. Joint prosthesis according to claim 4, **characterized in** that the second hole (30 and 33 respectively) is a polygonal hole.

5 6. Joint prosthesis according to claim 5, **characterized in** that the second hole (30 and 33 respectively) is a hexagonal hole.

7. Joint prosthesis according to any preceding claim, **characterized in** that the second hole (30 and 33 respectively) and the first hole (10 and 11 respectively) are centered or substantially centered with a common geometric center line (CL1 and CL2 respectively)
10 extending through the first and second screw-like members (4, 5) respectively.

8. Joint prosthesis according to any preceding claim, **characterized in** that the first hole (10 and 11 respectively) in the first and second screw-like member (4, 5) respectively, and the mounting pin (22 and 27 respectively) of the socket and head members (6, 7) respectively, are designed such that the first and second screw-like members (4, 5)
15 respectively, and the socket and head members (6, 7) respectively, are provided to define a press fit permitting the first screw-like member (4) and the socket member (6), through compression, to attach to each other, and the second screw-like member (5) and the head member (7), through compression, to attach to each other.

9. Joint prosthesis according to claim 8, **characterized in** that the first hole (10 and
20 11 respectively) in each first and second screw-like member (4, 5) and the mounting pins (22 and 27 respectively) of the socket and head members (6, 7) respectively, are conical.

10. Joint prosthesis according to any preceding claim, **characterized in** that the first and second screw-like members (4, 5) respectively, have an exteriorly conical shape and are provided with outer threads (34 and 35 respectively).

25 11. Joint prosthesis according to claim 10, **characterized in** that the outer threads (34 and 35 respectively) of each first and second screw-like member (4, 5) respectively, begin at a first end edge (12 and 14 respectively) thereof and end a distance within a second end edge (13 and 15 respectively) thereof such that each first and second screw-like member (4, 5) respectively, has a pointed end without threads.

30 12. Joint prosthesis according to claim 10 or 11, **characterized in** that the outer threads (34 and 35 respectively) of each first and second screw-like member (4, 5) respectively, are self-tapping.

13. Joint prosthesis according to any of claims 10-12, **characterized in** that each first and second screw-like member (4, 5) respectively, has no threads at elongated parts (4a and 5a respectively) thereof, which extend in an axial direction along the first and second screw-like member (4, 5) respectively, in order to divide the outer threads (34 and 35
35 respectively) into several threaded sections.

14. Joint prosthesis according to any preceding claim, **characterized in** that the guide wire (43) is designed for guiding a conical drill steel (45) for drilling or boring a hole in the respective bone (39; 41, 42) for the first and second screw-like member (4, 5) respectively.

5 15. Joint prosthesis according to any preceding claim, **characterized in** that the head (25) of the head member (7) is spherical and that the socket member (6) has a socket (20) fitting thereto.

10 16. Joint prosthesis according to any preceding claim, **characterized in** that each first and second screw-like member (4, 5) respectively, consists of at least one material and that each socket and head member (6, 7) consists of at least one other material.

17. Joint prosthesis according to any preceding claim, **characterized in** that each first and second screw-like member (4, 5) respectively, has a core of metallic material and at least one exterior layer of material which is dissolved when the first and second screw-like members (4, 5) respectively, are implanted.

15 18. Joint prosthesis according to claim 17, **characterized in** that the metallic material in the core is a titanium alloy and that the dissolvable material is or contains calcium phosphate.

19. Joint prosthesis according to any preceding claim, **characterized in** that the socket and head members (6, 7) consists of a chromium-cobalt alloy.

20 20. Joint prosthesis according to any preceding claim, **characterized in** that the prosthesis members (2, 3) are designed to be used at wrists (38).

21. Joint prosthesis according to claim 20, **characterized in** that the first screw-like member (4) is designed to be screwed onto the radius (39) of the arm and the second screw-like member (5) onto at least one of the bones of the carpus (40), e.g. the capitate (41) and one metacarpal bone (42), e.g. metacarpal III, in the metacarpus.

22. Joint prosthesis according to claim 20 or 21, **characterized in** that the first screw-like member (4) is thicker, shorter and has a larger first hole (10) than the second screw-like member (5).

23. Joint prosthesis according to any of claims 1-19, **characterized in** that the prosthesis members (2, 3) are designed to be used at interphalangeal joints, thumb joints, cubital joints, hallux joints or other smaller joints than wrists.

24. Use of a screw tool at a joint prosthesis according to the preceding claims for securing by screwing the first and second screw-like members (4, 5) onto different bones (39; 41, 42), **characterized in** that a rod (31) of the screw tool (32) is inserted into a second hole (30 and 33 respectively) in the first and second screw-like members (4, 5) respectively, such that these members can be screwed into the respective bone (39; 41, 42).

25. Use according to claim 24, **characterized in** that the rod (31) is threaded onto a guide wire (43) in order to permit securing by screwing a first and second screw-like member (4, 5) respectively, which is threaded onto the guide wire (43), into the respective bone (39; 41, 42) by means of the screw tool (32).

5 26. Use according to claim 24 or 25, **characterized in** that a screw driver is used as screw tool (32).

10

15

20

25

30

35

1/5

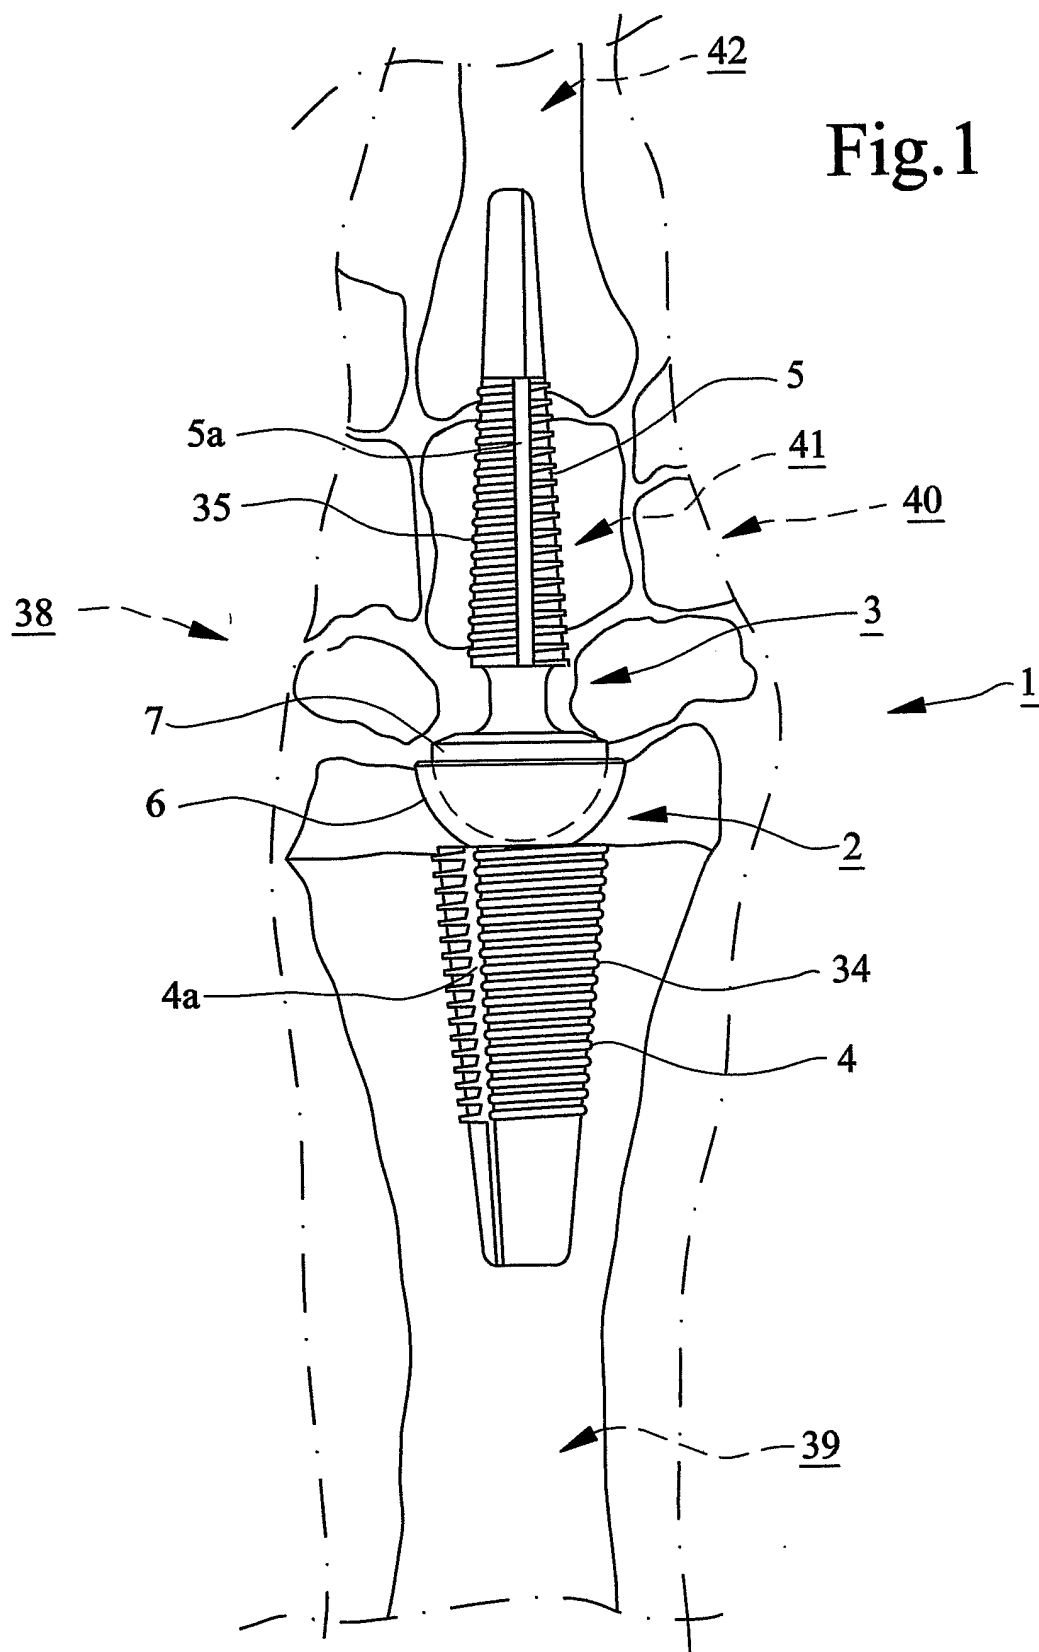


Fig.2

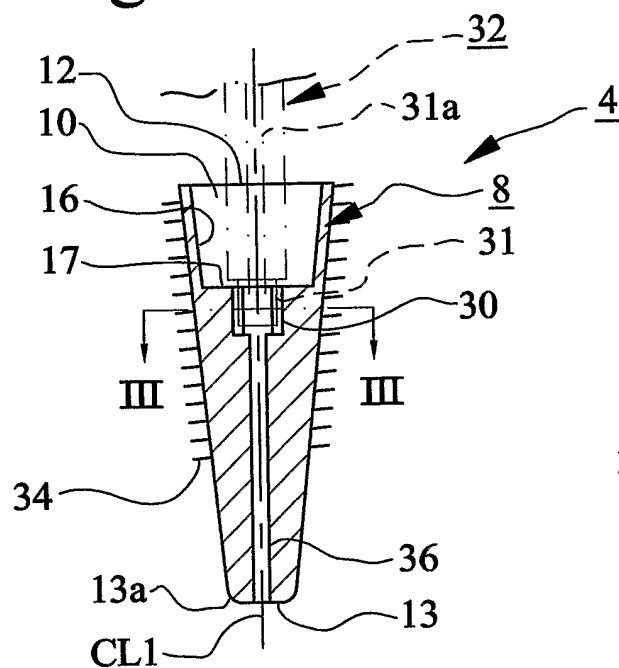


Fig.3

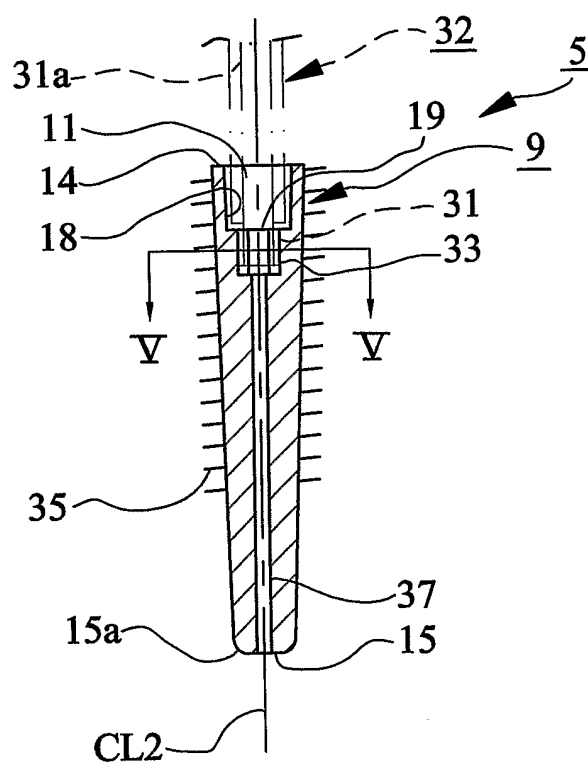



Fig.5




Fig.4

3/5

Fig.6

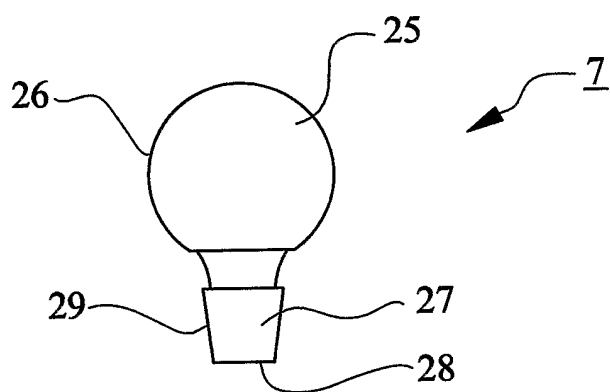
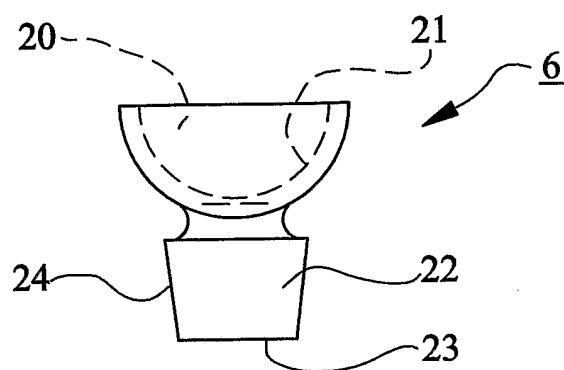


Fig.7

4/5

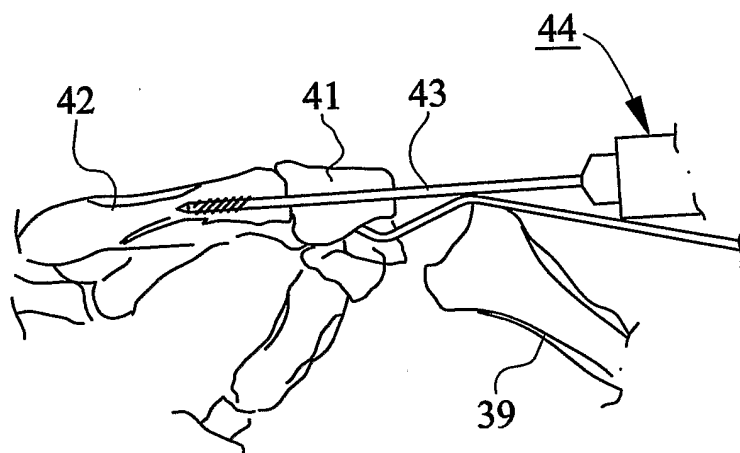


Fig.8

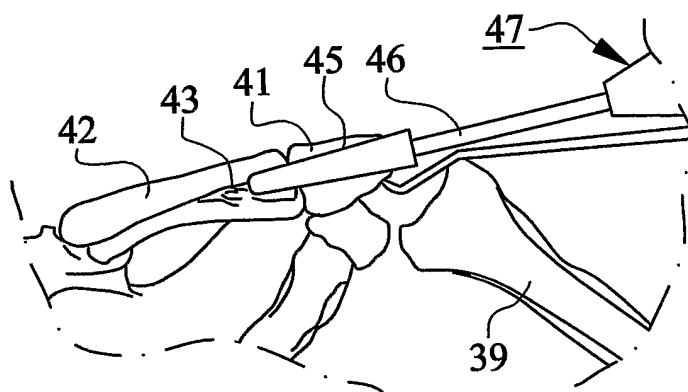


Fig.9

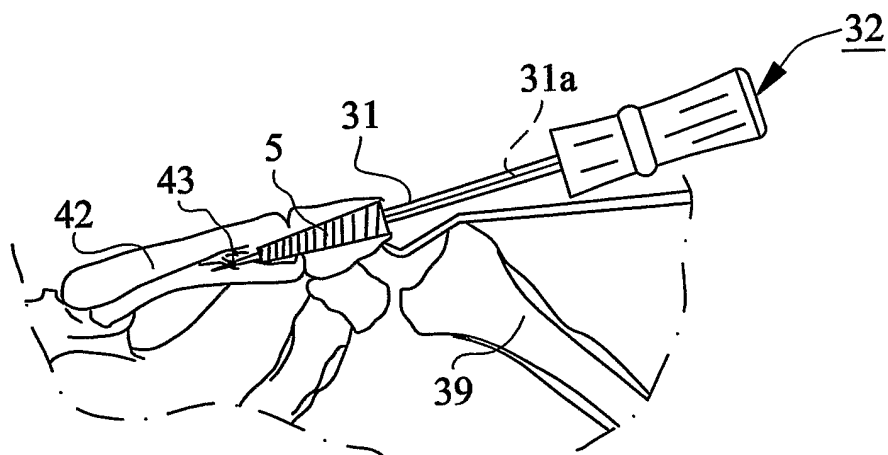


Fig.10

5/5

Fig.11

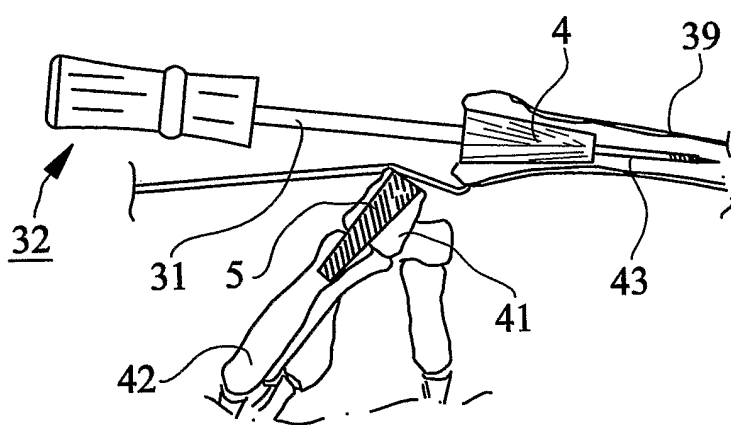
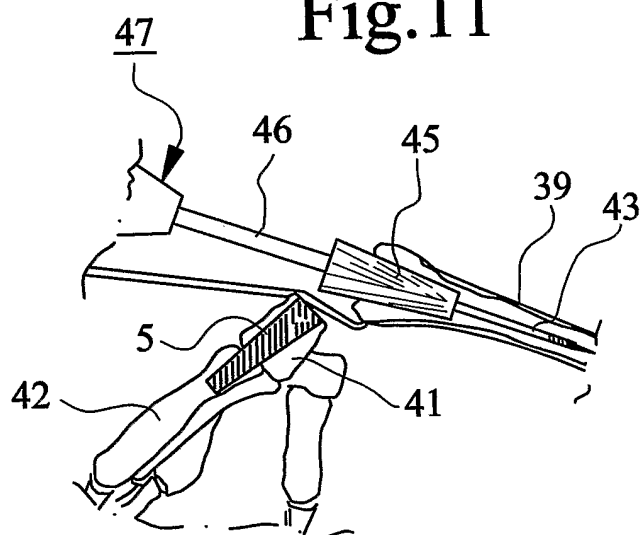


Fig.12

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE2006/000189

A. CLASSIFICATION OF SUBJECT MATTER

IPC: see extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: A61F, A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5147386 A (R.G. CARIGNAN ET AL), 15 Sept 1992 (15.09.1992), column 1, line 45 - line 50; column 3, line 54 - line 57; column 6, line 8 - line 24, column 7, line 44 - line 52, figur 1 --	1-27
Y	US 5580352 A (R. SEKEL), 3 December 1996 (03.12.1996), column 6, line 44 - line 51, figures 8,9 --	1-13,16-24
Y	US 6827722 B1 (R.J. SCHOENEFELD), 7 December 2004 (07.12.2004), column 1, line 8 - line 12; column 1, line 48 - line 57; column 4, line 20 - line 21 --	14,15,25-27

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

8 May 2006

Date of mailing of the international search report

11-05-2006

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

William Helin / MRo
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE2006/000189

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4624673 A (B.S. MEYER), 25 November 1986 (25.11.1986), column 4, line 9 - line 12 --	1-27
A	US 6284001 B1 (J.G. KNAPP), 4 Sept 2001 (04.09.2001), column 7, line 45 - line 56 --	1-27
A	EP 1297794 A2 (ETHICON, INC.), 2 April 2003 (02.04.2003), figures 1-4 --	-27
A	US 5464407 A (D.A. MCGUIRE), 7 November 1995 (07.11.1995), column 3, line 27 - line 44 -- -----	1-27

International patent classification (IPC)**A61F 2/42** (2006.01)**A61F 2/46** (2006.01)**Download your patent documents at www.prv.se**

Cited patent documents can be downloaded at www.prv.se by following the links e-tjänster/anförda dokument. Use the application number as username. The password is **r24rfedvdr**.

Paper copies can be ordered at a cost of 50 SEK per copy from PRV InterPat (telephone number 08-782 28 85).

Cited literature, if any, will be enclosed in paper form.

INTERNATIONAL SEARCH REPORT
Information on patent family members

04/03/2006

International application No.
PCT/SE2006/000189

US	5147386	A	15/09/1992	NONE		
US	5580352	A	03/12/1996	AU	660146 B	15/06/1995
				BR	9106510 A	08/09/1993
				DE	69125712 D,T	31/07/1997
				EP	0532617 A,B	24/03/1993
				AT	151621 T	15/05/1997
				AU	7966291 A	31/12/1991
				CA	2084762 A,C	07/12/1991
				JP	3311748 B	05/08/2002
				JP	5509006 T	16/12/1993
				WO	9118559 A	12/12/1991
US	6827722	B1	07/12/2004	NONE		
US	4624673	A	25/11/1986	CA	1237553 A	07/06/1988
				EP	0099403 A	01/02/1984
				JP	59500086 T	19/01/1984
				WO	8302555 A	04/08/1983
US	6284001	B1	04/09/2001	US	6099571 A	08/08/2000
				WO	9903430 A	28/01/1999
EP	1297794	A2	02/04/2003	CA	2405601 A	28/03/2003
				JP	2003144449 A	20/05/2003
				US	6916321 B	12/07/2005
				US	20030065332 A	03/04/2003
US	5464407	A	07/11/1995	AU	3032795 A	23/05/1996
				CA	2159373 A	17/05/1996
				EP	0716832 A	19/06/1996
				JP	8206128 A	13/08/1996
				US	5797918 A	25/08/1998
				US	5391170 A	21/02/1995
				US	5681320 A	28/10/1997
				US	5683400 A	04/11/1997
				US	5865834 A	02/02/1999
				US	5257996 A	02/11/1993
				US	5366457 A	22/11/1994
				US	5374270 A	20/12/1994
				US	5391169 A	21/02/1995