



(19)

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 267 650 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
28.12.2005 Bulletin 2005/52

(21) Application number: **01908002.7**

(22) Date of filing: **06.03.2001**

(51) Int Cl.⁷: **A24B 15/24, A24B 15/26**

(86) International application number:
PCT/GB2001/000945

(87) International publication number:
WO 2001/065954 (13.09.2001 Gazette 2001/37)

(54) TOBACCO TREATMENT

TABAKVERARBEITUNG

TRAITEMENT DU TABAC

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**

(30) Priority: **10.03.2000 GB 0005665
20.05.2000 GB 0012111**

(43) Date of publication of application:
02.01.2003 Bulletin 2003/01

(73) Proprietor: **British American Tobacco
(Investments) Limited
London WC2R 3LA (GB)**

(72) Inventors:

- **MCADAM, Kevin, Gerard
Southampton SO14 6FR (GB)**
- **O'REILLY, David
Bassett, Southampton SO16 7BW (GB)**
- **MANSON, Andrew, John
London WC2R 2PB (GB)**
- **ANDERSON, Ian, Geoffrey, Marchmont
Rowhams, Southampton SO16 8DW (GB)**

(74) Representative: **Walford, Margot Ruth
Patents Department,
British American Tobacco R&D Centre,
Regents Park Road
Southampton SO15 8TL (GB)**

(56) References cited:

WO-A-98/05226	US-A- 4 153 063
US-A- 5 584 989	US-A- 5 810 020

- PROKOPCZYK ET AL: 'Supercritical Fluid Extraction in the Determination of Tobacco-Specific-N-Nitrosamines in Smokeless Tobacco' CHEMICAL RESEARCH TOXICOLOGY vol. 5, no. 3, 1992, pages 336 - 340
- PROKOPCZYK ET AL: 'Improved Methodology for the Quantitative Assessment of Tobacco-Specific N-Nitrosamines in Tobacco by Supercritical Fluid Extraction' JOURNAL OF AGRICULTURAL AND FOOD CHEMISTRY vol. 43, no. 4, 1995, pages 916 - 922
- SONG ET AL: 'Supercritical Fluid Extraction and Gas Chromatography/Mass Spectrometry for the Analysis of Tobacco-Specific Nitrosamines in Cigarettes' ANALYTICAL CHEMISTRY vol. 71, no. 7, 1999, pages 1303 - 1308
- KATZ: 'Decaffeination of Coffee' TECHNOLOGY ELSEVIER APPLIED SCIENCE vol. 2, 1987, pages 59 - 71
- ZOSEL: 'Separation with Supercritical Gases', 1980, VERLAG CHEMIE * page 15 - page 23 *

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention relates to a method of treating tobacco to reduce or eliminate the content of nitrosamines therein, particularly tobacco specific nitrosamines.

5 [0002] Tobacco specific nitrosamines include N'-nitrosonornicotine, 4-(methylnitrosamino)-1-(3-pyridyl)-1-butanone, N'-nitrosoanatabine and N'-nitrosoanabasine.

10 [0003] Various methods are known for the removal of nitrosamines from tobacco. In US 5,803,081 and WO 98/58555 green leaf tobacco (i.e. tobacco prior to curing) is subjected to microwave radiation, convection heating or freeze drying in order to kill microbes thought to be responsible for the production of nitrosamines during curing of the tobacco. A disadvantage of this method is that the method includes the requirement of specific curing practices for the tobacco, which curing practices are carried out on the tobacco at an early stage post-harvest.

[0004] An aim of the present invention is to provide an improved method for reducing nitrosamines in tobacco.

[0005] A further aim of the present invention is to provide an improved method for selectively reducing nitrosamines in tobacco.

15 [0006] The present invention provides a tobacco treatment process in accordance with claim 1.

[0007] Preferably, nitrosamines are separated from the supercritical fluid extraction medium by subjecting the extraction medium to a nitrosamine removal process.

[0008] Suitably, the nitrosamine removal process may comprise a chemisorption step. Preferably, the chemisorption step may comprise the use of an ion exchanger.

20 [0009] Alternatively, the nitrosamine removal process may comprise an adsorbent step. A suitable adsorbent may be selected from one or more of the group consisting of glass beads, activated charcoal, aluminium silicate and zeolites. Other suitable adsorbents known to those persons skilled in the art may also be used.

[0010] In a further alternative, the nitrosamine removal process may comprise treatment of the extraction medium with ultraviolet (UV) light, resulting in the breakdown of nitrosamines in the extraction medium.

25 [0011] Yet further alternatives include the removal of nitrosamines by precipitating the nitrosamines from the extraction medium; by subjecting the extraction medium to nitrosamine specific enzyme breakdown; or by chromatographic or other methods of separation known to those persons skilled in the art.

30 [0012] The process for nitrosamine removal from the extraction medium may comprise more than one of the above outlined nitrosamine removal processes. In certain circumstances, at least, use of a plurality of removal processes (together comprising a multi-process) will result in an enhanced specificity of removal of nitrosamines. For example, the nitrosamine removal process may be a multi-process comprising a chemisorption step in combination with or followed by treatment with UV light. Prior to the UV light treatment a washing step may be required to remove the nitrosamines from the chemisorption medium, the UV light then being applied to the washings. Water, an acid, a salt solution or an alcohol may suitably be used in the washing step.

35 [0013] Suitably, the extraction medium having had some, if not all, of the nitrosamines removed therefrom may be brought into contact with tobacco, such that extract(s) other than nitrosamines in the medium may be incorporated or re-incorporated with the tobacco. Such extract(s) may, for example, comprise nicotine and/or flavour substances.

[0014] Much by preference, the supercritical fluid used is supercritical carbon dioxide, although other supercritical fluids known to the skilled person may be suitable.

40 [0015] Suitably, an acid, preferably an organic acid, may be added to the tobacco prior to treatment of the tobacco with supercritical fluid. Alternatively, the acid may be incorporated with the supercritical fluid. Furthermore, when an ion exchanger or adsorbent material is present, the acid may be incorporated with the ion exchanger or adsorbent. A suitable acid may be an organic acid selected from one or more of the group consisting of malonic acid, ascorbic acid, succinic acid, glutaric acid, adipic acid, malic acid, tartaric acid, mucic acid and citric acid, or a salt derivative(s) thereof.

45 [0016] Preferably, the organic acid is a citric acid salt, potassium citrate for example. Other suitable acids may be mineral acids, for example sulphuric acid and phosphoric acid. Suitably, when the acid is applied to the tobacco the acid is in solution. Such solution may be applied by spraying. Advantageously, the application of the acid to the tobacco may take place in a casing cylinder conventionally used within the tobacco industry for applying casings to tobacco.

[0017] Other modifiers, such as organic solvents or alcohols, for example, may alternatively or additionally be used.

50 [0018] Preferably, the extraction treatment of the tobacco with the supercritical fluid takes place at an elevated pressure and temperature. Suitably, when the supercritical fluid is carbon dioxide a pressure in the range of 100 to 350 bar may be used, preferably the pressure being about 200 to 300 bar and more preferably being about 240 to 260 bar. Preferably, the temperature used is greater than about 35° Celsius, more preferably in a range of about 35 to about 140° Celsius, and even more preferably in a range of about 35 to about 90° Celsius.

55 [0019] Advantageously, the tobacco is placed in a closable chamber or bomb during the extraction treatment thereof with the supercritical fluid.

[0020] Heating may be effected by heat transfer or by electromagnetic radiation (i.e. microwave or radiofrequency heating). When electromagnetic radiation is used the closed chamber or bomb will, of course, have to be made of a

non-electromagnetic absorbing material, e.g. non-metallic material, capable of withstanding the operating pressure. A suitable such material may be comprised of a polyfluorohydrocarbon material, such as Teflon (Trademark) for instance.

[0020] The technical effect of removing tobacco specific nitrosamines by processing of tobacco with supercritical fluid was heretofore unknown. Much by preference the conditions at which the extraction treatment of the tobacco with the supercritical fluid takes place are biased towards extraction in the supercritical fluid of nitrosamines, as compared with other tobacco specific compounds, such as nicotine for instance. Advantageously, no or very little, nicotine is removed from the tobacco in the extraction medium. Conditions which favour nitrosamine extraction (compared with nicotine extraction) include a pH of the tobacco of less than about 6.5, and preferably less than about 5.5.

[0021] Preferably, the ratio of the percentage reduction in nitrosamines to the percentage reduction in nicotine in tobacco, which tobacco has been subjected to the process of the present invention, is in the range of about 1.1:1 to about 18:1, more preferably about 1.3:1 to about 10:1, and even more preferably about 2:1 to about 6:1.

[0022] For a given set of treatment conditions, including, for example, the mass flow rate of the extraction medium per unit mass of the tobacco, there will occur, after the elapse of a time interval from commencement of the treatment process, a maximum difference between the extraction of the (greater) percentage amount of nitrosamines and the (lesser) percentage amount of nicotine. Thus it may be preferable to discontinue the extraction treatment at or about this time.

[0023] A suitable mass flow rate of the supercritical fluid extraction medium per kg of tobacco is in the range of about 1kg/h to about 55kg/h, and is dependent on the process conditions, such as the tobacco packing density in the chamber and the size of the chamber. Advantageously the mass flow rate of the supercritical fluid extraction medium per kg of tobacco is in the range of 10 to 40kg/h, more advantageously is in the range of 15 to 35kg/h and is even more advantageously about 30kg/h, although these figures do depend on what the desired product characteristics are.

[0024] Advantageously, the tobacco treated in accordance with the process of the present invention is cut tobacco, being cut lamina and/or cut stem tobacco. Alternatively, or in addition, the tobacco may be one or more of whole leaf tobacco, tobacco dust and reconstituted tobacco.

[0025] If deemed appropriate, the tobacco treated in accordance with the process of the present invention may be subjected to a conditioning step, whereby the moisture content of the tobacco, post-treatment, is brought to less than about 15%, preferably less than 13%.

[0026] When it is the case that following treatment of tobacco with the supercritical fluid, the nitrosamines are separated from the supercritical fluid extraction medium by subjecting the medium to a nitrosamine removal process, preferably the medium flows around a closed system.

[0027] Suitably, the closed system may comprise a first chamber, for the treatment of the tobacco with supercritical fluid, and a second chamber in which the nitrosamine removal process takes place, wherein the first and second chambers are interconnected by interconnecting means, pipe(s) for example. Such system further comprises fluid transfer means operable to cause the extraction medium to flow around the closed system. A nitrosamine removal material such as an ion-exchange resin or adsorbent may reside in the second chamber, such that supercritical fluid extraction medium, following treatment of the tobacco therewith, is transferred via the interconnecting means to the second chamber, wherein nitrosamines are totally or substantially removed. The supercritical fluid extraction medium, minus nitrosamines, may then be returned to the tobacco in the first chamber.

[0028] Suitably, a plurality of interconnected chambers may be provided for the treatment of the tobacco with supercritical fluid and/or a plurality of interconnected chambers may be provided for the nitrosamine removal process. When it is the case that more than one chamber is provided for either the treatment of the tobacco or the nitrosamine removal process, or for both, the supercritical fluid may flow sequentially through the chambers.

[0029] Alternatively, the closed system may comprise a first or single chamber having inlet and outlet means wherein interconnecting means interconnect the inlet with the outlet means of the chamber. Suitably, the interconnecting means may serve for the transfer of supercritical fluid extraction medium, under the action of fluid transfer means, from the outlet means of the chamber to and through a nitrosamine removal process station to the inlet means of the chamber. Preferably, the amount of fluid in the interconnecting means is kept to a minimum. A nitrosamine removal material, such as an ion exchanger or an adsorbent, may be contained within any suitable permeable container so as to provide a means by which fluid may pass through the container and a means by which the tobacco is prevented from contact with the nitrosamine removal material.

[0030] Alternatively the nitrosamine removal process may, for instance, be constituted by the transfer of the medium through a UV light source. In this instance, the interconnecting means must be pervious to UV light.

[0031] Suitably, a plurality of interconnected chambers may be provided for the treatment of the tobacco with supercritical fluid.

[0032] In addition to subjecting the tobacco to treatment with the supercritical fluid to extract nitrosamines from the tobacco, the tobacco may be subjected to a microbial deactivation process. As stated above microbes, including *Enterobacter agglomerans*, *Bacillus* spp, *Fusarium equiseti*, *Cladosporium cladosporoides*, *Altenaria alternata* and *Acremonium arxii* are thought to be responsible for or contribute to the production of nitrosamines during curing of the

tobacco. In fact, it is thought that microbes may also be a contributory factor in the production of nitrosamines in tobacco during storage of cured tobacco. Thus a reduction in microbial activity in the tobacco by way of the microbial deactivation process reduces the likelihood of reformation of nitrosamines in the tobacco post-extraction thereof. The microbial deactivation process may be carried out before or after subjecting the tobacco to the treatment with the supercritical fluid. A further alternative is to subject the tobacco to treatment with the supercritical fluid under microbial deactivating conditions, such that microbial deactivation and extraction occur simultaneously.

[0033] Suitably, the microbial deactivation process may comprise a pasteurisation process, wherein the tobacco is heated to a specified temperature and maintained at that temperature for a set period of time. By way of example, the tobacco may be heated to a temperature in the range of about 70° to about 150° Celsius for a period of between about 30 seconds to about 2 minutes. The heating may be effected by, for example, convection heating by way of contacting the tobacco with a gaseous heating medium, microwave heating or radio frequency heating.

[0034] Suitably, the moisture content of the tobacco being subjected to the sterilisation process is adjustable by way of either a pre- or a post-conditioning step.

[0035] Alternatively, the treatment of tobacco with, for example, ionising radiation, UV radiation, freeze drying or an electron beam to kill microbes may be used as the microbial deactivation process.

[0036] In addition to the treatment of the tobacco with the supercritical fluid to extract nitrosamines from the tobacco, the tobacco may also be subjected to a nitrite/nitrate removal process. Nitrites are important precursors of nitrosamines, whereas nitrates are precursors of nitrites. It is thought that following nitrosamine removal residual nitrites in the tobacco may be free to react with alkaloids also present in the tobacco thus to re-form nitrosamines. The nitrite/nitrate removal process may suitably comprise the steps of solvent extraction to remove the nitrites/nitrates from the tobacco, followed by ion exchange to bind the nitrites/nitrates. Alternatively, the nitrites may be removed by way of an oxidation step. In a yet further alternative, removal of nitrites/nitrates using micro-organisms as disclosed in any one of GB 1 440 171, GB 1 585 024, US 4709,710 or GB 2 014 031 may be used.

[0037] As with the microbial deactivation process, the nitrite/nitrate removal process may be carried out before, after or during the treatment of the tobacco with the supercritical fluid. When the nitrite/nitrate removal process is carried out simultaneously with the treatment of the tobacco with the supercritical fluid, the process may in order to remove nitrites from the tobacco comprise, for example, the step of either applying ascorbic acid to the tobacco prior to treatment of the tobacco with the supercritical fluid; incorporating ascorbic acid with the supercritical fluid; or, when an ion exchanger or adsorbent material is present, incorporating ascorbic acid with the ion exchanger or adsorbent. The ascorbic acid has the effect of scavenging nitrites from the tobacco.

[0038] The nitrite/nitrate removal process may be carried out as an alternative to or in addition to the microbial deactivation process.

[0039] The inventive process provides a Burley tobacco having an initial nitrosamine content after curing in the range of about 0.3 ppm - about 30 ppm, which after processing has a nitrosamine content that is at least 45% lower. If the tobacco is a Burley tobacco having a nitrosamine content of 5-6 ppm, after processing the content is preferably 3.6 ppm or less.

[0040] The inventive process also provides a Virginia tobacco having an initial moisture content after curing of less than 8.5 ppm, which after processing has a nitrosamine content that is at least 45% lower.

[0041] Preferably the Burley or Virginia processed tobacco have a nitrosamine content of at least 60% lower than its original content.

[0042] The inventive process also provides a US blended tobacco having an original nicotine content in the range of 0.10 - 2.0% and a nitrosamine content in the range of 0.10 - 1.2 μ g/g which after processing has a percentage decrease in nitrosamines to percentage decrease in nicotine in the range of 1:1 to 10:1.

[0043] The inventive process also provides a Virginia blended tobacco having an original nicotine content in the range of 0.30 - 2.15% and a nitrosamine content in the range of 0.10 - 1.5 μ g/g, which after processing has a percentage decrease in nitrosamines to percentage decrease in nicotine in the range of 1:1 to 10:1.

[0044] Preferably the ratio is in the range of 5:1 or more, and more preferably 8:1 or more.

[0045] In order that the present invention may be clearly understood and readily carried into effect reference will now be made, by way of example, to the accompanying diagrammatic drawing, in which:-

Figure 1 shows an apparatus for carrying out a process according to a first aspect of the present invention; and Figure 2 shows an apparatus for carrying out a process according to an alternative aspect of the present invention.

[0046] The apparatus as shown in Figure 1 is a closed system comprising a first chamber 1 and a second chamber 2 wherein the first and second chambers 1, 2 are interconnected by interconnecting pipes 3. The closed system further comprises fluid transfer means, namely a pump 4. The apparatus further comprises a reservoir tank 5 interconnected with the first chamber 1 via a duct 6. Valve 7 is located in duct 6 which valve 7 is operable to close the tank 5.

EXAMPLE 1

[0047] In operation of the Figure 1 apparatus, about 30kg of cut tobacco having a moisture content of either about 14% or 25% (see Table 1) is placed in the first chamber 1, the chamber having a volume of 1501. An ion exchanger, namely an acidic ion exchange resin (as available from Bayer GmbH) having a weight of 4.4kg, is placed into the second chamber 2, the chamber having a volume of 1501. The ion exchanger is mixed with about 500g of solid potassium citrate granules. The reservoir tank 5 is charged with carbon dioxide, which carbon dioxide is then pressurised by pump means (not shown) and is transferred by the pump means from the reservoir tank 5 to the first and second chambers 1, 2 and the interconnecting pipes 3 until the requisite extraction conditions are achieved, namely a pressure of about 250 bar and a temperature of about 70° Celsius. At this point the carbon dioxide reservoir tank is closed by closing valve 7. The supercritical carbon dioxide is then circulated, under the action of the pump 4, through the first chamber 1 (and, therefore, through the tobacco contained therein) and through the second chamber 2 (and, therefore, through the ion exchange resin therein) via the interconnecting pipes 3. The supercritical carbon dioxide extraction medium is circulated about the closed system for a period of either 1.5 hours or 3 hours. Then the first and second chambers 1, 2 are decompressed by opening vent means (not shown) and the chambers are opened.

[0048] The nicotine and nitrosamine contents of the thus treated tobacco are then evaluated using suitable standard laboratory tests.

[0049] Such a tobacco extraction process has been found to remove a substantial proportion of tobacco specific nitrosamines from the treated tobacco. Table 1 discloses percentage reductions in the tobacco of both nicotine and nitrosamines following treatment of the tobacco as outlined above. The total amount of CO₂ used for these examples was 2190kg.

Table 1

Run No.	Tobacco m. c.	Extraction Period (h)	Nicotine Reduction (%)	Nitrosamines Reduction (%)
1	14%	1.5	67	90
2	14%	3.0	78.5	94
3	25%	1.5	65.5	93.5
4	25%	3.0	77	95

[0050] Treatment for 1.5 hours results in a greater difference between the percentage amount of nitrosamines and the percentage amount of nicotine extracted, as compared with treatment for 3 hours.

Example 2

[0051] It was believed that the extraction period outlined above could be reduced further without substantially affecting the percentage reduction of nitrosamines, whilst further reducing the percentage reduction of nicotine. For instance, the extraction period may be between about 15 minutes to about 1.5 hours, preferably between about 20 minutes to about 1 hour, more preferably between about 25 minutes to about 40 minutes and even more preferably about 30 minutes.

[0052] The conditions of extraction are preferably further biased towards the extraction in the supercritical fluid of nitrosamines, as compared with other tobacco specific compounds, such as nicotine. Several other methods of biasing the extraction towards nitrosamine removal, as compared with other tobacco specific compounds, may be used in addition to or separately from adjustment of the extraction period. For instance, the pH of the tobacco may be maintained at less than about 6.5, preferably about 5.5. In accordance with a further alternative, the supercritical fluid extraction medium may be saturated, or substantially saturated, with tobacco specific compounds, or commercially available chemical analogues thereof, other than nitrosamines before contacting the extraction medium with the tobacco treatment. A yet further alternative, when the supercritical fluid is carbon dioxide, may be to cool the tobacco to a temperature below about 35°C, such that when the supercritical carbon dioxide is pumped into the chamber containing the tobacco the general effectiveness of the extraction process is reduced with preferential bias against the removal of tobacco specific compounds other than nitrosamines. Biasing towards the extraction of nitrosamines may also be effected by altering (i.e. increasing) the packing density of the tobacco in the extraction chamber.

[0053] Furthermore, biasing may be effected by altering, i.e. lowering the mass flow rate of the supercritical fluid extraction medium per unit mass of tobacco. For example, reducing the flow rate of the supercritical fluid per kg of tobacco to less than 30 kg/h. Each of the above outlined methods of biasing the extraction towards nitrosamine removal,

as compared with other tobacco specific compounds, may be carried out separately or in various combinations with one another.

[0054] As an optional addition to the above described process, the ion exchange resin situate in the second chamber 2, following decompression of the closed system, is flushed or washed with water. The washings are then treated with UV light from a UV light source (not shown). Exposure of the washings to UV light results in the degradation of nitrosamines in the washings. Extract(s) other than nitrosamines in the washings is then re-incorporated with the tobacco. Other extract(s) may include, for example, nicotine and/or flavour substances. In this way, the end result is that nitrosamines are selectively removed from the tobacco, without adversely affecting the taste of the tobacco.

[0055] Some examples of the above described variations are disclosed in Table 2 below.

[0056] In view of the variability of nicotine and nitrosamine contents in each batch of tobacco, 300g from each batch was retained as a control for the batch. The nicotine and nitrosamine levels for each control from the 4 batches sampled are given in Table 3 below.

15

20

25

30

35

40

45

50

55

5
10
15
20
25
30
35
40
45
50
55

Table 2

Trial / run	Tob type & wt	Nicotine in blend %	% nicotine reduction	Total TSNA in blend $\mu\text{g/g}$	% TSNA reduction	Extraction time	Total CO_2kg	Other process variables
1 run 2	238 / 35kg	0.53	78.46	0.14	94.33	3 hrs	2190	15% moist tobacco
1 run 4	238 / 35 kg	0.56	77.24	0.12	95.14	3 hrs	2190	25 % moist tobacco
1 run 5	238 / 35 kg	0.33	86.59	0.15	93.93	3 hrs	2190	500g Citrate added to ion exchanger
1 run 7	USB / 35kg	0.17	91.58	0.12	97.12	3 hrs	2190	15% moist tobacco
1 run 9	USB / 35kg	0.14	93.07	0.20	95.20	3 hrs	2190	25% moist tobacco
4 run 1	USB/3kg	1.47	20.11	1.13	61.69	2hrs	40	Ac original pH (5.44)
4 run 3	USB / 3 kg	1.7	7.61	1.08	63.39	2 hrs	40	pH of tobacco reduced (4.1 - 4.3)
4 run 4	238 / 3 kg	1.96	14.78	0.72	70.49	2 hrs	40	
4 run 6	238 / 3 kg	2.12	7.83	1.36	44.26	2 hrs	10	
3 run 11	238 / 15 kg	2.1	8.7	0.65	73.36	15 mins	200	
5 run 3	USB / 3 kg	1.4	22.65	1.11	66.57	2.5 hrs	40	Glass beads, no ion exchanger

TABLE 3

Batch No.	Nicotine Content (%)		Nitrosamine Content ($\mu\text{g/g}$)	
	USB	238	USB	238
1	2.02	2.46	4.17	2.47
4	1.84	2.30	2.95	2.44
3	1.84	2.29	2.95	2.44
5	1.77	not reported yet	3.32	not reported yet

EXAMPLE 3

[0057] The apparatus shown in Figure 2 is also a closed system, which apparatus comprises a chamber 1 provided with an inlet 8 and an outlet 9, interconnecting pipe 10, wherein the pipe 10 interconnects the inlet 8 with the outlet 9 of the chamber 1, and fluid transfer means, i.e. a pump 4. This apparatus further comprises a reservoir tank 5 interconnected with the chamber 1 via a duct 6. Valve 7 located in duct 6 allows for tank 5 to be closed. Adjacent a position of the pipe 10 is located a UV light source.

[0058] In operation of the Figure 2 apparatus about 100kg of cut tobacco having an appropriate moisture content is placed into chamber 1. The reservoir tank 5 is charged with carbon dioxide, which carbon dioxide is then pressurised by pump means (not shown) and is transferred by the pump means from the reservoir tank 5 to the chamber 1 and pipe 10 until the requisite extraction conditions are achieved, namely a pressure of about 250 bar and a temperature of about 50° Celsius. Then the tank 5 is closed by closing the valve 6. The supercritical carbon dioxide is then circulated, under the action of the pump 4, through the chamber 1 (and, therefore, through the tobacco contained therein) and through the pipe 10. The UV light source 11 irradiates the supercritical carbon dioxide extraction medium in the pipe 10. Thus, nitrosamines in the supercritical carbon dioxide are degraded. Degradation products thereof may then be removed, for instance by passing the supercritical carbon dioxide through a metal mesh (not shown). The pipe 10 is comprised of, at least in the region of the UV light source 11, material which is pervious to UV light, e.g. a high pressure quartz window. The amount of supercritical carbon dioxide in the interconnecting pipe 10 is kept to a minimum by use of a pipe 10 having a bore of a small diameter (i.e. a diameter of about 1cm). The supercritical carbon dioxide is, following exposure to the UV light, returned to the chamber 1 and again into contact with the tobacco therein. The supercritical carbon dioxide is circulated for a period of 30 minutes. Then the chamber 1 and the pipe 10 are decompressed by opening vent means (not shown). The tobacco treated in this way is free, or substantially free, of nitrosamines, whilst the nicotine content of the tobacco remained substantially the same pre- and post-treatment.

[0059] A further alternative apparatus (not shown) comprises substantially the apparatus shown in Figure 2 with a nitrosamine removal material held within a fluid permeable container in the chamber 1. The fluid may be re-circulated through the system for a number of times before removal and optional subsequent removal of nitrosamines therefrom.

Claims

1. A tobacco treatment process wherein tobacco having a pH of less than 6.5 is subjected to treatment with a supercritical fluid extraction medium to extract nitrosamines from said tobacco, said tobacco being one or more of cut tobacco, whole leaf tobacco, tobacco dust and reconstituted tobacco.
2. A process according to Claim 1, whereby said nitrosamines are separated from said supercritical fluid extraction medium by subjecting said extraction medium to a nitrosamine removal process.
3. A process according to Claim 2, wherein said nitrosamine removal process comprises a chemisorption step.
4. A process according to Claim 3, wherein said chemisorption step comprises the use of an ion exchanger.
5. A process according to Claim 2, wherein said nitrosamine removal process comprises an adsorbent step.
6. A process according to Claim 5, wherein an adsorbent of said adsorbent step is selected from one or more of the group consisting of glass beads, activated charcoal, aluminium silicate and zeolites.
7. A process according to Claim 2, wherein said nitrosamine removal process comprises treatment of said extraction

medium with ultraviolet (UV) light.

- 8. A process according to Claim 2, wherein said nitrosamine removal process comprises either precipitation of said nitrosamines from said extraction medium, or subjecting said extraction medium to nitrosamine-specific enzyme breakdown, or chromatographic separation of said nitrosamines from said extraction medium.
- 5 9. A process according to any one of Claims 2-8, wherein said nitrosamine removal process comprises a plurality of removal processes.
- 10 10. A process according to any one of Claims 2-9, wherein following said nitrosamine removal process, said extraction medium, being wholly or substantially free of said nitrosamines, is brought into contact with the tobacco, such that extract(s) other than nitrosamines in said extraction medium may be incorporated or re-incorporated with said tobacco.
- 15 11. A process according to Claim 10, wherein said extract(s) comprise nicotine and/or flavour substances.
- 12. A process according to any one of the preceding claims wherein said supercritical fluid extraction medium is supercritical carbon dioxide.
- 20 13. A process according to any one of the preceding claims, wherein an acid is added to said tobacco prior to treatment of said tobacco with said supercritical fluid; or to said supercritical fluid prior to treatment of said tobacco with said supercritical fluid.
- 25 14. A process according to any one of Claims 4 or 5 when appended to Claim 3, wherein an acid is added to the ion exchanger or adsorbent.
- 15. A process according to any one of Claims 1-14, wherein one or more of an organic solvent or an alcohol is added in addition to, or alternatively of, said acid.
- 30 16. A process according to Claim 15, wherein said acid is an organic acid.
- 17. A process according to Claim 16, wherein said acid is an organic acid selected from one or more of the group consisting of malonic acid, ascorbic acid, succinic acid, glutaric acid, adipic acid, malic acid, tartaric acid, mucic acid and citric acid, or a salt derivative thereof.
- 35 18. A process according to Claim 17, wherein said organic acid is a citric acid salt.
- 19. A process according to Claim 18, wherein said citric acid salt is potassium citrate.
- 40 20. A process according to any one of the preceding claims, wherein said extraction of said nitrosamines from said tobacco with said supercritical fluid takes place at an elevated pressure and temperature.
- 21. A process according to Claim 20, wherein when supercritical fluid is supercritical carbon dioxide, said pressure is in the range of 100 to 350 bar.
- 45 22. A process according to Claim 21, wherein said pressure is about 200 to 300 bar.
- 23. A process according to Claim 22, wherein said pressure is about 240 to 260 bar.
- 50 24. A process according to any one of Claims 20-23, wherein said temperature is greater than about 35° Celsius.
- 25. A process according to Claim 24, wherein said temperature is in a range of about 35° to about 140° Celsius.
- 26. A process according to Claim 25, wherein said temperature is in a range of about 35° to about 90° Celsius.
- 55 27. A process according to any one of the preceding claims, wherein said tobacco is placed in a closable chamber or bomb during said extraction treatment thereof with supercritical fluid.

28. A process according to any one of Claims 20 to 27, wherein said elevated temperature is effected by heat transfer or by electromagnetic radiation.

5 29. A process according to any one of the preceding claims wherein no, or very little, nicotine is removed from said tobacco in said extraction medium.

30. A process according to Claim 1, wherein said pH of said acid is less than about 5.5.

10 31. A process according to any one of the preceding claims, wherein the ratio of the percentage reduction in nitro-samines to the percentage reduction in nicotine is in the range of about 1.1:1 to about 18:1.

32. A process according to Claim 31, wherein said ratio is in the range of about 1.3:1 to about 10:1.

15 33. A process according to Claim 32, wherein said ratio is in the range of about 2:1 to about 6:1.

34. A process according to any one of the preceding claims, wherein a suitable mass flow rate of said supercritical fluid extraction medium per kg of tobacco is about 1-55kg/h.

20 35. A process according to Claim 34, wherein said mass flow rate is in the range of 10-40 kg/hr.

36. A process according to Claim 35, wherein said mass flow rate is in the range of 15-35 kg/hr.

37. A process according to Claim 36, wherein said mass flow rate is about 30 kg/h.

25 38. A process according to any one of the preceding claims, wherein said tobacco is subjected to a microbial deactivation process.

39. A process according to Claim 38, wherein said microbial deactivation process comprises a pasteurisation process.

30 40. A process according to Claim 39, wherein said tobacco is heated to a temperature in the range of about 70°C to about 150°C for a period of between 30 seconds to 2 minutes.

35 41. A process according to Claim 39, wherein said pasteurisation process is effected by heating of said tobacco by convection heating by way of contacting said tobacco with a gaseous heating medium, by microwave heating or by radio frequency heating.

42. A process according to any one of Claims 38-41, wherein the moisture content of said tobacco being subjected to said microbial deactivation process is adjustable by way of either a pre- or post- conditioning step.

40 43. A process according to Claim 38, wherein said microbial deactivation process comprises use of ionising radiation, UV radiation, freeze drying or an electron beam.

44. A process according to any one of Claims 1-43, wherein said tobacco is subjected to nitrite/nitrate removal process, before, during or after treatment of said tobacco with said supercritical fluid.

45 45. A process according to Claim 44, wherein said nitrite/nitrate removal process comprises the steps of solvent extraction to remove nitrites/nitrates from said tobacco followed by ion exchange to bind said nitrites/nitrates.

50 46. A process according to Claim 44; wherein said nitrite removal process comprises an oxidation step or use of micro-organisms.

47. A process according to any one of Claims 44-46, wherein ascorbic acid is applied to said tobacco, incorporated with said supercritical fluid, or incorporated with a chemisorption medium.

55

Patentansprüche

1. Tabakverarbeitungsverfahren, worin Tabak mit einem pH-Wert von weniger als 6,5 einer Behandlung mit einem

superkritischen Fluid als Extraktionsmedium unterworfen wird, um Nitrosamine aus dem Tabak zu extrahieren, wobei der Tabak eines oder mehrere darstellt von geschnittenem Tabak, Gesamtblatttabak, Tabakstaub und rekonstituiertem Tabak.

- 5 **2.** Verfahren nach Anspruch 1, worin die Nitrosamine von dem superkritischen Fluid als Extraktionsmedium getrennt werden, indem man das Extraktionsmedium einem Nitrosamin-Entfernungsprozess unterwirft.
- 10 **3.** Verfahren nach Anspruch 2, worin der Nitrosamin-Entfernungsprozess einen Chemisorptionsschritt umfasst.
- 15 **4.** Verfahren nach Anspruch 3, worin der Chemisorptionsschritt die Verwendung eines Ionenaustauschers umfasst.
- 20 **5.** Verfahren nach Anspruch 2, worin der Nitrosamin-Entfernungsprozess einen Adsorptionsschritt umfasst.
- 25 **6.** Verfahren nach Anspruch 5, worin ein Adsorptionsmittel des Adsorptionsschrittes ausgewählt ist unter einem oder mehreren der Gruppe, bestehend aus Glaskügelchen, Aktivkohle, Aluminiumsilicat und Zeoliten.
- 30 **7.** Verfahren nach Anspruch 2, worin der Nitrosamin-Entfernungsprozess die Behandlung des Extraktionsmediums mit ultraviolettem (UV) Licht umfasst.
- 35 **8.** Verfahren nach Anspruch 2, worin der Nitrosamin-Entfernungsprozess entweder die Ausfällung der Nitrosamine aus dem Extraktionsmedium oder das Unterwerfen des Extraktionsmediums unter einen Nitrosamin-spezifischen enzymatischen Abbau oder die chromatographische Trennung der Nitrosamine von dem Extraktionsmedium umfasst.
- 40 **9.** Verfahren nach einem der Ansprüche 2-8, worin der Nitrosamin-Entfernungsprozess eine Vielzahl von Entfernungsprozessen umfasst.
- 45 **10.** Verfahren nach einem der Ansprüche 2-9, worin nach dem Nitrosamin-Entfernungsprozess das Extraktionsmedium, das vollständig oder im Wesentlichen frei von Nitrosaminen ist, mit dem Tabak in Kontakt gebracht wird, so dass andere Extrakt(e) als Nitrosamine in dem Extraktionsmedium in den Tabak eingearbeitet oder wieder eingearbeitet werden können.
- 50 **11.** Verfahren nach Anspruch 10, worin der oder die Extrakt(e) Nikotin und/oder Aromasubstanzen (Flavor) umfassen.
- 55 **12.** Verfahren nach einem der vorstehenden Ansprüche, worin das superkritische Fluid als Extraktionsmedium superkritisches Kohlendioxid ist.
- 60 **13.** Verfahren nach einem der vorstehenden Ansprüche, worin eine Säure dem Tabak vor der Behandlung des Tabaks mit superkritischem Fluid oder dem superkritischen Fluid vor der Behandlung des Tabaks mit dem superkritischen Fluid zugesetzt wird.
- 65 **14.** Verfahren nach einem der Ansprüche 4 oder 5, wenn abhängig von Anspruch 3, worin dem Ionenaustauscher oder Adsorptionsmittel eine Säure zugesetzt wird.
- 70 **15.** Verfahren nach einem der Ansprüche 1-14, worin eines oder mehrere von einem organischen Lösungsmittel oder einem Alkohol zusätzlich oder alternativ zur Säure zugesetzt wird.
- 75 **16.** Verfahren nach Anspruch 15, worin die Säure eine organische Säure ist.
- 80 **17.** Verfahren nach Anspruch 16, worin die Säure eine organische Säure darstellt, ausgewählt aus einer oder mehreren der Gruppe, bestehend aus Malonsäure, Ascorbinsäure, Bernsteinsäure, Glutarsäure, Adipinsäure, Äpfelsäure, Weinsäure, Mucinsäure und Zitronensäure oder einem Salzderivat derselben.
- 85 **18.** Verfahren nach Anspruch 17, worin die organische Säure ein Zitronensäuresalz ist.
- 90 **19.** Verfahren nach Anspruch 18, worin das Zitronensäuresalz Kaliumcitrat ist.
- 95 **20.** Verfahren nach einem der vorstehenden Ansprüche, worin die Extraktion der Nitrosamine aus dem Tabak mit dem

superkritischen Fluid bei erhöhtem Druck und Temperatur abläuft.

21. Verfahren nach Anspruch 20, worin dann, wenn das superkritische Fluid superkritisches Kohlendioxid ist, der Druck im Bereich von 100 bis 350 bar liegt.
- 5 22. Verfahren nach Anspruch 21, worin der Druck etwa 200 bis 300 bar beträgt.
23. Verfahren nach Anspruch 22, worin der Druck etwa 240 bis 260 bar beträgt.
- 10 24. Verfahren nach einem der Ansprüche 20-23, worin die Temperatur größer als etwa 35 °C ist.
25. Verfahren nach Anspruch 24, worin die Temperatur in einem Bereich von etwa 35 °C bis etwa 140 °C liegt.
- 15 26. Verfahren nach Anspruch 25, worin die Temperatur in einem Bereich von etwa 35 °C bis etwa 90 °C liegt.
27. Verfahren nach einem der vorstehenden Ansprüche, worin der Tabak während der Extraktionsbehandlung desselben mit superkritischem Fluid in eine verschließbare Kammer oder Bombe eingebracht wird.
- 20 28. Verfahren nach einem der Ansprüche 20-27, worin die erhöhte Temperatur mittels Wärmetransfer oder mittels elektromagnetischer Strahlung bewirkt wird.
29. Verfahren nach einem der vorstehenden Ansprüche, worin kein oder sehr wenig Nikotin aus dem Tabak in das Extraktionsmedium entfernt wird.
- 25 30. Verfahren nach Anspruch 1, worin der pH-Wert der Säure unterhalb von etwa 5,5 liegt.
31. Verfahren nach einem der vorstehenden Ansprüche, worin das Verhältnis der prozentualen Verringerung an Nitrosaminen zur prozentualen Verringerung an Nikotin im Bereich von etwa 1,1:1 bis etwa 18:1 liegt.
- 30 32. Verfahren nach Anspruch 31, worin das Verhältnis in dem Bereich von etwa 1,3:1 bis etwa 10:1 liegt.
33. Verfahren nach Anspruch 32, worin das Verhältnis im Bereich von etwa 2:1 bis etwa 6:1 liegt.
34. Verfahren nach einem der vorstehenden Ansprüche, worin eine geeignete Massenströmungsrate des superkritischen Fluids als Extraktionsmedium pro kg an Tabak etwa 1 - 55 kg/h beträgt.
- 35 35. Verfahren nach Anspruch 34, worin die Massenströmungsrate im Bereich von etwa 10 - 40 kg/h liegt.
36. Verfahren nach Anspruch 35, worin die Massenströmungsrate in dem Bereich von 15 - 35 kg/h liegt.
- 40 37. Verfahren nach Anspruch 36, worin die Massenströmungsrate etwa 30 kg/h beträgt.
38. Verfahren nach einem der vorstehenden Ansprüche, worin der Tabak einem Mikroben-Desaktivierungsprozess unterworfen wird.
- 45 39. Verfahren nach Anspruch 38, worin der Mikroben-Desaktivierungsprozess einen Pasteurisierungsprozess umfasst.
- 50 40. Verfahren nach Anspruch 39, worin der Tabak für eine Zeitspanne zwischen 30 Sekunden bis 2 Minuten auf eine Temperatur im Bereich von etwa 70 °C bis etwa 150 °C erwärmt wird.
41. Verfahren nach Anspruch 39, worin der Pasteurisierungsprozess durch Erwärmen des Tabaks mittels Konvektionswärme durch In-Kontakt-Bringen des Tabaks mit einem gasförmigen Heizmedium, durch Mikrowellenerwärmung oder mittels Radiofrequenzwärmung bewirkt wird.
- 55 42. Verfahren nach einem der Ansprüche 38-41, worin der Feuchtigkeitsgehalt des Tabaks, der dem Mikroben-Desaktivierungsprozesses unterworfen wird, mit Hilfe entweder eines Vor- oder eines Nachkonditionierungsschrittes einstellbar ist

43. Verfahren nach Anspruch 38, worin der Mikroben-Desaktivierungsprozess die Verwendung von ionisierender Strahlung, UV-Strahlung, Gefriertrocknung oder eines Elektronenstrahls umfasst.

5 44. Verfahren nach einem der Ansprüche 1-43, worin der Tabak vor, während oder nach der Behandlung des Tabaks mit dem superkritischen Fluid einem Nitrit/Nitrat-Entfernungsprozess unterworfen wird.

10 45. Verfahren nach Anspruch 44, worin der Nitrit/Nitrat-Entfernungsprozess die Schritte der Lösungsmittlextraktion zur Entfernung von Nitriten/Nitraten aus dem Tabak, gefolgt von Ionenaustausch zur Bindung der Nitrite/Nitrate, umfasst.

15 46. Verfahren nach Anspruch 44, worin der Nitrit-Entfernungsprozess einen Oxidationsschritt oder die Verwendung von Mikroorganismen umfasst.

47. Verfahren nach einem der Ansprüche 44-46, worin Ascorbinsäure auf den Tabak angewandt, mit dem superkritischen Fluid eingearbeitet oder mit einem Chemisorptionsmedium eingearbeitet wird.

Revendications

20 1. Procédé de traitement du tabac, dans lequel du tabac ayant un pH inférieur à 6,5 est soumis à un traitement avec un milieu d'extraction par fluide supercritique afin d'extraire les nitrosamines dudit tabac, ledit tabac étant un ou plusieurs parmi du tabac coupé, du tabac en feuilles entières, de la poussière de tabac et du tabac reconstitué.

25 2. Procédé selon la revendication 1, dans lequel lesdites nitrosamines sont séparées dudit milieu d'extraction par fluide supercritique en soumettant ledit milieu d'extraction à un procédé d'enlèvement de nitrosamines.

30 3. Procédé selon la revendication 2, dans lequel ledit procédé d'enlèvement de nitrosamines comprend une étape de chimisorption.

4. Procédé selon la revendication 3, dans lequel ladite étape de chimisorption comprend l'utilisation d'un échangeur d'ions.

5. Procédé selon la revendication 2, dans lequel ledit procédé d'enlèvement de nitrosamines comprend une étape d'adsorption.

35 6. Procédé selon la revendication 5, dans lequel un adsorbant de ladite étape d'adsorption est choisi parmi un ou plusieurs de ceux du groupe constitué par des billes de verre, du charbon de bois activé, du silicate d'aluminium et des zéolithes.

40 7. Procédé selon la revendication 2, dans lequel ledit procédé d'enlèvement de nitrosamines comprend le traitement dudit milieu d'extraction avec de la lumière ultraviolette (UV).

8. Procédé selon la revendication 2, dans lequel ledit procédé d'enlèvement de nitrosamines comprend la précipitation desdites nitrosamines à partir dudit milieu d'extraction ou bien la soumission dudit milieu d'extraction à une dégradation enzymatique spécifique aux nitrosamines ou bien une séparation chromatographique desdites nitrosamines à partir dudit milieu d'extraction.

9. Procédé selon l'une quelconque des revendications 2 à 8, dans lequel ledit procédé d'enlèvement de nitrosamines comprend une pluralité de procédés d'enlèvement.

50 10. Procédé selon l'une quelconque des revendications 2 à 9, dans lequel, après ledit procédé d'enlèvement de nitrosamines, ledit milieu d'extraction complètement ou pratiquement exempt desdites nitrosamines est mis en contact avec le tabac de façon à pouvoir incorporer ou réincorporer dans ledit tabac un ou des extraits autres que les nitrosamines présentes dans ledit milieu d'extraction.

55 11. Procédé selon la revendication 10, dans lequel le ou lesdits extraits comprennent de la nicotine et/ou des substances aromatisantes.

12. Procédé selon l'une quelconque des revendications précédentes, dans lequel ledit milieu d'extraction par fluide supercritique est le dioxyde de carbone supercritique.

5 13. Procédé selon l'une quelconque des revendications précédentes, dans lequel un acide est ajouté audit tabac avant le traitement dudit tabac avec ledit fluide supercritique ; ou audit fluide supercritique avant le traitement dudit tabac avec ledit fluide supercritique.

10 14. Procédé selon l'une quelconque des revendications 4 ou 5 en liaison avec la revendication 3, dans lequel un acide est ajouté à l'échangeur d'ions ou à l'adsorbant.

15 15. Procédé selon l'une quelconque des revendications 1 à 14, dans lequel un ou plusieurs parmi un solvant organique ou un alcool sont ajoutés en plus ou en variante dudit acide.

16. Procédé selon la revendication 15, dans lequel ledit acide est un acide organique.

17. Procédé selon la revendication 16, dans lequel ledit acide est un acide organique choisi parmi un ou plusieurs de ceux du groupe constitué par l'acide malonique, l'acide ascorbique, l'acide succinique, l'acide glutarique, l'acide adipique, l'acide malique, l'acide tartrique, l'acide mucique et l'acide citrique, ou un sel dérivé de ceux-ci.

20 18. Procédé selon la revendication 17, dans lequel ledit acide organique est un sel de l'acide citrique.

19. Procédé selon la revendication 18, dans lequel ledit sel de l'acide citrique est le citrate de potassium.

25 20. Procédé selon l'une quelconque des revendications précédentes, dans lequel ladite extraction desdites nitrosamines provenant dudit tabac avec ledit fluide supercritique se fait sous une pression et à une température élevées.

21. Procédé selon la revendication 20. dans lequel, lorsque le fluide supercritique est le dioxyde de carbone supercritique, ladite pression se situe dans la plage de 100 à 350 bars.

30 22. Procédé selon la revendication 21, dans lequel ladite pression se situe dans la plage de 200 à 300 bars environ.

23. Procédé selon la revendication 22, dans lequel ladite pression se situe dans la plage de 240 à 260 bars environ.

35 24. Procédé selon l'une quelconque des revendications 20 à 23, dans lequel ladite température est supérieure à 35° Celsius environ.

25. Procédé selon la revendication 24, dans lequel ladite température se situe dans une plage de 35° environ à 140° Celsius environ.

40 26. Procédé selon la revendication 25, dans lequel ladite température se situe dans une plage de 35° environ à 90° Celsius environ.

27. Procédé selon l'une quelconque des revendications précédentes, dans lequel ledit tabac est placé dans une chambre ou bombe fermable lors dudit traitement d'extraction de celui-ci avec le fluide supercritique.

45 28. Procédé selon l'une quelconque des revendications 20 à 27, dans lequel ladite température élevée est obtenue par un transfert de chaleur ou par un rayonnement électromagnétique.

50 29. Procédé selon l'une quelconque des revendications précédentes, dans lequel très peu ou pas de nicotine est enlevée dudit tabac dans ledit milieu d'extraction.

30. Procédé selon la revendication 1. dans lequel ledit pH dudit acide est inférieur à 5,5 environ.

55 31. Procédé selon l'une quelconque des revendications précédentes, dans lequel le ratio de la réduction en pourcentage des nitrosamines sur la réduction en pourcentage de la nicotine se situe dans la plage de 1,1:1 environ à 18:1 environ.

32. Procédé selon la revendication 31, dans lequel ledit ratio se situe dans la plage de 1,3:1 environ à 10:1 environ.

33. Procédé selon la revendication 32. dans lequel ledit ratio se situe dans la plage de 2:1 environ à 6:1 environ.
34. Procédé selon l'une quelconque des revendications précédentes, dans lequel un débit massique approprié dudit milieu d'extraction par fluide supercritique par kg de tabac est de 1 à 55 kg/h environ.
- 5 35. Procédé selon la revendication 34, dans lequel ledit débit massique se situe dans la plage de 10 à 40 kg/h.
36. Procédé selon la revendication 35, dans lequel ledit débit massique se situe dans la plage de 15 à 35 kg/h.
- 10 37. Procédé selon la revendication 36, dans lequel ledit débit massique est de 30 kg/h environ.
38. Procédé selon l'une quelconque des revendications précédentes, dans lequel ledit tabac est soumis à un procédé de désactivation microbienne.
- 15 39. Procédé selon la revendication 38. dans lequel ledit procédé de désactivation microbienne comprend un procédé de pasteurisation.
40. Procédé selon la revendication 39, dans lequel ledit tabac est chauffé à une température dans la plage de 70°C environ à 150°C environ pendant une durée allant de 30 secondes à 2 minutes.
- 20 41. Procédé selon la revendication 39, dans lequel ledit procédé de pasteurisation s'effectue en chauffant ledit tabac par chauffage par convection, en mettant le tabac en contact avec un milieu chauffant gazeux, par chauffage à micro-ondes ou par chauffage à haute fréquence.
- 25 42. Procédé selon l'une quelconque des revendications 38 à 41, dans lequel la teneur en humidité dudit tabac soumis audit procédé de désactivation microbienne peut être ajustée au moyen d'une étape de pré-conditionnement ou de post-conditionnement.
43. Procédé selon la revendication 38, dans lequel ledit procédé de désactivation microbienne comprend l'utilisation d'un rayonnement ionisant, d'un rayonnement UV, d'une cryodessiccation ou d'un faisceau d'électrons.
- 30 44. Procédé selon l'une quelconque des revendications 1 à 43, dans lequel ledit tabac est soumis à un procédé d'enlèvement des nitrites/nitrates avant, pendant ou après le traitement dudit tabac avec ledit fluide supercritique.
- 35 45. Procédé selon la revendication 44, dans lequel ledit procédé d'enlèvement des nitrites/nitrates comprend les étapes d'extraction par solvant pour enlever les nitrites/ nitrates dudit tabac, suivie d'un échange d'ions pour lier lesdits nitrites/nitrates.
- 40 46. Procédé selon la revendication 44, dans lequel ledit procédé d'enlèvement des nitrites comprend une étape d'oxydation ou l'utilisation de micro-organismes.
47. Procédé selon l'une quelconque des revendications 44 à 46, dans lequel de l'acide ascorbique est appliqué sur ledit tabac, incorporé audit fluide supercritique ou incorporé à un milieu de chimisorption.

45

50

55

Fig.1.

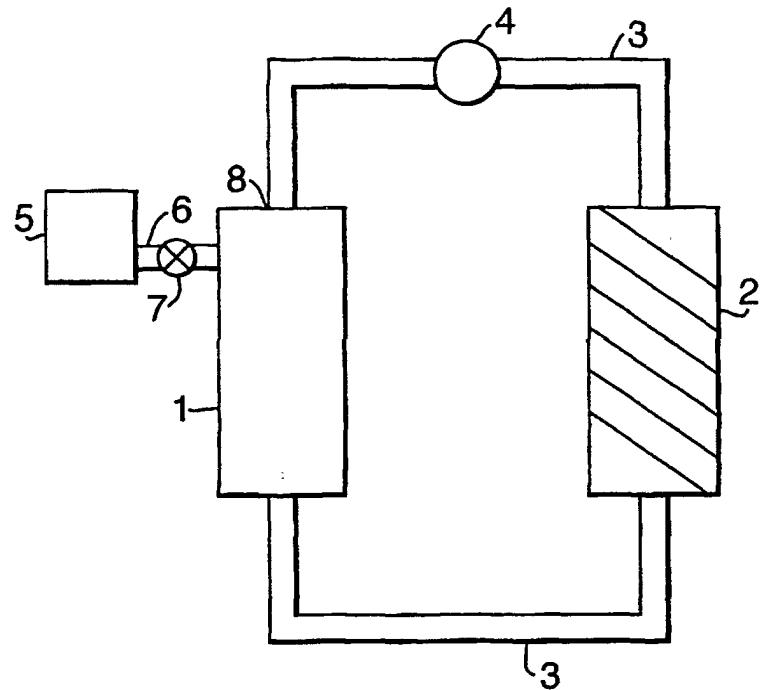


Fig.2.

