



(22) Date de dépôt/Filing Date: 2017/02/22

(41) Mise à la disp. pub./Open to Public Insp.: 2017/10/13

(45) Date de délivrance/Issue Date: 2021/01/26

(30) Priorité/Priority: 2016/04/13 (US15/097,998)

(51) Cl.Int./Int.Cl. *E01C 5/00* (2006.01),
E01C 5/06 (2006.01), *E01C 5/22* (2006.01),
E01C 9/00 (2006.01)


(72) Inventeur/Inventor:
HARKNESS, WILLIAM ANTHONY, US

(73) Propriétaire/Owner:
THE BOEING COMPANY, US

(74) Agent: SMART & BIGGAR LLP

(54) Titre : STRUCTURE DE ROUTE MODULAIRE ET PISTE D'ATERRISSAGE CONSTRUITE A PARTIR DE LADITE
STRUCTURE

(54) Title: MODULAR ROADWAY STRUCTURE AND RUNWAY CONSTRUCTED THEREFROM

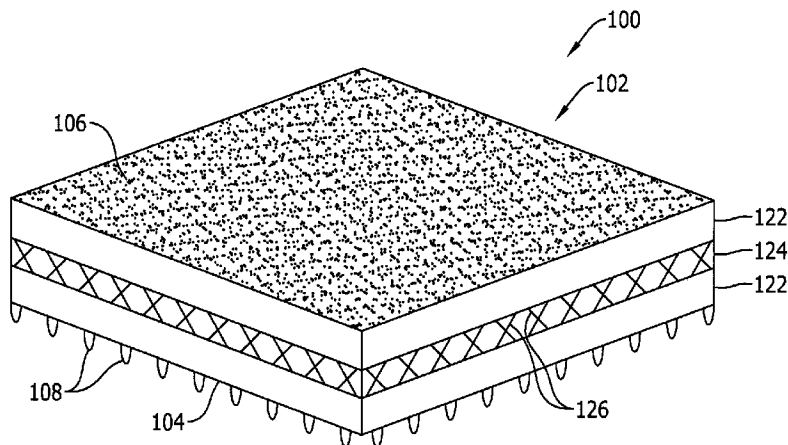

(57) Abrégé/Abstract:

A modular roadway structure that includes a body portion including a bottom surface and a top surface. The bottom surface is configured to be positioned on a surface, and the top surface is formed with a predetermined textured pattern for defining a predetermined coefficient of friction across the top surface.

ABSTRACT

A modular roadway structure that includes a body portion including a bottom surface and a top surface. The bottom surface is configured to be positioned on a surface, and the top surface is formed with a predetermined textured pattern for
5 defining a predetermined coefficient of friction across the top surface.

MODULAR ROADWAY STRUCTURE AND RUNWAY CONSTRUCTED THEREFROM

BACKGROUND

The field of the present disclosure relates generally to airport runway surfaces and, more specifically, to a runway formed from a plurality of modular roadway structures having a tailorable surface texture and capable of housing functional devices therein.

5 Many known airport runway surfaces, especially those located at large commercial airports, are fabricated from concrete or asphalt. For example, airport runway surfaces are generally fabricated from large amounts of poured concrete forming slabs having a thickness of up to about **20** inches. Forming the slabs from concrete enables the runway surface to withstand high exhaust temperatures from
10 aircraft during takeoff and to withstand the weight of increasingly large aircraft, for example. While generally providing a desirable friction force for vehicles operating thereon, at least some known airport runway surfaces incorporate surface texturing or surface treatments of the concrete slabs to modify the surface properties of the runway surface. Incorporating such modifications to the runway surface can be a time-
15 consuming and laborious task, and provides limited improvements to the surface properties of the runway surface during adverse weather conditions. Moreover, the solid construction of the concrete slabs makes it difficult for underlying technologies to be installed therein.

20 BRIEF DESCRIPTION

In one embodiment, there is provided a modular roadway structure comprising: a body portion comprising a bottom surface and a top surface, wherein said bottom surface is configured to be positioned on a surface, and wherein said top surface is formed with a predetermined textured pattern configured to provide directional friction

forces, that are oppositely oriented and of asymmetric friction levels, across said top surface from end-to-end of said body portion.

The body portion may be fabricated from carbon fiber material.

5 The predetermined textured pattern may include a plurality of projections including a first side and a second side. The first side may provide a first friction force across said top surface, and the second side may provide a second friction force greater than the first friction force and oriented in an opposing direction relative to the first friction force across said top surface.

The plurality of projections may form a saw-tooth textured pattern.

10 The modular roadway structure may include at least one functional device coupled to said body portion.

The body portion may include a hollow channel extending therethrough such that an opening may be defined at the top surface. The hollow channel sized to receive the at least one functional device such that the at least one functional device
15 may be selectively retractable within said body portion.

The body portion may include a bottom panel, a top panel, and a support structure positioned between said bottom panel and said top panel, wherein said support structure defines an at least partially hollow space between said bottom panel and said top panel.

20 The top panel may be selectively removable from said support structure.

In another embodiment, there is provided a runway comprising: a touch-down zone; a takeoff zone; and a runway zone extending between said touch-down zone and said takeoff zone, wherein at least one of said touch-down zone, said takeoff zone, and said runway zone comprise a plurality of modular roadway structures that
25 each comprise a top surface formed with a predetermined textured pattern forming directional friction forces, that are oppositely oriented and of asymmetric friction levels, across the predetermined texture pattern of said top surface.

The predetermined textured pattern may include a plurality of projections including a first side and a second side, the first side providing a first friction force
30 across said top surface, and said second side providing a second friction force greater than the first friction force across said top surface.

The plurality of modular roadway structures may include the plurality of projections, the plurality of modular roadway structures oriented such that the first friction force and the second friction force are oriented with a length of the runway.

5 The plurality of modular roadway structures may be oriented such that the second friction force may be directionally oriented from said takeoff zone towards said touch-down zone.

The plurality of modular roadway structures may include the plurality of projections, the plurality of modular roadway structures oriented such that the second friction force may be transversely oriented relative to a length of the runway .

10 The runway may include an overrun zone positioned adjacent to said takeoff zone, wherein the predetermined textured pattern in said overrun zone has a greater magnitude than the predetermined textured pattern in said touch-down zone, said takeoff zone, and said runway zone.

15 The predetermined textured pattern in said touch-down zone and said takeoff zone may be greater than the predetermined textured pattern in said runway zone.

The plurality of modular roadway structures may be arranged in a pair of laterally-spaced roadway sections extending along a length of the runway.

20 In another embodiment, there is provided a method of constructing a runway, said method comprising: positioning a plurality of modular roadway structures on a surface, wherein the plurality of modular roadway structures include a bottom surface configured to be positioned on the surface and a top surface formed with a predetermined textured pattern configured to provide directional friction forces, that are oppositely oriented and of asymmetric friction levels, across the top surface from end-to-end of each modular roadway structure ; and orienting the plurality of modular roadway structures in a predetermined orientation such that is the direction friction forces are provided lengthwise along the runway.

25 Each modular roadway structure may include a bottom panel and a top panel, said method further comprising replacing the top panel of at least one modular roadway structure of the plurality of modular roadway structures with a replacement top panel.

The method may involve replacing an installed modular roadway structure of the plurality of modular roadway structures with a replacement modular roadway structure.

- 5 Positioning the plurality of modular roadway structures may involve positioning at least one modular roadway structure having plug and play functionality on the surface, wherein the at least one modular roadway structure may be configured to interchangeably connect with a plurality of functional devices.

BRIEF DESCRIPTION OF THE DRAWINGS

- 10 FIG. 1 is a perspective view illustration of an exemplary modular roadway structure;

FIG. 2 is an enlarged side view illustration of an exemplary top surface of the modular roadway structures shown in FIG. 1;

- 15 FIG. 3 is a perspective view illustration of an alternative modular roadway structure;

FIG. 4 is a top view of an exemplary runway; and

FIG. 5 is a top view of an alternative runway.

DETAILED DESCRIPTION

The implementations described herein relate to a runway formed from a plurality of modular roadway structures having a tailorable surface texture. More specifically, rather than being formed from solid concrete slabs, the runway is formed from the plurality of modular roadway structures that are prefabricated and selectively installed based on a desired function and positioning of each structure on the runway. For example, the surface texture of each structure is selectively tailored to provide a predetermined coefficient of friction across a top surface of the structure. The predetermined coefficient of friction is selected such that the top surface provides a greater friction force than that of concrete, and provides better grip for aircraft traveling along the runway at certain regions thereof. Moreover, the structures are constructed such that underlying functional devices are capable of being installed and incorporated therewith. As such, the modular roadway structures are easily installable and transportable, easily replaceable, and selectively tailorable based on the needs and desired functions at predetermined regions of a runway or other suitable roadway surface.

As used herein, an element or step recited in the singular and proceeded with the word “a” or “an” should be understood as not excluding plural elements or steps, unless such exclusion is explicitly recited. Furthermore, references to “exemplary implementation” or “one implementation” of the present disclosure are not intended to be interpreted as excluding the existence of additional implementations that also incorporate the recited features.

FIG. 1 is a perspective view illustration of an exemplary modular roadway structure **100**, and FIG. 2 is an enlarged side view illustration of a top surface of modular roadway structure **100**. In the exemplary implementation, modular roadway structure **100** includes a body portion **102** including a bottom surface **104** and a top surface **106**. Bottom surface **104** is for positioning on an existing surface (not shown), such as a dirt surface, a synthetic surface, or a paved surface. As will be explained in more detail below, the existing surface is at least partially excavated and modular roadway structure **100** is sized for installation within the excavated portion of the existing surface with a minimum clearance fit. Alternatively, body

portion **102** includes a retaining mechanism (not shown) for mating with an adjacent modular roadway structure **100**, such as a snap-on connection.

Moreover, in one implementation, bottom surface **104** includes an anchoring device (not shown) for securely coupling modular roadway structure **100** to the existing surface and restricting lateral movement of modular roadway structure **100** relative to the existing surface. An exemplary anchoring device includes, but is not limited to, one or more anchoring members **108** extending from bottom surface **104** for insertion within the existing surface.

Top surface **106** is formed with a predetermined textured pattern for defining a predetermined coefficient of friction across top surface **106**. Top surface **106** is formed with any textured pattern that enables modular roadway structure **100** to function as described herein. For example, referring to FIG. 2, the predetermined textured pattern includes a plurality of projections **110** shaped to provide asymmetric directional friction forces across top surface **106**. More specifically, projections **110** include a first side **112** and a second side **114**, and are arranged to form a saw-tooth textured pattern. As such, first side **112** of projections **110** provides a first friction force **116** across top surface **106**, and second side **114** of projections **110** provides a second friction force **118** greater than first friction force **116** across top surface **106**. As will be explained in more detail below, the asymmetric directional friction forces provided by the predetermined textured pattern provide directional grip for vehicles traveling across top surface **106**. As such, the predetermined textured pattern enables modular roadway structure **100** to be selectively oriented on a roadway based on desired directional grip at different regions of the roadway.

Moreover, in some implementations, the magnitude of the predetermined textured pattern is selectively adjustable such that different levels of friction are provided across top surface **106**. As used herein, "magnitude" refers to degrees of variation in the size of projections **110**, or the number of projections **110** per unit area across top surface **106**. As such, the greater the magnitude of the predetermined textured pattern, the greater friction force and gripping power is provided across top surface **106**. For example, the greater the size of projections **110**, the greater friction force is provided. In addition, decreasing the number of

projections **110** per unit area (i.e., spacing adjacent projections **110** from each other) facilitates increasing the friction force provided across top surface **106**. In some implementations, the predetermined textured pattern is not uniform across top surface **106**. For example, orienting a first group of projections **110** on top surface **106** in a first direction, and orienting a second group of projections **110** on top surface **106** in a second direction provides further functionality and directional grip to modular roadway structure **100**.

In the exemplary implementation, includes and is formed from a bottom panel **120**, a top panel **122**, and a support structure **124** positioned between bottom panel **120** and top panel **122**. Bottom surface **104** is defined on bottom panel **120**, and top surface **106** is defined on top panel **122** such that projections **110** (shown in FIG. 2) are integrally formed with top panel **122**. Bottom panel **120** and top panel **122** are also formed as a substantially solid structure. In contrast, support structure **124** defines an at least partially hollow space between bottom panel **120** and top panel **122**. Defining the at least partially hollow space between bottom panel **120** and top panel **122** facilitates reducing material use when forming modular roadway structure **100**, and enables conduits, pipes, electrical wiring, or other components to extend therethrough.

Support structure **124** has any configuration that enables modular roadway structure **100** to function as described herein. More specifically, support structure **124** includes a plurality of side walls **126** arranged such that the at least partially hollow space is defined between bottom panel **120** and top panel **122**. Moreover, the thickness and configuration of side walls **126** are adjustable to tailor predetermined regions of modular roadway structure **100** to have higher strength, reinforcement, or compressibility. As such, additional flexibility and additional selectable attributes are provided when constructing modular roadway structure **100**.

Moreover, in some implementations, top panel **122** is selectively removable from a remainder of modular roadway structure **100**, such as support structure **124**, and capable of replacement with a new or different top panel **122**. More specifically, enabling top panel **122** to be selectively removable allows top panel **122** to be easily and rapidly replaceable when top panel **122** reaches the end of its service life due to

wear or damage, for example. In addition, top panel **122** may be replaced with a top panel having different characteristics than the removed top panel, based on the desired functionality of modular roadway structure **100**. For example, the replacement top panel may have a different magnitude of the predetermined textured pattern than the removed top panel (i.e., to accommodate greater wind conditions), or may be replaced with a top panel capable of deploying a functional device, as will be described in more detail below. In an alternative implementation, top panel **122** is removed from modular roadway structure **100** and reinstalled in a different orientation to modify the directional grip provided across modular roadway structure **100**.

Body portion **102** may be fabricated from any material that enables modular roadway structure **100** to function as described herein. For example, in one implementation, the material used to fabricate body portion **102** is a three-dimensional (3D) printable material such that modular roadway structure **100** is capable of being additively manufactured. As such, modular roadway structure **100** is capable of being formed with a selectively tailored predetermined coefficient of friction, and additional selectable attributes based on the desired functionality of modular roadway structure **100**. In the exemplary implementation, body portion **102** is not fabricated from and does not include concrete material. Moreover, in one implementation, body portion **102** is at least partially fabricated from recycled carbon fiber material.

FIG. **3** is a perspective view illustration of an alternative modular roadway structure **128**. In the exemplary implementation, modular roadway structure **128** includes at least one functional device **130** coupled to body portion **102**. More specifically, body portion **102** includes a hollow channel **132** extending therethrough such that an opening **134** is defined at top surface **106**. Hollow channel **132** is sized to receive functional device **130** such that functional device **130** is selectively retractable within body portion **102**. Alternatively, functional device **130** is housed within body portion **102** when in operation. As such, when modular roadway structure **128** is used to form an aggregated roadway, functional device **130** is capable of being selectively activated from within body portion **102** to provide the

desired function. Moreover, as described above, the hollow space defined between bottom panel **120** and top panel **122** enables functional device **130** to be easily connected to a central controller (not shown), for example.

Modular roadway structure **100** is also formed with a common electrical interface (i.e., plug and play interface) to provide a universal power and data pathway such that different functional devices are easily interchangeable with body portion **102**. Exemplary functional devices include, but are not limited to, heating pads, sensors, data pathways, energy capture devices (i.e., solar panel modules), lighting mechanisms, foreign object debris detectors, robot storage modules, unmanned aerial vehicle launchers, safety proximity devices, wireless data transfer devices, acoustic disruptor devices for wildlife, airplane scanner devices, maintenance checkpoint devices, fog vacuum and/or blower devices, and weight sensing devices. Moreover, regarding the robot storage modules, functional device **130** facilitates storing and launching automated robots capable of performing any suitable function. For example, the automated robots are capable of performing functions such as, but not limited to aircraft maintenance and surface cleanup.

FIG. 4 is a top view of an exemplary runway **136**. In the exemplary implementation, runway **136** includes a touch-down zone **138**, a takeoff zone **140**, and a runway zone **142** extending between touch-down zone **138** and takeoff zone **140**. At least one of touch-down zone **138**, takeoff zone **140**, or runway zone **142** include and are formed from a plurality of modular roadway structures **100**. Modular roadway structures **128** (shown in FIG. 3) are also positionable to form runway **136** based on whether functional devices **130** (shown in FIG. 3) are needed at predetermined regions of runway **136**. The plurality of modular roadway structures **100** have a predetermined textured pattern for defining a predetermined coefficient of friction across top surface **106** (shown in FIG. 1) and a top surface of runway **136**, and are arranged to provide enhanced and predetermined directional grip across runway **136**.

For example, in one implementation, the plurality of modular roadway structures **100** are oriented such that first friction force **116** and second friction force **118** (each shown in FIG. 2) are oriented with a length of runway **136**. More

specifically, the plurality of modular roadway structures **100** are oriented such that second friction force **118** is directionally oriented from takeoff zone **140** towards touch-down zone **138**. As such, a vehicle traveling from takeoff zone **140** towards touch-down zone **138** is provided with enhanced directional grip to facilitate increasing acceleration, for example. Conversely, a vehicle traveling from touch-down zone **138** towards takeoff zone **140** is provided with oppositely oriented enhanced directional grip to facilitate increasing the braking power of the vehicle, for example.

In another implementation, the plurality of modular roadway structures **100** are oriented such that second friction force **118** is transversely oriented relative to the length of runway **136**. More specifically, modular roadway structures **100** positioned on opposing sides of a centerline **144** of runway **136** are oriented such that second friction force **118** is directionally oriented towards centerline **144**. As such, transverse movement is inhibited across runway **136**. Inhibiting transverse movement across runway **136** facilitates ensuring a vehicle does not slide off runway **136**, especially during a crosswind landing, for example. In an alternative implementation, the plurality of modular roadway structures **100** include a combination of projections **110** directionally oriented differently from each other such that directional grip is enhanced in more than one direction across runway **136**.

In the exemplary implementation, runway **136** also includes a first overrun zone **146** and a second overrun zone **148**. First overrun zone **146** is positioned adjacent to takeoff zone **140**, and second overrun zone **148** is positioned adjacent to touch-down zone **138**. First overrun zone **146** includes a plurality of modular roadway structures **100** oriented such that second friction force **118** is directionally oriented from first overrun zone **146** towards touch-down zone **138**. As such, first overrun zone **146** provides enhanced directional grip to a vehicle traveling from touch-down zone **138** towards takeoff zone **140**. Moreover, in one implementation, the predetermined textured pattern in first overrun zone **146** has a greater magnitude than the predetermined textured pattern in touch-down zone **138**, takeoff zone **140**, and runway zone **142** to ensure the vehicle is restricted from traveling past runway **136** and into an unsurfaced area. Similarly, second overrun zone **148**

includes a plurality of modular roadway structures **100** oriented such that second friction force **118** is directionally oriented from second overrun zone **148** towards takeoff zone **140**. As such, second overrun zone **148** provides enhanced directional grip to a vehicle traveling from takeoff zone **140** towards touch-down zone **138**, and
 5 ensures the vehicle is restricted from traveling past runway **136** and into an unsurfaced area.

Moreover, in some implementations, the predetermined textured pattern in touch-down zone **138** and takeoff zone **140** has a greater magnitude than the predetermined textured pattern in runway zone **142**. Providing enhanced directional
 10 grip in touch-down zone **138** and takeoff zone **140** aids a vehicle in decelerating and accelerating in a more efficient manner. Alternatively, runway zone **142** is not formed from modular roadway structures **100**.

FIG. **5** is a top view of an alternative runway **150**. In the exemplary implementation, the plurality of modular roadway structures **100** are arranged in a
 15 pair of laterally-spaced roadway sections **152** extending along the length of runway **150**. As such, the most heavily traveled portions of runway **150** are provided with enhanced directional grip without having to install more modular roadway structures **100** than that is necessary.

A method of constructing runway **136** is also described herein. The method
 20 includes positioning a plurality of modular roadway structures **100** on a surface. The plurality of modular roadway structures **100** include bottom surface **104** configured to be positioned on the surface and top surface **106** formed with a predetermined textured pattern for defining a predetermined coefficient of friction across top surface **106**. The method also includes orienting the plurality of modular roadway structures
 25 **100** in a predetermined orientation such that a directional friction force is provided along runway **136**.

In one implementation, each modular roadway structure **100** includes a bottom panel and a top panel, and the method further includes replacing the top panel of at least one modular roadway structure of the plurality of modular roadway
 30 structures with a replacement top panel. Moreover, the method further includes replacing an installed modular roadway structure **100** of the plurality of modular

roadway structures **100** with a replacement modular roadway structure **100**. The replacement modular roadway structure **100** is either the same modular roadway structure as the installed modular roadway structure **100**, or is different from the installed modular roadway structure **100**. As such, modular roadway structures **100** are interchangeable such that attributes of runway **136** are selectively and easily modifiable.

Positioning a plurality of modular roadway structures **100** also includes positioning at least one modular roadway structure **100** having plug and play functionality on the existing surface, wherein the at least one modular roadway structure **100** is configured to interchangeable connect with a plurality of functional devices.

Moreover, in some implementations, the method further includes anchoring the plurality of modular roadway structure **100** to the surface, or mating adjacent modular roadway structures **100** with each other.

This written description uses examples to disclose various implementations, including the best mode, and also to enable any person skilled in the art to practice the various implementations, including making and using any devices or systems and performing any incorporated methods. The patentable scope of the disclosure is defined by the claims, and may include other examples that occur to those skilled in the art. Such other examples are intended to be within the scope of the claims if they have structural elements that do not differ from the literal language of the claims, or if they include equivalent structural elements with insubstantial differences from the literal language of the claims.

EMBODIMENTS IN WHICH AN EXCLUSIVE PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:

1. A modular roadway structure comprising:

a body portion comprising a bottom surface and a top surface,

wherein said bottom surface is configured to be positioned on a surface,

5 and wherein said top surface is formed with a predetermined textured pattern configured to provide directional friction forces, that are oppositely oriented and of asymmetric friction levels, across said top surface from end-to-end of said body portion.

2. The modular roadway structure in accordance with Claim 1, wherein said body portion is fabricated from carbon fiber material.

10 3. The modular roadway structure in accordance with Claim 1 or 2, wherein the predetermined textured pattern comprises a plurality of projections comprising a first side and a second side, said first side providing a first friction force across said top surface, and said second side providing a second friction force, the second friction force greater than the first friction force and oriented in an
15 opposing direction relative to the first friction force, across said top surface.

4. The modular roadway structure in accordance with Claim 3, wherein said plurality of projections form a saw-tooth textured pattern.

5. The modular roadway structure in accordance with any one of Claims 1 to 4 further comprising at least one functional device coupled to said body portion.

20 6. The modular roadway structure in accordance with Claim 5, wherein said body portion comprises a hollow channel extending therethrough such that an opening is defined at said top surface, said hollow channel sized to receive said at least

one functional device such that said at least one functional device is selectively retractable within said body portion.

7. The modular roadway structure in accordance with any one of Claims 1 to 6, wherein said body portion comprises:

5 a bottom panel;

a top panel; and

a support structure positioned between said bottom panel and said top panel, wherein said support structure defines an at least partially hollow space between said bottom panel and said top panel.

- 10 8. The modular roadway structure in accordance with Claim 7, wherein said top panel is selectively removable from said support structure.

9. A runway comprising:

a touch-down zone;

a takeoff zone; and

- 15 a runway zone extending between said touch-down zone and said takeoff zone, wherein at least one of said touch-down zone, said takeoff zone, and said runway zone comprise a plurality of modular roadway structures that each comprise a top surface formed with a predetermined textured pattern forming directional friction forces, that are oppositely oriented and of
20 asymmetric friction levels, across the predetermined texture pattern of said top surface.

10. The runway in accordance with Claim 9, wherein the predetermined textured pattern comprises a plurality of projections comprising a first side and a second side, said first side providing a first friction force across said top surface, and

said second side providing a second friction force greater than the first friction force across said top surface.

- 5 **11.** The runway in accordance with Claim **10**, wherein said plurality of modular roadway structures comprises said plurality of projections, said plurality of modular roadway structures oriented such that the first friction force and the second friction force are oriented with a length of the runway.
- 12.** The runway in accordance with Claim **11**, wherein said plurality of modular roadway structures are oriented such that the second friction force is directionally oriented from said takeoff zone towards said touch-down zone.
- 10 **13.** The runway in accordance with Claim **10** or **11**, wherein said plurality of modular roadway structures comprises said plurality of projections, said plurality of modular roadway structures oriented such that the second friction force is transversely oriented relative to a length of the runway.
- 15 **14.** The runway in accordance with any one of Claims **9 to 13** further comprising an overrun zone positioned adjacent to said takeoff zone, wherein the predetermined textured pattern in said overrun zone has a greater magnitude than the predetermined textured pattern in said touch-down zone, said takeoff zone, and said runway zone.
- 20 **15.** The runway in accordance with any one of Claims **9 to 14**, wherein the predetermined textured pattern in said touch-down zone and said takeoff zone is greater than the predetermined textured pattern in said runway zone.
- 16.** The runway in accordance with any one of Claims **9 to 15**, wherein said plurality of modular roadway structures are arranged in a pair of laterally-spaced roadway sections extending along a length of the runway.
- 25 **17.** A method of constructing a runway, said method comprising:

positioning a plurality of modular roadway structures on a surface, wherein the plurality of modular roadway structures include a bottom surface configured to be positioned on the surface and a top surface formed with a predetermined textured pattern configured to provide directional friction forces, that are oppositely oriented and of asymmetric friction levels, across the top surface from end-to-end of each modular roadway structure; and

5

orienting the plurality of modular roadway structures in a predetermined orientation such that is the direction friction forces are provided lengthwise along the runway.

10 **18.** The method in accordance with Claim **17**, wherein each modular roadway structure includes a bottom panel and a top panel, said method further comprising replacing the top panel of at least one modular roadway structure of the plurality of modular roadway structures with a replacement top panel.

15 **19.** The method in accordance with Claim **17** or **18** further comprising replacing an installed modular roadway structure of the plurality of modular roadway structures with a replacement modular roadway structure.

20 **20.** The method in accordance with any one of Claims **17 to 19**, wherein positioning the plurality of modular roadway structures comprises positioning at least one modular roadway structure having plug and play functionality on the surface, wherein the at least one modular roadway structure is configured to interchangeably connect with a plurality of functional devices.

1/3

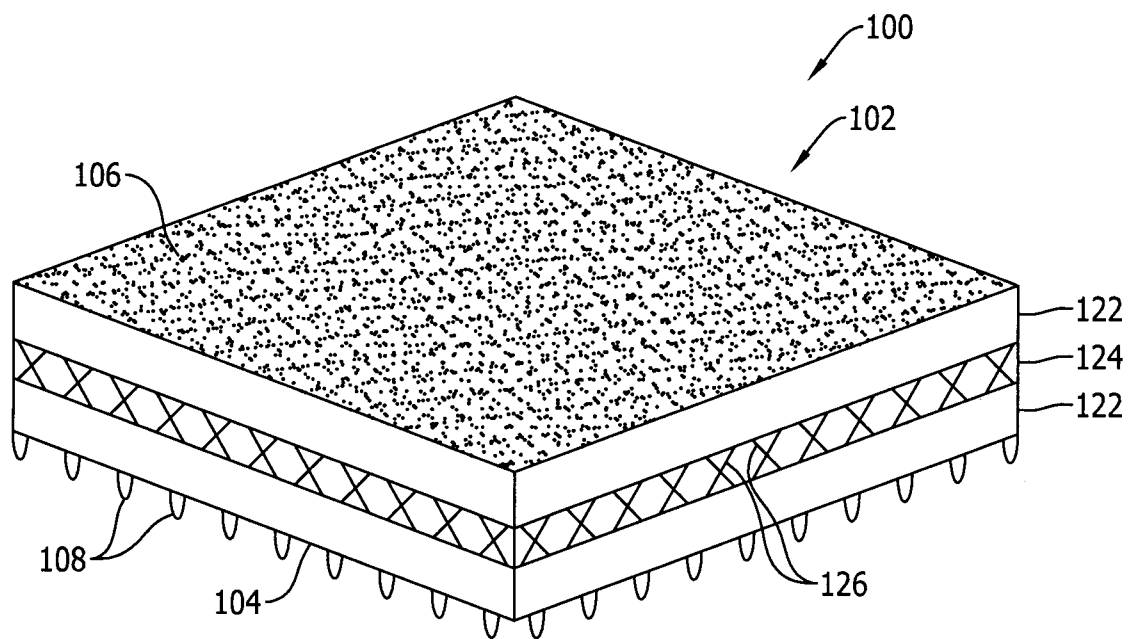


FIG. 1

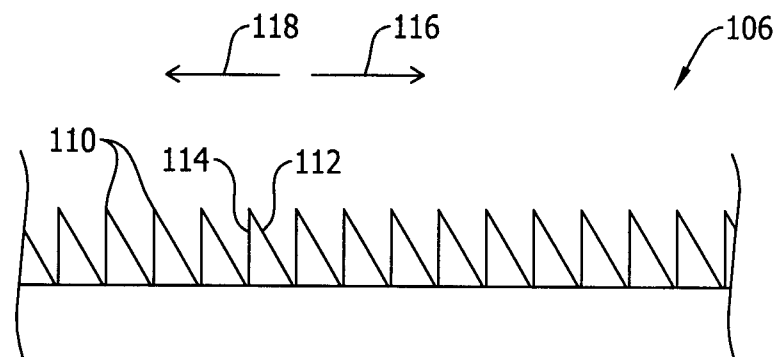


FIG. 2

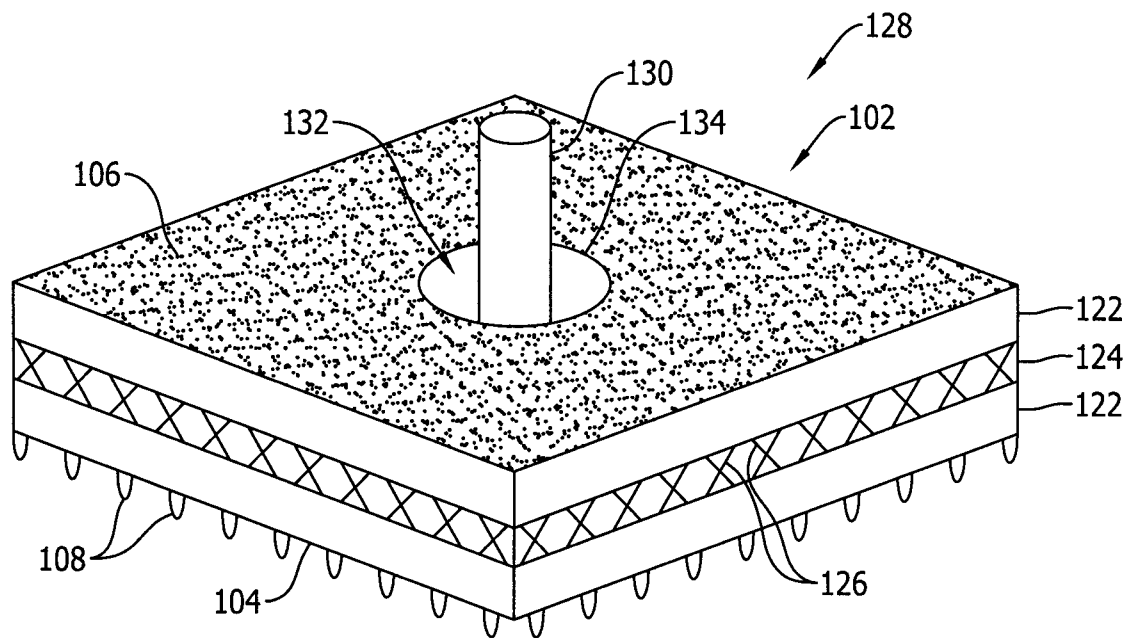


FIG. 3

3/3

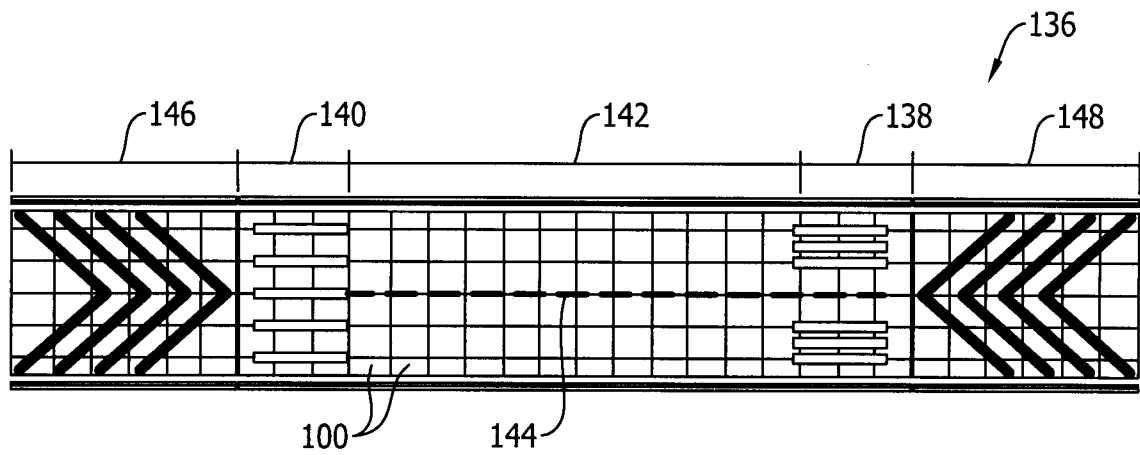


FIG. 4

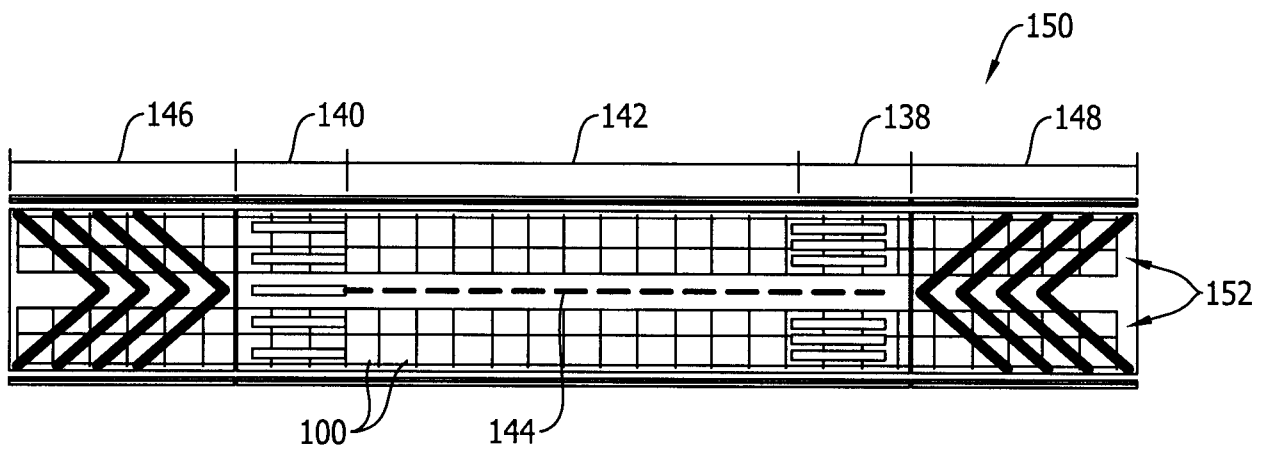


FIG. 5

