

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
2 November 2006 (02.11.2006)

PCT

(10) International Publication Number
WO 2006/116040 A1

- (51) International Patent Classification:

<i>B32B 3/02</i> (2006.01)	<i>B32B 9/00</i> (2006.01)
<i>B32B 3/26</i> (2006.01)	<i>B32B 33/00</i> (2006.01)
<i>B32B 3/30</i> (2006.01)	
- (21) International Application Number:
PCT/US2006/015028
- (22) International Filing Date: 21 April 2006 (21.04.2006)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:

60/673,883	22 April 2005 (22.04.2005)	US
60/676,212	29 April 2005 (29.04.2005)	US
- (71) Applicant (for all designated States except US): **INSITE SOLUTIONS, LLC** [US/US]; P.O. Box 8698, Rocky Mount, North Carolina 27804 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **LOWE, Clifford, A.** [US/US]; 3632 Litchfield Drive, Rocky Mount, North Carolina 27803 (US).
- (74) Agents: **ZOLLINGER III, Fred, H.** et al.; **ZOLLINGER & BURLESON LTD.**, P.O. Box 2368, North Canton, Ohio 44720 (US).

- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Published:
— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.



WO 2006/116040 A1

(54) Title: FLOOR MARKING TAPE

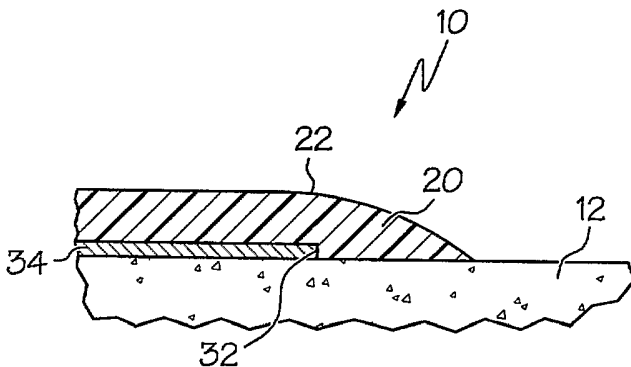

(57) Abstract: A floor marking tape has a structure that retains the adhesive under the tape to prevent the adhesive from being squeezed out from under the tape when the tape is in use on a floor. In one embodiment, the structure is a shoulder that defines a recess that holds the bulk of the adhesive. The shoulder prevents the adhesive from flowing out to the outer edge of the tape. The tape may have beveled edges that limit the unintentional lifting and delamination of the tape from the floor. The upper surface of the tape may be curved from edge-to-edge to limit dirt retention on the tape as well as allowing objects to slide over the tape.

FLOOR MARKING TAPE

BACKGROUND OF THE INVENTION

5 1. TECHNICAL FIELD

The present invention generally relates to marking products and, more particularly, to a tape that is used to mark boundaries on a variety of substrates such as factory floors.

10 2. BACKGROUND INFORMATION

Various boundary marking systems are known in the art. These include rails, painted lines, and tape lines. Tape lines are desirable because they can be lifted when a space is reconfigured with excessive damage to the floor. A drawback with some tape products is inconsistent coloring. Another
15 drawback is that the edge of the tape is prone to being caught on floor cleaning devices or skids. Another drawback with existing tapes is the tendency for the adhesive used to hold the tape to the floor to be squeezed out the side of the tape where it collects dirt and helps to delaminate the tape from the floor.

20

BRIEF SUMMARY OF THE INVENTION

In one configuration, the invention provides a floor tape having a body having an upper surface and a lower surface; the lower surface adapted to face the floor on which the floor tape is installed; the body having a
25 longitudinal direction; the body having a pair of lateral edges disposed in the longitudinal direction; an adhesive disposed adjacent the lower surface of the body; and the body having a structure that prevents the adhesive from reaching the lateral edges of the body when the floor tape is installed.

In another configuration, the invention provides a floor marking tape
30 having a beveled edge to limit the unintentional lifting and delamination of the tape from the floor. The upper surface of the tape may be curved from edge-to-edge to limit dirt retention on the tape as well as allowing objects to slide over the tape.

In another configuration, the bottom surface of the tape includes a

structure that retains the adhesive under the tape to prevent the adhesive from being squeezed out from under the tape. In one embodiment, the structure is a shoulder that defines a recess that holds the bulk of the adhesive. The shoulder prevents the adhesive from flowing out to the outer edge of the tape.

The invention also provides another configuration wherein the upper surface of the body of the tape is formed to have a smooth glossy surface to limit the dirt that clings to the upper surface of the tape. This surface is formed without a secondary coating.

The invention also provides a tape configuration wherein the body of the tape is rigid such that short lengths cannot be rolled for storage. These lengths are supplied pieces that are assembled on the floor end-to-end in the pattern desired by the user. The rigid body is durable and resists damage during use.

15

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

Fig. 1 is a cross section of the tape of the invention.

Fig. 2 is an enlarged view of the encircled portion of Fig. 1.

Fig. 3 is a cross section of the edge of the tape applied to a floor surface.

20

Similar numbers refer to similar parts throughout the specification.

DETAILED DESCRIPTION OF THE INVENTION

A tape made in accordance with the concepts of the present invention is indicated by the numeral 10 in the accompanying drawings. Tape 10 is used to mark areas of a floor 12 such as the areas around machines or aisles from forklifts. Tape 10 generally includes a body 20 having an upper surface 22 and a lower surface 24. At least the lateral edges of upper surface 22 are smoothly beveled as shown in Fig. 2. The smooth bevel helps to prevent tape 10 from being unintentionally lifted.

30

Lower surface 24 defines a recess 30 bounded by a pair of shoulders 32. Recess 30 may be centered with respect to body 20. Recess 30 is designed to receive the adhesive 34 that holds tape 10 to floor 12. Shoulders 32 prevent adhesive 34 from flowing out past the lateral edges of tape 10

where it collects dirt. Other structures combined with body 20 may also be used in place of or in combination with shoulders 32. Downwardly-projecting ribs and slots may be used to control adhesive flow.

5 In one configuration, body 20 has an overall width of 101.6 mm with recess 30 having a width of 97.8 mm leaving a shoulder width of 1.9 mm to engage floor 12 when tape 10 is installed. Recess 30 is 0.18 mm deep. The thickness of body 20 just inside shoulder 32 is 0.6 mm while body 20 has a thickness of 0.95 mm at its longitudinal centerline.

10 Body 20 may be fabricated from any polymer that can be calendared or extruded. Materials suitable for this application are Natural rubber, Synthetic Polyisoprene (high-cis or solution), Polybutadiene (high-cis or solution), Polybutadiene/Styrene copolymer (solution or emulsion type including SBS or SB block type polymers), Ethylene/Propylene Diene (EPDM) rubber, Butadiene/Acrylonitrile rubber, Butyl rubber (including chlorobutyl and bromobutyl types), Polyisobutylene (and copolymers), Chloroprene
15 (Neoprene), Chlorosulfonated polymers (Hypalons), Polyepichlorohydrin, Alkylated Chlorosulfonated polymers (Ascium), Polysulfide, Polyethylene, Polypropylene, Polymethylpentene and other saturated and unsaturated polymers known in the art. Polyvinyl chloride, Polyvinylidene Chloride (and
20 Copolymers with polyvinyl chloride), Polyacrylates, Polymethacrylates (and combinations), Polyurethanes, Polyesters, Polyamides and combinations may also be used. The polymers may be thermoplastic, thermoset or cured. They may contain crosslinked polymers. Hydrogenated polymers may also be used. The preferred polymers are based on plasticized Polyvinyl chloride.

25 In one embodiment, body 20 is a Polyvinyl Chloride (PVC) polymer that has been formulated to be flexible, tough, tear resistant and Ultraviolet Light (UV) resistant. Body 20 may be extruded in the form shown in the drawings. The PVC can have a wide range of molecular weights generally measured by inherent viscosity. Suitable PVC's have an inherent viscosity of between 0.53
30 and 1.20. The higher the inherent viscosity, the more plasticizer is needed to retain similar properties. The optimum inherent viscosity is obtained by experimentation. In one embodiment, the inherent viscosity is 110ML/G.

The plasticizers that can be used are generally from the ester class. Suitable plasticizers are di-Octyl Adipate, di-2Ethylhexyl Adipate, di-Decyl

Adipate, di-Octyl Sebacate, di-Decyl Sebacate, di-2-Ethylhexyl Sebacate, di-Octyl Phthalate, di-2-Ethylhexyl Phthalate, di-Decyl Phthalate and mixtures of the above. In one embodiment, the plasticizer is dioctylphalate, and the ratio (weight) was 1:20.

5 The adhesive for this application can be one that is comprised of a number of different polymers. These adhesives are mainly non-structural type although one knowledgeable in the adhesive art may find some structural adhesives that may be suitable.

10 The polymers that are most widely used in the non-structural adhesives are hydrocarbon type, such as natural rubber, high cis-polyisoprene, solution polyisoprene, high cis-polybutadiene, solution polybutadiene, styrene-butadiene polymers (including di-block and triblock polymers such as the Kraton polymers produce by Shell Ltd.), butyl rubber (including chloro and bromobutyl rubber), polychloroprene (neoprene), acrylonitrile-butadiene
15 (nitrile), and polyisobutylene. Other polymers that may be used are polysulfide, polyvinyl methyl ether, polyvinyl acetal, polyvinyl acetate, polyamide, polyester, polyolefins, acrylic and poly alkyl acrylates (such as poly hexyl acrylate, poly octyl acrylate, poly isooctyl acrylate, poly 2-ethylhexyl acrylate, poly decyl acrylate, and poly lauryl acrylate).

20 The last class of polymers is preferred. Combinations of compatible polymers may also be used.

 In addition to the polymers other important ingredients are required such as tackifiers, fillers, antioxidants, and antiozonants.

25 Tackifiers used should be compatible with the rubber component used. Tackifiers that can be used are rosin and rosin derivatives, C5 to C9 hydrocarbon resins, terpenes and terpene phenolic derivatives. These may be used singly or in combination.

30 Fillers that can be used are carbon black, silica (fumed and precipitated), clays (hard and soft), and other mineral fillers. Other fillers such as powdered Polyvinyl Chloride (PVC) could also be used.

 Antioxidant that could be used are AO 2246 (American Cyanamide), Naugard 445 (Uniroyal), and Ethyl AO 702 (Ethyl Corp.).

 Antiozonants that can be used are Cyasorb UV24 (American Cyanamide) and Tinuvin 770 (Ciba Geigy).

Scrims and felts could be used as adhesive carriers.

The adhesive can be cured or uncured. Cured adhesives can be produced by Ultraviolet light, Peroxides, Sulfur/Accelerator, or by formation of Ionic Crosslinks using polyvalent cations.

5 The adhesive may be extruded, knife coated, calendared or by any mechanical method onto the substrate. It may also be solvent coated onto the substrate. The curing process in most cases is performed after it is applied to the substrate. Some lightly cross-linked systems can be calendared onto the substrate.

10 Body 20 may be extruded. A chrome-plated and/or polished extrusion die is used to provide a glossy surface finish. This glossy surface finish also helps prevent dirt and dust from collecting on the upper surface of body 20. The glossy finish may also help the visibility of the tape. An increase in glossiness may also be achieved by increasing the temperature during
15 extrusion. Another factor that adds to the glossiness is the hardness of the surface of the material. The hardness may be above 98 on the Shore A hardness scale. In the context of this application, a glossy surface finish is desired to have a gloss test measurement (under ASTM D523 at a 60 degree angle using NOVO Gloss Meter Model 817; 21.11 degrees Celsius; 50%
20 relative humidity) of greater than 45 and may be greater than 50. Such a glossy surface finish is comparable to a tape sold by 3M® under the trademark Vinyl Tape 471 (Yellow). Body 20 may be extruded to have a surface finish with a gloss reading falling above these limits without the requirement of a secondary coating.

25 Gloss tests performed by Graphic Communication Institute, Cal Poly State University, San Luis, Obispo, CA 93407, show that a sample of the invention extruded to have a glossy surface finish tested to have an average gloss at least 25% higher than commercially available extruded product samples sold under the trademark DURASTRIPE®. In this test, seven
30 sample products were tested for surface glossiness. The tester measured took 10 readings (5 from two perpendicular directions) for each sample and averaged the readings.

Sample 1 3M® 471 (yellow)

Sample 2 Electro Tape Hazard Stripe #143 / Yellow and Black with over-

laminate (yellow tested)

Sample 3 Last Mark (yellow)

Sample 4 Superior Mark recessed adhesive / no shine (yellow)

5 Sample 5 Superior Mark recessed adhesive / shine (yellow) (invention
embodiment)

Sample 6 DuraStripe® Original 2" (yellow)

Sample 7 DuraStripe® Original 4" (yellow)

The gloss tests results were:

	Average Gloss
10 Sample 1	48.37
Sample 2	68.87
Sample 3	6.37
Sample 4	5.25
Sample 5	52.81
15 Sample 6	33.09
Sample 7	39.45

One method of manufacturing the invention is to mix the material and extrude the mixture through an extrusion die having the profile described above. The material may be extruded onto a release paper (such as wax
20 paper). Rollers are used to control the dimensions. The material is cooled and the release paper is removed and the adhesive is applied to the recess. The adhesive may be protected by a liner until placed into use. In another embodiment, the adhesive and body material may be co-extruded.

Body 20 may be fabricated to be rigid enough so that shorter lengths
25 (under 1500 mm) cannot be rolled for storage. These rigid body sections may be supplied to the user in a plurality of short sections that may be pieced together by the user on the floor surface. The rigid body material is durable and resists damage when in use.

In the foregoing description, certain terms have been used for brevity,
30 clearness, and understanding. No unnecessary limitations are to be implied therefrom beyond the requirement of the prior art because such terms are used for descriptive purposes and are intended to be broadly construed. Moreover, the description and illustration of the invention is an example and the invention is not limited to the exact details shown or described.

CLAIMS

1. A floor tape comprising:

a body having an upper surface and a lower surface; the lower surface adapted to face the floor on which the floor tape is installed;

the body having a longitudinal direction;

the body having a pair of lateral edges disposed in the longitudinal direction;

an adhesive disposed adjacent the lower surface of the body; and

the body having a structure that prevents the adhesive from reaching the lateral edges of the body when the floor tape is installed.

2. The floor tape of claim 1, wherein the body defines a recess; an adhesive disposed in the recess; the adhesive adapted to secure the body to the floor.

3. The floor tape of claim 2, wherein the recess has a depth; the thickness of the adhesive being substantially the same as the depth of the recess.

4. The floor tape of claim 2, wherein the body is 101.6 mm wide; the recess being 97.8 mm wide; the recess being centered with respect to the width of the body to define a pair of shoulders.

5. The floor tape of claim 1, wherein the body is beveled at the lateral edges.

6. The floor tape of claim 1, wherein the body is fabricated from PVC.

7. The floor tape of claim 6, wherein the body is extruded.

8. The floor tape of claim 7, wherein the body is colored evenly throughout the body.

9. The floor tape of claim 1 wherein the body may be rolled for storage.

10. The floor tape of claim 1, wherein the body is rigid and cannot be rolled for storage.

5 11. The floor tape of claim 2, wherein the recess is continuous in the longitudinal direction of the body.

12. The floor tape of claim 1, wherein the upper surface of the body is smoothly curved between the lateral edges.

10

13. The floor tape of claim 1, wherein the body has a surface finish that reads over 45 on an ASTM D523 gloss test taken at a 60 degree angle.

14. A floor tape comprising:

15

a body having an upper surface and a lower surface; the body having a pair of lateral edges;




the lower surface of the body defining a recess; the recess being disposed inwardly of the lateral edges to define a pair of shoulders; and an adhesive disposed in the recess between the shoulders.

20

15. A floor tape comprising:

an extruded body having an upper surface having a surface finish that reads over 45 on an ASTM D523 gloss test taken at a 60 degree angle; and an adhesive disposed in the lower surface of the extruded body.

25

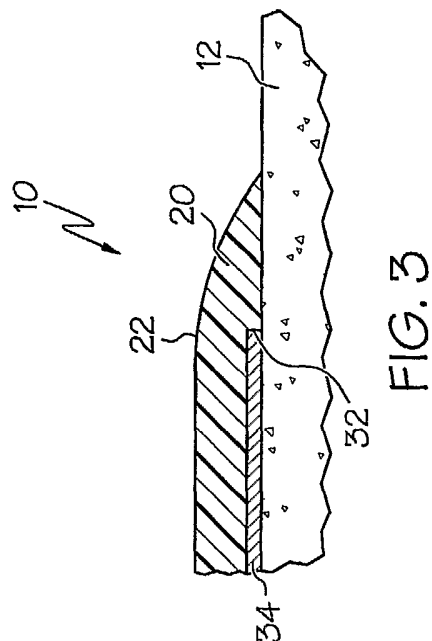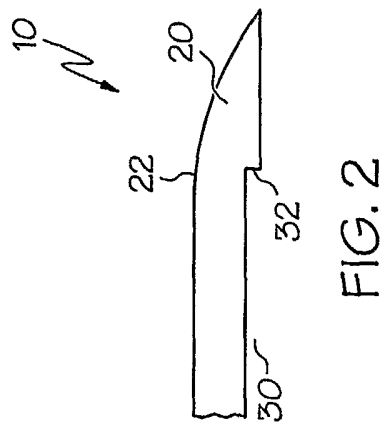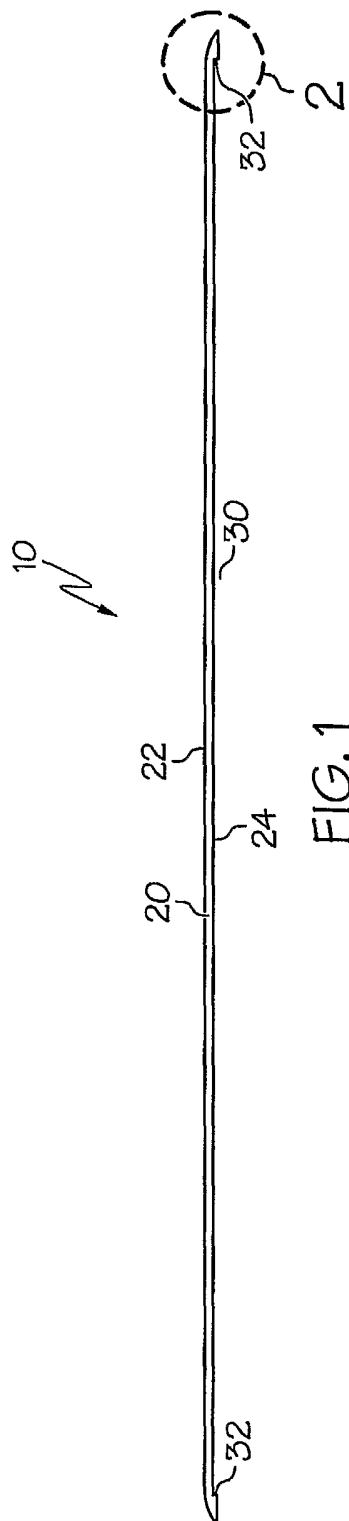

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US06/15028

A. CLASSIFICATION OF SUBJECT MATTER
 IPC: **B32B 3/02(2006.01),3/26(2006.01),3/30(2006.01),9/00(2006.01),33/00(2006.01)**
 USPC: 428/40.1,41.6,174,192,343,409,906
 According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
 Minimum documentation searched (classification system followed by classification symbols)
 U.S. : 428/40.1, 41.6, 174, 192, 343, 409, 906

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
 NONE

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
 WEST, search terms: floor, adhesive, tape, pavement, body, backing, recess, cavity polyvinyl chloride, roll, gloss, extrude

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5,730,446 A (TAYLOR et al) 24 March 1998, See abstract and all figures.	1-3, 5-11, 13
Y		4, 12
Y	US 6,616,790 A (LUHMANN et al) 9 September 2003, See abstract; figure-2; col. 2, line 64; col. 3, lines 19-23.	1-11, 13
Y	US 3,871,947 A (BREKKEN) 18 March 1978; see abstract; col. 4, lines 43-45.	12, 14

Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:	"T"
"A" document defining the general state of the art which is not considered to be of particular relevance	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier application or patent published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search
09 July 2006 (09.07.2006)

Date of mailing of the international search report
11 AUG 2006

Name and mailing address of the ISA/US
 Mail Stop PCT. Attn: ISA/US
 Commissioner for Patents
 P.O. Box 1450
 Alexandria, Virginia 22313-1450
 Facsimile No. (571) 273-3201

Authorized officer
 Nasser Ahmad *[Signature]*
 Telephone No. 571-272-1700