

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
4 October 2007 (04.10.2007)

PCT

(10) International Publication Number
WO 2007/112365 A2

- (51) International Patent Classification:
E05D 11/10 (2006.01)
- (21) International Application Number:
PCT/US2007/064951
- (22) International Filing Date: 26 March 2007 (26.03.2007)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/743,787 26 March 2006 (26.03.2006) US
- (71) Applicant (for all designated States except US):
CHATSWORTH PRODUCT, INC. [US/US]; 31425
Agoura Road, Westlake Village, CA 91361-4614 (US).

AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **LEWIS, Richard, Evans** [US/US]; 4510 Edgemont Drive, Austin, TX 78731 (US).
- (74) Agents: **WRIGHT, James, D.** et al.; Tillman Wright, PLLC, P.O. Box 471581, Charlotte, NC 28247 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,


Declaration under Rule 4.17:
— of inventorship (Rule 4.17(iv))

Published:
— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: INDEXING HINGE

10

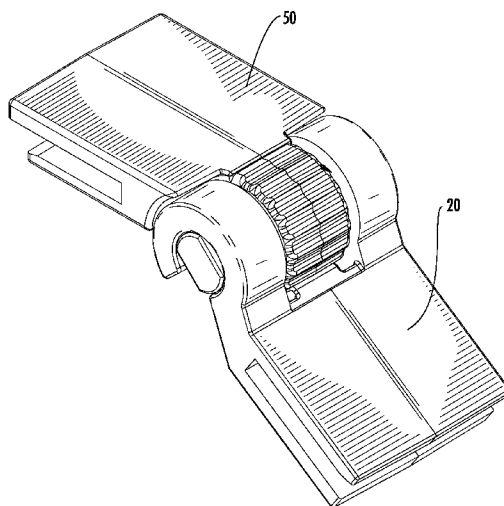

(57) Abstract: An indexing hinge comprises a two arm hinge half and an axle hinge half. The two arm hinge half includes two hinge arms, a projecting indexing element disposed therebetween and a first mounting element. The axle hinge half includes two axles, each extending from a toothed indexing element, and a second mounting element. When the axle hinge half is connected to the two arm hinge half by interconnecting each axle with a respective hinge arm, the projecting indexing element abuts the toothed indexing element in such a way as to prevent rotation unless an additional rotational torque is applied. An electronic equipment enclosure installation comprises an electronic equipment enclosure and an indexing hinge.

WO 2007/112365 A2

INDEXING HINGE

CROSS-REFERENCE TO RELATED APPLICATION

[0001] For purposes of the United States, the present application is a U.S. nonprovisional patent application of, and claims priority under 35 U.S.C. § 119(e) to, U.S. Provisional Patent Application No. 60/743,787 filed March 26, 2006, which provisional patent application is incorporated by reference herein.

COPYRIGHT STATEMENT

[0002] All of the material in this patent document is subject to copyright protection under the copyright laws of the United States and of other countries. The copyright owner has no objection to the facsimile reproduction by anyone of the patent document or the patent disclosure, as it appears in the Patent and Trademark Office patent file or records, but otherwise reserves all copyright rights whatsoever.

BACKGROUND OF THE PRESENT INVENTION

Field of the Present Invention

[0003] The present invention relates generally to hinges for small doors, and, in particular, to selectively positionable hinges for small doors for electronic equipment cabinets, ventilation ducts, and the like.

Background

[0004] Racks, frames, cabinets and the like for supporting computer and other electronic equipment are very well known. Such support apparatus are often partially or fully enclosed, either directly through the use of doors and other panels mounted directly thereon, or indirectly by lining several such apparatuses up in a row such that the sides of each rack are immediately adjacent another rack.

[0005] Often doors and other panels are mounted to the support apparatus with hinges, which conveniently make it possible to open and close the doors and other panels without removing them from the support apparatus. A door or other panel may be opened to access electronic equipment disposed within the support apparatus. Additionally, a door or other panel may be opened to allow air to flow through the support apparatus for cooling purposes.

[0006] A traditional hinge is able to rotate freely about its pivot axis, through its range of rotation, once the door or other panel to which it is attached has been disengaged from the support apparatus or opened. Such free rotation is often undesirable, as it may cause a safety

hazard to technicians accessing equipment within the support apparatus and to other personnel working within the area where the support apparatus is located. Accordingly, it is desirable to provide a hinge that may be fixed at predetermined positions about its range of rotation such that the hinge does not rotate freely therethrough. Such hinge may be rotated with the application of a small amount of rotational torque; however, the hinge may not rotate freely. With such a novel hinge, a person may open a door or other panel on a support apparatus and fix the door or panel in a desired position within its range of rotation. The hinge, and therefore the door or panel, remains in the desired position until enough rotational torque is applied to the hinge to move it to another position.

[0007] While the need for such a hinge has been described in the context of support apparatus for electronic equipment, it will be understood that such hinge may be used in many applications, which will be clear to the Ordinary Artisan.

SUMMARY OF THE PRESENT INVENTION

[0008] Broadly defined, the present invention according to one aspect is an indexing hinge comprising a two arm hinge half and an axle hinge half. The two arm half hinges includes two hinge arms, a projecting indexing element disposed therebetween, and a first mounting element adapted to mount and connect the two arm hinge half to a first structure of an electronic equipment support apparatus. The axle hinge half includes two axles, each extending from a toothed indexing element, and a second mounting element adapted to mount and connect the axle hinge half to a second structure of an electronic equipment support apparatus. When the axle hinge half is connected to the two arm hinge half by interconnecting each axle with a respective hinge arm, the projecting indexing element abuts the toothed indexing element in such a way as to prevent rotation unless an additional rotational torque is applied.

[0009] In features of this aspect, each axle has two flat surfaces arranged therein to permit interconnection of the axle to a respective hinge arm, the toothed indexing element is formed in the shape of a nearly complete cylinder and extends from a proximal end of the second mounting element such that the axis of the cylinder generally parallels the proximal end of the mounting element, and the cylinder defines curved surfaces and two bases. The toothed indexing element includes a plurality of teeth covering the curved surfaces of the cylinder, and the teeth extend generally from one cylinder base to the other and defines a plurality of detents therebetween.

[0010] In further features, the projecting indexing element includes a short protrusion

with a rounded or beveled tip that abuts the toothed indexing element in such a way as to prevent rotation unless an additional rotational torque is applied, and the two hinge arms each include an approximately arcuate hinge barrel section for interconnection with a respective axle. In accordance with this feature, each hinge barrel section defines a partially-enclosed opening of substantially cylindrical cross-section, and the two hinge barrel sections are aligned such that the cylindrical openings are collinear. It is preferred that a distance from a tip of the projecting indexing element to a center of the cylindrical openings is greater than a radius of the cylindrical openings and the tip of the projecting indexing element is arranged to interact with the toothed indexing element in such a way as to prevent rotation unless an additional rotation torque is applied.

[0011] In additional features of this aspect, the first mounting element and the second mounting element each include a first mounting section and a second mounting section separated by a slot, wherein a U-shaped structure is disposed. With regard to this feature, the U-shaped structure includes a ramped structure and a tapered structure disposed in opposing facing relation to one another to aid in mounting the corresponding hinge half to a door, wall or other planar structure.

[0012] In other features of this aspect, the hinge arms act as a spring by extending and contracting slightly as the projecting indexing element and toothed indexing element interact with one another when the additional rotational torque is applied to the indexing hinge to cause rotation thereof and the projecting indexing element abuts the toothed indexing element in such a way as to enable selective positioning resistant to flowing air.

[0013] The present invention according to a second aspect is an electronic equipment enclosure installation comprising an electronic equipment enclosure, and an indexing hinge. The indexing hinge comprises a two arm hinge half and an axle hinge half. The two arm hinge half includes two hinge arms, a projecting indexing element disposed therebetween, and a first mounting element adapted to mount and connect the two arm hinge half to a first structure of an electronic equipment support apparatus. The axle hinge half includes two axles, each extending from a toothed indexing element, and a second mounting element adapted to mount and connect the axle hinge half to a second structure of an electronic equipment support apparatus. When the axle hinge half is connected to the two arm hinge half by interconnecting each axle with a respective hinge arm, the projecting indexing element abuts the toothed indexing element in such a way as to prevent rotation unless an additional rotational torque is applied.

[0014] In features of this aspect, each axle has two flat surfaces arranged therein to

permit interconnection of the axle to a respective hinge arm, the toothed indexing element is formed in the shape of a nearly complete cylinder and extends from a proximal end of the second mounting element such that the axis of the cylinder generally parallels the proximal end of the mounting element, and the cylinder defines curved surfaces and two bases. The
5 toothed indexing element includes a plurality of teeth covering the curved surfaces of the cylinder, and the teeth extend generally from one cylinder base to the other and define a plurality of detents therebetween.

[0015] In further features of this aspect, the projecting indexing element includes a short protrusion with a rounded or beveled tip that abuts the toothed indexing element in such
10 a way as to prevent rotation unless an additional rotational torque is applied, and the two hinge arms each include an approximately arcuate hinge barrel section for interconnection with a respective axle. With regard to this feature, each hinge barrel section defines a partially-enclosed opening of substantially cylindrical cross-section, and the two hinge barrel sections are aligned such that the cylindrical openings are collinear. It is preferred that a distance from
15 a tip of the projecting indexing element to a center of the cylindrical openings is greater than a radius of the cylindrical openings and that the tip of the projecting indexing element is arranged to interact with the toothed indexing element in such a way as to prevent rotation unless an additional rotation torque is applied.

[0016] In an additional feature, the first mounting element and the second mounting
20 element each include a first mounting section and a second mounting section separated by a slot, wherein a U-shaped structure is disposed. With regard to this feature, the U-shaped structure includes a ramped structure and a tapered structure disposed in opposing facing relation to one another to aid in mounting the corresponding hinge half to a door, wall or other planar structure.

[0017] In other features, the hinge arms act as a spring by extending and contracting
25 slightly as the projecting indexing element and toothed indexing element interact with one another when the additional rotational torque is applied to the indexing hinge to cause rotation thereof and the projecting indexing element abuts the toothed indexing element in such a way as to enable selective positioning resistant to flowing air.

[0018] The present invention according to a third aspect is an indexing hinge
30 comprising a two arm hinge half and an axle hinge half. The two arm half hinges includes two hinge arms, a projecting indexing element disposed therebetween, and a first mounting element adapted to mount and connect the two arm hinge half to a first structure. The axle hinge half includes two axles, each extending from a toothed indexing element, and a second

mounting element adapted to mount and connect the axle hinge half to a second structure. When the axle hinge half is connected to the two arm hinge half by interconnecting each axle with a respective hinge arm, the projecting indexing element abuts the toothed indexing element in such a way as to prevent rotation and enable selective positioning resistant to
5 flowing air unless an additional rotational torque is applied by user..

[0019] In features of this aspect, each axle has two flat surfaces arranged therein to permit interconnection of the axle to a respective hinge arm, the toothed indexing element is formed in the shape of a nearly complete cylinder and extends from a proximal end of the second mounting element such that the axis of the cylinder generally parallels the proximal
10 end of the mounting element, and the cylinder defines curved surfaces and two bases. The toothed indexing element includes a plurality of teeth covering the curved surfaces of the cylinder, and the teeth extend generally from one cylinder base to the other and defines a plurality of detents therebetween.

[0020] In further features, the projecting indexing element includes a short protrusion
15 with a rounded or beveled tip that abuts the toothed indexing element in such a way as to prevent rotation unless an additional rotational torque is applied, and the two hinge arms each include an approximately arcuate hinge barrel section for interconnection with a respective axle. In accordance with this feature, each hinge barrel section defines a partially-enclosed opening of substantially cylindrical cross-section, and the two hinge barrel sections are aligned
20 such that the cylindrical openings are collinear. It is preferred that a distance from a tip of the projecting indexing element to a center of the cylindrical openings is greater than a radius of the cylindrical openings and the tip of the projecting indexing element is arranged to interact with the toothed indexing element in such a way as to prevent rotation unless an additional rotation torque is applied.

[0021] In additional features of this aspect, the first mounting element and the second
25 mounting element each include a first mounting section and a second mounting section separated by a slot, wherein a U-shaped structure is disposed. With regard to this feature, the U-shaped structure includes a ramped structure and a tapered structure disposed in opposing facing relation to one another to aid in mounting the corresponding hinge half to a door, wall
30 or other planar structure.

[0022] In another feature of this aspect, the hinge arms act as a spring by extending and contracting slightly as the projecting indexing element and toothed indexing element interact with one another when the additional rotational torque is applied to the indexing hinge to cause rotation thereof.

[0023] Further areas of applicability of the present invention will become apparent from the detailed description provided hereinafter. It should be understood that the detailed description and specific examples, while indicating the preferred embodiment of the invention, are intended for purposes of illustration only and are not intended to limit the scope of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0024] Further features, embodiments, and advantages of the present invention will become apparent from the following detailed description with reference to the drawings, wherein:

FIG. 1 is an isometric view of an electronic equipment enclosure installation, having an internal air duct with doors mounted using an indexing hinge, in accordance with a preferred embodiment of the present invention;

FIG. 2 is a partially exploded isometric view of one of the internal air ducts of FIG. 1;

FIG. 3 is a detailed fragmentary exploded view of an upper port door of FIG. 2;

FIG. 4 is a top orthogonal view of an indexing hinge in accordance with the preferred embodiments of the present invention;

FIG. 5 is a bottom orthogonal view of the two arm hinge half of the indexing hinge of FIG. 4;

FIG. 6 is a bottom plan view of the two arm hinge half of FIG. 5;

FIG. 7 is a side cross-sectional view of the two arm hinge half of FIG. 6, taken along line 7-7;

FIG. 8 is a side plan view of the two arm hinge half of FIG. 5;

FIG. 9 is an end plan view of the two arm hinge half of FIG. 5;

FIG. 10 is a top orthogonal view of the axle hinge half of the indexing hinge of FIG. 4;

FIG. 11 is a bottom plan view of the axle hinge half of FIG. 10;

FIG. 12 is a side plan view of the axle hinge half of FIG. 10;

FIG. 13 is an end plan view of the two arm hinge half of FIG. 10;

FIG. 14 is a side plan view of the indexing hinge of FIG. 4, shown in a disassembled state;

FIG. 15 is a top plan view of the indexing hinge of FIG. 4;

FIG. 16 is a side cross-sectional view of the indexing hinge of FIG. 15, taken

along line 16-16;

FIG. 17 is a side cross-sectional view of the indexing hinge of FIG. 15, taken along line 17-17;

FIG. 18 is a side cross-sectional view of the indexing hinge of FIG. 17, but with the hinge in a first alternative rotational state;

FIG. 19 is a side cross-sectional view of the indexing hinge of FIG. 17, but with the hinge in a second alternative rotational state;

FIG. 20 is a side cross-sectional view similar to that of FIG. 16, wherein the indexing hinge is shown in an installed state; and

FIG. 21 is a side cross-sectional view similar to that of FIG. 17, wherein the indexing hinge is shown in the installed state.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0025] As a preliminary matter, it will readily be understood by one having ordinary skill in the relevant art (“Ordinary Artisan”) that the present invention has broad utility and application. Furthermore, any embodiment discussed and identified as being “preferred” is considered to be part of a best mode contemplated for carrying out the present invention. Other embodiments also may be discussed for additional illustrative purposes in providing a full and enabling disclosure of the present invention. Moreover, many embodiments, such as adaptations, variations, modifications, and equivalent arrangements, will be implicitly disclosed by the embodiments described herein and fall within the scope of the present invention.

[0026] Accordingly, while the present invention is described herein in detail in relation to one or more embodiments, it is to be understood that this disclosure is illustrative and exemplary of the present invention, and is made merely for the purposes of providing a full and enabling disclosure of the present invention. The detailed disclosure herein of one or more embodiments is not intended, nor is to be construed, to limit the scope of patent protection afforded the present invention, which scope is to be defined by the claims and the equivalents thereof. It is not intended that the scope of patent protection afforded the present invention be defined by reading into any claim a limitation found herein that does not explicitly appear in the claim itself.

[0027] Thus, for example, any sequence(s) and/or temporal order of steps of various processes or methods that are described herein are illustrative and not restrictive. Accordingly, it should be understood that, although steps of various processes or methods may

be shown and described as being in a sequence or temporal order, the steps of any such processes or methods are not limited to being carried out in any particular sequence or order, absent an indication otherwise. Indeed, the steps in such processes or methods generally may be carried out in various different sequences and orders while still falling within the scope of the present invention. Accordingly, it is intended that the scope of patent protection afforded the present invention is to be defined by the appended claims rather than the description set forth herein.

[0028] Additionally, it is important to note that each term used herein refers to that which the Ordinary Artisan would understand such term to mean based on the contextual use of such term herein. To the extent that the meaning of a term used herein—as understood by the Ordinary Artisan based on the contextual use of such term—differs in any way from any particular dictionary definition of such term, it is intended that the meaning of the term as understood by the Ordinary Artisan should prevail.

[0029] Furthermore, it is important to note that, as used herein, “a” and “an” each generally denotes “at least one,” but does not exclude a plurality unless the contextual use dictates otherwise. Thus, reference to “a picnic basket having an apple” describes “a picnic basket having at least one apple” as well as “a picnic basket having apples.” In contrast, reference to “a picnic basket having a single apple” describes “a picnic basket having only one apple.”

[0030] When used herein to join a list of items, “or” denotes “at least one of the items,” but does not exclude a plurality of items of the list. Thus, reference to “a picnic basket having cheese or crackers” describes “a picnic basket having cheese without crackers”, “a picnic basket having crackers without cheese”, and “a picnic basket having both cheese and crackers.” Finally, when used herein to join a list of items, “and” denotes “all of the items of the list.” Thus, reference to “a picnic basket having cheese and crackers” describes “a picnic basket having cheese, wherein the picnic basket further has crackers,” as well as describes “a picnic basket having crackers, wherein the picnic basket further has cheese.”

[0031] Referring now to the drawings, in which like numerals represent like components throughout the several views, the preferred embodiments of the present invention are next described. The following description of the preferred embodiment(s) is merely exemplary in nature and is in no way intended to limit the invention, its application, or uses.

[0032] FIG. 1 is an isometric view of an electronic equipment enclosure installation **100**, having an internal air duct **102** with doors **104** mounted thereto using an indexing hinge **10**, in accordance with an exemplary embodiment of the present invention. As shown, the

electronic equipment enclosure installation **100** typically includes an equipment enclosure **106** supported by a raised floor (not shown). The equipment enclosure **106** comprises a frame, conventionally formed from vertical and horizontal frame members, and may further include mounting rails (not shown), for supporting electronic equipment and related accessories, and one or more panels (not shown), which conventionally take the form of side panels, front and rear doors or panels, top panels, and bottom panels.

[0033] In use, electronic equipment (not shown) is installed in the equipment enclosure **106**, typically by attaching the equipment to the mounting rails, and operated normally. Arranged inside the equipment enclosure **106** is an internal air duct **102** adapted to guide the flow of cool air from beneath the raised floor to various elevations within the enclosure **106**.

[0034] In the exemplary embodiment illustrated in FIGS. 1-3, the internal air duct **102** includes a pair of risers **108**, each riser **108** extending vertically from a respective collector **110**, and the two risers being connected at their upper ends by an air dam (not shown). Each riser **108** is of generally hollow, rectangular construction, with a solid top end and a bottom end that opens into a corresponding collector **110**, and includes a plurality of distribution openings or ports **112** arranged along the front thereof. The internal air ducts **102** include ports **112** near the top of the risers **108**. Each port **112** may be selectively closed and opened, or covered and uncovered, by a respective port door **104** mounted to one of the risers **108** by a pair of indexing hinges **10**. The indexing hinges **10** of the present invention permit each door **104** to be opened and closed individually for selective cooling of electronic equipment stored in the electronic equipment enclosure **106**. Additionally, the indexing hinges **10** provide a mechanism for partially opening or selectively positioning the doors **104** for further cooling selectability.

[0035] FIG. 2 is a partially exploded perspective view of one of the internal air ducts **102** of FIG. 1, and FIG. 3 is a detailed exploded view of an upper port door **104** of FIG. 2. As is shown, the doors **104** and the portions of the riser **108** to which the doors **104**, and consequently the indexing hinges **10**, will be mounted have a profile **116** (best shown in FIG. 3) cut therein so as to be able to accept the indexing hinge **10**. The profile shape will be more fully understood when the structure of the indexing hinge **10** is described fully hereinbelow.

[0036] The hinges shown in FIGS. 4-21 are shown in a different orientation than the hinges shown in FIGS. 1-3. FIGS. 1-3 show one exemplary application of the hinges, wherein the hinges are in a particular orientation. It will be understood by the Ordinary Artisan that the hinges of the present invention may be used in any orientation. Further, relative terms such as top, bottom, side, and end are used for convenience and illustration with regard to FIGS. 4-21

and should not be considered limiting in any way on the invention. FIG. 4 is a top orthogonal view of an indexing hinge **10** in accordance with the preferred embodiments of the present invention. As shown therein, the indexing hinge **10** primarily includes two hinge halves **20**, **50**, referred to herein as a two arm hinge half **20** and an axle hinge half **50**. These two elements **20**, **50** are described below.

[0037] FIG. 5 is a bottom orthogonal view of the two arm hinge half **20** of the indexing hinge **10** of FIG. 1, while FIG. 6 is a bottom plan view of the two arm hinge half **20** of FIG. 5 and FIG. 7 is a side cross-sectional view of the two arm hinge half **20** of FIG. 6, taken along line 7-7. As collectively shown therein, the two arm hinge half **20** includes two hinge arms **22**, **24**, a projecting indexing element **26** and a first mounting element **28**. The two hinge arms **22**, **24**, which are preferably symmetric with respect to each other, each include a base section **30** extending from a proximal end of the mounting element **28** and an approximately arcuate hinge barrel section **32** extending from an end of the base section **30** opposite the mounting element **28**. Each base section **30** is preferably offset from the body of the mounting element **28**, and is sloped along the upper and lower surface to permit maximum rotation of the axle hinge half **50** as described hereinbelow. Each hinge barrel section **32** defines a partially-enclosed opening **34** of substantially cylindrical cross-section, and the two hinge barrel sections **32** are aligned such that the cylindrical openings **34** are collinear.

[0038] The projecting indexing element **26** is preferably disposed halfway between the two hinge arms **22**, **24** and comprises a short protrusion with a rounded or beveled tip **36** extending from the proximal end of the mounting element **28**. Though not absolutely necessary, it is further preferable that the distance from the tip **36** to the center of the cylindrical openings **34** is greater than the radius of the cylindrical openings **34** and is arranged to interact with teeth **60** and detents **62** of an indexing element **56** on the axle hinge half **50**, as described below.

[0039] FIGS. 8 and 9 are a side plan view and an end plan view, respectively, of the two arm hinge half **20** of FIG. 5. As shown in FIGS. 7-9, the mounting element **28** includes a first mounting section **38** and a second mounting section **40** separated by a slot **42**. Disposed within the slot **42** is a U-shaped structure **44**. At the end of the U-shaped structure **44** adjacent the first mounting section **38** is disposed a ramped structure **46** arranged to face into the slot **42**, and at the end of the U-shaped structure **44** adjacent the second mounting section **40** is disposed a tapered structure **48**, also arranged to face into the slot **42** in opposition to the ramped structure **46**. Further, extending along the entire length of the edge of the second mounting section **40** at the end of the slot **42** is a beveled surface **49**. The ramped structure **46**,

the tapered structure **48** and the beveled surface **49** all aid in mounting the two arm hinge half **20** to a door, other panel, wall or other planar structure **90, 95** (perhaps best seen in FIG. 20) by forcing the first and second mounting sections **38, 40** apart or otherwise guiding the two arm hinge half **20** into place on the planar structure **90, 95** before snapping into place in a correspondingly-sized and -located slot on the planar structure **90, 95**, as will be apparent to the Ordinary Artisan.

[0040] FIG. 10 is a top orthogonal view of the axle hinge half **50** of the indexing hinge **10** of FIG. 4, while FIG. 11 is a bottom plan view of the axle hinge half **50** of FIG. 10 and FIG. 12 is a side plan view of the axle hinge half **50** of FIG. 10. As collectively shown therein, the axle hinge half **50** includes two flat-sided axles **52, 54**, each extending from a toothed indexing element **56**, and a second mounting element **58**. As perhaps best shown in FIG. 12, the toothed indexing element **56** is formed in the shape of a nearly complete cylinder extending from a proximal end of the mounting element **58** such that the axis of the cylinder generally parallels the proximal end of the mounting element **58**. Except for where the cylinder intersects the proximal end of the mounting element **58**, the curved surfaces of the cylinder are covered with a plurality of teeth **60**, each extending generally from one cylinder base to the other and defining a plurality of detents **62** therebetween. The purpose and operation of these teeth **60** and the detents **62** they define will be made apparent hereinbelow.

[0041] The two axles **52, 54**, which are preferably symmetric with respect to each other, each comprise a portion of a cylinder having opposing flat, parallel faces **64**. The diameter of the cylinder and the orientation and size of the flat faces **64** are each selected to correspond with the size and arrangement of the openings **34** of the two arm hinge half **20** and other aspects of the hinge arms **22, 24**, as will be further described hereinbelow.

[0042] FIG. 13 is an end plan view of the axle hinge half **50** of FIG. 10. As shown in FIGS. 12 and 13, the mounting element **58** includes a first mounting section **68** and a second mounting section **70** separated by a slot **72**. Disposed within the slot **72** is a U-shaped structure **74**. At the end of the U-shaped structure **74** adjacent the first mounting section **68** is disposed a ramped structure **76** arranged to face into the slot **72**, and at the end of the U-shaped structure **74** adjacent the second mounting section **70** is disposed a tapered structure **78**, also arranged to face into the slot **72** in opposition to the ramped structure **76**. Further, extending along the entire length of the edge of the second mounting section **70** at the end of the slot **72** is a beveled surface **79**. The ramped structure **76**, the tapered structure **78** and the beveled surface **79** all aid in mounting the axle hinge half **50** to a door, other panel, wall or other planar structure **90, 95** by forcing the first and second mounting sections **68, 70** apart or

otherwise guiding the axle hinge half **50** into place on the planar structure **90, 95** before snapping into place in a correspondingly-sized and -located slot on the planar structure **90, 95**, as will be apparent to the Ordinary Artisan.

[0043] In addition, the proximal end of the mounting element **58** includes concave surfaces **66** disposed on either side of the indexing element **56**, as perhaps best shown in FIG. 10. The curvature of each concave surface **66** is selected to be generally cylindrical in form, the axis of such cylinder being generally coincident with the axis defining the cylinder of the indexing element **56** and the flat-sided axles **52, 54**. This concave surface permits free rotation of the two hinge arms **22, 24** of the two arm hinge half **20** as more fully described hereinbelow.

[0044] FIG. 14 is a side plan view of the indexing hinge **10** of FIG. 4, shown in a disassembled state. As illustrated therein, the two halves **20, 50** may be connected together by aligning the flat-sided axles **52, 54** with the openings **34** in the hinge barrel sections **32**, and more particularly, by aligning the flat-sided axles **52, 54** with the gap between the free ends of the hinge barrel sections **32** and the respective hinge arm base sections **30**. Once aligned, the halves **20, 50** may be interconnected by pressing them together along the lines of force represented by the arrow **80** in FIG. 14. With a sufficient amount of force, the barrel sections **32** may be forced away from the base sections **30** by a distance sufficient to permit the axles **52, 54** to pass into the openings **34**, at which point the barrel sections **32** return to the original positions, thereby retaining the axles **52, 54** in the openings **34**.

[0045] The assembled hinge **10** is shown in FIGS. 15-17, wherein FIG. 15 is a top plan view of the indexing hinge **10** of FIG. 4, while FIG. 17 is a side cross-sectional view of the indexing hinge **10** of FIG. 15, taken along line 17-17, and FIG. 17 is a side cross-sectional view of the indexing hinge **10** of FIG. 15, taken along line 17-17. FIG. 16 perhaps best illustrates the retention of the axles **52, 54** in the openings **34**, as well as the relationship of the outer surfaces of the barrel sections **32** to the concave surfaces **66** of the axle hinge half **50**. As evidenced therein, the interconnection of the hinge arms **22, 24** of the first hinge half **20** to the axles **52, 54** of the second hinge half **50** permit the two halves **20, 50** to rotate with respect to each other about an axis defined by the axles **52, 54**.

[0046] Significantly, however, free rotation of the two hinge halves **20, 50** is restricted through the use of the two indexing elements **26, 56**. As perhaps best shown in FIG. 17, the tip **36** of the projecting indexing element **26** is arranged to interact with the teeth **60** and detents **62** of the indexing element **56** on the axle hinge half **50**. More specifically, as one of the hinge halves **20, 50** is rotated relative to the other, the teeth **60** tend to bias the tip **36** into

one of the detents **62** defined therebetween. Thus, in order to cause the tip **36** to move from one detent **62** to another, an extra amount of force, over and above that required to cause rotation by itself, is necessary in order to overcome the biasing force applied by the teeth **60** adjacent the current detent **62**. This minimum force is such that once the hinge halves **20**, **50** are placed in a particular rotational disposition, relative to each other, they are predisposed to remain in that position until a user once again applies the minimum force in order to cause rotation. This feature of the indexing hinge enables the hinge to maintain its selective positioning against external forces such as the force of flowing air, e.g., if the hinge **10** is being used to mount a door to an internal air duct **102** as shown in FIGS. 1-3, or if the hinge **10** is being used on an air conditioning vent (not shown). In this regard, it is preferable, though not necessary, that the distance from the tip **36** to the center of the cylindrical openings **34** is greater than the radius of the cylindrical openings **34**, thereby facilitating the application of a greater amount of torque by the tip **36** on the axle hinge half **50**.

[0047] FIG. 18 is a side cross-sectional view of the indexing hinge **10** of FIG. 17, but with the hinge **10** in a first alternative rotational state. FIG. 19 is a side cross-sectional view of the indexing hinge **10** of FIG. 17, but with the hinge **10** in a second alternative rotational state. Together, FIGS. 18 and 19 demonstrate the full range of rotation of the two arm hinge half **20** relative to the axle hinge half **50**.

[0048] FIG. 20 is a side cross-sectional view similar to that of FIG. 16, wherein the indexing hinge **10** is shown in an installed state. FIG. 21 is a side cross-sectional view similar to that of FIG. 17, wherein the indexing hinge **10** is shown in the installed state. As stated previously, the installation of the indexing hinge **10** on doors, other panels, walls or other planar structures **90**, **95** will be apparent to the Ordinary Artisan.

[0049] Both halves **20**, **50** of the hinge **10** may be molded from a suitable plastic material. The single integral indexing feature of the two arm hinge halve **20** is designed to provide a slight interference fit against the mating multiple integral indexing teeth of the axle hinge half **50**. By virtue of the material composition and the "split" design of the hinge arms **22**, **24**, a sufficient compliance exists to permit the two hinge arms **22**, **24** to act as a spring and extend and contract slightly as the indexing features **26**, **56** interfere with one another as the hinge components **20**, **50** are rotated. The compliance of the hinge arms **22**, **24** further allows the hinge assembly **10** to hold the indexing features **26**, **56** together at known, repeatable positions with sufficient force to prevent rotation unless a moderate amount of rotational torque is applied. As disclosed and described, the hinge **10** is particularly intended for use with small doors, and more particularly with doors found on electronic equipment

cabinets of the general kind described in commonly-assigned U.S. Patent Application No. 11/625,716, the entirety of which is incorporated herein by reference. The embodiment shown may be particularly suitable for a sheet metal door design, but other applications will be obvious to the Ordinary Artisan.

5 [0050] Based on the foregoing information, it is readily understood by those persons skilled in the art that the present invention is susceptible of broad utility and application. Many embodiments and adaptations of the present invention other than those specifically described herein, as well as many variations, modifications, and equivalent arrangements, will be apparent from or reasonably suggested by the present invention and the foregoing
10 descriptions thereof, without departing from the substance or scope of the present invention. Accordingly, while the present invention has been described herein in detail in relation to its preferred embodiment, it is to be understood that this disclosure is only illustrative and exemplary of the present invention and is made merely for the purpose of providing a full and enabling disclosure of the invention. The foregoing disclosure is not intended to be construed
15 to limit the present invention or otherwise exclude any such other embodiments, adaptations, variations, modifications or equivalent arrangements; the present invention being limited only by the claims appended hereto and the equivalents thereof. Although specific terms are employed herein, they are used in a generic and descriptive sense only and not for the purpose of limitation.

What is claimed is:

1. An indexing hinge, comprising:
 - (a) a two arm hinge half, including two hinge arms, a projecting indexing element disposed therebetween, and a first mounting element adapted to mount and connect the two arm hinge half to a first structure of an electronic equipment support apparatus; and
 - (b) an axle hinge half, including two axles, each extending from a toothed indexing element, and a second mounting element adapted to mount and connect the axle hinge half to a second structure of an electronic equipment support apparatus;
 - (c) wherein when the axle hinge half is connected to the two arm hinge half by interconnecting each axle with a respective hinge arm, the projecting indexing element abuts the toothed indexing element in such a way as to prevent rotation unless an additional rotational torque is applied.
2. The indexing hinge of Claim 1, wherein each axle has two flat surfaces arranged therein to permit interconnection of the axle to a respective hinge arm.
3. The indexing hinge of Claim 1, wherein the toothed indexing element is formed in the shape of a nearly complete cylinder and extends from a proximal end of the second mounting element such that the axis of the cylinder generally parallels the proximal end of the mounting element.
4. The indexing hinge of Claim 3, wherein the cylinder defines curved surfaces and two bases, wherein the toothed indexing element includes a plurality of teeth covering the curved surfaces of the cylinder, and wherein the teeth extend generally from one cylinder base to the other and define a plurality of detents therebetween.
5. The indexing hinge of Claim 1, wherein the projecting indexing element includes a short protrusion with a rounded or beveled tip that abuts the toothed indexing element in such a way as to prevent rotation unless an additional rotational torque is applied.
6. The indexing hinge of Claim 1, wherein the two hinge arms each include an approximately arcuate hinge barrel section for interconnection with a respective axle.
7. The indexing hinge of Claim 6, wherein each hinge barrel section defines a partially-enclosed opening of substantially cylindrical cross-section, and the two hinge barrel sections are aligned such that the cylindrical openings are collinear.
8. The indexing hinge of Claim 7, wherein a distance from a tip of the projecting indexing element to a center of the cylindrical openings is greater than a radius of the cylindrical openings and wherein the tip of the projecting indexing element is arranged

to interact with the toothed indexing element in such a way as to prevent rotation unless an additional rotation torque is applied.

9. The indexing hinge of Claim 1, wherein the first mounting element and the second mounting element each include a first mounting section and a second mounting section separated by a slot, wherein a U-shaped structure is disposed.
10. The indexing hinge of Claim 9, wherein the U-shaped structure includes a ramped structure and a tapered structure disposed in opposing facing relation to one another to aid in mounting the corresponding hinge half to a door, wall or other planar structure.
11. The indexing hinge of Claim 1, wherein the hinge arms act as a spring by extending and contracting slightly as the projecting indexing element and toothed indexing element interact with one another when the additional rotational torque is applied to the indexing hinge to cause rotation thereof.
12. The indexing hinge of Claim 1, wherein the projecting indexing element abuts the toothed indexing element in such a way as to enable selective positioning resistant to flowing air.
13. An electronic equipment enclosure installation, comprising
- (a) an electronic equipment enclosure, and
 - (b) an indexing hinge, comprising:
 - (i) a two arm hinge half, including two hinge arms, a projecting indexing element disposed therebetween, and a first mounting element adapted to mount and connect the two arm hinge half to a first structure of an electronic equipment support apparatus; and
 - (ii) an axle hinge half, including two axles, each extending from a toothed indexing element, and a second mounting element adapted to mount and connect the axle hinge half to a second structure of an electronic equipment support apparatus;
 - (iii) wherein when the axle hinge half is connected to the two arm hinge half by interconnecting each axle with a respective hinge arm, the projecting indexing element abuts the toothed indexing element in such a way as to prevent rotation unless an additional rotational torque is applied.
14. The electronic equipment enclosure installation of Claim 13, wherein each axle has two flat surfaces arranged therein to permit interconnection of the axle to a respective hinge arm.
15. The electronic equipment enclosure installation of Claim 13, wherein the toothed

indexing element is formed in the shape of a nearly complete cylinder and extends from a proximal end of the second mounting element such that the axis of the cylinder generally parallels the proximal end of the mounting element.


- 5 16. The electronic equipment enclosure installation of Claim 15, wherein the cylinder defines curved surfaces and two bases, wherein the toothed indexing element includes a plurality of teeth covering the curved surfaces of the cylinder, and wherein the teeth extend generally from one cylinder base to the other and define a plurality of detents therebetween.
- 10 17. The electronic equipment enclosure installation of Claim 13, wherein the projecting indexing element includes a short protrusion with a rounded or beveled tip that abuts the toothed indexing element in such a way as to prevent rotation unless an additional rotational torque is applied.
- 15 18. The electronic equipment enclosure installation of Claim 13, wherein the two hinge arms each include an approximately arcuate hinge barrel section for interconnection with a respective axle.
19. The electronic equipment enclosure installation of Claim 18, wherein each hinge barrel section defines a partially-enclosed opening of substantially cylindrical cross-section, and the two hinge barrel sections are aligned such that the cylindrical openings are collinear.
- 20 20. The electronic equipment enclosure installation of Claim 19, wherein a distance from a tip of the projecting indexing element to a center of the cylindrical openings is greater than a radius of the cylindrical openings and wherein the tip of the projecting indexing element is arranged to interact with the toothed indexing element in such a way as to prevent rotation unless an additional rotation torque is applied.
- 25 21. The electronic equipment enclosure installation of Claim 13, wherein the first mounting element and the second mounting element each include a first mounting section and a second mounting section separated by a slot, wherein a U-shaped structure is disposed.
- 30 22. The electronic equipment enclosure installation of Claim 21, wherein the U-shaped structure includes a ramped structure and a tapered structure disposed in opposing facing relation to one another to aid in mounting the corresponding hinge half to a door, wall or other planar structure.
23. The electronic equipment enclosure installation of Claim 13, wherein the hinge arms act as a spring by extending and contracting slightly as the projecting indexing element

and toothed indexing element interact with one another when the additional rotational torque is applied to the indexing hinge to cause rotation thereof.

24. The electronic equipment enclosure installation of Claim 13, wherein the projecting indexing element abuts the toothed indexing element in such a way as to enable selective positioning resistant to flowing air.
25. An indexing hinge, comprising:
- (a) a two arm hinge half, including two hinge arms, a projecting indexing element disposed therebetween, and a first mounting element adapted to mount and connect the two arm hinge half to a first structure; and
 - (b) an axle hinge half, including two axles, each extending from a toothed indexing element, and a second mounting element adapted to mount and connect the axle hinge half to a second structure;
 - (c) wherein when the axle hinge half is connected to the two arm hinge half by interconnecting each axle with a respective hinge arm, the projecting indexing element abuts the toothed indexing element in such a way as to prevent rotation and enable selective positioning resistant to flowing air unless an additional rotational torque is applied by user.
26. The indexing hinge of Claim 25, wherein each axle has two flat surfaces arranged therein to permit interconnection of the axle to a respective hinge arm.
27. The indexing hinge of Claim 25, wherein the toothed indexing element is formed in the shape of a nearly complete cylinder and extends from a proximal end of the second mounting element such that the axis of the cylinder generally parallels the proximal end of the mounting element.
28. The indexing hinge of Claim 27, wherein the cylinder defines curved surfaces and two bases, wherein the toothed indexing element includes a plurality of teeth covering the curved surfaces of the cylinder, and wherein the teeth extend generally from one cylinder base to the other and define a plurality of detents therebetween.
29. The indexing hinge of Claim 25, wherein the projecting indexing element includes a short protrusion with a rounded or beveled tip that abuts the toothed indexing element in such a way as to prevent rotation unless an additional rotational torque is applied.
30. The indexing hinge of Claim 25, wherein the two hinge arms each include an approximately arcuate hinge barrel section for interconnection with a respective axle.
31. The indexing hinge of Claim 30, wherein each hinge barrel section defines a partially-enclosed opening of substantially cylindrical cross-section, and the two hinge barrel

sections are aligned such that the cylindrical openings are collinear.

32. The indexing hinge of Claim 31, wherein a distance from a tip of the projecting indexing element to a center of the cylindrical openings is greater than a radius of the cylindrical openings and wherein the tip of the projecting indexing element is arranged to interact with the toothed indexing element in such a way as to prevent rotation unless an additional rotation torque is applied.
- 5
33. The indexing hinge of Claim 25, wherein the first mounting element and the second mounting element each include a first mounting section and a second mounting section separated by a slot, wherein a U-shaped structure is disposed.
- 10
34. The indexing hinge of Claim 33, wherein the U-shaped structure includes a ramped structure and a tapered structure disposed in opposing facing relation to one another to aid in mounting the corresponding hinge half to a door, wall or other planar structure.
35. The indexing hinge of Claim 25, wherein the hinge arms act as a spring by extending and contracting slightly as the projecting indexing element and toothed indexing element interact with one another when the additional rotational torque is applied to the indexing hinge to cause rotation thereof.
- 15

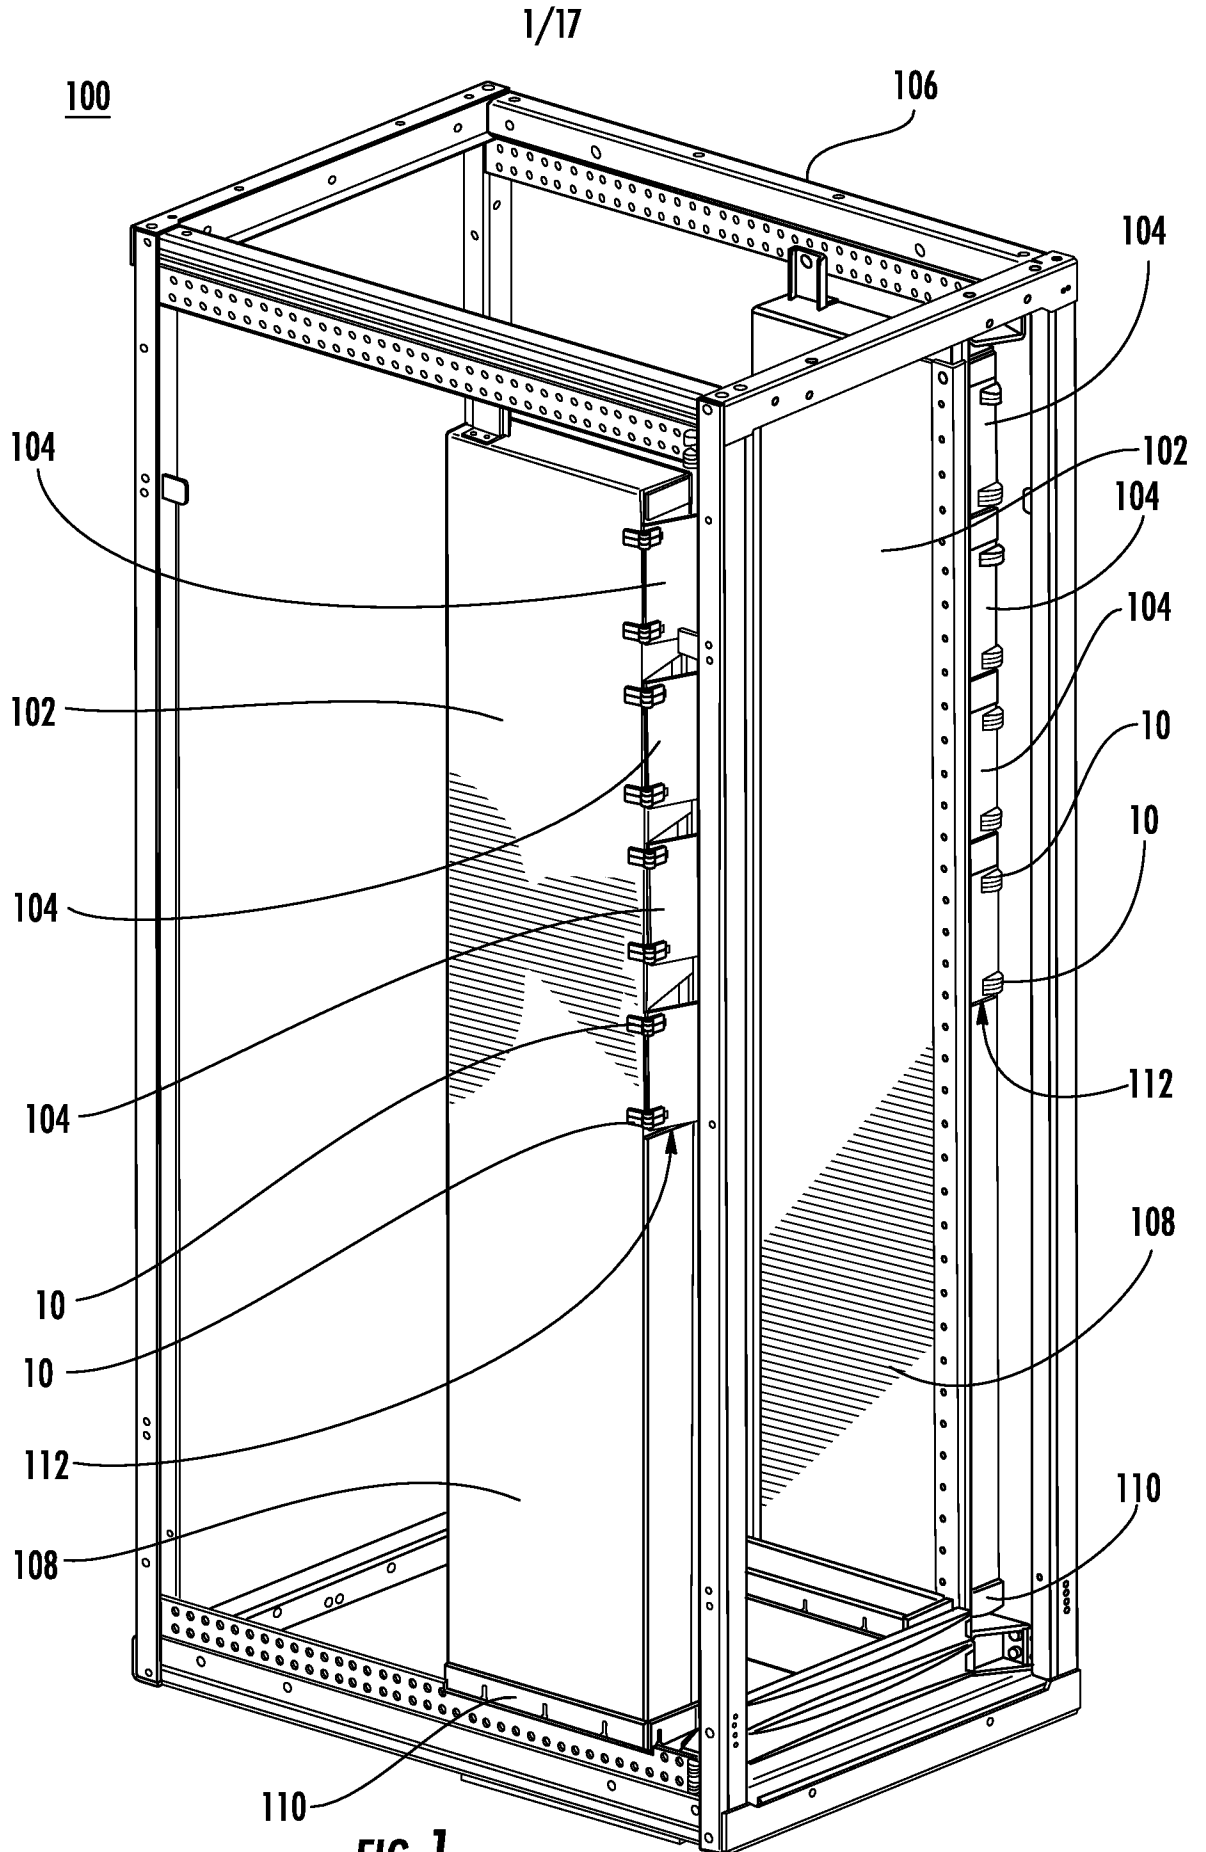

2/17

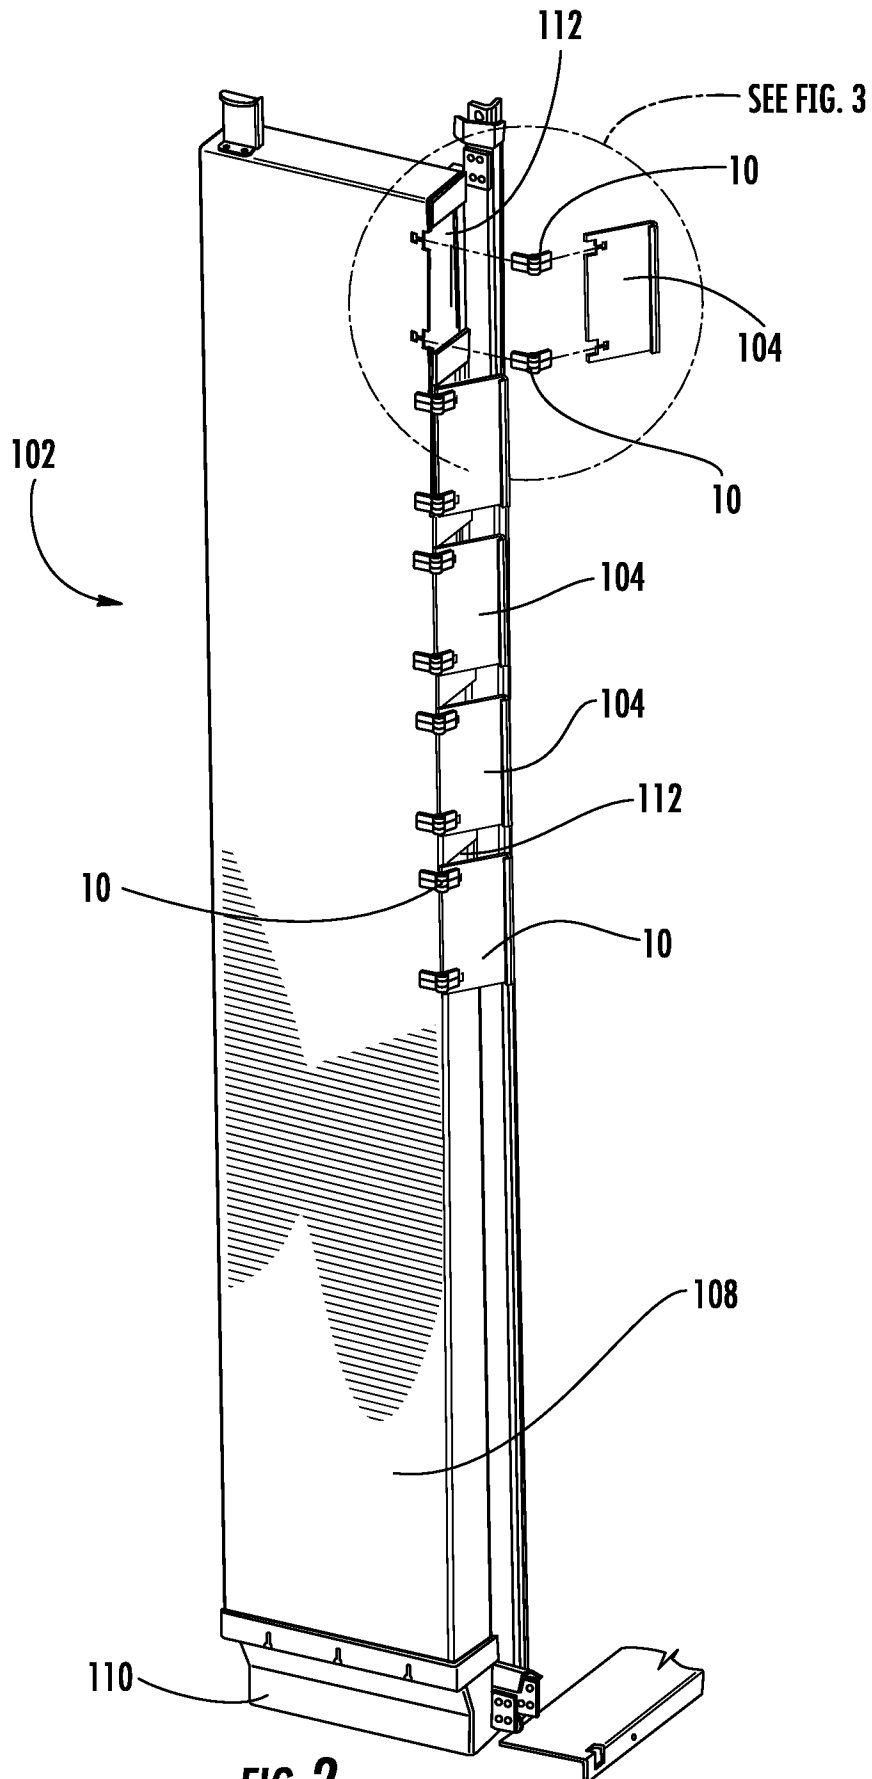


FIG. 2

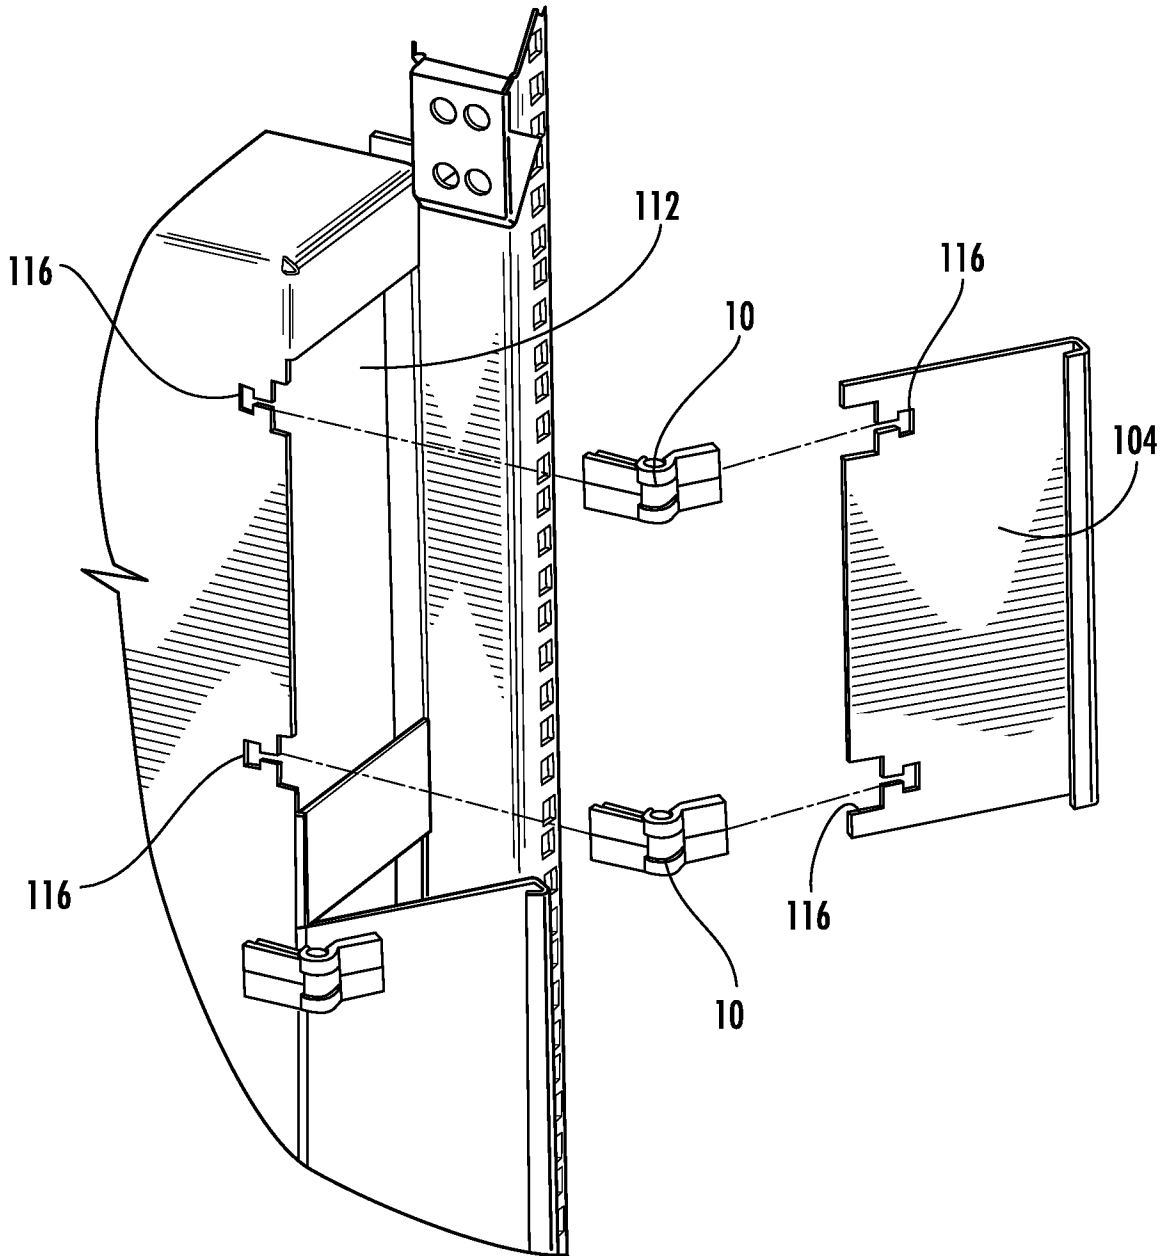


FIG. 3

10

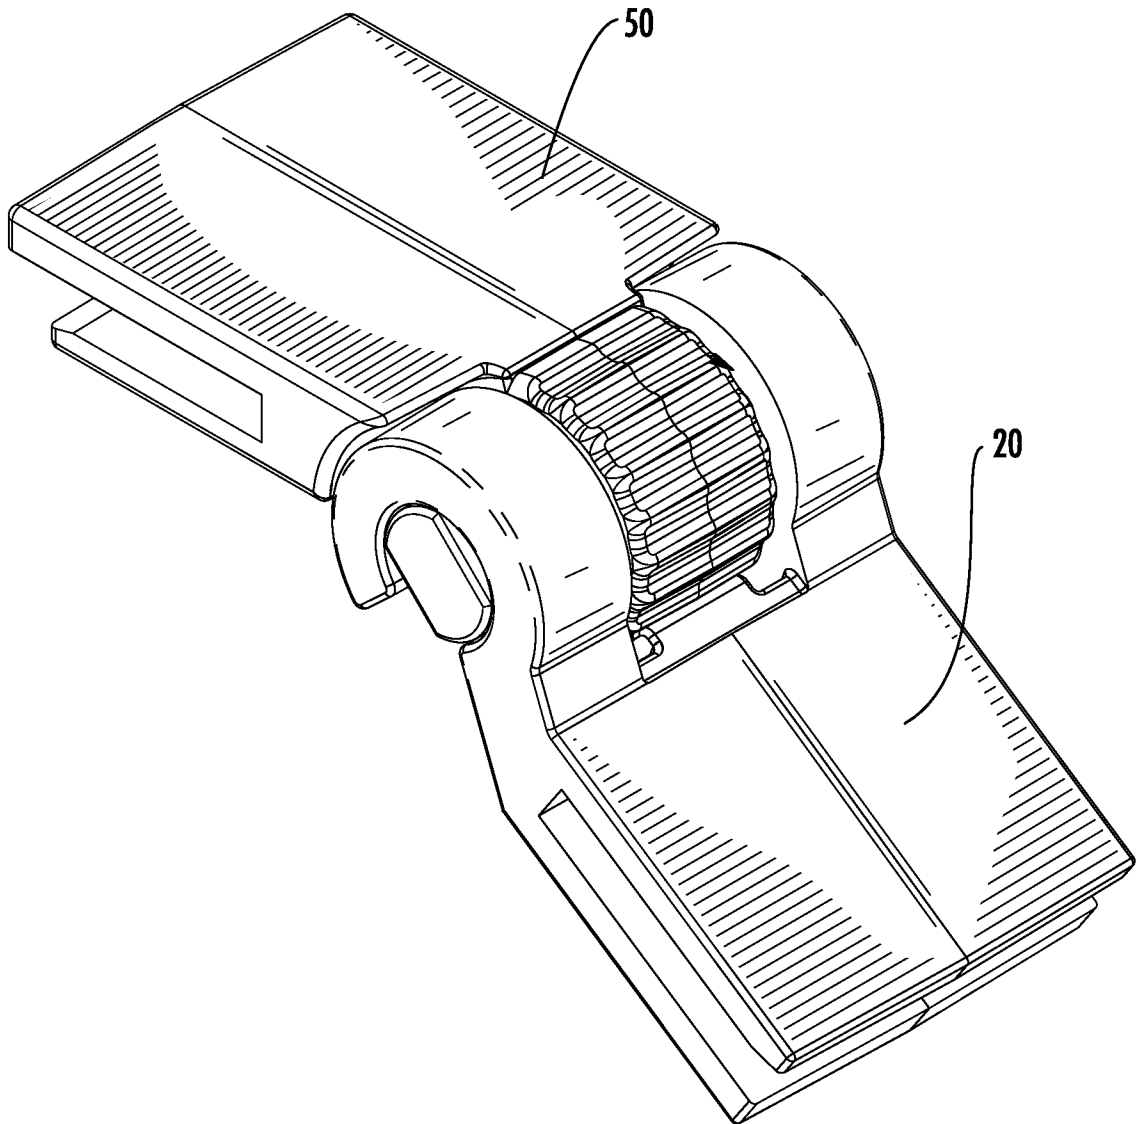


FIG. 4

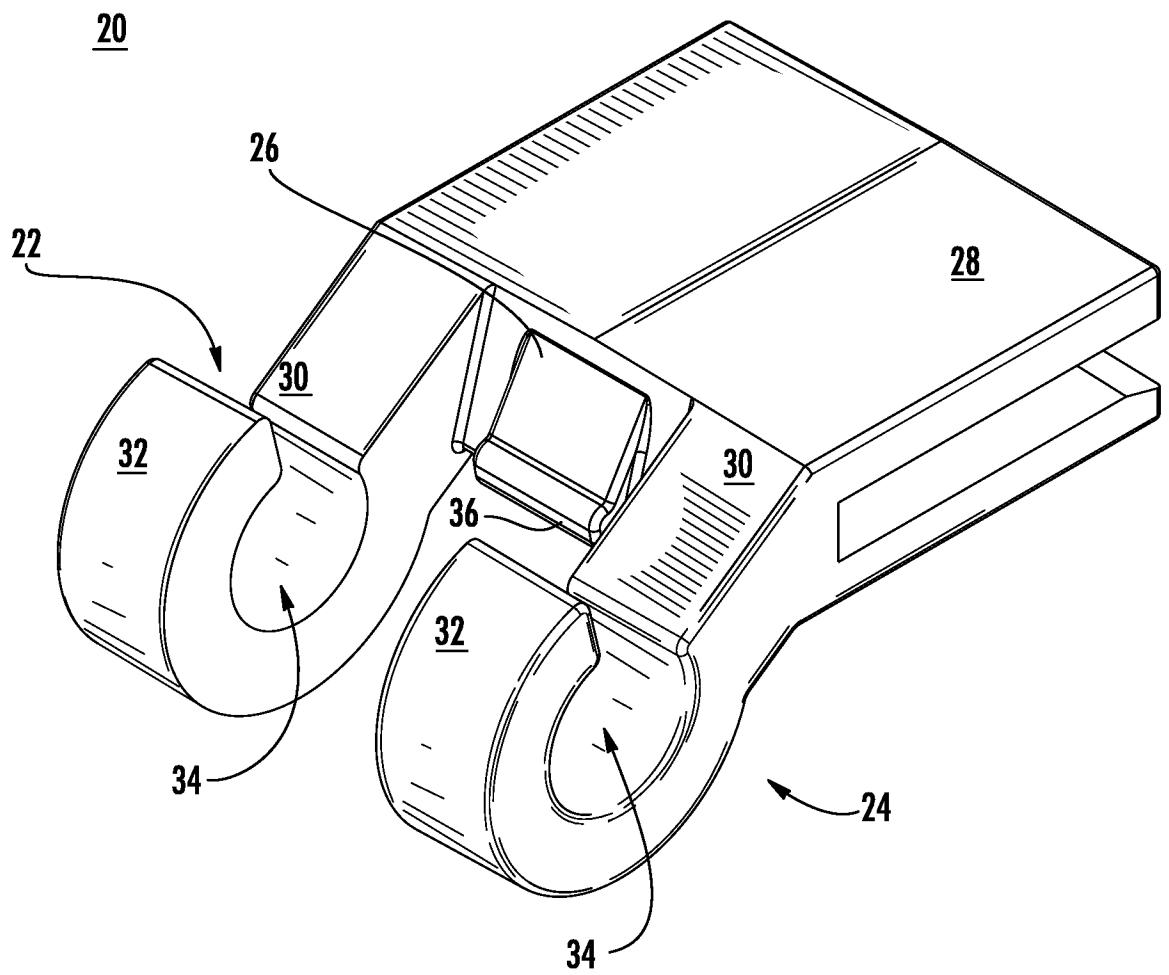


FIG. 5

20

6/17

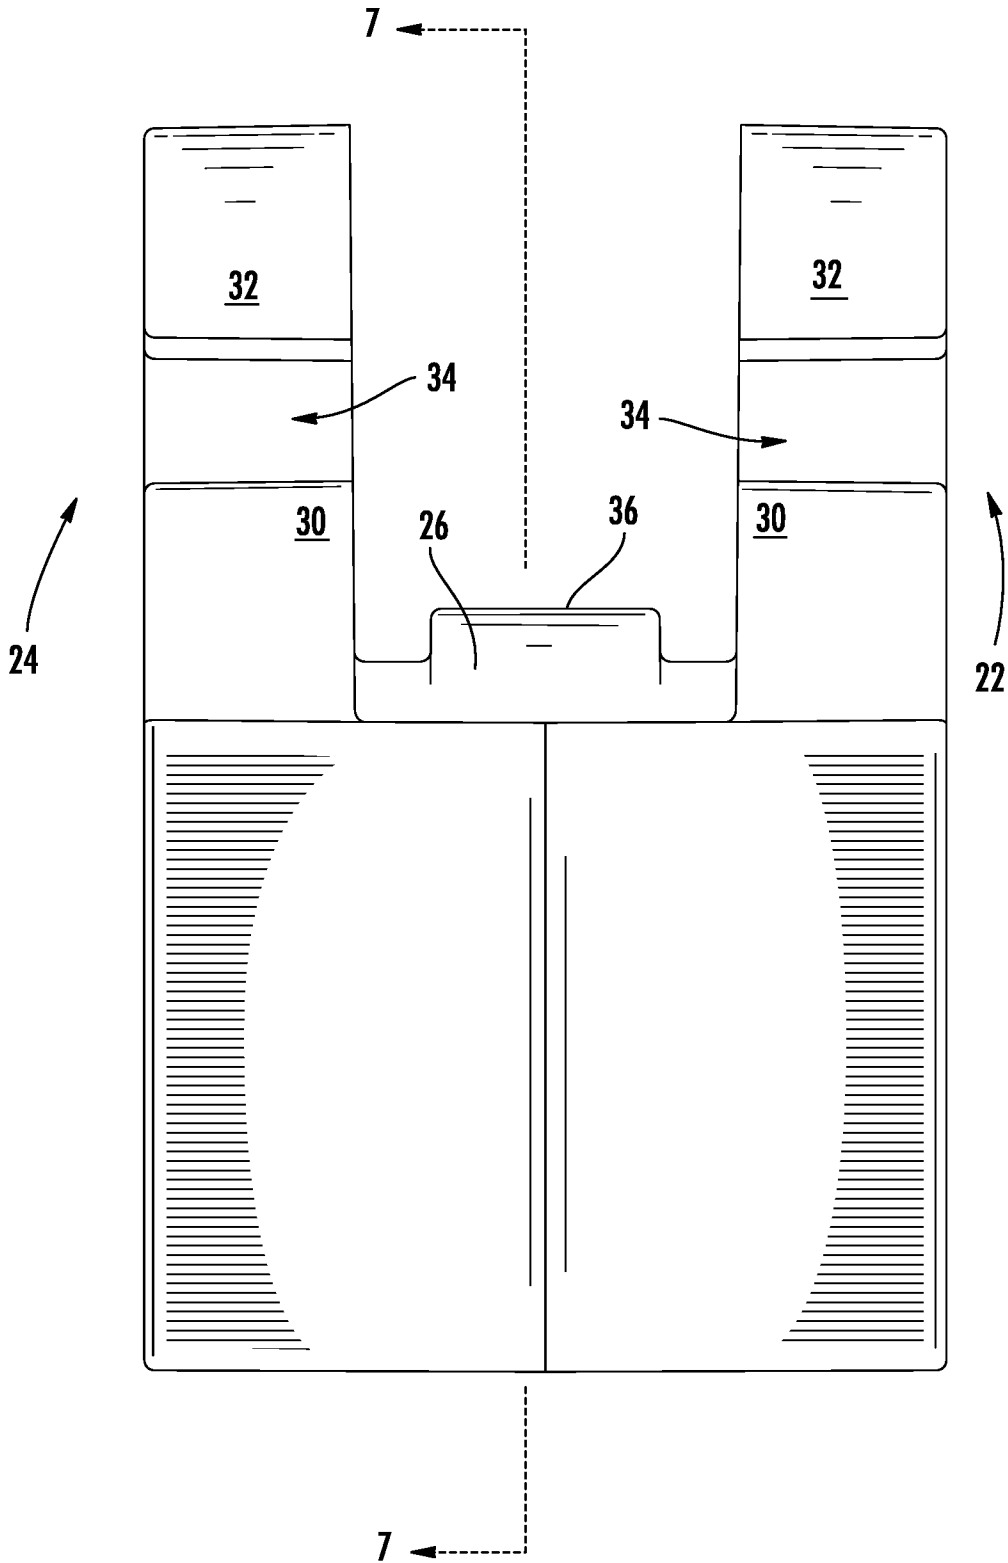


FIG. 6

7/17

20

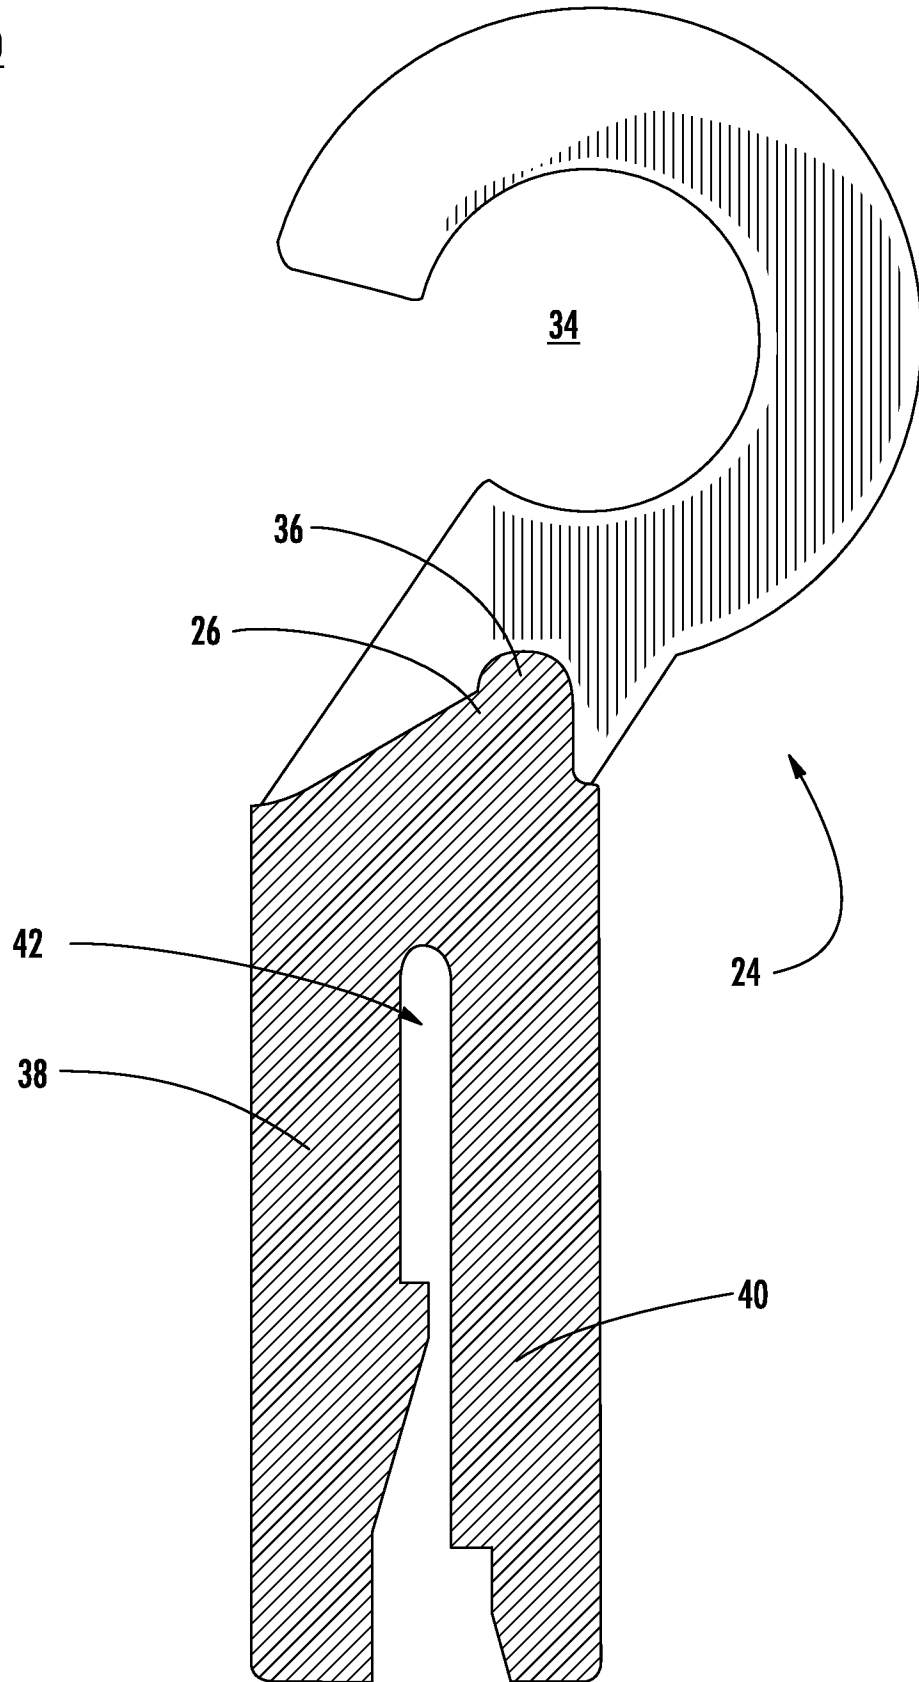


FIG. 7

20

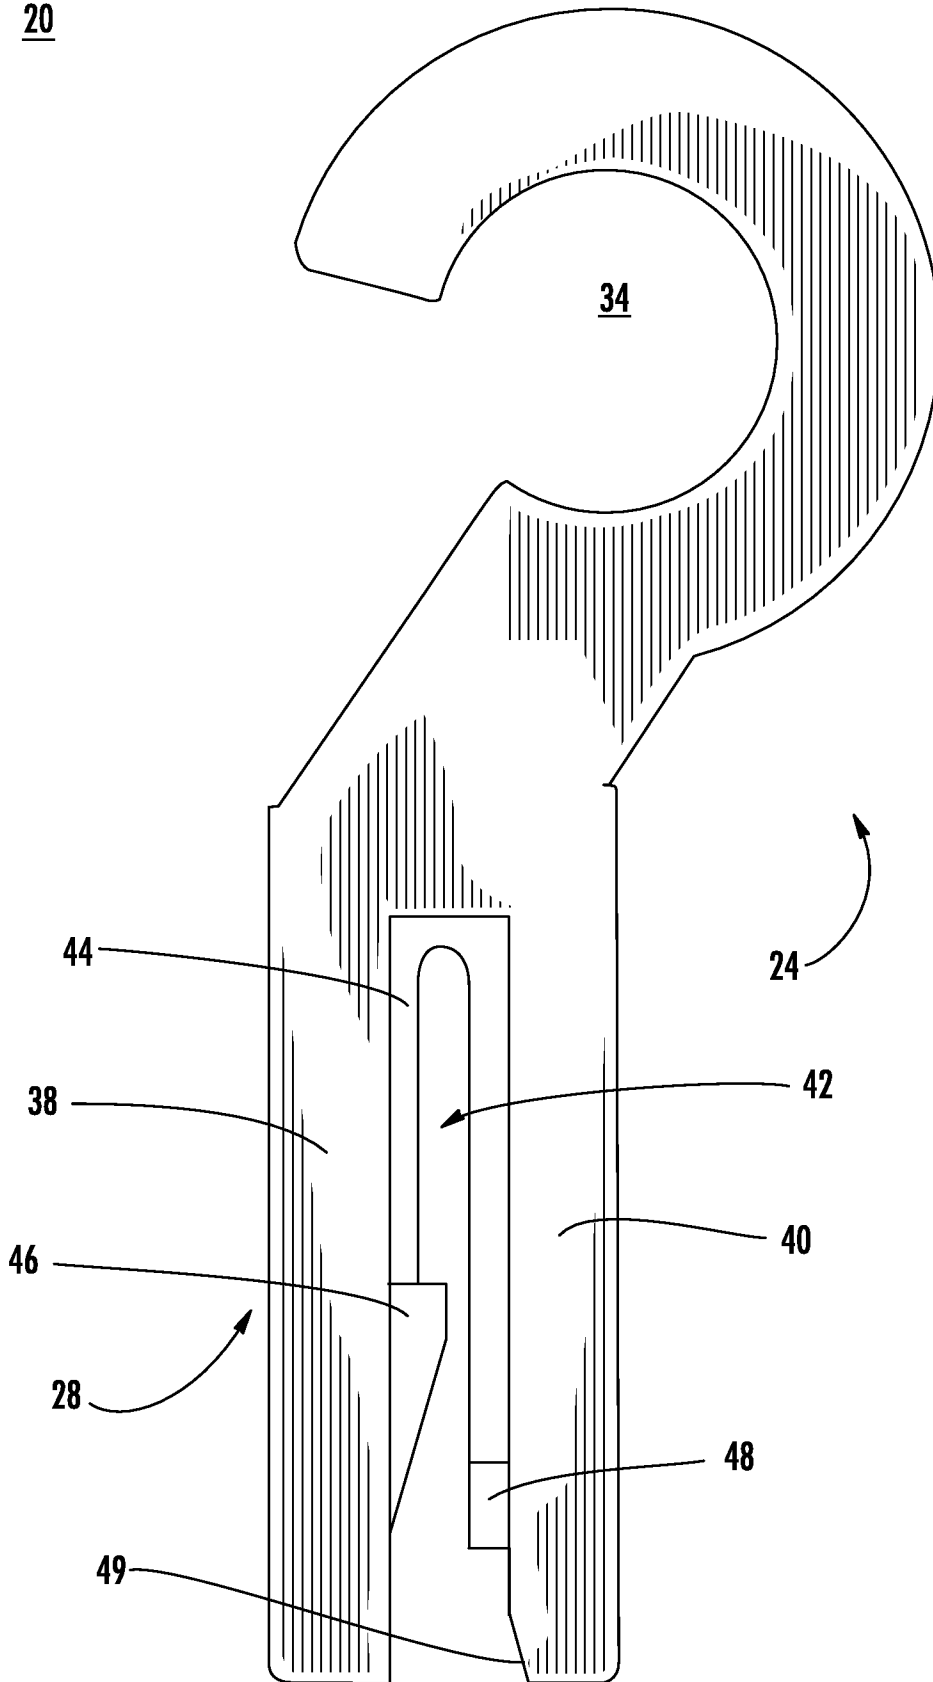


FIG. 8

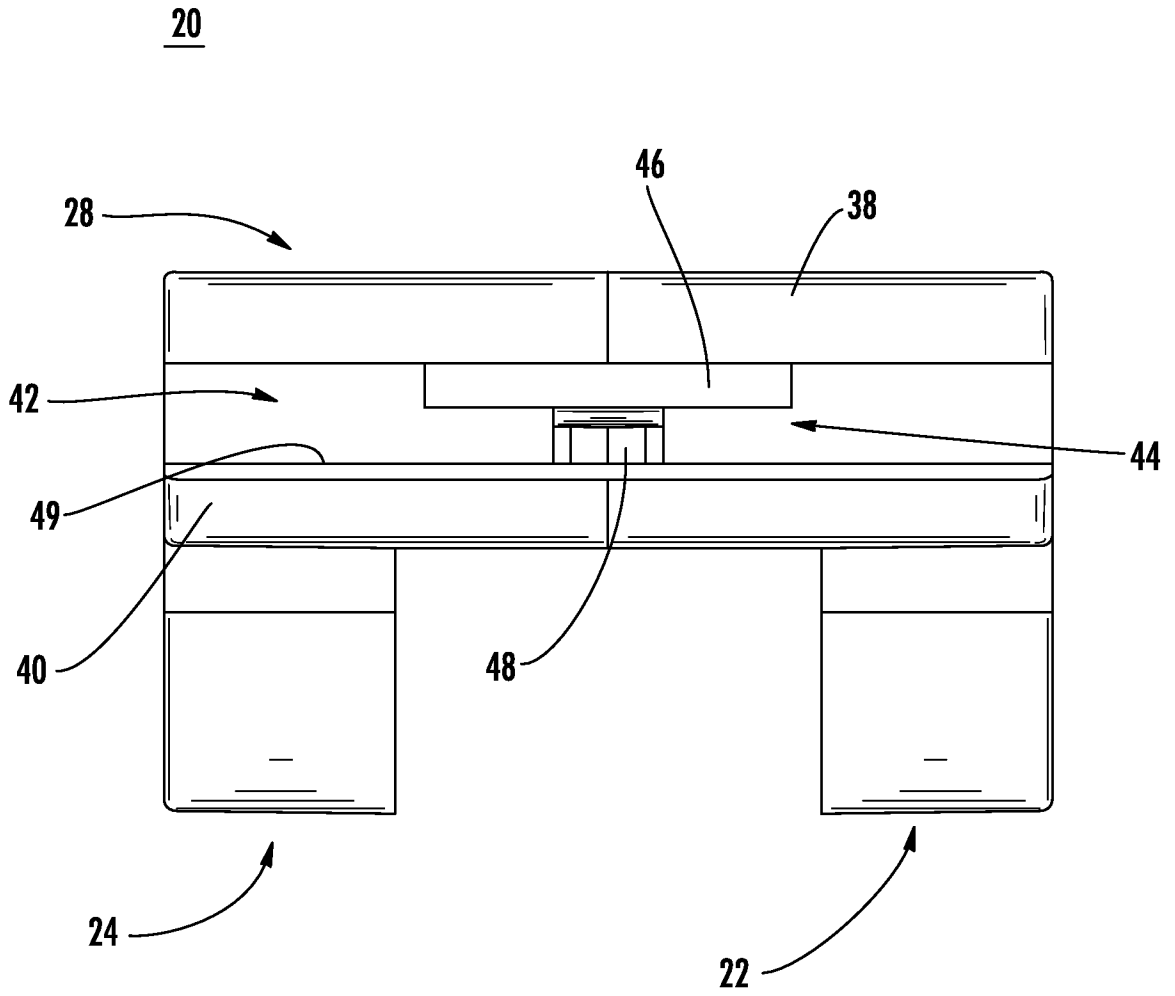


FIG. 9


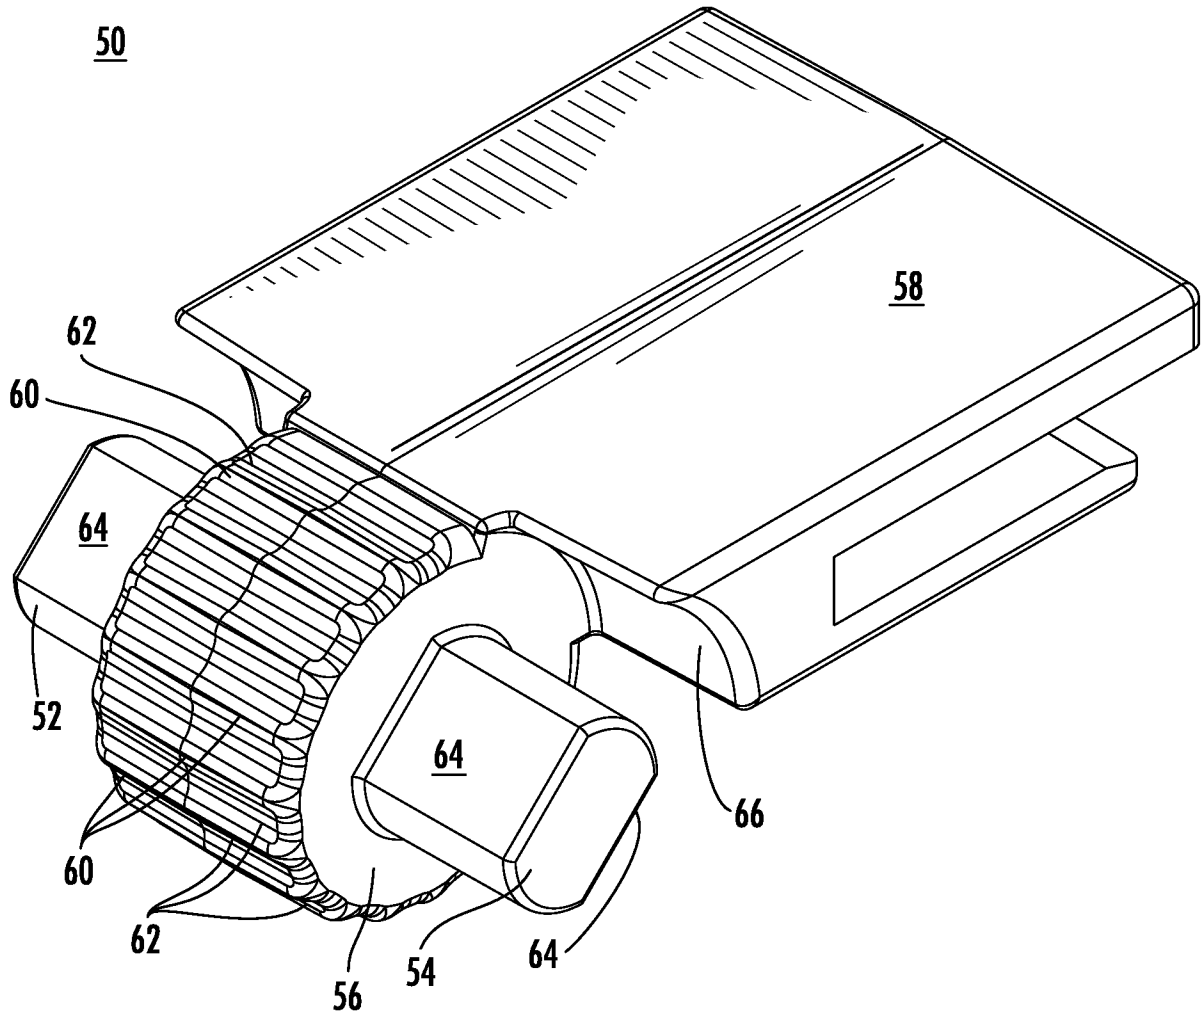


FIG. 10

50

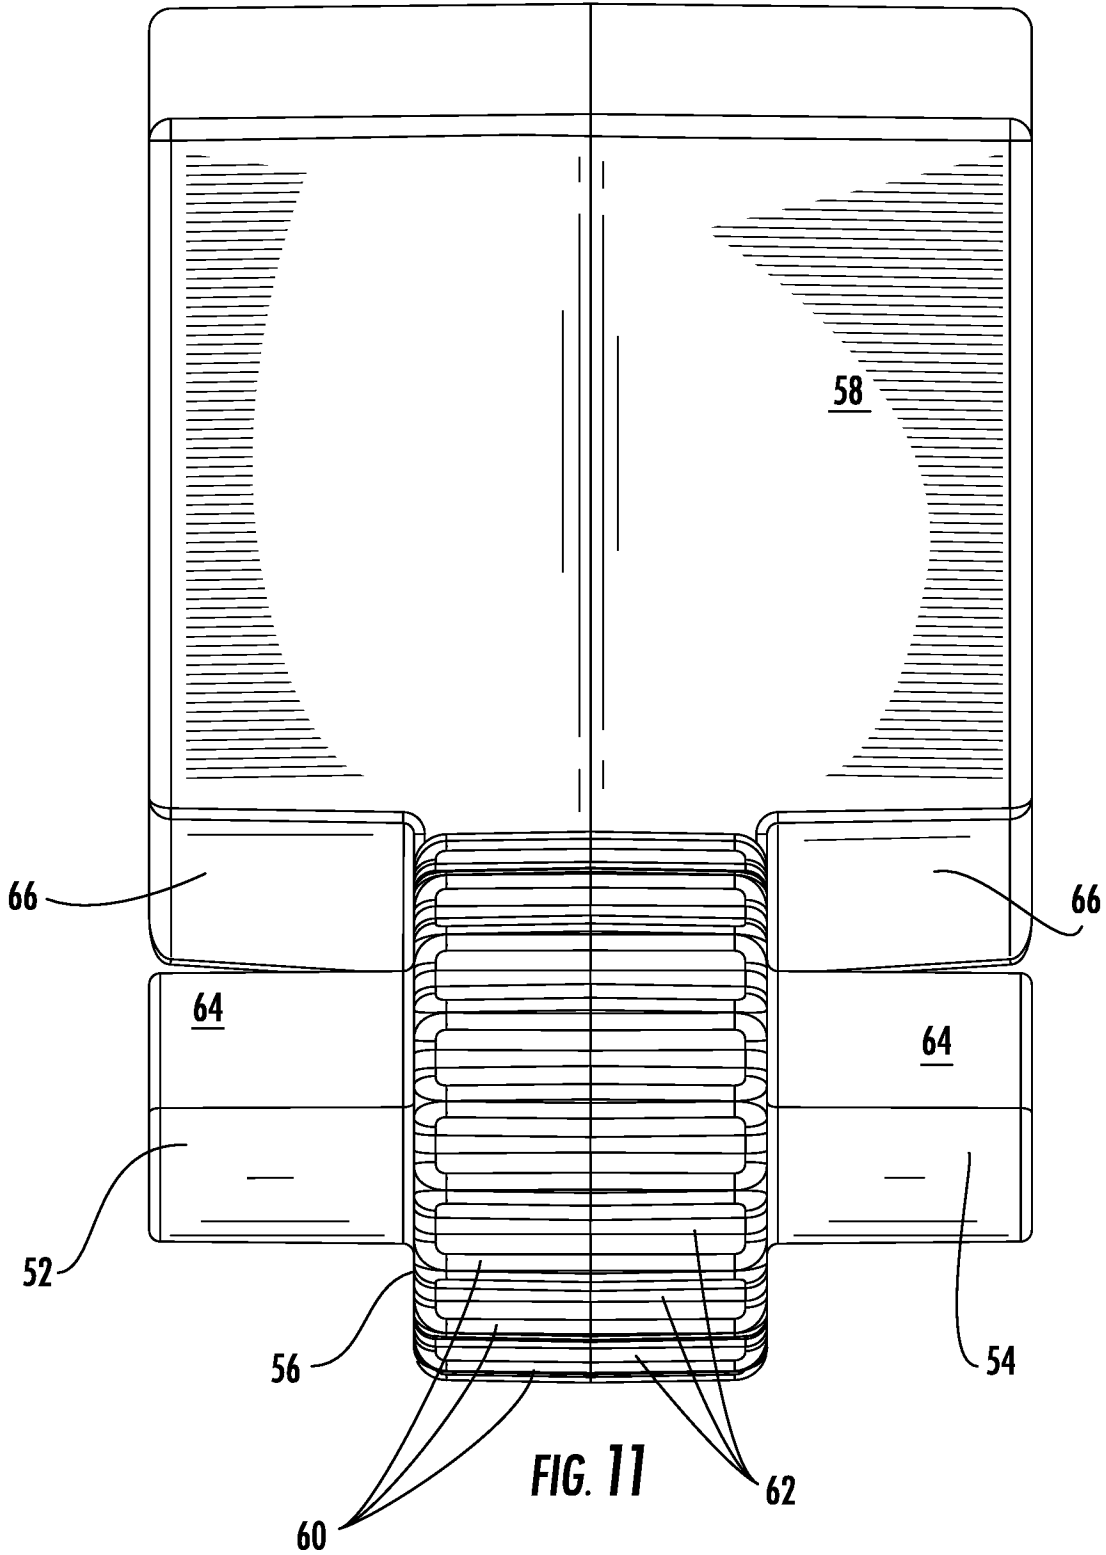

50

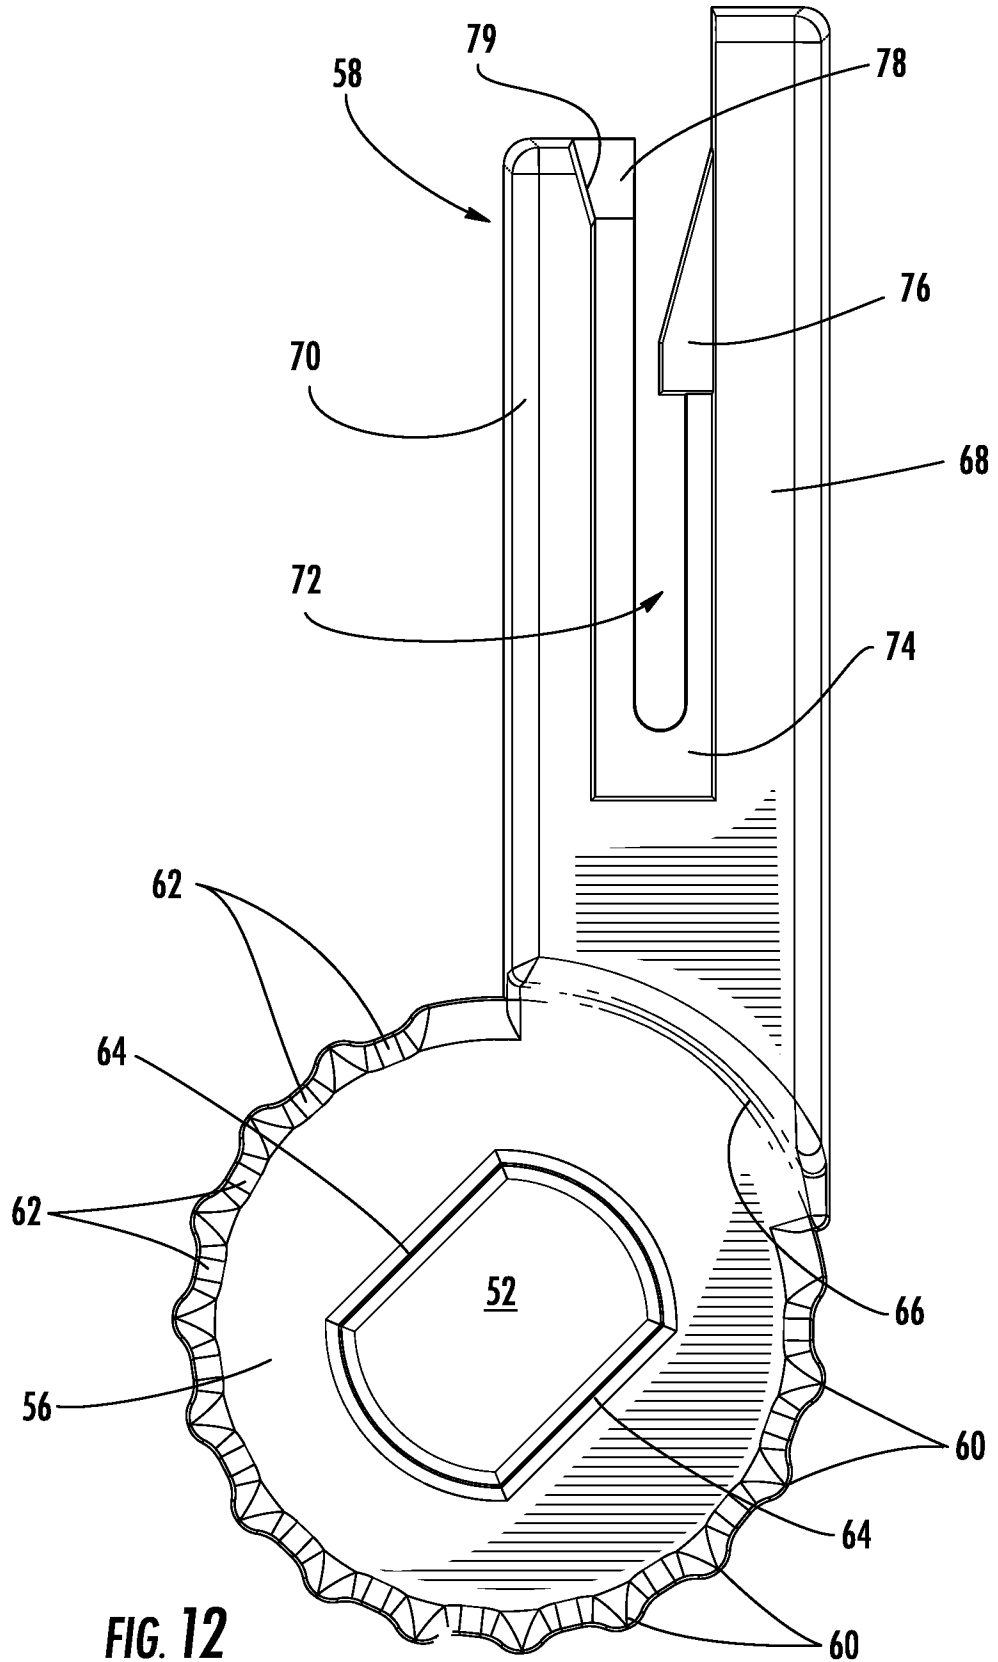


FIG. 12

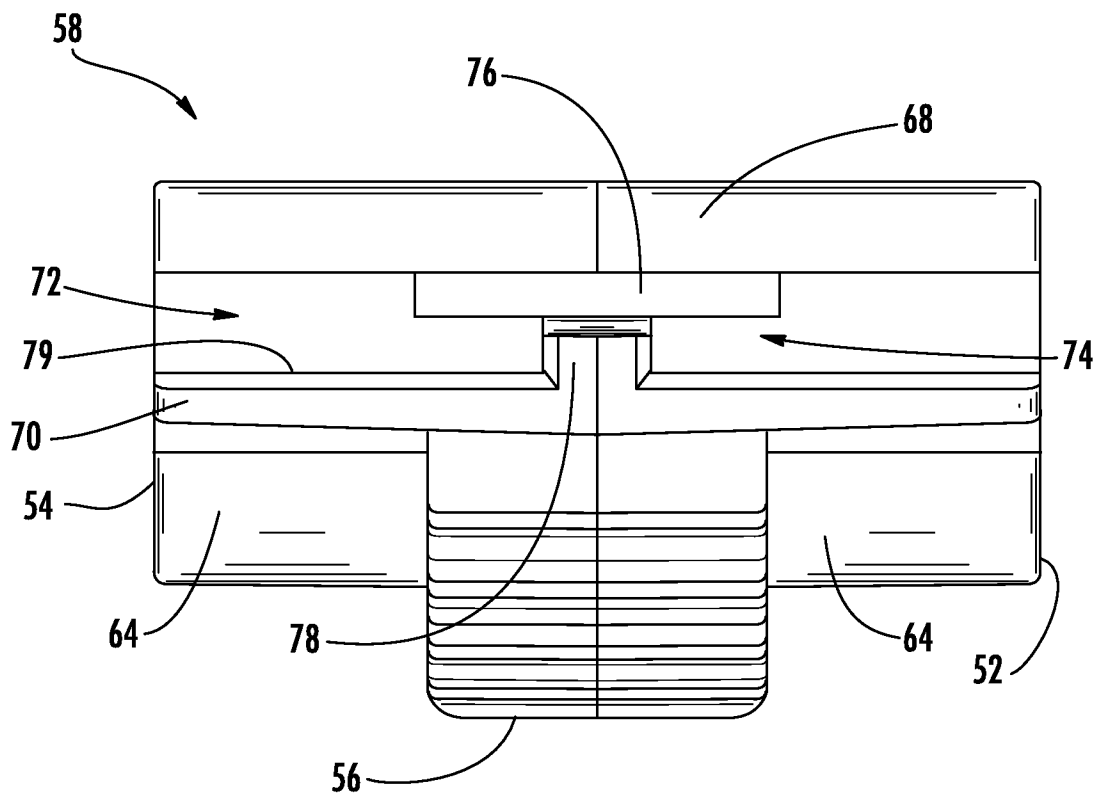


FIG. 13

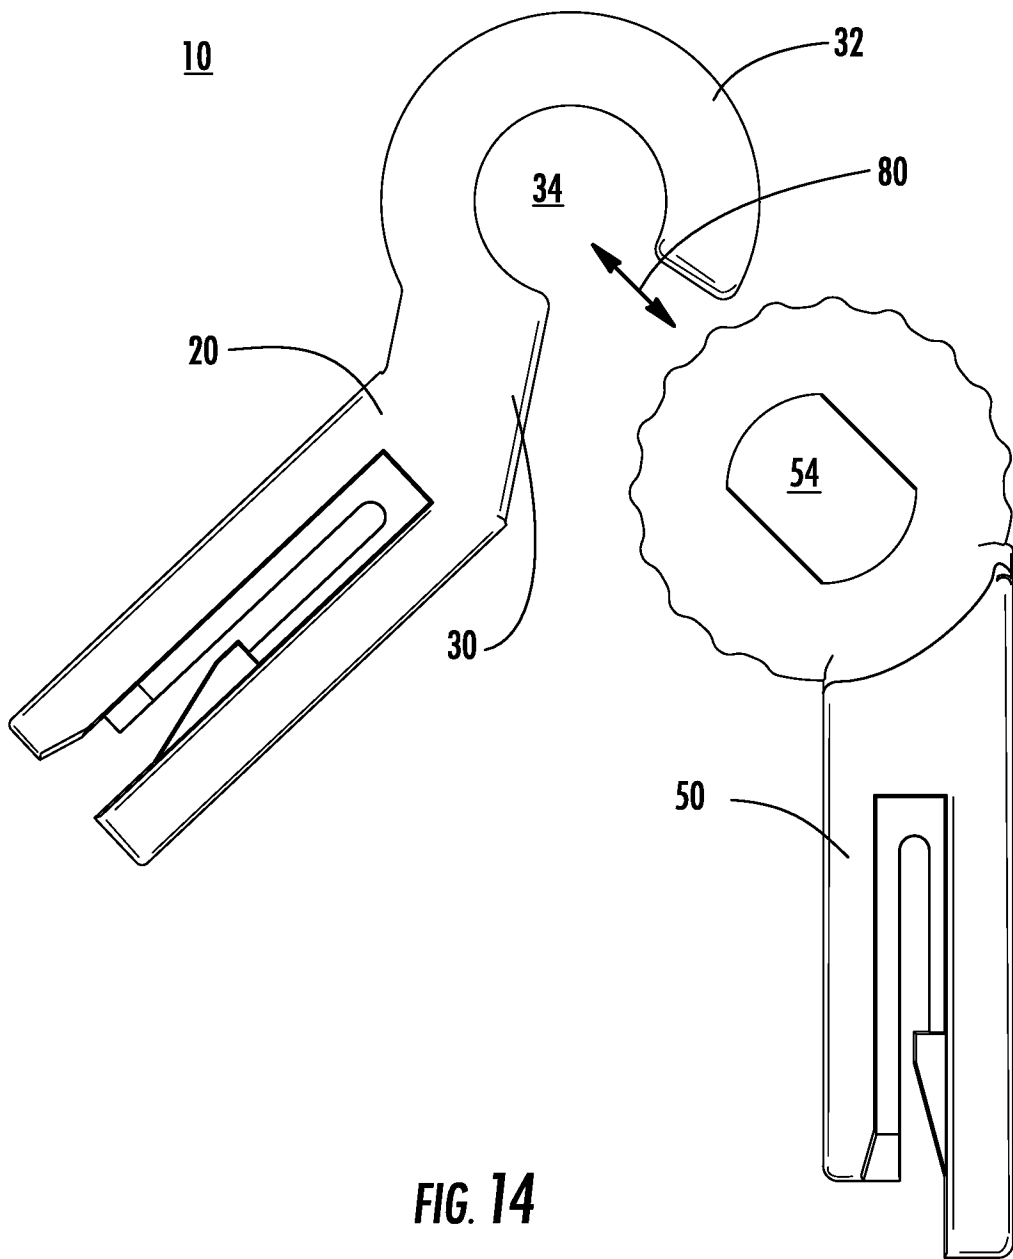


FIG. 14

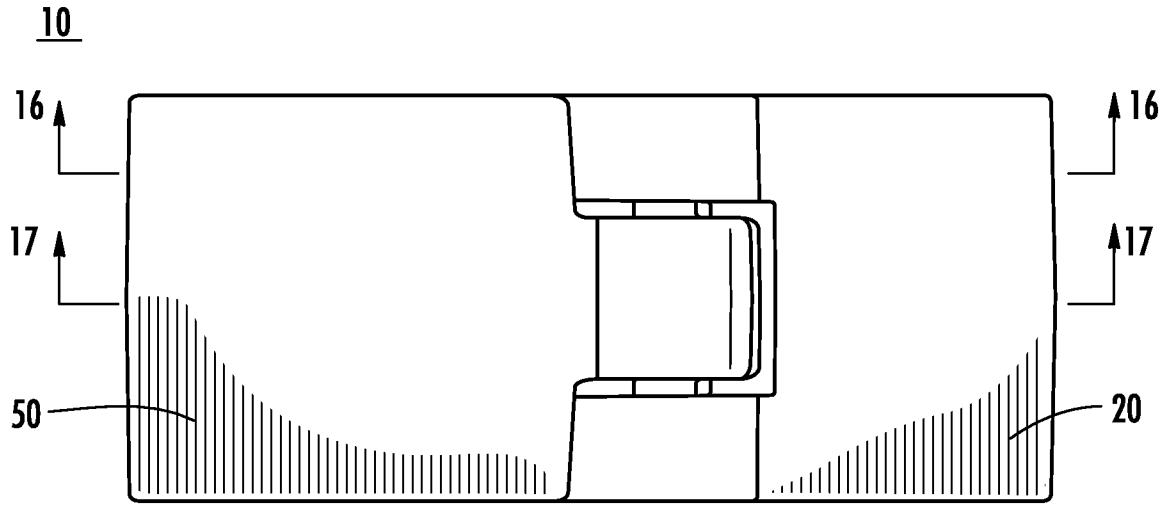


FIG. 15

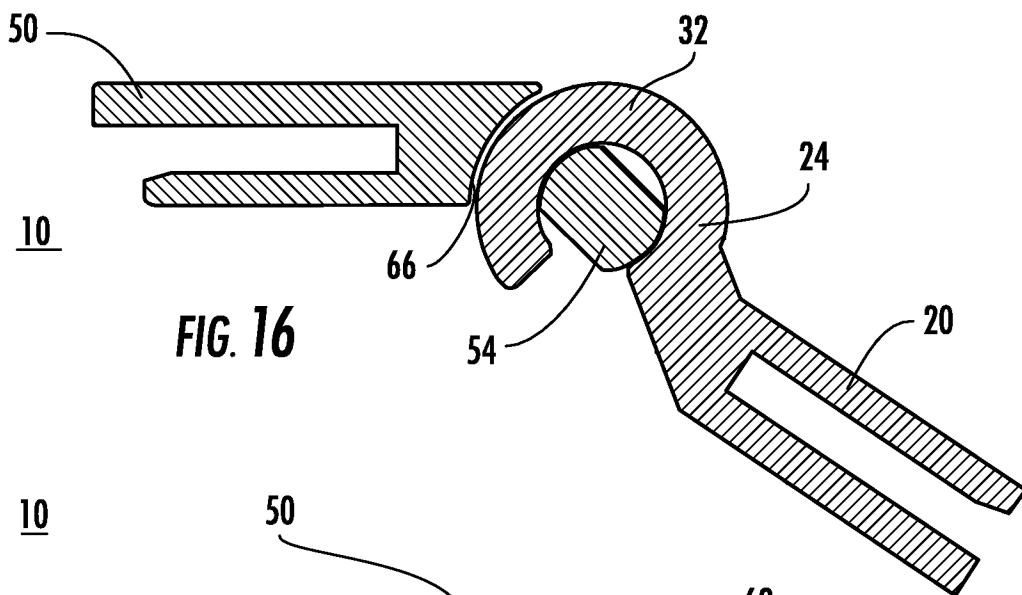


FIG. 16

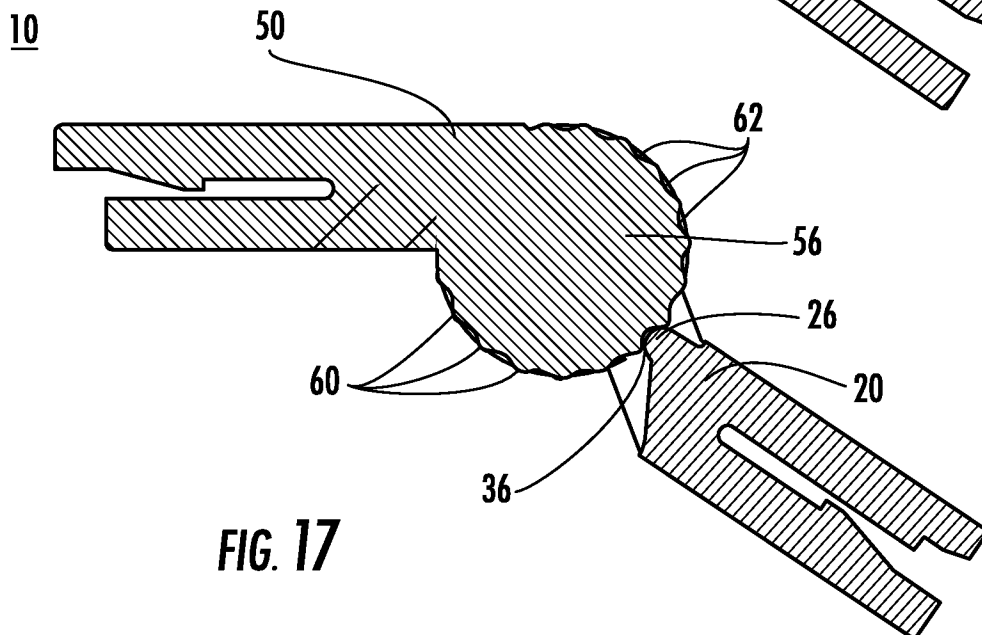


FIG. 17

