



- (51) **International Patent Classification:**
C07C 7/04 (2006.01) *B01J 19/24* (2006.01)
C07C 11/04 (2006.01)
- (21) **International Application Number:** PCT/US2014/010631
- (22) **International Filing Date:** 8 January 2014 (08.01.2014)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:** 13/738,685 10 January 2013 (10.01.2013) US
- (71) **Applicants (for all designated States except US):** LYONDELL CHEMICAL TECHNOLOGY, L.P. [US/US]; 1221 McKinney, Suite 700, Lyondellbasell Tower, Houston, TX 77010 (US). EQUISTAR CHEMICALS, LP [US/US]; 1221 McKinney, Suite 700, Houston, TX 77010 (US).
- (72) **Inventors; and**
- (71) **Applicants (for US only):** SAWYER, Gary, A. [US/US]; 712 Centennial Avenue, Media, PA 19063 (US). BRIDGES, Robert, S. [US/US]; 303 W. Spreading Oaks, Friendswood, TX 77546 (US). COLEMAN, Steven, T. [US/US]; 5930 Bent Tree Court, Humble, TX 77346 (US). HOOD, Allen David Jr. [US/US]; 4106 Village Corner Drive, Houston, TX 77059 (US).
- (74) **Agents:** STREETER, Leslie, . et al.; Lyondellbasell Industries, 1221 McKinney, Suite 700, Houston, TX 77010 (US).
- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).
- Published:**
— with international search report (Art. 21(3))



WO 2014/110102 A1

(54) **Title:** ETHYLENE SEPARATION PROCESS

(57) **Abstract:** Ethylene separation processes are described herein. The ethylene separation processes generally include introducing a feed stream including ethylene and butene into a de-ethenizer; and separating the ethylene from the butene via fractional distillation within the de-ethenizer to form an overhead stream including separated ethylene and a bottoms stream including separated butene, wherein the de-ethenizer operates at a pressure of less than 350 psig.

ETHYLENE SEPARATION PROCESS

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims benefit and priority of United States Patent Application No. 13/738,685 filed on January 10, 2014, which is incorporated herein by reference in its entirety.

STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH OR DEVELOPMENT

[0002] Not applicable.

BACKGROUND

FIELD OF THE INVENTION

[0003] The present invention generally relates to ethylene separation processes. More particularly, the present invention generally relates to ethylene separation within a propylene production process.

RELATED ART

[0004] This section introduces information from the art that may be related to or provide context for some aspects of the techniques described herein and/or claimed below. This information is background facilitating a better understanding of that which is disclosed herein. This is a discussion of “related” art. That such art is related in no way implies that it is also “prior” art. The related art may or may not be prior art. The discussion is to be read in this light, and not as admissions of prior art.

[0005] Ethylene separation processes within propylene production processes often exchange fresh ethylene with the feed to the ethylene separation process prior to introduction of the fresh ethylene to a metathesis reaction. However, efforts are continuously underway to improve ethylene separation processes, including reducing energy requirements and other costs in propylene production processes.

[0006] The present invention is directed to resolving, or at least reducing, one or all of the problems mentioned above.

SUMMARY

[0007] Various embodiments of the present invention include ethylene separation processes. The ethylene separation processes generally include introducing a feed stream including ethylene and butene into a de-ethenizer; and separating the ethylene from the butene via fractional distillation within the de-ethenizer to form an overhead stream including separated ethylene and a bottoms stream including separated butene, wherein the de-ethenizer operates at a pressure of less than 350 psig.

[0008] Various embodiments of the present invention further include processes for producing propylene. The processes generally include reacting a metathesis feed stream including butene with ethylene in the presence of a metathesis catalyst via a metathesis reaction to form a metathesis product stream including propylene, ethylene and butene; separating the ethylene from the propylene via fractional distillation within a de-ethenizer to form an overhead stream including separated ethylene and a bottoms stream including separated butene and propylene; and recycling the overhead stream from the de-ethenizer to the metathesis reaction in the form of vapor.

[0009] One or more embodiments include the process of any preceding paragraph further including compressing the overhead stream from a first pressure to a second pressure.

[0010] One or more embodiments include the process of any preceding paragraph, wherein the first pressure ranges from 250 psig to 325 psig and the second pressure ranges from 300 psig to 400 psig.

[0011] One or more embodiments include the process of any preceding paragraph, wherein a difference between the second pressure and the first pressure is from 50 psig to 100 psig.

[0012] One or more embodiments include the process of any preceding paragraph further including condensing a portion of the overhead stream to form a recycle ethylene stream and introducing the recycle ethylene stream to the de-ethenizer, wherein the overhead stream is compressed prior to condensing.

[0013] One or more embodiments include the process of any preceding paragraph, further including introducing fresh ethylene to the de-ethenizer as reflux supplement.

[0014] One or more embodiments include the process of any preceding paragraph, wherein the de-ethenizer operates at a pressure of less than 350 psig.

[0015] One or more embodiments include the process of any preceding paragraph, wherein the feed stream further including propylene.

[0016] One or more embodiments include the process of any preceding paragraph further including condensing a portion of the overhead stream to form a recycle ethylene stream and introducing the recycle ethylene stream to the de-ethenizer.

[0017] One or more embodiments include the process of any preceding paragraph, wherein the fresh ethylene is introduced to the de-ethenizer at a temperature of from -20°F to 10°F.

[0018] One or more embodiments include the process of any preceding paragraph, wherein the metathesis product stream is introduced to the de-ethenizer at a temperature of from 50°F to 90°F.

[0019] One or more embodiments include the process of any preceding paragraph, wherein the metathesis product stream is introduced to the de-ethenizer at a pressure of from 250 psig to 350 psig.

[0020] The above paragraphs present a simplified summary of the presently disclosed subject matter in order to provide a basic understanding of some aspects thereof. The summary is not an exhaustive overview, nor is it intended to identify key or critical elements to delineate the scope of the subject matter claimed below. Its sole purpose is to present some concepts in a simplified form as a prelude to the more detailed description set forth below.

BRIEF DESCRIPTION OF DRAWINGS

[0021] The claimed subject matter may be understood by reference to the following description taken in conjunction with the accompanying drawings, in which like reference numerals identify like elements, and in which:

[0022] Figure 1 illustrates an embodiment of a propylene production process.

[0023] Figure 2 illustrates an alternate embodiment of a propylene production process.

[0024] While the invention is susceptible to various modifications and alternative forms, the drawings illustrate specific embodiments herein described in detail by way of example. It should be understood, however, that the description herein of specific embodiments is not intended to limit the invention to the particular forms disclosed, but on the contrary, the intention is to cover all modifications, equivalents, and alternatives falling within the spirit and scope of the invention as defined by the appended claims.

DETAILED DESCRIPTION

[0025] Illustrative embodiments of the subject matter claimed below will now be disclosed. In the interest of clarity, not all features of an actual implementation are described in this

specification. It will be appreciated that in the development of any such actual embodiment, numerous implementation-specific decisions must be made to achieve the developers' specific goals, such as compliance with system-related and business-related constraints, which will vary from one implementation to another. Moreover, it will be appreciated that such a development effort, even if complex and time-consuming, would be a routine undertaking for those of ordinary skill in the art having the benefit of this disclosure.

[0026] In the description below, unless otherwise specified, all compounds described herein may be substituted or unsubstituted and the listing of compounds includes derivatives thereof. Further, various ranges and/or numerical limitations may be expressly stated below. It should be recognized that unless stated otherwise, it is intended that endpoints are to be interchangeable. Further, any ranges include iterative ranges of like magnitude falling within the expressly stated ranges or limitations.

[0027] Embodiments described herein include ethylene separation processes. The ethylene separation processes are discussed primarily herein with reference to separating a metathesis product stream within a propylene production process. However, it is contemplated that the ethylene separation processes described herein may be utilized within any process requiring separation of ethylene from butene.

[0028] Propylene production processes generally includes reacting a metathesis feed stream including n-butene with ethylene in the presence of a metathesis catalyst to form a metathesis product stream including propylene, ethylene, butene and C₅₊ olefins. As used herein, the term "metathesis" refers to an equilibrium reaction between two olefins where the double bond of each olefin is broken to form intermediate reactants. These intermediates recombine to form new olefin products. In one or more specific embodiments discussed herein, the two olefins include ethylene and butene and the new olefin product is propylene.

[0029] As discussed previously herein, n-butene is fed to the metathesis reaction via the metathesis feed stream. The ethylene may be fed to the reaction by any suitable method known to one skilled in the art. For example, the ethylene may be fed to the metathesis reaction via an inlet separate from an inlet utilized to feed the metathesis feed stream. Alternatively, the ethylene may be combined with the metathesis feed stream prior to the metathesis feed stream passing through such inlet.

[0030] Metathesis catalysts are well known in the art (*see, e.g.*, U.S. Letters Patent 4,513,099 and U.S. Letters Patent 5,120,894). Generally, the metathesis catalyst includes a transition metal oxide, such as transition metal oxides of cobalt, molybdenum, rhenium, tungsten and combinations thereof, for example. In one or more specific embodiments, the metathesis catalyst

includes tungsten oxide. The metathesis catalyst may be supported on a carrier, such as silica, alumina, titania, zirconia, zeolites, clays and mixtures thereof, for example. In one or more embodiments, the carrier is selected from silica, alumina and combinations thereof. The catalyst may be supported on a carrier by methods known in the art, such as adsorption, ion-exchange, impregnation or sublimation, for example. The metathesis catalyst may include from 1 wt.% to 30 wt.% or from 5 wt.% to 20 wt.% transition metal oxide, for example.

[0031] The metathesis reaction may further include contacting the butene with ethylene in the presence of an isomerization catalyst (either sequentially or simultaneously with the metathesis catalyst). The isomerization catalyst is generally adapted to convert 1-butene present in the metathesis feed stream to 2-butene for subsequent reaction to propylene. Isomerization catalysts may include zeolites, metal oxides (*e.g.*, magnesium oxide, tungsten oxide, calcium oxide, barium oxide, lithium oxide and combinations thereof), mixed metal oxides (*e.g.*, silica-alumina, zirconia-silica), acidic clays (*see, e.g.*, U.S. Letters Patent 5,153,165; U.S. Letters Patent 4,992,613; U.S. Patent Publication 2004/0249229 and U.S. Patent Publication 2006/0084831) and combinations thereof, for example. In one or more specific embodiments, the catalyst is magnesium oxide. The magnesium oxide may have a surface area of at least 1 m²/g or at least 5 m²/g, for example.

[0032] The isomerization catalyst may be supported on a support material. Suitable support materials include silica, alumina, titania, silica-alumina and combinations thereof, for example.

[0033] The metathesis reaction may occur at a pressure of from 150 psig to 600 psig, or from 200 psig to 500 psig, or from 240 psig to 450 psig, for example. The metathesis reactions may occur at a temperature of from 100°C to 500°C, or from 200°C to 400°C, or from 300°C to 350°C, for example. The methathesis reaction may occur at a weight hourly space velocity (WHSV) of from 3 hr⁻¹ to 200 hr⁻¹, or from 20 hr⁻¹ to 40 hr⁻¹, for example.

[0034] The contact time needed to obtain a desirable yield of metathesis reaction products depends upon several factors, such as the activity of the catalyst, temperature and pressure, for example. However, in one or more embodiments, the length of time during which the metathesis feed stream and the ethylene are contacted with the catalyst can vary from 0.1 s to 4 hours or from 0.5 s to 0.5 hours, for example. The metathesis reaction may be conducted batch-wise or continuously with fixed catalyst beds, slurried catalyst, fluidized beds, or by using any other conventional contacting techniques, for example.

[0035] The metathesis product stream generally includes ethylene, propylene, C₄ olefins, and C₅₊ olefins (including pentene and hexene, for example). Therefore, the propylene production process often includes separating the components of the metathesis product stream. An example

of a method of separation is shown in U.S. Letters Patent 7,214,841, which is hereby incorporated by reference, and such method generally includes separation within a fractionation system. As used herein, the term "fractionation" refers to processes for the separation of components based on the relative volatility and/or boiling point of the components. The fractionation processes may include those known in the art and the term "fractionation" can be used interchangeably with the terms "distillation" and "fractional distillation" herein.

[0036] The fractionation system generally includes a de-ethenizer. The de-ethenizer receives and separates the metathesis product stream to form an overhead stream and a bottoms stream. The overhead stream is composed primarily of the recovered ethylene and at least a portion of the overhead stream may be recycled back to the metathesis reaction (discussed in further detail below). The bottoms stream generally includes the propylene, butene and C₅₊ olefins.

[0037] Reflux is a distillation technique involving the condensation of vapors and the return of this condensate to the system from which it originated. Inside the distillation column, the downflowing reflux liquid provides cooling and condensation of the upflowing vapors, thereby increasing the efficiency of the distillation column. Typically, the reflux liquid is the portion of the overhead stream from a distillation column that is returned to the upper part of the column. Often, the entire de-ethenizer overhead stream is condensed to form a condensed stream, which may then be split into a reflux liquid stream and a recycle ethylene stream. In such processes, the recycle ethylene stream is returned to the metathesis reaction in liquid form.

[0038] One or more embodiments include partially condensing the overhead stream to form a reflux liquid stream and a recycle ethylene stream, which may then be returned to the metathesis reaction in vapor form. Alternatively, when no portion of the overhead product will be utilized as reflux liquid, it is contemplated that the overhead stream may be recycled (*i.e.*, returned to the metathesis reaction) without passing through a condenser.

[0039] When recycling ethylene as vapor to the metathesis reaction, the ethylene vapor may be compressed via a compressor from a first pressure to a second pressure sufficient to provide flow of the ethylene vapor to the metathesis reaction. In one or more embodiments, the first pressure may range from 250 psig to 325 psig and the second pressure may range from 300 psig to 400 psig, for example. Alternatively, the difference in the first pressure and the second pressure may be from 50 psig to 100 psig, for example. One specific embodiment includes compressing the overhead product to raise the condensing temperature utilized in a subsequent partial condenser.

[0040] One or more embodiments include introducing fresh ethylene to the upper portion of the de-ethenizer, either in addition to, or as a replacement for the reflux liquid stream.

Accordingly, the fresh ethylene introduced to the de-ethenizer is referred to as reflux supplement herein. As known in the art, "fresh" ethylene refers to ethylene that has not been processed in the system being referred to, herein the propylene production process. In one or more embodiments, the fresh ethylene is introduced to the de-ethenizer as reflux supplement at a rate that is less than that of the reflux liquid stream.

[0041] In one or more embodiments, the fresh ethylene/reflux supplement is introduced to the de-ethenizer at a temperature of from -20°F to 100°F, or from -10°F to 50°F, or from -10°F to 10°F and a pressure of from 300 psig to 1000 psig, or from 400 psig to 900 psig, or from 600 psig to 800 psig, for example.

[0042] Generally, a de-ethenizer within a propylene production process operates at a pressure of from 350 psig to 650 psig. However, one or more embodiments of the present invention include operating the de-ethenizer at a pressure lower than that referenced. For example, one or more embodiments include operating the de-ethenizer at a pressure of less than 350 psig, or a pressure of less than 300 psig, or a pressure of less than 250psig.

[0043] The fractionation system, in one or more embodiments, may further include a de-propenizer and a de-butenizer as known in the art. The de-propenizer may receive and separate the bottoms stream (from the de-ethenizer) to form a de-propenizer overhead stream and a de-propenizer bottoms stream. The de-propenizer overhead stream is composed primarily of the propylene product. The de-propenizer bottoms stream generally includes the butene and C₅₊ olefins.

[0044] The de-butenizer may receive and separate at least a portion of the de-propenizer bottoms stream to form a de-butenizer overhead stream and a de-butenizer bottoms stream. The de-butenizer overhead stream is composed primarily of the recovered butene and the de-butenizer bottoms stream generally includes the C₅₊ olefins. Optionally, at least a portion of the de-butenizer overhead stream may be recycled back to the metathesis reaction.

[0045] The processes described herein advantageously can reduce heating requirements in the metathesis reactor and/or the de-ethenizer, possibly by half of heating requirements for similar systems absent the embodiments of the invention. For example, embodiments described herein provide for a metathesis product stream entering the de-ethenizer having a temperature of from 50°F to 90°F and a pressure of from 250 psig to 350 psig, which may eliminate the need for heat exchange of the metathesis product stream.

[0046] It is noted, however, that while the addition of a compressor for the ethylene recycle stream may add capital cost to the process, lower system pressures in the metathesis reaction and the de-ethenizer can offset the compressor capital cost.

[0047] Referring now to Figure 1, a simplified process flow diagram of a process 100 for producing propylene according to embodiments disclosed herein is illustrated. Figure 1 illustrates a process 100 including introducing a metathesis feed stream 102 to a metathesis reactor 104 having metathesis catalyst 105 (and optional isomerization catalyst-not shown) disposed therein to form metathesis product stream 106 including propylene, ethylene, butene and C₅₊ olefins. Figure 1 illustrates a specific embodiment wherein ethylene is mixed with the metathesis feed stream 102 via line 108; however, it is contemplated that the ethylene may contact the metathesis feed stream via processes known in the art.

[0048] The metathesis product stream 106 is passed to a de-ethenizer 110 to separate at least a portion of the ethylene from the metathesis product stream 106 to form an overhead stream 112 and a bottoms stream 114 including propylene and C₄₊ olefins.

[0049] Fresh ethylene is introduced to the de-ethenizer 110 as reflux supplement (in the same manner as the reflux liquid ethylene is introduced to the de-ethenizer 110) via line 116. In the specific embodiment illustrated in Figure 1, the overhead stream 112 is passed through a partial condenser 118 to form a recycle ethylene stream 120 and a reflux liquid stream 122. The recycle ethylene stream 120 is withdrawn from the partial condenser 118 as a vapor and is compressed in compressor 128 and then recycled to the metathesis reactor 104 via line 130. The reflux liquid stream 122 is returned to the de-ethenizer 110.

[0050] Conversely, as shown in Figure 2, the overhead stream 112 may be compressed within the compressor 128 prior to passing through the partial condenser 118, resulting in a higher condensing temperature than that shown in Figure 1.

[0051] As known in the art, the de-ethenizer bottoms stream 114 may be passed through a re-boiler (not shown) and returned to the de-ethenizer 110 or further separated in additional separation columns (not shown).

[0052] Therefore, the present invention is well adapted to attain the ends and advantages mentioned as well as those that are inherent therein. The particular embodiments disclosed above are illustrative only, as the present invention may be modified and practiced in different but equivalent manners apparent to those skilled in the art having the benefit of the teachings herein. Furthermore, no limitations are intended to the details of construction or design herein shown, other than as described in the claims below. It is therefore evident that the particular

illustrative embodiments disclosed above may be altered, combined, or modified and all such variations are considered within the scope and spirit of the present invention.

[0053] The invention illustratively disclosed herein suitably may be practiced in the absence of any element that is not specifically disclosed herein and/or any optional element disclosed herein. While compositions and methods are described in terms of “comprising,” “containing,” or “including” various components or steps, the compositions and methods can also “consist essentially of” or “consist of” the various components and steps. All numbers and ranges disclosed above may vary by some amount. Whenever a numerical range with a lower limit and an upper limit is disclosed, any number and any included range falling within the range are specifically disclosed. In particular, every range of values (of the form, “from about a to about b,” or, equivalently, “from approximately a to b,” or, equivalently, “from approximately a-b”) disclosed herein is to be understood to set forth every number and range encompassed within the broader range of values.

[0054] This concludes the detailed description. The particular embodiments disclosed above are illustrative only, as the invention may be modified and practiced in different but equivalent manners apparent to those skilled in the art having the benefit of the teachings herein. Furthermore, no limitations are intended to the details of construction or design herein shown, other than as described in the claims below. It is therefore evident that the particular embodiments disclosed above may be altered or modified and all such variations are considered within the scope and spirit of the invention. Accordingly, the protection sought herein is as set forth in the claims below.

CLAIMS

WHAT IS CLAIMED IS:

1. An ethylene separation process comprising:
introducing a feed stream comprising ethylene and butene into a de-ethenizer; and
separating the ethylene from the butene via fractional distillation within the de-ethenizer to form an overhead stream comprising separated ethylene and a bottoms stream comprising separated butene, wherein the de-ethenizer operates at a pressure of less than 350 psig.
2. The ethylene separation process of claim 1 further comprising compressing the overhead stream from a first pressure to a second pressure.
3. The ethylene separation process of claim 2, wherein the first pressure ranges from 250 psig to 350 psig and the second pressure ranges from 300 psig to 400 psig.
4. The ethylene separation process of claim 2, wherein a difference between the second pressure and the first pressure is from 50 psig to 100 psig.
5. The ethylene separation process of claim 2 further comprising condensing a portion of the overhead stream to form a recycle ethylene stream and introducing the recycle ethylene stream to the de-ethenizer, wherein the overhead stream is compressed prior to condensing.
6. The ethylene separation process of claim 1 further comprising introducing fresh ethylene to the de-ethenizer as reflux supplement.
7. The ethylene separation process of claim 1, wherein the de-ethenizer operates at a pressure of less than 350 psig.
8. The ethylene separation process of claim 1, wherein the feed stream further comprises propylene.

9. The ethylene separation process of claim 1 further comprising condensing a portion of the overhead stream to form a recycle ethylene stream and introducing the recycle ethylene stream to the de-ethenizer.
10. The ethylene separation process of claim 1, wherein the fresh ethylene is introduced to the de-ethenizer at a temperature of from -20°F to 10°F.
11. The ethylene separation process of claim 1, wherein the metathesis product stream is introduced to the de-ethenizer at a temperature of from 50°F to 90°F.
12. The ethylene separation process of claim 1, wherein the metathesis product stream is introduced to the de-ethenizer at a pressure of from 250 psig to 350 psig.
13. A process for producing propylene comprising:
 - reacting a metathesis feed stream comprising butene with ethylene in the presence of a metathesis catalyst via a metathesis reaction to form a metathesis product stream comprising propylene, ethylene and butene;
 - separating the ethylene from the propylene via fractional distillation within a de-ethenizer to form an overhead stream comprising separated ethylene and a bottoms stream comprising separated butene and propylene; and
 - recycling the overhead stream from the de-ethenizer to the metathesis reaction in the form of vapor.
14. The process of claim 13, wherein the de-ethenizer operates at a pressure of less than 350 psig.
15. The process of claim 13, wherein the feed stream further comprises propylene.
16. The process of claim 13 further comprising compressing the overhead stream from a first pressure to a second pressure and condensing a portion of the overhead stream comprising the second pressure to form a recycle ethylene stream and introducing the recycle ethylene stream to the metathesis feed stream.
17. The process of claim 16, wherein the first pressure ranges from 250 psig to 350 psig and the second pressure ranges from 300 psig to 400 psig.

18. The process of claim 13, wherein the fresh ethylene is introduced to the de-ethenizer at a temperature of from -20°F to 10°F.

19. The process of claim 13, wherein the metathesis product stream is introduced to the de-ethenizer at a temperature of from 50°F to 90°F.

20. The process of claim 13, wherein the metathesis product stream is introduced to the de-ethenizer at a pressure of from 250 psig to 350 psig.

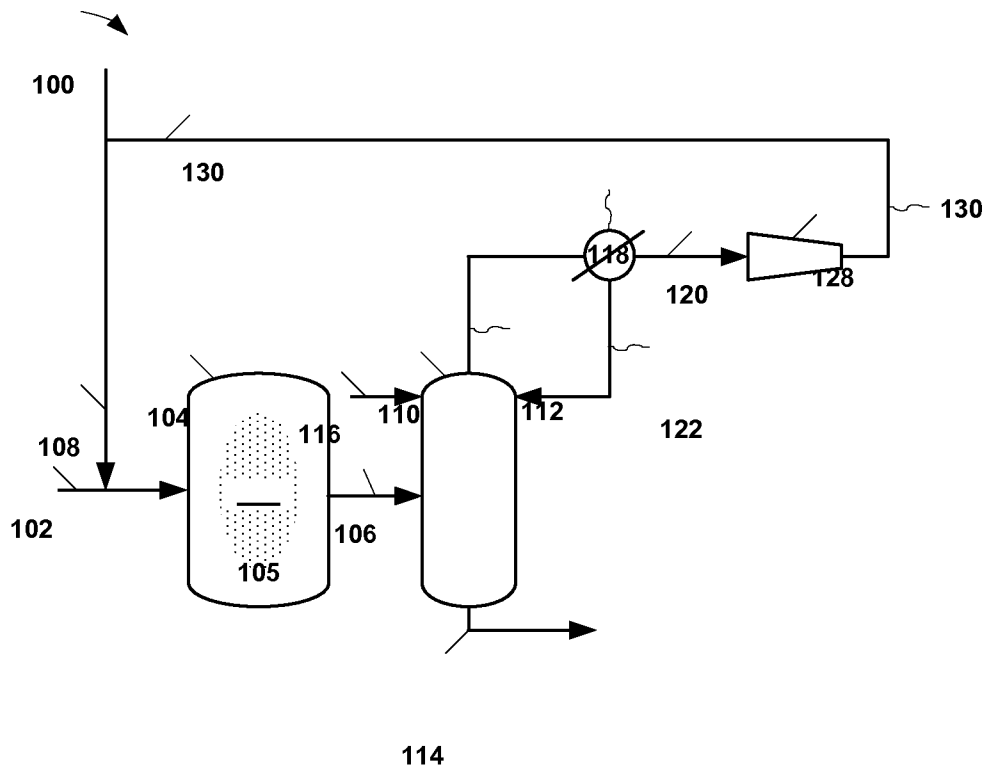


FIG. 1

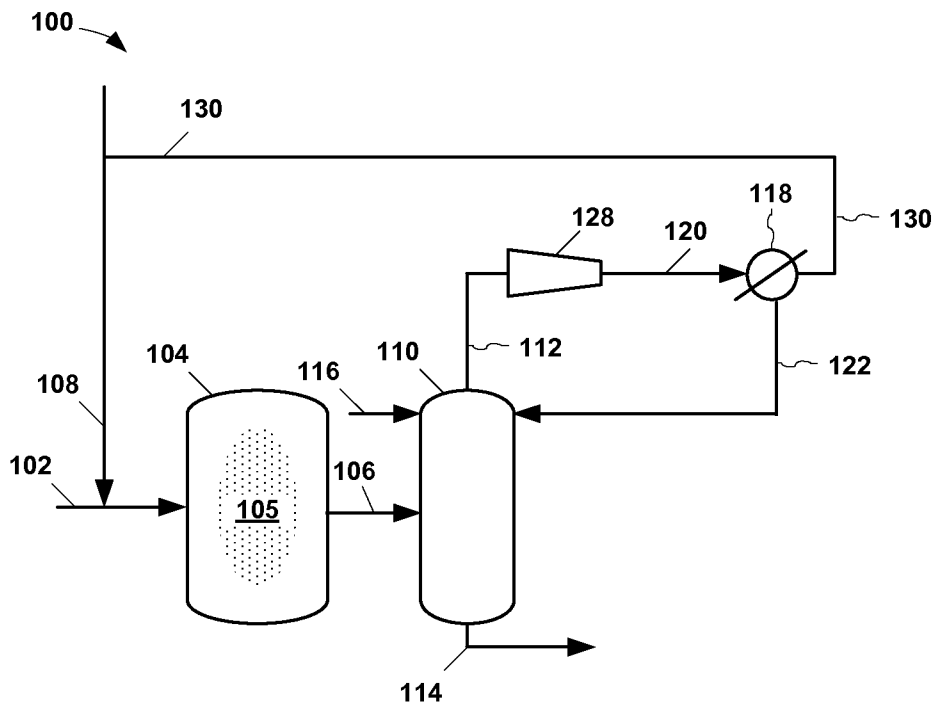


FIG. 2

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2014/010631**A. CLASSIFICATION OF SUBJECT MATTER****C07C 7/04(2006.01)i, C07C 11/04(2006.01)i, B01J 19/24(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

C07C 7/04; C07C 2/08; C07C 6/02; C07C 4/00; C07C 2/10; C07C 5/25; C07C 11/04; B01J 19/24

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: ethylene, propylene, butene and de-ethenizer

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2012-0095275 A1 (COLEMAN STEVEN T. et al.) 19 April 2012 See abstract, example and claims 1-12.	1-20
A	US 2006-0161033 A1 (JEAN-ALAIN CHODORGE et al.) 20 July 2006 See abstract and claims 1-21.	1-20
A	US 7525007 B2 (SUMNER CHARLES) 28 April 2009 See abstract and claims 1-24.	1-20
A	US 8586813 B2 (BALA RAMACHANDRAN et al.) 19 November 2013 See abstract and claims 1-31.	1-20

 Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

25 April 2014 (25.04.2014)

Date of mailing of the international search report

25 April 2014 (25.04.2014)

Name and mailing address of the ISA/KR

International Application Division
Korean Intellectual Property Office
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan City, 302-701,
Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

KANG, Tai Hyun

Telephone No. +82-42-481-8408



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2014/010631

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2012-0095275 A1	19/04/2012	CN 103153922 A	12/06/2013
		US 2013-172647 A1	04/07/2013
		US 8395005 B2	12/03/2013
		WO 2012-051427 A1	19/04/2012
US 2006-0161033 A1	20/07/2006	CA 2530951 A1	27/06/2006
		FR 2880018 A1	30/06/2006
		FR 2880018 B1	23/02/2007
		US 7868216 B2	11/01/2011
US 7525007 B2	28/04/2009	CA 2546021 A1	02/06/2005
		EP 1687246 A1	09/08/2006
		US 2005-0107650 A1	19/05/2005
		US 2007-0135668 A1	14/06/2007
		US 7223895 B2	29/05/2007
		WO 2005-049534 A1	02/06/2005
US 8586813 B2	19/11/2013	CA 2748877 A1	27/01/2011
		CA 2826975 A1	27/01/2011
		EP 2456738 A2	30/05/2012
		EP 2456738 A4	09/01/2013
		JP 2012-520348A	06/09/2012
		KR 10-2012-0042995 A	03/05/2012
		KR 10-2013-0138855 A	19/12/2013
		US 2011-0021858 A1	27/01/2011
		US 2014-066681 A1	06/03/2014
		WO 2011-011173 A2	27/01/2011