

FORM 1

60 4832

SPRUSON & FERGUSON

COMMONWEALTH OF AUSTRALIA

PATENTS ACT 1952

APPLICATION FOR A STANDARD PATENT

ARCO Chemical Company, of 3801 West Chester Pike, Newtown Square, Pennsylvania, 19073, UNITED STATES OF AMERICA, hereby apply for the grant of a standard patent for an invention entitled:

"Fluorosurfactant-coated thermoplastic polymer particles."

which is described in the accompanying complete specification.

Details of basic application(s):-

Basic Applic. No: Country:

011654

UNITED STATES OF AMERICA

Application Date:

5 February 1987

The address for service is:-

Spruson & Ferguson
Patent Attorneys
Level 33 St Martins Tower
31 Market Street
Sydney New South Wales Australia


DATED this FOURTH day of FEBRUARY 1988

ARCO Chemical Company

By:

M. J. Anderson


Registered Patent Attorney



TO: THE COMMISSIONER OF PATENTS
OUR REF: 49827
S&F CODE: 58030

5845/2 APPLICATION ACCEPTED AND AMENDMENTS

ALLOWED 34-9-90

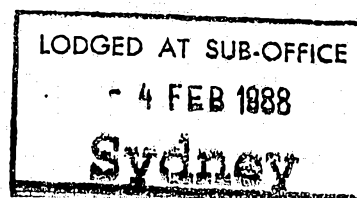

PF 50-01-1942A

COMMONWEALTH OF AUSTRALIA

THE PATENTS ACT 1952

DECLARATION IN SUPPORT OF A
CONVENTION APPLICATION FOR A PATENTAUSTRALIA
CONVENTION
STANDARD
& PETTY PATENT
DECLARATIONIn support of the Convention Application made for a
patent for an invention entitled:

Title of Invention

Foam Cups with Enhanced Coffee Retention

Full name(s) and
address(es) of
Declarant(s)

I/WeX

Harry W. Gill, Jr.
ARCO CHEMICAL COMPANY
3801 West Chester Pike
Newtown Square, PA 19073
U.S.A.

do solemnly and sincerely declare as follows:-

Full name(s) of
Applicant(s)4. ~~I am/We are the applicant(s) for the patent.~~*(or, in the case of an application by a body corporate)*

1. I am/We are authorised by

ARCO Chemical Company

the applicant(s) for the patent to make this declaration on
its/their behalf.2. The basic application(s) as defined by Section 141 of the
Act was/were made

Basic Country(ies)

in United States of America

Priority Date(s)

on 5 February, 1987

Basic Applicant(s)

by Fred M. Sonnenberg

Full name(s) and
address(es) of
inventor(s)3. ~~I am/We are the actual inventor(s) of the invention referred
to in the basic application(s).~~*(or where a person other than the inventor is the applicant)*

3. FRED M. SONNENBERG

of 50 Merbrook Lane,
Merion, Pennsylvania 19066,
United States of America*(respectively)*is/are the actual inventor(s) of the invention and the facts upon
which the applicant(s) is/are entitled to make the application are
as follows:Set out how Applicant(s)
derive title from actual
inventor(s) e.g. The
Applicant(s) is/are the
assignee(s) of the
invention from the
inventor(s)The said applicant is the assignee of Atlantic
Richfield Company which is the assignee of the
actual inventor.4. The basic application(s) referred to in paragraph 2 of this
Declaration was/were the first application(s) made in a Convention
country in respect of the invention(s) the subject of the application.

Declared at Newtown Sq this 18 day of May 1988

(12) PATENT ABRIDGMENT (11) Document No. AU-B-11274/88
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 604832

(54) Title
FLUROSURFACTANT-COATED THERMOPLASTIC POLYMER PARTICLES

International Patent Classification(s)
 (51)⁴ **C08K 005/06 C08J 009/14 C08K 005/19 C08K 005/36**
C08K 005/42 C08K 005/52 C08L 025/06

(21) Application No. : **11274/88** (22) Application Date : **04.02.88**

(30) Priority Data

(31) Number (32) Date (33) Country
011654 05.02.87 US UNITED STATES OF AMERICA

(43) Publication Date : **11.08.88**

(44) Publication Date of Accepted Application : **03.01.91**

(71) Applicant(s)
ARCO CHEMICAL COMPANY


(72) Inventor(s)
FRED M. SONNENBERG

(74) Attorney or Agent
SPRUSON & FERGUSON, GPO Box 3898, SYDNEY NSW 2001


(56) Prior Art Documents
AU 583232 66984/86 C08L 25/06, 25/12

(57) Claim

1. A moldable composition comprising expandable thermoplastic polymer particles and a fluorosurfactant having the general formula:




wherein R represents a perfluoroalkyl group having from 6 to 16 carbon atoms; wherein X represents $-CH_2SCH_2CH_2CO_2Li$, $-CH_2SO_3H$, $-CH_2SO_3NH_4$, $-CH_2O(CH_2CH_2O)_xH$, $-CH_2O(CH_2CH_2O)_yH$, $-CH_2SCH_2CH_2N^+(CH_3)_3CH_3SO_4^-$, $-CH(OCOCH_3)CH_2N^+(CH_3)_2CH_2CO_2^-$, and





and wherein x represents an integer from 8 to 14, y represents an integer from 4 to 7, R' represents $-OCH_2CH_2R$ or $-OM$, and M represents $-H$, $-NH_4$, or $-NH_2(CH_2CH_2OH)_2$, the amount of fluorosurfactant being present

in an amount sufficient to enhance the coffee retentiveness of cups molded from the moldable composition as compared to the coffee retentiveness in the absence of the fluorosurfactant.

3. A method for enhancing the coffee retentiveness of molded foam cups made from foamable thermoplastic polymer particles which have been impregnated with a blowing agent which comprises coating the thermoplastic polymer particles with an effective amount of a fluorosurfactant having the general formula:



to foam coated particles, wherein R represents a perfluoroalkyl group having from 6 to 16 carbon atoms; wherein X represents

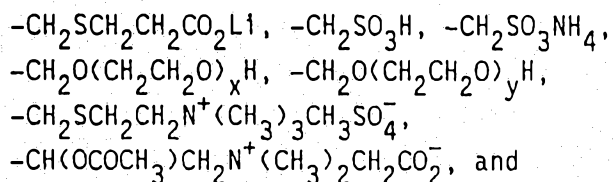

and wherein x represents an integer from 8 to 14, y represents an integer from 4 to 7, R' represents $-OCH_2CH_2R$ or $-OM$, and M represents $-H$, $-NH_4$, or $-NH_2(CH_2CH_2OH)_2$, said fluorosurfactant being present in an amount sufficient to enhance the coffee retentiveness of said molded foam cups as compared to the rate at which coffee leaks in the absence of said fluorosurfactant.

60 48 32
FORM 10 Ref: 49827

COMMONWEALTH OF AUSTRALIA

PATENTS ACT 1952

COMPLETE SPECIFICATION

(ORIGINAL)

FOR OFFICE USE:

Class Int Class

Complete Specification Lodged:
Accepted:
Published:

Priority:

Related Art:

This document contains the
amendments made under
Section 49 and is correct for
printing.

Name and Address
of Applicant:

ARCO Chemical Company
3801 West Chester Pike
Newtown Square Pennsylvania 19073
UNITED STATES OF AMERICA

Address for Service: Spruson & Ferguson, Patent Attorneys
Level 33 St Martins Tower, 31 Market Street
Sydney, New South Wales, 2000, Australia

Complete Specification for the invention entitled:

"Fluorosurfactant-coated thermoplastic polymer particles."

The following statement is a full description of this invention, including the
best method of performing it known to me/us



"Fluorosurfactant-coated thermoplastic polymer particles."

ABSTRACT

Enhanced coffee retention properties are achieved in thermoplastic polymer foam cups molded from thermoplastic polymer particles by coating at least a portion of the surfaces of the particles before molding with a fluorosurfactant.



This invention relates to a moldable composition comprising expandable thermoplastic polymer particles and a fluorosurfactant, and to moldable, expandable thermoplastic polymer particles at least a portion of the surfaces of which have a coating produced by removing diluent from a fluorosurfactant in diluent solution. The invention also relates to foam cups exhibiting enhanced coffee retention properties manufactured from said moldable thermoplastic polymer particles or said moldable composition and to a method for enhancing coffee retentiveness of molded foam cups made from foamable thermoplastic polymer particles comprising coating the thermoplastic polymer particles with an effective amount of fluorosurfactant.

The manufacture of molded articles, e.g., cups from expanded thermoplastic particles is well known. The most commonly used thermoplastic particles are expandable polystyrene beads known as EPS. Typically, polystyrene beads are impregnated with a blowing agent which boils below the softening point of the polystyrene and causes the impregnated beads to expand when they are heated. When the impregnated beads are heated in a mold cavity, they expand to fill the cavity and fuse together to form a shaped article.

The formation of molded articles, e.g., cups from impregnated polystyrene beads, is generally done in two steps. First, the impregnated polystyrene beads are pre-expanded to a density of from about 2 to about 12 pounds per cubic foot. Second, the expanded beads or "prepuff" are heated in a closed mold to further expand the prepuff and to form a fused article having the shape of the mold. The second step is generally referred to as "molding".

The pre-expansion step is conventionally carried out by heating the impregnated beads using any conventional heating medium such as steam, hot air, hot water, or radiant heat. One generally accepted method for accomplishing the pre-expansion of impregnated thermoplastic particles is taught in U.S. Pat. 3,023,175 to Rodman.


In the manufacture of foam cups, the preferred thermoplastic is expandable polystyrene beads. The polystyrene beads used to make foam cups are generally prepared by an aqueous suspension polymerization process which results in beads that can be screened to relatively precise bead sizes. Typically, bead diameters are within the range of from about 0.008 to about 0.02 inch.




In spite of careful bead size control, one problem which continues to plague the molded cup industry is that cups moulded from expandable polystyrene beads exhibit a tendency to leak coffee. The leakage results from penetration of the coffee around the fused polystyrene beads.

5 It has been found that if at least a portion of the surfaces of the thermoplastic particles is coated with a fluorosurfactant, cups molded therefrom exhibit enhanced coffee retention as compared to cups molded from the same expanded thermoplastic beads in the absence of the fluorosurfactant coating.

10 According to a first embodiment of this invention there is provided a moldable composition comprising expandable thermoplastic polymer particles and a fluorosurfactant having the general formula:




wherein R represents a perfluoroalkyl group having from 6 to 16 carbon atoms; wherein X represents $-CH_2SCH_2CH_2CO_2Li$, $-CH_2SO_3H$, $-CH_2SO_3NH_4$, $-CH_2O(CH_2CH_2O)_xH$, $-CH_2O(CH_2CH_2O)_yH$, $-CH_2SCH_2CH_2N^+(CH_3)_3CH_3SO_4^-$, $-CH(OCOCH_3)CH_2N^+(CH_3)_2CH_2CO_2^-$, and




and wherein x represents an integer from 8 to 14, y represents an integer from 4 to 7, R' represents $-OCH_2CH_2R$ or $-OM$, and M represents $-H$, $-NH_4$, or $-NH_2(CH_2CH_2OH)_2$, the amount of fluorosurfactant being present in an amount sufficient to enhance the coffee retentiveness of cups molded from the moldable composition as compared to the coffee retentiveness in the absence of the fluorosurfactant.

According to a second embodiment of this invention there is provided a method for enhancing the coffee retentiveness of molded foam cups made from foamable thermoplastic polymer particles which have been impregnated with a blowing agent which comprises coating the thermoplastic polymer particles with an effective amount of a fluorosurfactant having the general formula:




to form coated particles, wherein R represents a perfluoroalkyl group having from 6 to 16 carbon atoms; wherein X represents

-CH₂SCH₂CH₂CO₂Li, -CH₂SO₃H, -CH₂SO₃NH₄,
 -CH₂O(CH₂CH₂O)_xH, -CH₂O(CH₂CH₂O)_yH,
 5 -CH₂SCH₂CH₂N⁺(CH₃)₃CH₃SO₄⁻,
 -CH(OCOCH₃)CH₂N⁺(CH₃)₂CH₂CO₂⁻, and




and wherein x represents an integer from 8 to 14, y represents an integer from 4 to 7, R' represents -OCH₂CH₂R or -OM, and M represents -H, -NH₄, or -NH₂(CH₂CH₂OH)₂, said fluorosurfactant being present in an amount sufficient to enhance the coffee retentiveness of said molded foam cups as compared to the rate at which coffee leaks in the absence of said fluorosurfactant.

There is provided, according to a third embodiment of the invention moldable, expandable thermoplastic polymer particles at least a portion of the surfaces of which have a coating produced by removing diluent from a fluorosurfactant in diluent solution, the fluorosurfactant having the general formula



wherein R represents a perfluoroalkyl group having from 6 to 16 carbon atoms; wherein X represents -CH₂SCH₂CH₂CO₂Li, -CH₂SO₃H, -CH₂SO₃NH₄, -CH₂O(CH₂CH₂O)_xH, -CH₂O(CH₂CH₂O)_yH,
 -CH₂SCH₂CH₂N⁺(CH₃)₃CH₃SO₄⁻,
 -CH(OCOCH₃)CH₂N⁺(CH₃)₂CH₂CO₂⁻, and





and wherein x represents an integer from 8 to 14, y represents an integer from about 4 to 7, R' represents -OCH₂CH₂R or -OM, and M represents -H, -NH₄, or -NH₂(CH₂CH₂OH)₂, said fluorosurfactant being present in an amount sufficient to enhance the coffee retentiveness of cups molded from said moldable, expandable thermoplastic polymer particles as compared



to the coffee retentiveness in the absence of fluorosurfactant.

There is also provided, according to a fourth embodiment of the invention, a foam cup produced by the steps of pre-expanding and molding the moldable, expandable thermoplastic polymer particles of the third
5 embodiment or obtained by the method of the second embodiment, or produced from the composition of the first embodiment.

In the practice of this invention, any suitable thermoplastic homopolymer or copolymer can be employed. Particularly suitable for use are homopolymers derived from vinyl aromatic monomers including styrene,
10 isopropylstyrene, alpha-methylstyrene, nuclear methylstyrenes, chlorostyrene, tert-butylstyrene, and the like, as well




as copolymers prepared by the copolymerization of at least one vinyl aromatic monomer with monomers such as butadiene, alkyl methacrylates, alkyl acrylates, acrylonitrile, and maleic anhydride, wherein the vinyl aromatic monomer is present in at least 50% by weight of the copolymer. Styrenic polymers are preferred, particularly polystyrene.


10 The polymer used in this invention must be in the form of beads, granules, or other particles convenient for the expansion and molding operations. Beads formed from an aqueous suspension process are essentially spherical and are preferred for molding foam cups.

20 The polymer particles are impregnated using any conventional method with a suitable blowing agent. For example, the impregnation can be achieved by adding the blowing agent to the aqueous suspension during the polymerization of the polymer, or alternatively by re-suspending the polymer particles in an aqueous medium and then incorporating the blowing agent as taught in U.S. Pat. 2,983,692 to D'Alelio. Any gaseous material or material which will produce gases on heating can be used as the blowing agent. Conventional blowing agents include aliphatic hydrocarbons containing 4 to 6 carbon atoms in the molecule, such as butanes, pentanes, hexanes, and the halogenated hydrocarbons which boil at a temperature below the softening point of the polymer chosen.

Fluorosurfactants suitable for use to coat the expandable polymer particles are represented by the following general formula:



wherein R represents a perfluoroalkyl group having from 6 to 16 carbon atoms; wherein X represents $-\text{CH}_2\text{SCH}_2\text{CH}_2\text{CO}_2\text{Li}$, $-\text{CH}_2\text{SO}_3\text{H}$, $-\text{CH}_2\text{SO}_3\text{NH}_4$, $-\text{CH}_2\text{O}(\text{CH}_2\text{CH}_2\text{O})_x\text{H}$, $-\text{CH}_2\text{O}(\text{CH}_2\text{CH}_2\text{O})_y\text{H}$, $-\text{CH}_2\text{SCH}_2\text{CH}_2\text{N}^+(\text{CH}_3)_3\text{CH}_3\text{SO}_4^-$, $-\text{CH}(\text{OCOCH}_3)\text{CH}_2\text{N}^+(\text{CH}_3)_2\text{CH}_2\text{CO}_2^-$, and



and wherein x represents an integer from 8 to 14, y represents an integer from 4 to 7, R' represents $-\text{OCH}_2\text{CH}_2\text{R}$ or $-\text{OM}$, and M represents $-\text{H}$, $-\text{NH}_4$, or $-\text{NH}_2(\text{CH}_2\text{CH}_2\text{OH})_2$.

Fluorosurfactants having the above general formula are commercially available from E. I. DuPont under the trademark ZONYL®.

ZONYL fluorosurfactants grades FSA (50% solids), FSP (35% solids), FSE (10% solids), RP, NF, UR (100% solids), FSJ (40% solids), TBS (33% solids), FSN (40% solids), FSN-100 (100% solids), FSO (50% solids), FSO-100 (100% solids), FSC (50% solids), and FSK (47% solids) are suitable for use in this invention. The ZONYL fluorosurfactants are typically supplied in diluents. All amounts by weight of ZONYL fluorosurfactant listed herein are based on 100% solids unless stated otherwise. The typical diluents are water/ethylene glycol, water/isopropyl alcohol, or water/acetic acid. ZONYL FSP is preferred and is supplied as 35% solids in water/isopropyl alcohol (45:20) solution.

The fluorosurfactant can be coated onto the polymer particles using any suitable method. For example, the fluorosurfactant can be applied by blending the polymer particles with the fluorosurfactant in a suitable mixer,

e.g., a high intensity mixer, a low intensity ribbon blender, or a drum mixer. Alternatively, the fluorosurfactant can be applied during the impregnation of the polymer particles by adding it along with the blowing agent.

Enhanced coffee retention has been observed when as little as about 0.01 part by weight fluorosurfactant (100% solids) is employed per each 100 parts by weight of polymer particles. Using more than about 0.25 part by weight of fluorosurfactant (100% solids) has not been found to impart any significant enhancement in the coffee retention of molded cups.

Moreover, the entire surface of the particles does not need to be completely coated. It is adequate for the purposes of this invention if at least a portion of the surfaces of the particles are coated with fluorosurfactant. In the practice of this invention, the fluorosurfactant in diluent solution is coated on at least a portion of the surfaces of the beads, and the diluent is removed, leaving a thin film coating of the fluorosurfactant on the bead. The following examples further demonstrate the invention.

EXAMPLE 1

This example demonstrates the preparation of fluorosurfactant coated polystyrene beads and foam cups produced therefrom. The polystyrene beads were coated with fluorosurfactant by blending. Five samples (A-E) were separately prepared using the following procedure:

To 300 g of n-pentane impregnated polystyrene beads having bead diameters within the range of from about 0.008

to about 0.02 inch was added the amount and type of fluorosurfactant shown in column 2 of following Table 1. The mixture of impregnated beads and fluorosurfactant was tumble blended in a glass jar for about 15 minutes, and then about 0.24 g of zinc stearate, a mold release agent, was added. The mixture was further tumble blended for about a half hour.

10 The impregnated, fluorosurfactant-coated beads were pre-expanded in a Buccaneer expander to the density shown in column 3 of following Table 1 and allowed to age for at least 2 hours before being molded into cups.

Cup molding was carried out using a 6W smooth wall mold which produces a 6 oz. cup. The cup molding machine was set to a steam header pressure of 120 psi and a back pressure of 35 psi. The total molding cycle took 6.43 seconds per cup and consisted of fill time 0.85 second, dwell time 0.65 second, cook time 1.70 seconds, and cool time 3.25 seconds. Forty cups were molded from each sample and allowed to age overnight before testing.


20 Ten cups of each sample were subjected to coffee retention testing as follows: Coffee at 190°F. was poured into each cup and the side walls and bottom of each cup containing coffee was observed for coffee stains or leakage every 15 minutes over a 2 hour period.

The mean time to failure (MTF) of each ten cup sample was calculated by adding the time to failure for each cup (the 15 minute period during which a cup exhibits leakage or staining is recorded as the time to failure for that cup) and dividing the total time by the number of cups tested. The maximum MTF value if none of the ten cups


30

in a sample exhibited any stain or leakage is 2.0 hours. The minimum MTF value if all ten cups fail within the first 15 minutes is 0.25 hour.

Coffee retention testing was repeated on a second set and a third set of ten cups of each of the five samples 2 weeks and 1 month after the first test. The results of the coffee retention testing is set forth in following Table 1.



10



20



30


4 2 0 0 1 1 0 7 4

TABLE 1

Sample	Fluorosurfactant (wt %)	Density	Coffee Retention After Aging (MTF) ²		
			1 Day	2 Week	1 Month
Control	None	4.07	0.43 ²	0.35	0.45
A	ZONYL FSP ¹ (0.01)	4.03	0.43	0.35	0.50
B	ZONYL FSP (0.05)	3.86	1.75	1.00	1.30
C	ZONYL FSP (0.075)	3.94	1.88	1.70	2.00
D	ZONYL FSP (0.10)	3.87	1.58	1.85	2.00
E	ZONYL FSP (0.15)	3.59	1.27	0.88	0.80

-3-

- 10 1. ZONYL FSP Fluorosurfactant is represented by the following formula:



2. Mean Time to Failure of a ten cup sample in hours.

EXAMPLE 2

This example demonstrates the invention using substantially the procedure of Example 1 and compares the difference in coffee retention achieved using three different fluorosurfactants. Three samples (F-H) and a control were prepared.

The amount and type of fluorosurfactant used and the results of the coffee retention testing are shown in following Table 2.

10


20

TABLE 2

Sample	Fluorosurfactant (wt %)	Density	Coffee Retention After Aging (MTF)		
			1 Day	2 Week	1 Month
Control	None	3.96	0.43	0.25	0.25
F	ZONYL FSE ¹ (0.075)	3.77	0.48	0.45	0.40
G	ZONYL RP ² (0.15)	3.84	0.65	0.50	0.38
H	ZONYL FSP (0.15)	3.59	1.27	0.88	0.80

1. ZONYL FSE Fluorosurfactant is nominally the same as ZONYL FSP (See Example 1, Note 1).

10 2. ZONYL RP Fluorosurfactant is represented by the following formula:



EXAMPLE 3

This example demonstrates another method for coating polystyrene beads with fluorosurfactant and describes introduction of fluorosurfactant during the impregnation of the polystyrene beads.

To a soda pop bottle containing 100 g of unimpregnated polystyrene beads having diameters within the range of from about 0.009 to about 0.03 inch is added about 97 ml of distilled water, about 2.0 g of a suspending agent (tricalcium phosphate), about 2.0 ml of soap (sodium dodecylbenzene sulfonate), about 0.3 g of a 35% fluoro-surfactant solution (ZONYL® FSP), and about 7.8 g of n-pentane blowing agent.

The contents of the bottle are tumbled end over end in an oil bath and heated to about 105°C. After remaining at 105°C. for about 2 hours, the contents are cooled to room temperature, the bottle is opened, and the contents acidified to a pH of about 1.0.


The beads are retained in the acid for about 15 minutes, and then washed with water, centrifuged, and tray dried for about 4 hours. The resulting beads are recovered with at least a portion of their surfaces coated with fluorosurfactant and are tested for coffee retention according to the procedure set out in Example 1. Cups molded from the resulting beads which are at least partially coated with fluorosurfactant exhibit enhanced coffee retention as compared to beads prepared identically but in the absence of the fluorosurfactant.

It will be evident from the foregoing that various modifications can be made to this invention. Such, however, are considered as being within the scope of the invention.


10

CLAIMS The claims defining the invention are as follows:

1. A moldable composition comprising expandable thermoplastic polymer particles and a fluorosurfactant having the general formula:




wherein R represents a perfluoroalkyl group having from 6 to 16 carbon atoms; wherein X represents $-CH_2SCH_2CH_2CO_2Li$, $-CH_2SO_3H$, $-CH_2SO_3NH_4$, $-CH_2O(CH_2CH_2O)_xH$, $-CH_2O(CH_2CH_2O)_yH$, $-CH_2SCH_2CH_2N^+(CH_3)_3CH_3SO_4^-$, $-CH(OCOCH_3)CH_2N^+(CH_3)_2CH_2CO_2^-$, and



and wherein x represents an integer from 8 to 14, y represents an integer from 4 to 7, R' represents $-OCH_2CH_2R$ or $-OM$, and M represents $-H$, $-NH_4$, or $-NH_2(CH_2CH_2OH)_2$, the amount of fluorosurfactant being present in an amount sufficient to enhance the coffee retentiveness of cups molded from the moldable composition as compared to the coffee retentiveness in the absence of the fluorosurfactant.


2. The moldable composition of claim 1 in which said thermoplastic polymer particles are impregnated with a blowing agent.

3. A method for enhancing the coffee retentiveness of molded foam cups made from foamable thermoplastic polymer particles which have been impregnated with a blowing agent which comprises coating the thermoplastic polymer particles with an effective amount of a fluorosurfactant having the general formula:



to foam coated particles, wherein R represents a perfluoroalkyl group having from 6 to 16 carbon atoms; wherein X represents


$-\text{CH}_2\text{SCH}_2\text{CH}_2\text{CO}_2\text{Li}$, $-\text{CH}_2\text{SO}_3\text{H}$, $-\text{CH}_2\text{SO}_3\text{NH}_4$,
 $-\text{CH}_2\text{O}(\text{CH}_2\text{CH}_2\text{O})_x\text{H}$, $-\text{CH}_2\text{O}(\text{CH}_2\text{CH}_2\text{O})_y\text{H}$,
 $-\text{CH}_2\text{SCH}_2\text{CH}_2\text{N}^+(\text{CH}_3)_3\text{CH}_3\text{SO}_4^-$,
 $-\text{CH}(\text{OCOCH}_3)\text{CH}_2\text{N}^+(\text{CH}_3)_2\text{CH}_2\text{CO}_2^-$, and



and wherein x represents an integer from 8 to 14, y represents an integer from 4 to 7, R' represents $-\text{OCH}_2\text{CH}_2\text{R}$ or $-\text{OM}$, and M represents $-\text{H}$, $-\text{NH}_4$, or $-\text{NH}_2(\text{CH}_2\text{CH}_2\text{OH})_2$, said fluorosurfactant being present in an amount sufficient to enhance the coffee retentiveness of said molded foam cups as compared to the rate at which coffee leaks in the absence of said fluorosurfactant.


4. A method of claim 3 in which the fluorosurfactant is coated on the thermoplastic polymer particles before the step of impregnating the particles with a blowing agent by blending, or after the step of impregnating the polymer particles with a blowing agent by blending, or during the step of impregnating the thermoplastic polymer particles with a blowing agent.

5. Moldable, expandable thermoplastic polymer particles at least a portion of the surfaces of which have a coating produced by removing diluent from a fluorosurfactant in diluent solution, the fluorosurfactant having the general formula



wherein R represents a perfluoroalkyl group having from 6 to 16 carbon atoms; wherein X represents $-\text{CH}_2\text{SCH}_2\text{CH}_2\text{CO}_2\text{Li}$, $-\text{CH}_2\text{SO}_3\text{H}$,

$-\text{CH}_2\text{SO}_3\text{NH}_4$, $-\text{CH}_2\text{O}(\text{CH}_2\text{CH}_2\text{O})_x\text{H}$, $-\text{CH}_2\text{O}(\text{CH}_2\text{CH}_2\text{O})_y\text{H}$,
 $-\text{CH}_2\text{SCH}_2\text{CH}_2\text{N}^+(\text{CH}_3)_3\text{CH}_3\text{SO}_4^-$,
 $-\text{CH}(\text{OCOCH}_3)\text{CH}_2\text{N}^+(\text{CH}_3)_2\text{CH}_2\text{CO}_2^-$, and



and wherein x represents an integer from 8 to 14, y represents an integer



0100f

from about 4 to 7, R^1 represents $-OCH_2CH_2R$ or $-OM$, and M represents $-H$, $-NH_4$, or $-NH_2(CH_2CH_2OH)_2$, said fluorosurfactant being present in an amount sufficient to enhance the coffee retentiveness of cups molded from said moldable, expandable thermoplastic polymer particles as compared to the coffee retentiveness in the absence of fluorosurfactant.

6. The moldable composition of claim 1 or claim 2 or the method claimed in claim 3 or claim 4 or the particles claimed in claim 5 in which said thermoplastic polymer particles are styrenic polymer particles.

7. The moldable composition of claim 1, claim 2 or claim 6 or the method of claim 3, claim 4 or claim 6 or the particles of claim 5 or claim 6 in which said thermoplastic polymer particles are polystyrene beads.

8. The moldable composition of claim 1, claim 2, claim 6 or claim 7 or method of claim 3, claim 4, claim 6 or claim 7 or particles of claim 5, claim 6 or claim 7 in which said fluorosurfactant is employed in an amount of from about 0.01 to about 0.25 part by weight (100 solids) per each 100 parts by weight of thermoplastic polymer particles.

9. A foam cup produced by the steps of pre-expanding and molding the moldable, expandable thermoplastic polymer particles of any one of claims 5 to 8 or the coated particles obtained by the method of any one of claims 3, 4, 6, 7 and 8, or produced from the composition of any one of claims 1, 2, 6, 7 and 8.

10. A moldable composition comprising expandable thermoplastic polymer particles and a fluorosurfactant, substantially as herein described with reference to any one of Examples 1 to 3.

11. A method for enhancing the coffee retentiveness of molded foam cups made from foamable thermoplastic polymer particles which have been impregnated with a blowing agent which method comprises coating the thermoplastic polymer particles with an effective amount of a fluorosurfactant, substantially as herein described with reference to any one of Examples 1 to 3.

12. Moldable, expandable thermoplastic polymer particles at least a portion of the surfaces of which have a coating produced by removing diluent from a fluorosurfactant in diluent solution, substantially as herein described with reference to Example Example 3.

13. A foam cup produced by the steps of pre-expanding and molding moldable, expandable thermoplastic polymer particles of claim 12 or the



EH/0100f

- 16 -

coated particles obtained by the method of claim 11, or produced from the composition of claim 10.

DATED this TWELFTH day of SEPTEMBER 1990

Arco Chemical Company

Patent Attorneys for the Applicant

SPRUSON & FERGUSON



KEM/0100f