



(22) Date de dépôt/Filing Date: 2011/04/27

(41) Mise à la disp. pub./Open to Public Insp.: 2011/10/30

(30) Priorités/Priorities: 2010/04/30 (US61/329,762);
2011/04/18 (US13/088,700)

(51) Cl.Int./Int.Cl. *C01B 3/56* (2006.01),
B01D 39/12 (2006.01), *C01B 3/02* (2006.01),
C01B 3/32 (2006.01), *C01B 3/50* (2006.01)


(71) Demandeur/Applicant:
TM INDUSTRIAL SUPPLY, INC., US

(72) Inventeurs/Inventors:
STEINER, CARL A., US;
JACKSON, RICKY L., US

(74) Agent: DIMOCK STRATTON LLP

(54) Titre : FILTRE

(54) Title: FILTER

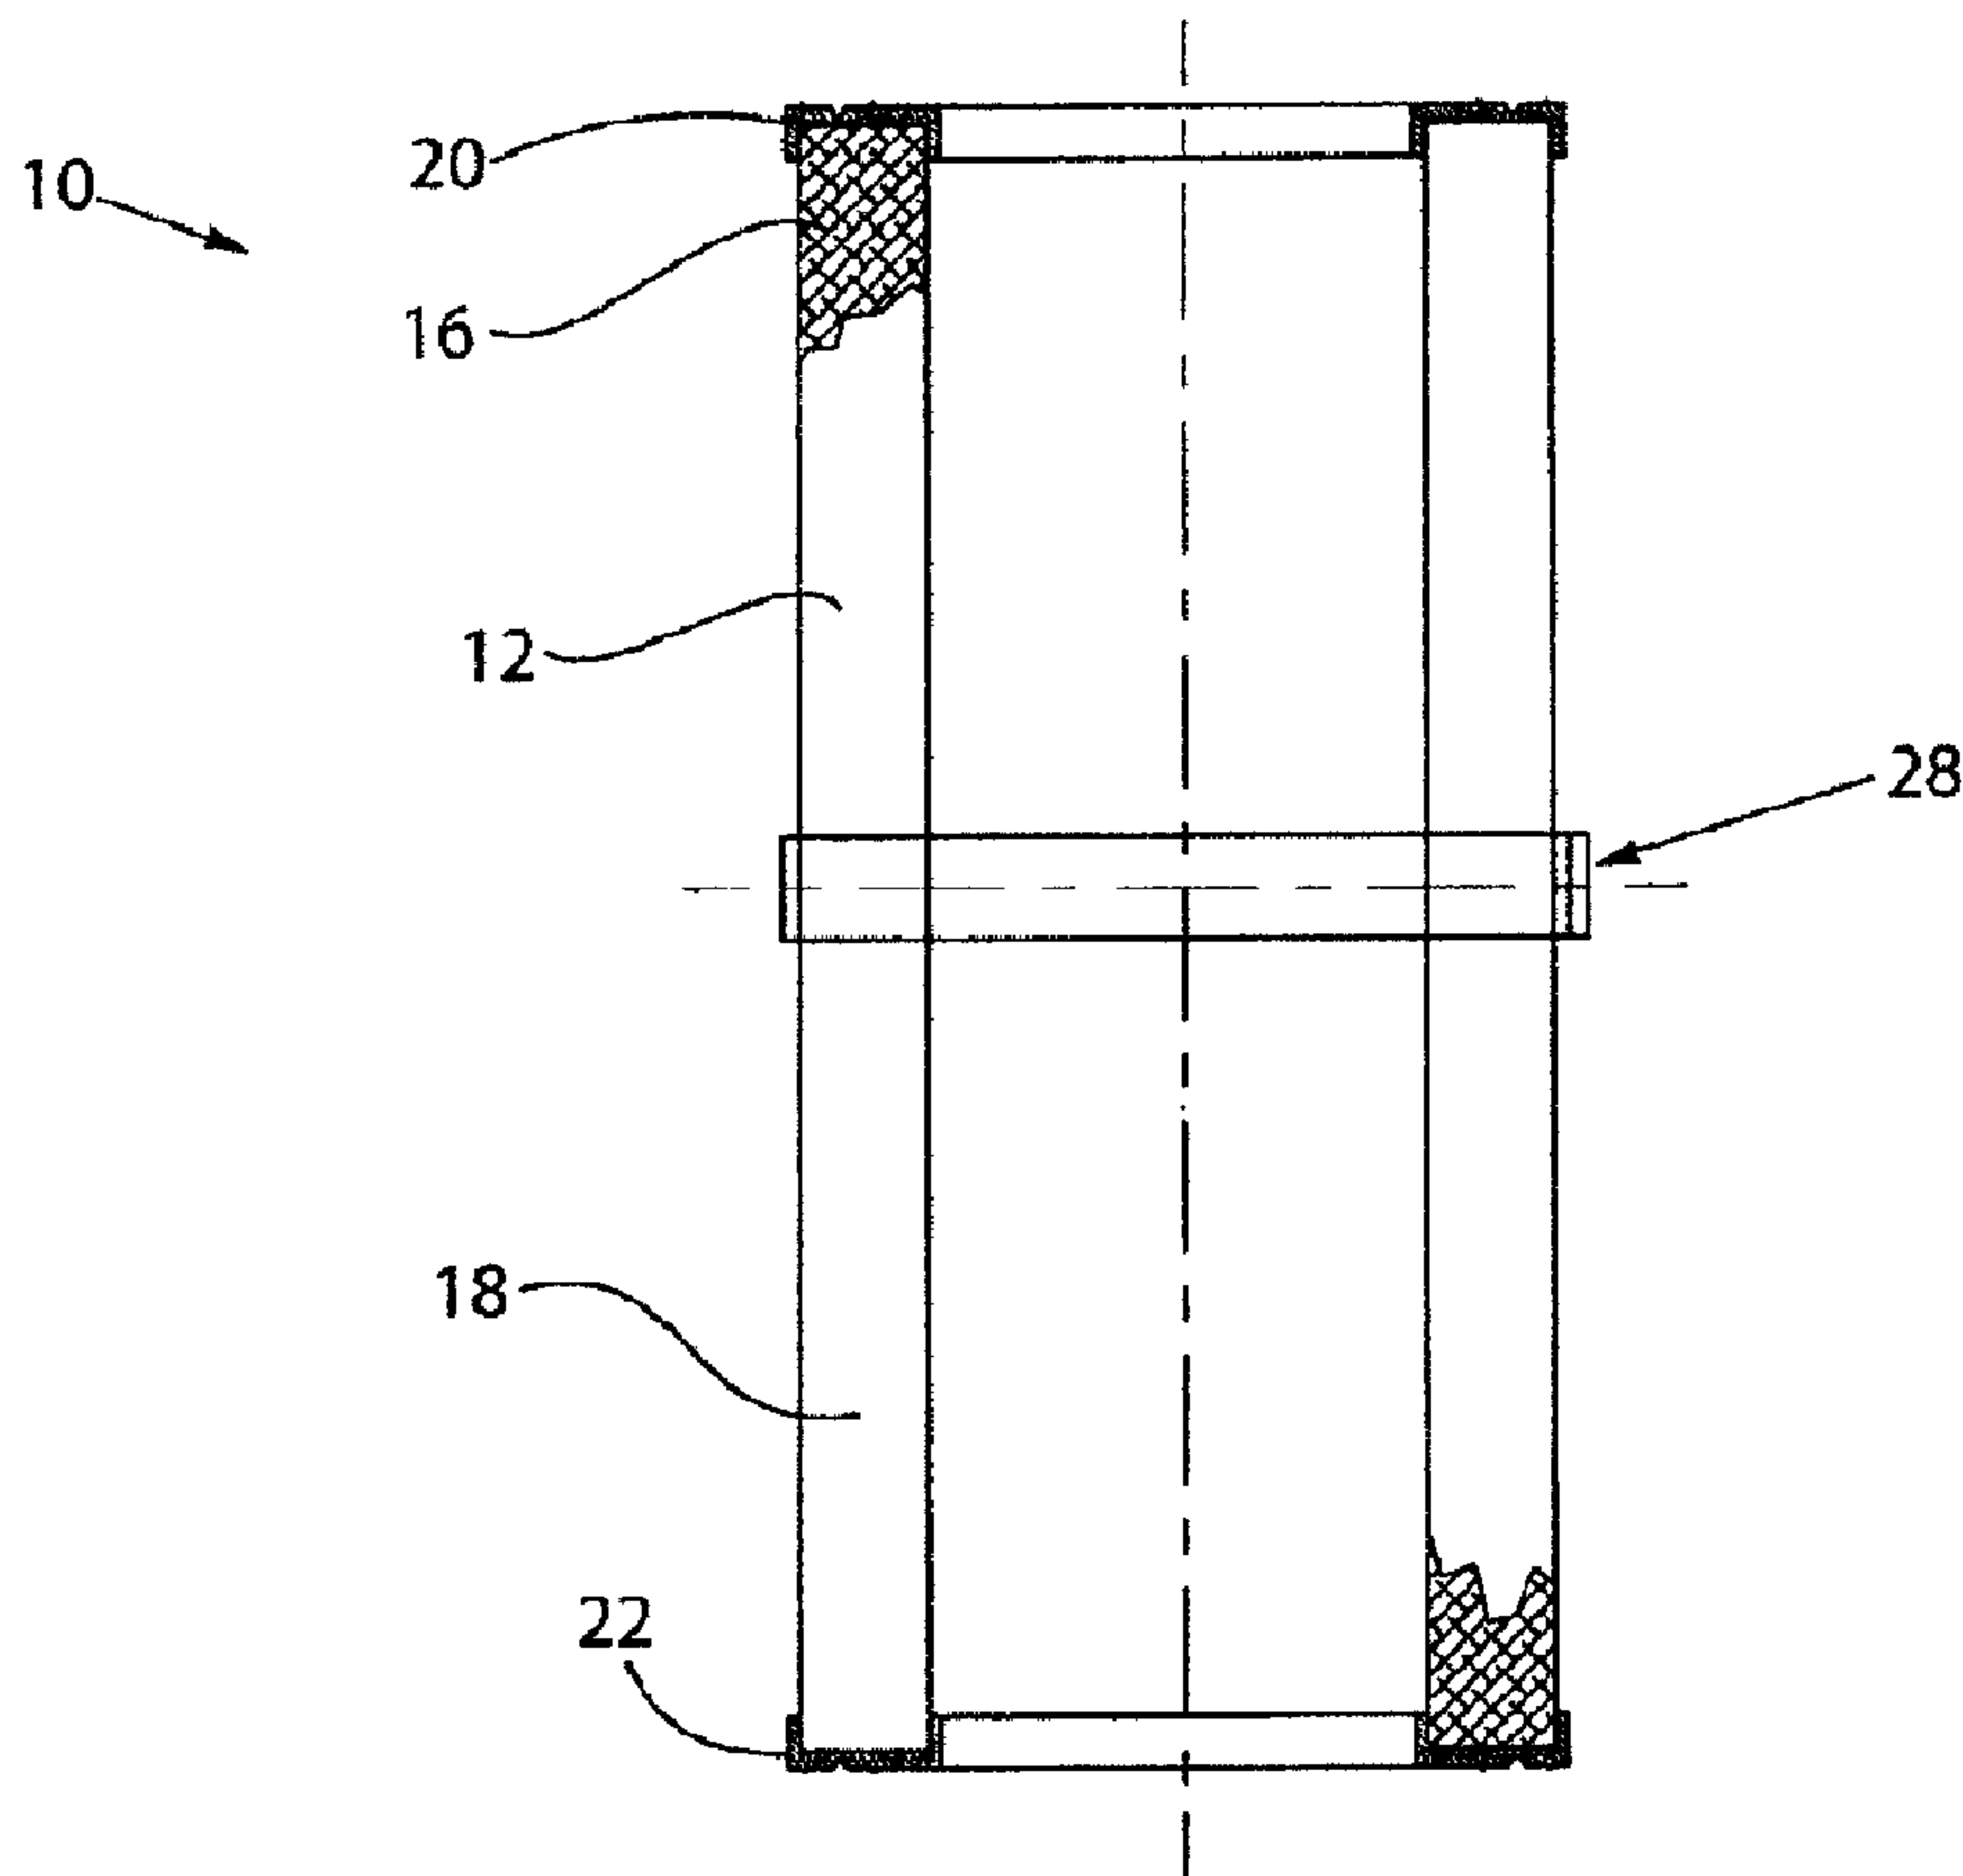

(57) Abrégé/Abstract:

A high temperature filter and a self-cleaning filtering system for filtering media, such as biomass materials, are provided. The filter and filtering system is particularly useful in the filtration of syngas in a plasma arc gasification process to remove char and other

(57) **Abrégé(suite)/Abstract(continued):**

particles of down to a submicron size from the syngas. The filter is formed from a pleated metal mesh material including end caps secured by a high-temperature metallic paste or adhesive, such that the filter is capable of withstanding operating temperatures up to 2000°F. The system includes a backflush unit for injecting cleaning media therein to remove trapped char and other debris from the filter. At least two filtering systems can be placed in parallel so that one system can be cleaned while the other is operating. A method for filtering media is also disclosed.

FILTER**ABSTRACT OF THE INVENTION**

A high temperature filter and a self-cleaning filtering system for filtering media, such as biomass materials, are provided. The filter and filtering system is particularly useful in the filtration of syngas in a plasma arc gasification process to remove char and other particles of down to a submicron size from the syngas. The filter is formed from a pleated metal mesh material including end caps secured by a high-temperature metallic paste or adhesive, such that the filter is capable of withstanding operating temperatures up to 2000°F. The system includes a backflush unit for injecting cleaning media therein to remove trapped char and other debris from the filter. At least two filtering systems can be placed in parallel so that one system can be cleaned while the other is operating. A method for filtering media is also disclosed.

FILTER

BACKGROUND OF THE INVENTION

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This application is based upon United States Provisional Patent Application Serial No. 61/329,762 entitled "Filter", filed April 30, 2010 which is hereby incorporated by reference.

Field of the Invention

[0002] This invention relates to a filter and filtering system for filtering media and, more particularly, to a high temperature filter and a self-cleaning filtering system for filtering synthetic gas (syngas) in a gasification process.

Description of Related Art

[0003] In the synthetic gas (syngas) industry, it is known that any debris in a syngas system made from biomass will harm the catalyst used in the reaction process. Therefore, it is necessary to filter the syngas to remove this char and other particles typically found therein. Due to high temperature processing conditions, current gasification systems use filters formed from ceramic materials or tri-sintered metal. The use of these types of filters is often unsatisfactory, as ceramic filters can crack and sintered metal filters cannot be easily cleaned to remove the filtered particles therefrom. Additionally, ceramic material cannot be easily recycled. Therefore, the filters are often discarded after a particular period of time or after a particular number of filtering cycles. This discarding of the filters results in increased industrial waste and causes processing downtime during replacement.

[0004] Different methods and systems for filtering biomass or syngas materials are shown, for example, in U.S. Patent Nos. 7,300,481; 7,056,487; 6,077,490 and 4,865,627.

[0005] There is a need in the art for a high temperature filter and self-cleaning filtering system that can sufficiently remove char and other particles from a media, such as biomass material, with a minimum amount of processing downtime that overcomes the disadvantages of the prior art.

SUMMARY OF THE INVENTION

[0006] According to one aspect, the present invention is directed to a filter for use in a gasification system such as in the production of synthetic gas or syngas. The filter can be formed from all stainless steel materials which can be easily cleaned and are readily recyclable into scrap material. The filter comprises a cylindrical member formed from a pleated metal mesh sheet having a first end portion and a second end portion. The pleated metal mesh sheet is overlapped and secured along at least one edge portion to hold the sheet in a cylindrical shape. At least one end cap is positioned adjacent to at least one of the first end portion and the second end portion. A high temperature metallic paste or adhesive secures at least one end cap to at least one of the first end portion and the second end portion. The pleated metal sheet is welded along the overlapped edge portion to form a weld line, and the metal paste can be applied along the weld line. According to one embodiment, the at least one end cap comprises a first end cap and a second end cap and the metallic paste or adhesive can also be used to secure the first end cap to the first end portion of the cylindrical member and to secure the second end cap to the second end portion of the cylindrical member. This metallic paste or adhesive can be capable of withstanding an operating temperature up to 2000°F such as within the range of a 600 - 2000°F or even the range of 1500 - 2000°F. One type of metallic paste that can be used is a high temperature epoxy resin. According to one embodiment, the metal mesh sheet is capable of filtering particles as small as 1 micron. According to another embodiment, the metal mesh sheet can be a metal cloth capable of filtering submicron sized particles.

[0007] According to another aspect, the present invention is directed to a self-cleaning filtering system for use in a gasification process comprising a housing, a filter located within the housing, an inlet in fluid communication with the housing and filter for feeding a supply of media therein for filtration, an outlet in fluid communication with and/or in cooperation with the filter for removing the filtered media, a backflush unit located inline between the filter and the outlet for injecting or backflushing cleaning material back into the filter and removing collected debris from the filter, and a drain in fluid communication with the housing for draining the debris as it is removed from the filter. The system can further include a vent for venting gas from within the housing. The cleaning material can be compressed air, steam, compressed gas, and liquid. One example of the cleaning material comprises the application of jet-air pulses. The supply of media can be a biomass material, which can be a liquid, such as water or oil, a gas,

and/or a combination thereof. According to one embodiment, the media can comprise syngas and the filter can be configured for removing char and particles having a submicron size from the syngas. The filter can be a cylindrical pleated metal mesh filter. Also, the filter can be secured together with a high temperature metallic paste or adhesive and is capable of withstanding operating temperatures up to 2000°F such as within the range of a 600 - 2000°F or even the range of 1500 - 2000°F. The filtering system can be arranged in a simplex or a duplex design. In the duplex design, at least two filtering systems are placed in parallel so that at least one of the filtering systems remains in operation while the other system is being cleaned.

[0008] According to yet another aspect, the invention is directed to a method for filtering a syngas in a gasification system. The method comprises providing a housing, positioning a filter within the housing, feeding a supply of syngas into the housing and the filter for filtration thereof, and providing an outlet in fluid communication with and/or in cooperation with the filter for removing the filtered syngas material. The filter is capable of filtering submicron particles at high operating temperatures. The filter can comprise a metal mesh pleated cylindrical filter having a pair of end caps attached to the filter with a high temperature metallic paste or adhesive, such as an epoxy, e.g., Loctite®. The filter can be capable of withstanding operating temperatures up to 2000°F such as within the range of a 600 - 2000°F or even the range of 1500 - 2000°F. The method can further include providing a backflush unit located inline between the filter and the outlet for blowing cleaning media back through the filter to dislodge collected particles from the filter and providing a drain in fluid communication with the housing for draining the particles as they are removed from the filter. The method can also include providing a vent in cooperation with the housing for venting excess gas from within the housing.

[0009] These and other features and characteristics of the present invention, as well as the methods of operation and functions of the related elements of structures, and the combination of parts and economies of manufacture, will become more apparent upon consideration of the following description with reference to the accompanying drawings, all of which form a part of this specification, wherein like reference numerals designate corresponding parts in the various figures.

BRIEF DESCRIPTION OF THE DRAWINGS

- [0010] Fig. 1 shows a cross-sectional side elevation view of the filter, according to the invention, for use in the gasification process;
- [0011] Fig. 2 shows a top view of the filter of Fig. 1;
- [0012] Fig. 3A shows an exploded view of the filter portion denoted by IIIA in Fig. 2;
- [0013] Fig. 3B shows an exploded view of the filter portion denoted by IIIB in Fig. 3A;
- [0014] Fig. 4 shows a cross-sectional side elevation view of a simplex self-cleaning filtering system, including the filter of Fig. 1, for use in a gasification process;
- [0015] Fig. 4A shows a chart depicting the valving arrangement for the filtration of a gas through the filtering system of Fig. 4;
- [0016] Fig. 4B shows a chart depicting the valving arrangement for the filtration of a liquid through the filtering system of Fig. 4;
- [0017] Fig. 5 shows a side elevation view of a duplex self-cleaning filtering system, including the filter of Fig. 1, for use in a gasification process;
- [0018] Fig. 5A shows a chart depicting the valving arrangement for the filtration of a media through the filtering system of Fig. 5;
- [0019] Fig. 6 shows a top view of the duplex filter system of Fig. 5;
- [0020] Fig. 7 shows a side elevation detailed view of the inlet/outlet manifold of the filtering system of Fig. 5;
- [0021] Fig. 8 shows a chart depicting various micron filter cloth specifications which can be used for the metal mesh material of the filter of Fig. 1; and
- [0022] Fig. 9 shows a chart depicting various specifications for Twill Dutch weave filter cloth which can be used for the metal mesh material of the filter of Fig. 1.

BRIEF DESCRIPTION OF THE INVENTION

[0023] For purposes of the description hereinafter, the terms “upper”, “lower”, “right”, “left”, “vertical”, “horizontal”, “top”, “bottom”, “lateral”, “longitudinal”, and derivatives thereof, shall relate to the invention as it is oriented in the drawing figures. However, it is to be understood that the invention may assume various alternative variations, except where expressly specified to the contrary. It is also to be understood that the specific devices illustrated in the attached drawings, and described in the following specification, are simply exemplary embodiments of

the invention. Hence, specific dimensions and other physical characteristics related to the embodiments disclosed herein are not to be considered as limiting.

[0024] Reference is now made to Figs. 1-2, which show the filter according to the invention, generally indicated as 10, for use in a gasification process for filtering media, such as biomass materials or waste materials, such as a synthetic gas or syngas in a plasma arc gasification system. The filter 10 can be formed from all stainless steel materials. The use of an all stainless steel filter facilitates the physical cleaning of the filter so that the filter can be easily recycled as scrap metal. The filter 10 can comprise a cylindrical member 12 formed from a pleated metal mesh 14 sheet having a first end portion 16 and a second end portion 18. According to one embodiment, the filter 10 can be pleated into multiple pleats having multiple pleat depths so that a variety of filters having a variety of surface areas can be produced. In order to increase the amount of surface area, the filters are designed to be stackable upon one another. The pleated metal mesh sheet 14 is overlapped, as shown at 23 in Fig. 3A, and secured along at least one edge portion to hold the sheet 14 in a cylindrical shape. At least one end cap or a pair of end caps, such as a first end cap 20 and a second end cap 22, can be secured to the cylindrical member 12. A structural plate 28 can be provided substantially midway between the first end portion 16 and the second end portion 18 or at any other location as needed for supporting the cylindrical member 12. As illustrated in Fig. 3B, the filter 10 can comprise a plurality of metal mesh sheets 14a, 14b and 14c, and a perforated sheet metal layer 15 to provide support and strength to the metal mesh sheets 14a, 14b and 14c.

[0025] A high temperature metallic paste can be used to secure the end caps 20, 22 to at least one of the first end portion 16 and the second end portion 18. The pleated metal sheet 14 can be welded along the overlapped one edge portion 23 to form a weld line 24 as shown in Fig. 3A and the high temperature metallic paste can also be applied, as shown by 26 in Fig. 3A, along the overlap having a length L such that the metallic paste encompasses the weld line 24. The purpose for the application of the metallic paste along entire length L of the overlap is to seal off this overlap and to fill any voids which may have been created during welding. The metallic paste is of a formulation that is capable of withstanding an operating temperature within the range of up to 2000°F such as 600 - 2000°F or even within the range of 1500-2000°F. The filter 10 is designed for filtering up to a 20 psid (differential). The metallic paste can be Loctite® Fixmaster® 2000° Putty, produced by the Henkel Corporation, which is an epoxy single

component putty designed to fill and restore damaged metal and fill cracks in environments that will see temperatures up to 2000°F. This paste is water-based, non-toxic and a self-reactive cure type.

[0026] According to one embodiment, the metal mesh sheet 14 is capable of filtering particles as small as 1 micron. According to another embodiment, the metal mesh sheet can be a metal cloth capable of filtering submicron sized particles. Examples of the different types of metal sheet and/or cloth material are shown in Figs. 8 and 9. Figs. 8 and 9 show Twill Dutch Weave Filter Cloth. The term "Twill" refers to a weave wherein the warp and weft (shute) wires pass alternately over two and under two wires. The term "Dutch" refers to the use of a heavier warp wire diameter in conjunction with a lighter weft wire diameter. In a Twill Dutch Filter Weave, the weft wires are driven up so tightly that there is always a shute wire above and below the warp wires, creating a weave with the warp wires completely covered. The flow-pass geometry is extremely tortuous, allowing reasonable flow rates while insuring excellent particle size retention.

[0027] Reference is now made to Fig. 4, which shows a cross-sectional side elevation view of a self-cleaning simplex self-cleaning filtering system, generally indicated as 50, including the filter 10 described above and shown in Fig. 1, for use in a gasification process. The filtering system 50 comprises a housing 52, the filter 10, located within the housing 52, and an inlet 56 for feeding a supply of media into the housing 52 and the filter 10 for filtration thereof. The system 50 further includes an outlet 58 in cooperation with the filter 10 for removing the filtered media and a backflush unit 60 located inline between the filter 10 and the outlet 58 for injecting or backflushing cleaning material back into the filter 10 and removing collected debris, such as char, from the filter 10. An opening 62 is located in fluid communication with the housing 52, such as at the bottom 64 of the housing 52, for draining the debris through drain 66 as it is removed from the filter 10. The system 50 can further include a vent 68 for venting gas from within the housing. The cleaning material can be compressed air, steam, compressed gas, liquid, and the like. One example of the cleaning material comprises a thirty second jet-air pulse to remove the char and debris that is collected on the filter element 10. The supply of media can be a biomass material and can be a liquid, such as water or oil, a gas, and/or a combination thereof. According to one embodiment, the media can comprise syngas and the filter 10 can be configured for removing char and particles having a 1 micron sized, or even as small as

submicron sized, particles from the syngas. As discussed above, and shown in Fig. 1 the filter can be a cylindrical pleated metal mesh filter having the particular weaves shown in the tables of Figs. 8 and 9. Figs. 4A and 4B show the operation of the filtering system 50, including the opening and closing of the inlet 56, outlet 58, backflush unit 60 and drain 66, during the filtration of a gas and liquid respectively, during standard filtering operation, venting, and backflushing. It can be appreciated that inlet 56, outlet 58, backflush unit 60 and drain 66 can be located at any location with respect to the housing 52, as long as they are in fluid communication with the housing. Flow through the inlet 56, outlet 58, backflush unit 60 and drain 66 can be controlled, for example, by valves as shown by 57, 59, 61 and 67 in Fig. 4.

[0028] As shown in Figs. 5-7, the filtering system can be a duplex design, generally indicated as 70. In the duplex design, at least two filtering systems, such as a first filtering system 72 and a second filtering system 74, are placed in parallel so that at least one of the filtering systems 72, 74 remains in operation while the other system is being cleaned. The duplex system 70 also includes a pair of inlets 102, 104 for feeding the media into the respective first and second housings 71A, 71B and subsequently into first and second filters 73, 75, and a pair of outlets 94, 96 in fluid communication with first and second housings 71A, 71B respectively. An inlet/outlet manifold 76 is positioned in-line between the first and second filtering systems 72, 74. As illustrated in Fig. 7, the inlet/outlet manifold 76 includes a baffle plate 77 to direct the inlet flow of the media to either the first filtering system 72 or second filtering system 74 depending upon which of the valves 1A or 1B are open. The inlet flow then moves throughout the designated first or second filtering system 72, 74. After filtration is completed, the filtered media then re-enters the inlet/outlet manifold 76 and comes into contact with baffle plate 77 which prevents the filtered media from re-entering into the first or second filtering systems 72, 74 and diverts the filtered media through the outlet and out of the duplex system 70.

[0029] During cleaning of one of the filtering systems 72, 74, certain valves associated with that particular system to be cleaned start closing (e.g. 1A, 2A, 1B, 2B) while other valves, directly associated with a respective filter 73, 75 (e.g. 4A and 4B), are opened and closed on an intermittent schedule and the respective valve associated with drain 92 (e.g. 3A and 3B), is opened, while introducing a back purge via first and second backflush units 78 or 80 to dislodge the debris from the filter media so that this debris is discharged out the first and/or second bottom drain 82, 84, respectively. First and second vents 86, 88 may be provided to vent any

excess gas from the filtering systems 72, 74. Fig. 5A shows the operation of the duplex filtering system 70, including the opening and closing of the various valves 1A-4A and 1B-4B during the filtration of a media, during no-flow, start-up operation, dwell and backflush. It can be appreciated that the media can be any type of material to be filtered, including water, oil, gas, and the like.

[0030] As stated above, this duplex arrangement 70, as shown in Figs. 5-7, ensures that the system functions in a continuous manner. The duplex housing arrangement 70 will switch from one housing 72 to the other 74, upon a 15 psid differential, then a cleaning process will be activated, for example, a cleaning process using a 30 second Jet-Air Pulse, via a backflush unit 78, 80 to remove the debris on the filter element 10, which is then blown down through the cone bottom 89, 90 of the housing, through drains 82, 84 and subsequently out of the system via drain 92, thus discharging the filtered char from the surface of the filter 10.

[0031] According to another aspect, the invention is directed to a method for filtering a media, such as a syngas, in a gasification system. With continuing reference to Fig. 4, the method comprises providing a housing 52, positioning a filter 10 within the housing 52, feeding a supply of media into the housing 52 and the filter 10 for filtration thereof, and providing an outlet 58 for cooperation with the filter 10 for removing the filtered material. The filter 10 is capable of filtering submicron particles at high operating temperatures up to 2000°F, such as within the range of 600 - 2000°F or even the range of 1500-2000°F. As shown in Figs. 1-2, 3A, 3B and 4, and discussed above, the filter 10 can comprise a metal mesh pleated cylindrical filter member 12, including a pair of end caps 20, 22 attached to the filter 10 with a high temperature metallic paste or adhesive. The method can further include providing a backflush unit 60 located inline between the filter 10 and the outlet 58 for introducing cleaning media back through the filter 10 to dislodge collected particles and char from the filter 10. The method also includes providing an outlet or drain 62 in the housing and a drain outlet 66 for draining the particles out of the housing 52 as they are removed from the filter 10. The method can also include providing a vent 68 cooperating with the housing for venting excess gas from within the housing. The above-described method can also be performed using the duplex system, as shown in Figs. 5-7, so that the system functions in a continuous manner during cleaning, thus eliminating downtime during the processing of the media.

[0032] It can be appreciated that the syngas filtration process system of the invention can be used on any type of media or biomass syngas, including municipal solid waste (MSW), waste food, glycerin, wood chips, crop waste, coal gasification (IGCC), and the like.

[0033] Although the invention has been described in detail for the purpose of illustration based on what is currently considered to be the most practical and preferred embodiments, it is to be understood that such detail is solely for that purpose and that the invention is not limited to the disclosed embodiments, but, on the contrary, is intended to cover modifications and equivalent arrangements that are within the spirit and scope of this description. For example, it is to be understood that the present invention contemplates that, to the extent possible, one or more features of any embodiment can be combined with one or more features of any other embodiment.

THE INVENTION CLAIMED IS:

1. A filter for use in a gasification system in the production of syngas, said filter comprising:

a cylindrical member formed from a pleated metal mesh sheet having a first end portion and a second end portion, said pleated metal mesh sheet being overlapped and secured along at least one edge portion to hold the sheet in a cylindrical shape;

at least one end cap positioned adjacent to at least one of the first end portion and the second end portion; and

a high temperature metallic paste or adhesive for securing the at least one end cap to the at least one of the first end portion and the second end portion.

2. The filter of claim 1, wherein the pleated metal sheet is welded along the at least one edge portion to form a weld line.

3. The filter of claim 2, wherein the metallic paste or adhesive is applied along the weld line.

4. The filter of claim 1, wherein the at least one end cap comprises a first end cap and a second end cap and wherein the metallic paste or adhesive is used to secure the first end cap to the first end portion of the cylindrical member and the second end cap to the second end portion of the cylindrical member.

5. The filter of claim 1, wherein the metallic paste or adhesive is capable of withstanding an operating temperature up to 2000°F.

6. The filter of claim 5, wherein the metallic paste or adhesive is capable of withstanding an operating temperature within the range of 600 - 2000°F.

7. The filter of claim 6, wherein the metallic paste or adhesive is capable of withstanding an operating temperature within the range of 1500 - 2000°F.

8. The filter of claim 1, wherein the metal mesh sheet is capable of filtering particles as small as 1 micron.

9. The filter of claim 1, wherein the metal mesh sheet is a metal cloth capable of filtering submicron sized particles.

10. The filter of claim 1, wherein the metallic paste or adhesive comprises an epoxy based resin.

11. The filter of claim 1, wherein the metal mesh sheet and the at least one end cap is formed from a stainless steel material.

12. A self-cleaning filtering system for use in a gasification process, said filtering system comprising:

a housing;

a filter located within the housing;

an inlet for feeding a supply of media into the housing and the filter for filtration thereof;

an outlet in cooperation with the filter for removing the filtered media;

a backflush unit located inline between the filter and the outlet for injecting cleaning material back into the filter and removing collected debris from the filter; and

13. a drain in fluid communication with the housing for draining the debris as it is removed from the filter. The system of claim 12, further including a vent for venting gas from within the housing.

14. The system of claim 12, wherein the cleaning material is selected from the group consisting of compressed air, steam, compressed gas, and liquid.

15. The system of claim 14, wherein the cleaning material comprises jet-air pulses.

16. The system of claim 12, wherein the supply of media is selected from the group consisting of liquid, gas, and a combination thereof.

17. The system of claim 12, wherein the filter comprises a cylindrical pleated metal mesh filter.

18. The system of claim 17, wherein the filter is secured together with a high temperature metallic paste or adhesive and wherein the metallic paste or adhesive is capable of withstanding operating temperatures up to 2000°F.

19. The system of claim 18, wherein the metallic paste or adhesive is capable of withstanding an operating temperature within the range of 600 - 2000°F.

20. The system of claim 19, wherein the metallic paste or adhesive is capable of withstanding an operating temperature within the range of 1500 - 2000°F.

21. The system of claim 12, wherein the media comprises syngas and the filter is configured for removing char and particles having a submicron size.

22. The system of claim 12, wherein at least two filtering systems are placed in parallel so that at least one of the filtering systems remains in operation while the other filtering system is being cleaned.

23. A method for filtering a syngas in a gasification system, said method comprising providing at least a first filtering system comprising:

providing a housing;

positioning a filter within the housing;

feeding a supply of syngas into the housing and the filter for filtration thereof; and

providing an outlet in cooperation with the filter for removing the filtered syngas

wherein the filter is capable of filtering submicron particles at high operating temperatures.

24. The method of claim 23, wherein the filter comprises a metal mesh pleated cylindrical filter and a pair of end caps attached to the filter with a high temperature metallic paste or adhesive.

25. The method of claim 24, wherein the filter is capable of withstanding operating temperatures up to 2000°F.

26. The method of claim 25, wherein the filter is capable of withstanding an operating temperature within the range of 600 - 2000°F.

27. The method of claim 26, wherein the filter is capable of withstanding an operating temperature within the range of 1500 - 2000°F.

28. The method of claim 23, including providing a backflush unit located inline between the filter and the outlet for blowing cleaning media back through the filter to dislodge collected particles from the filter; and

providing a drain in the housing for draining the particles as they are removed from the filter.

29. The method of claim 23, including providing a vent cooperating with the housing for venting excess gas from within the housing.

30. The method of claim 23, wherein the method includes providing at least a second filtering system in parallel operation with the first filtering system so that cleaning of either the first or second filtering system can occur while the opposite filtering system is operating.

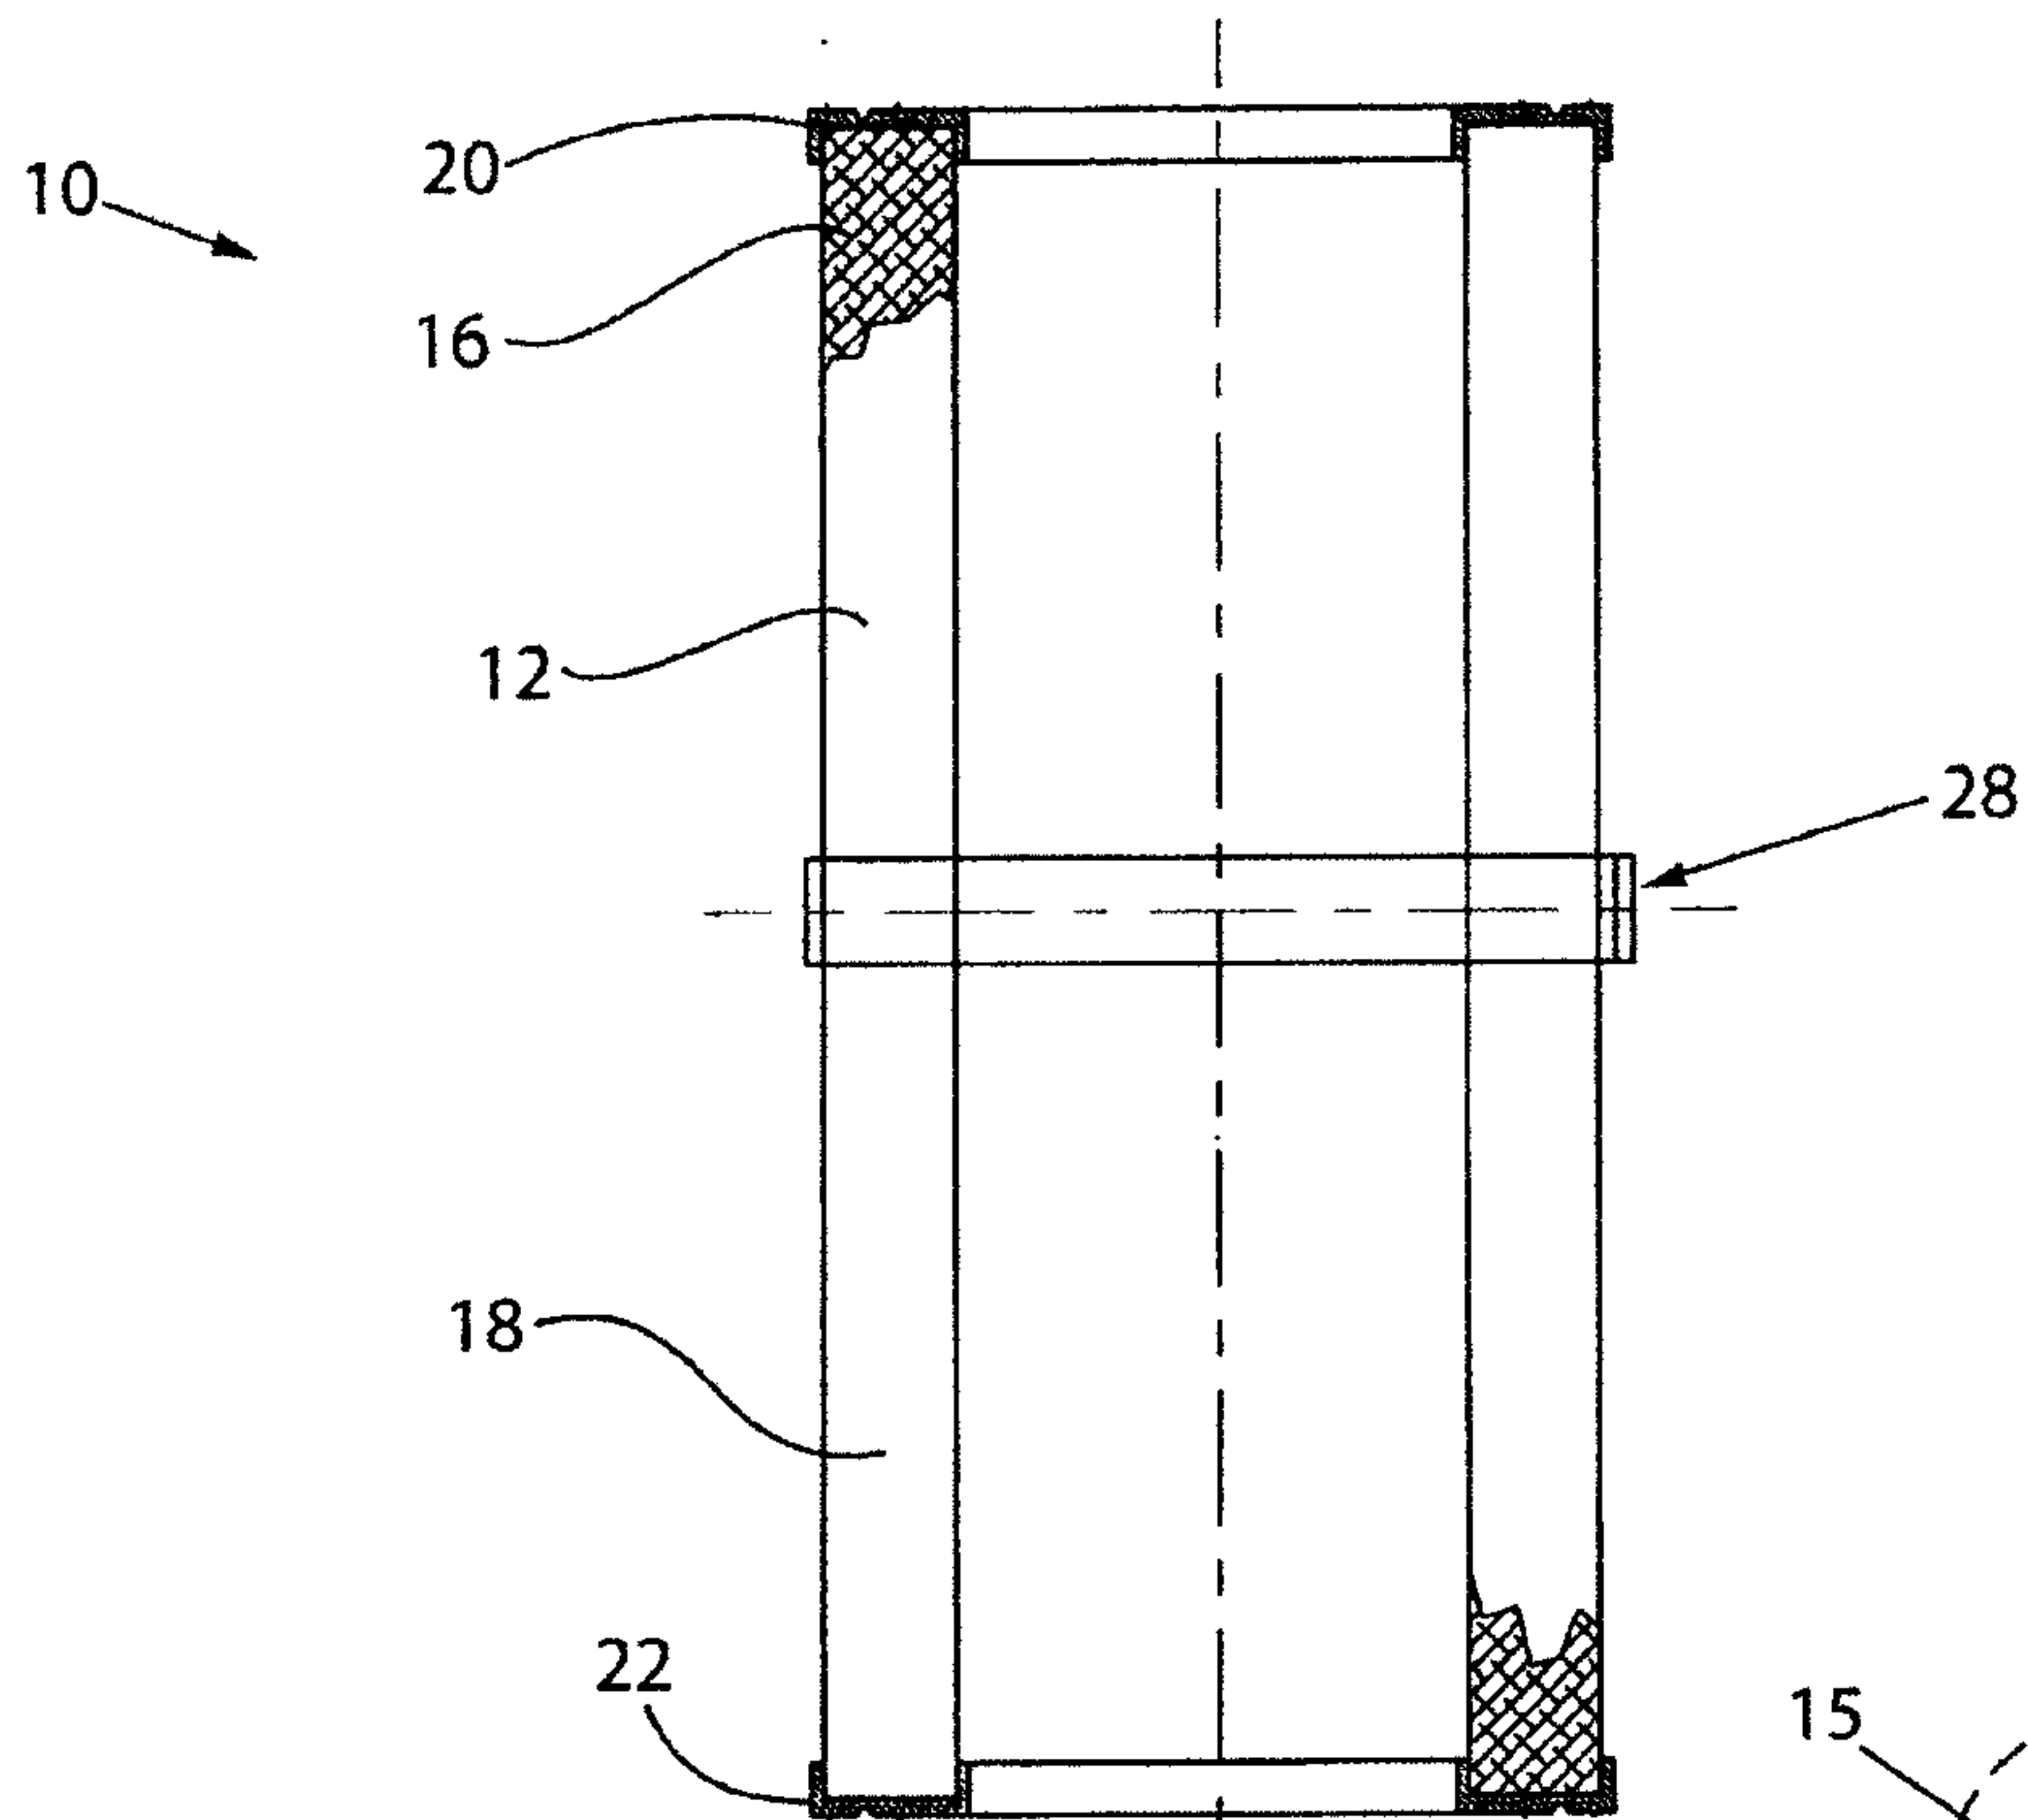


FIG. 1

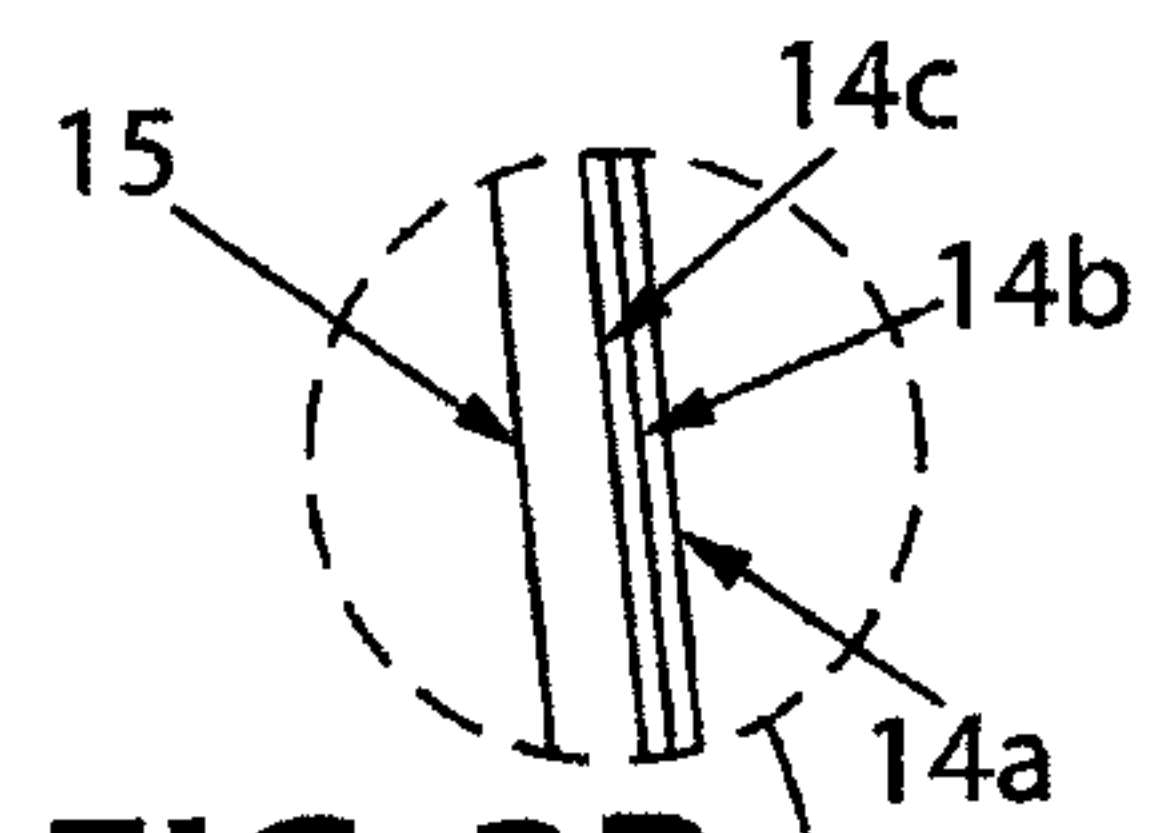


FIG. 3B

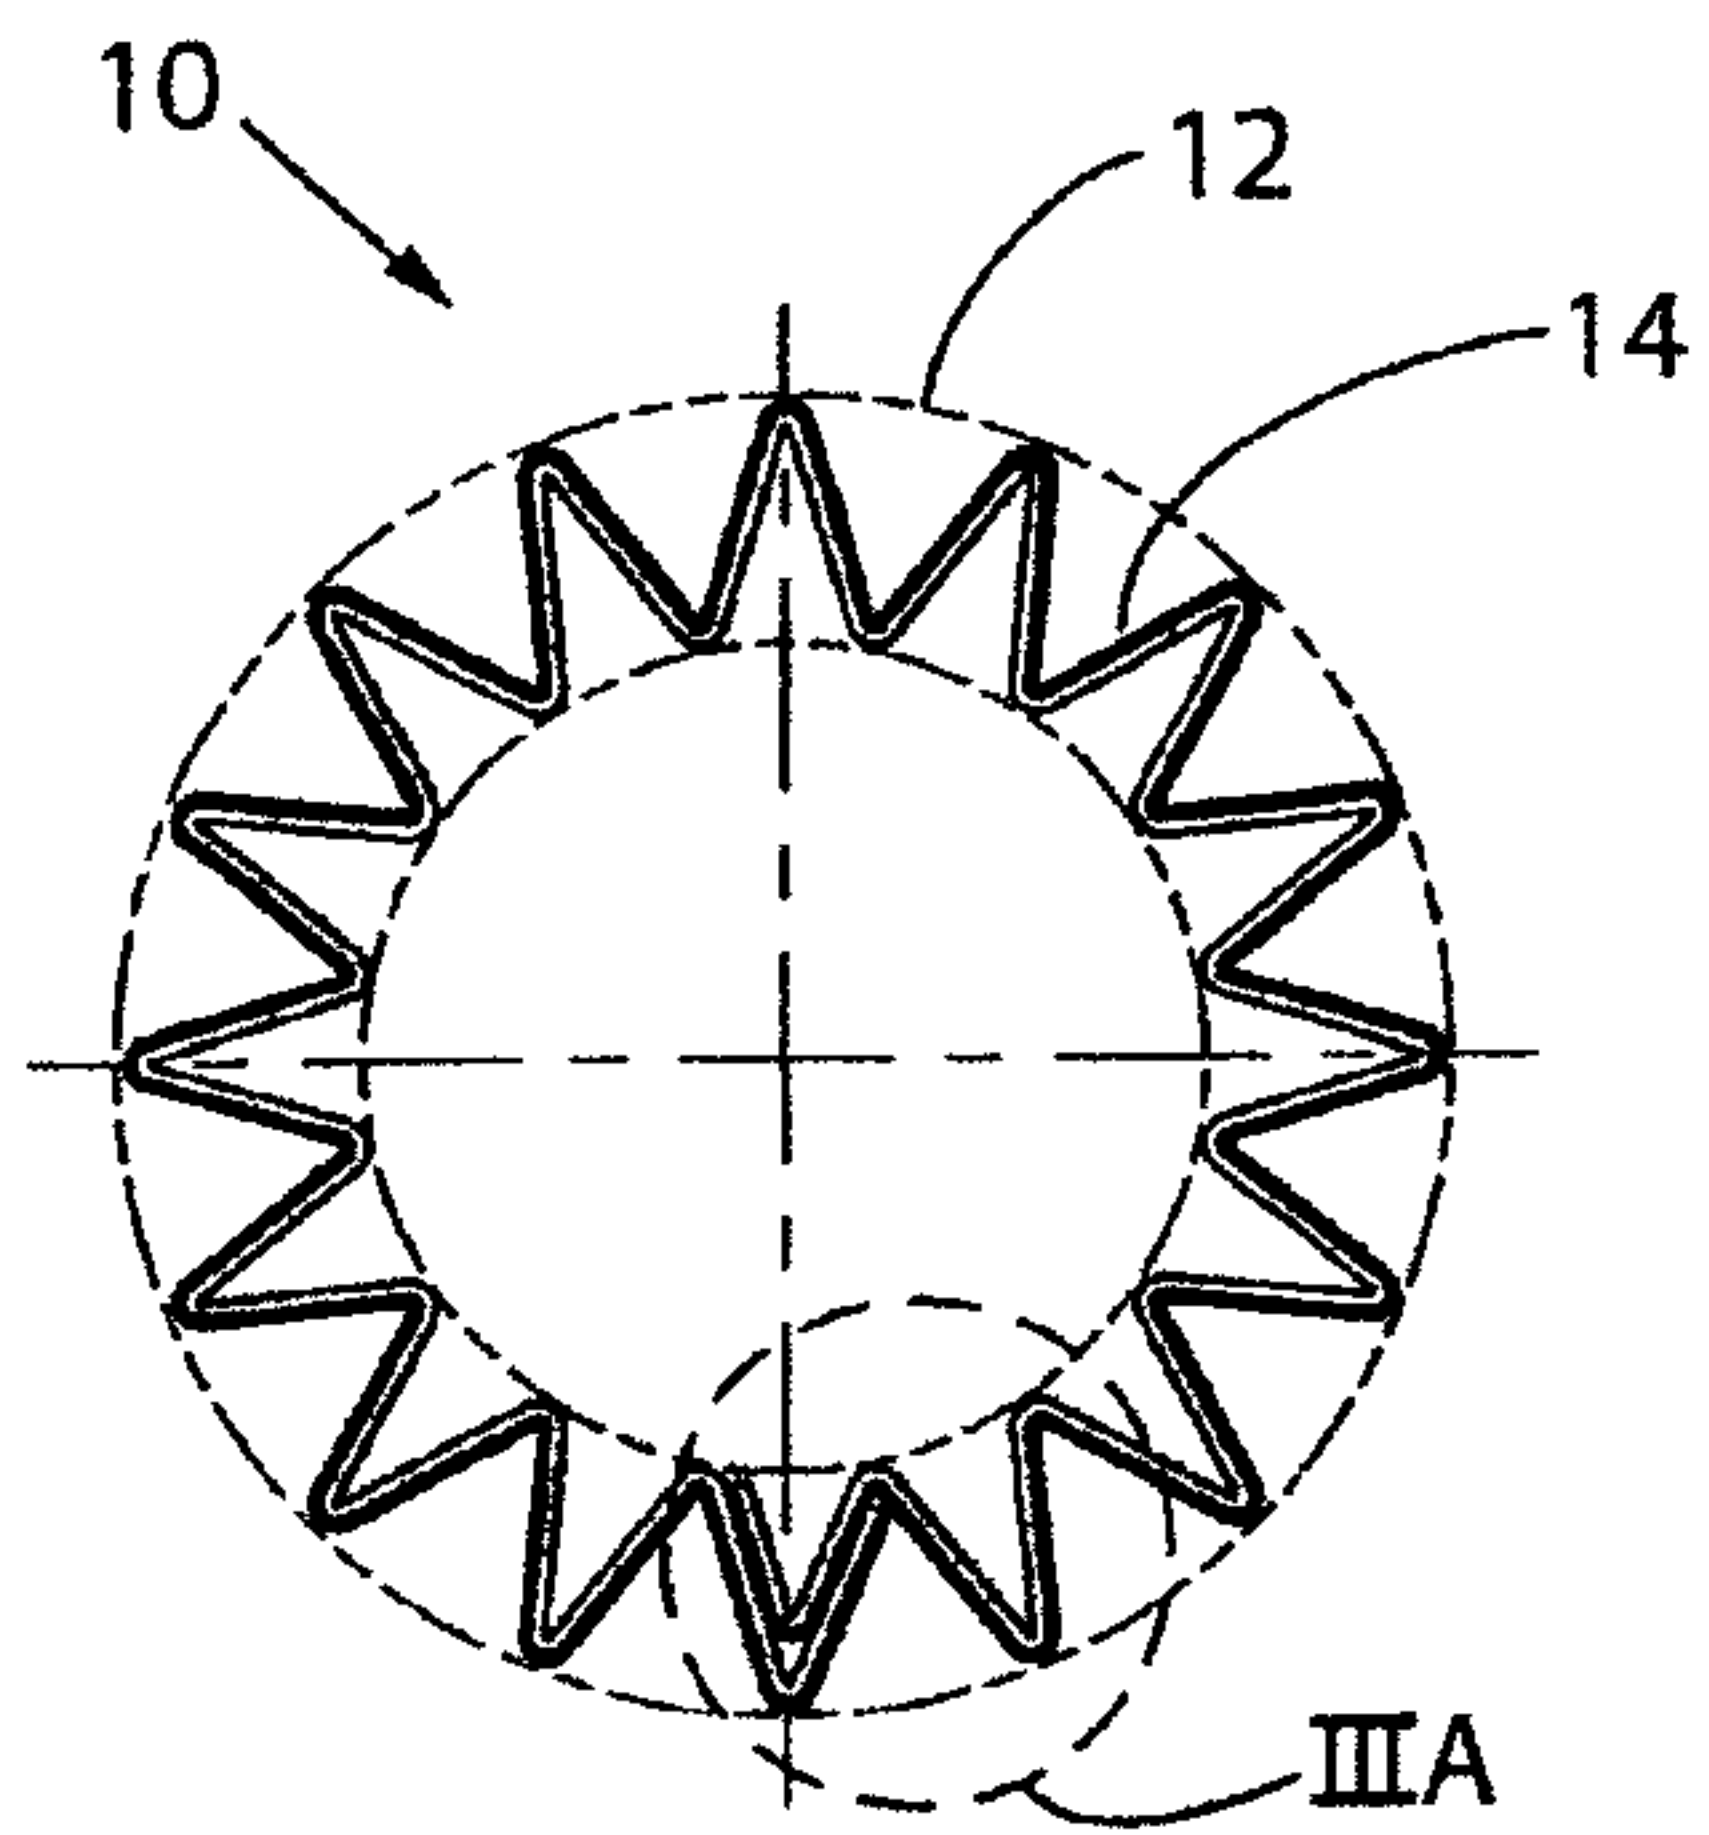


FIG. 2


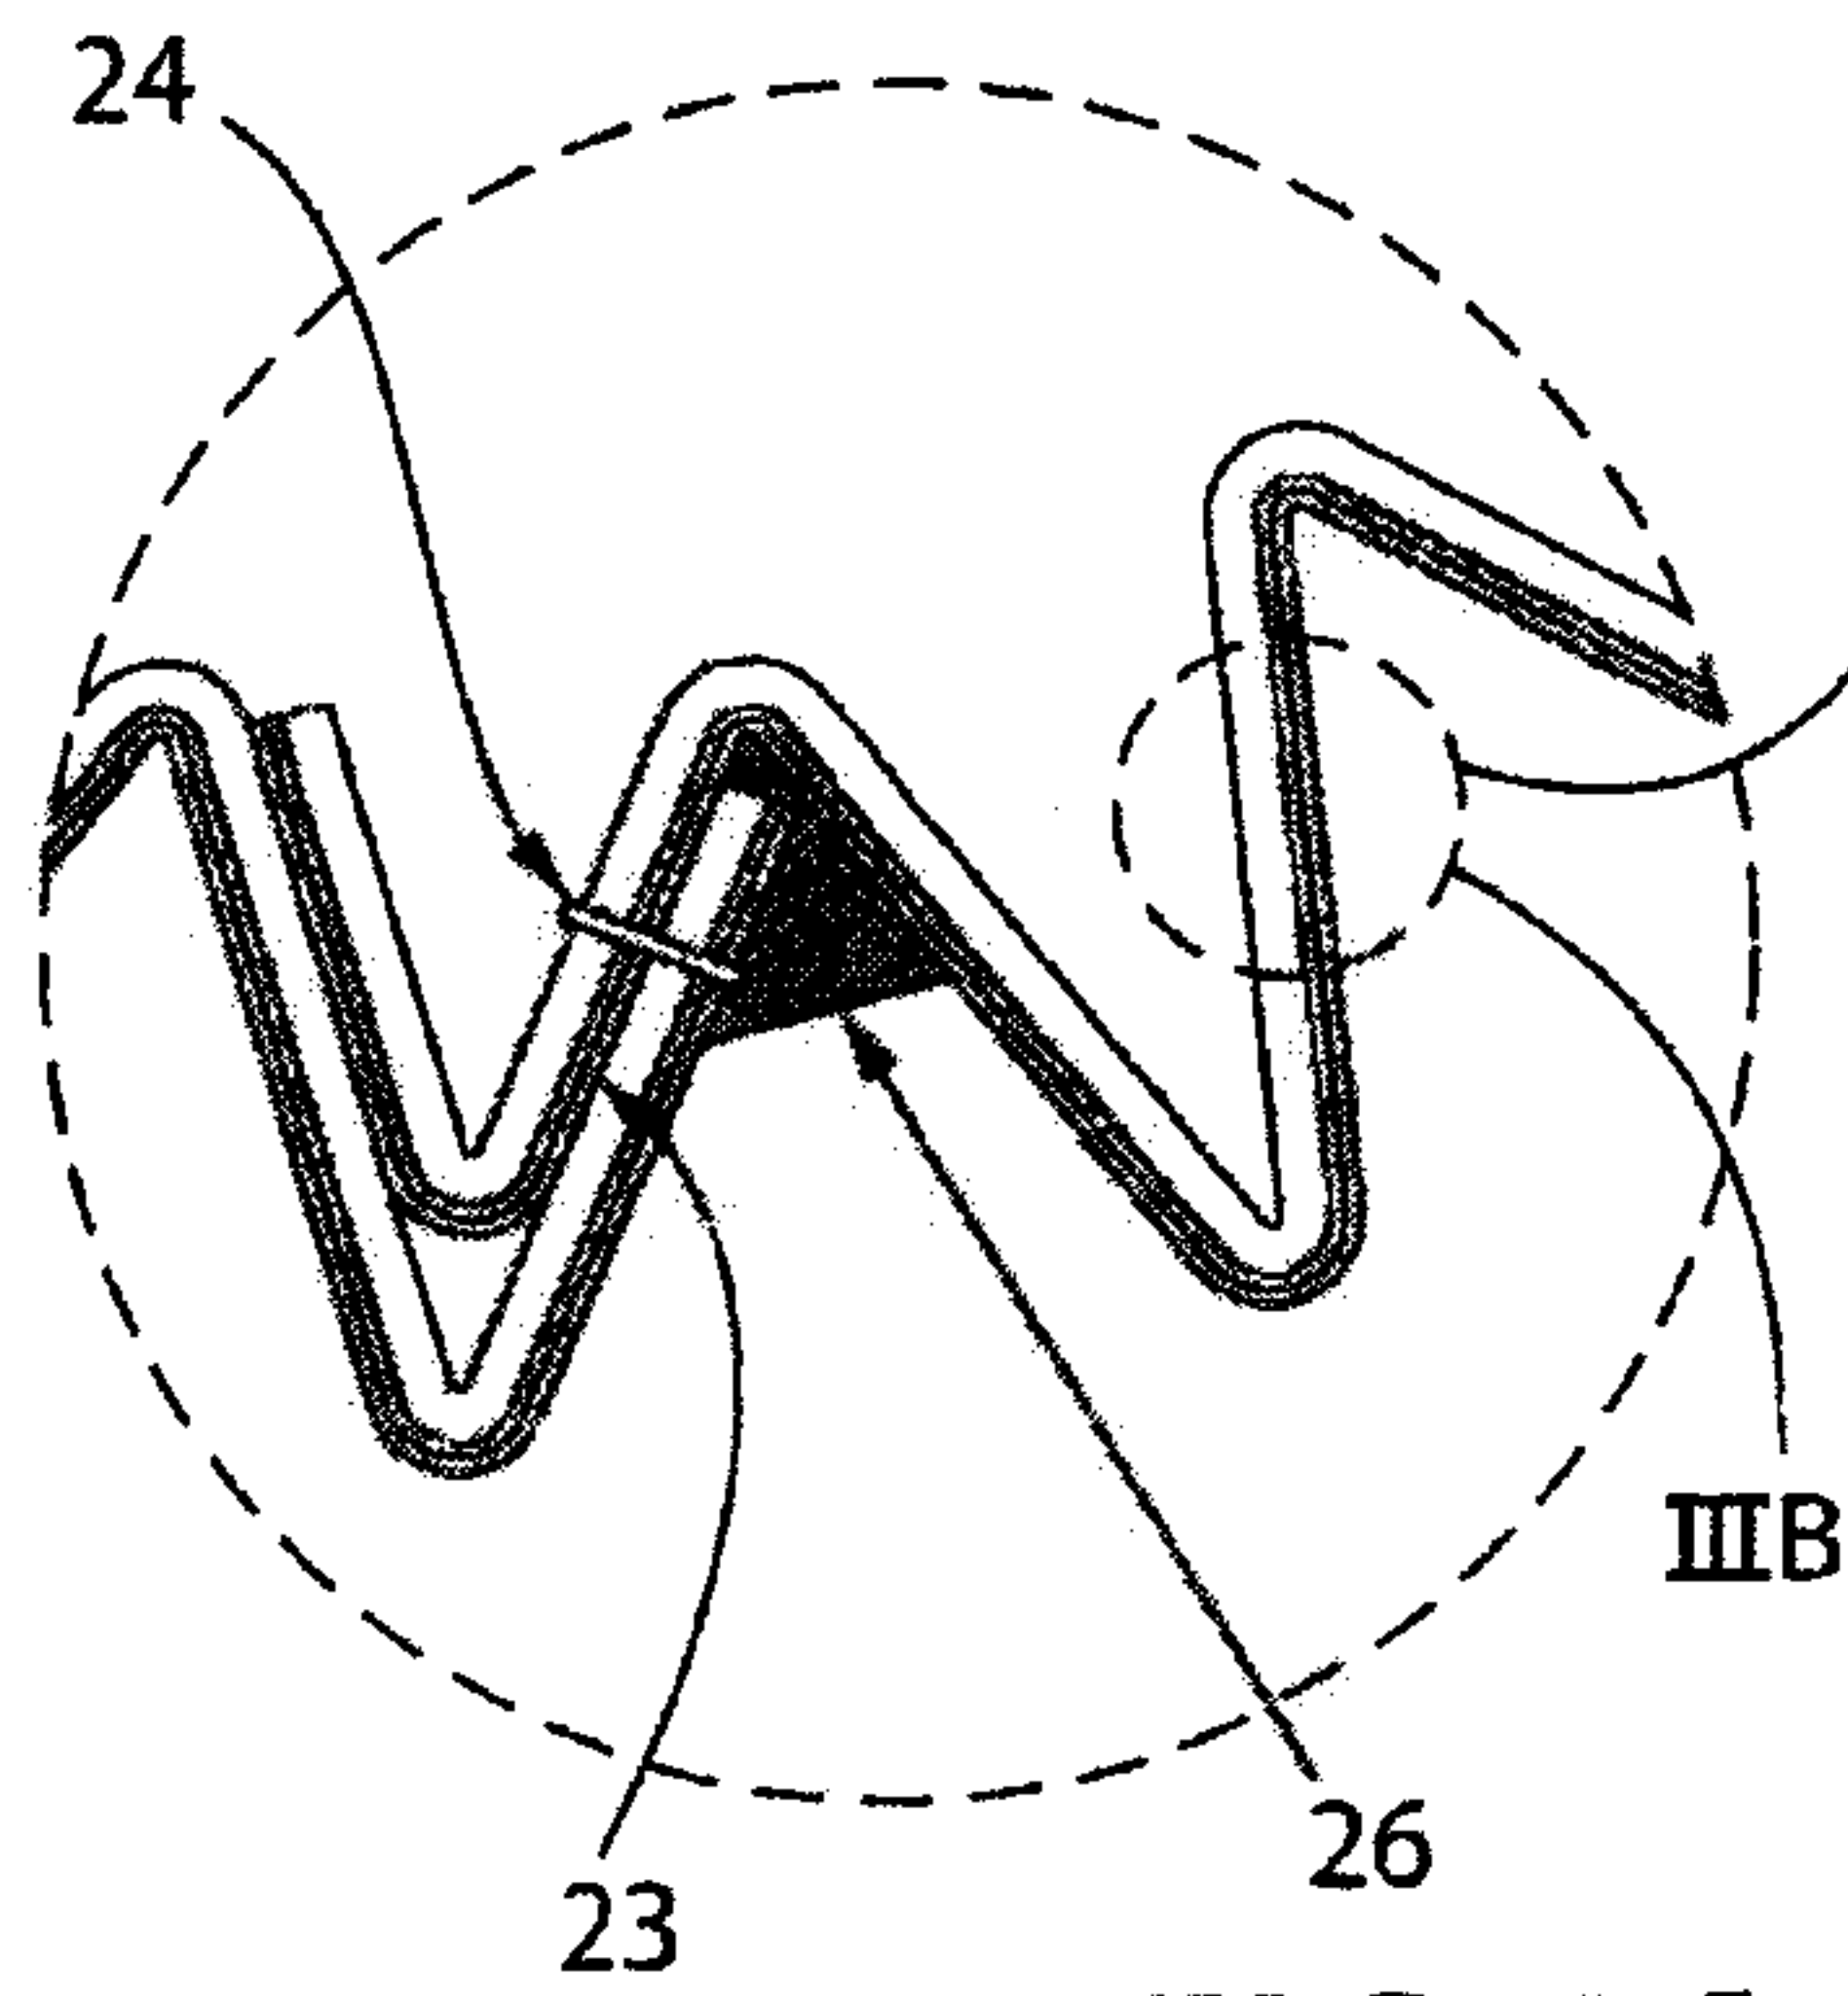


FIG. 3A

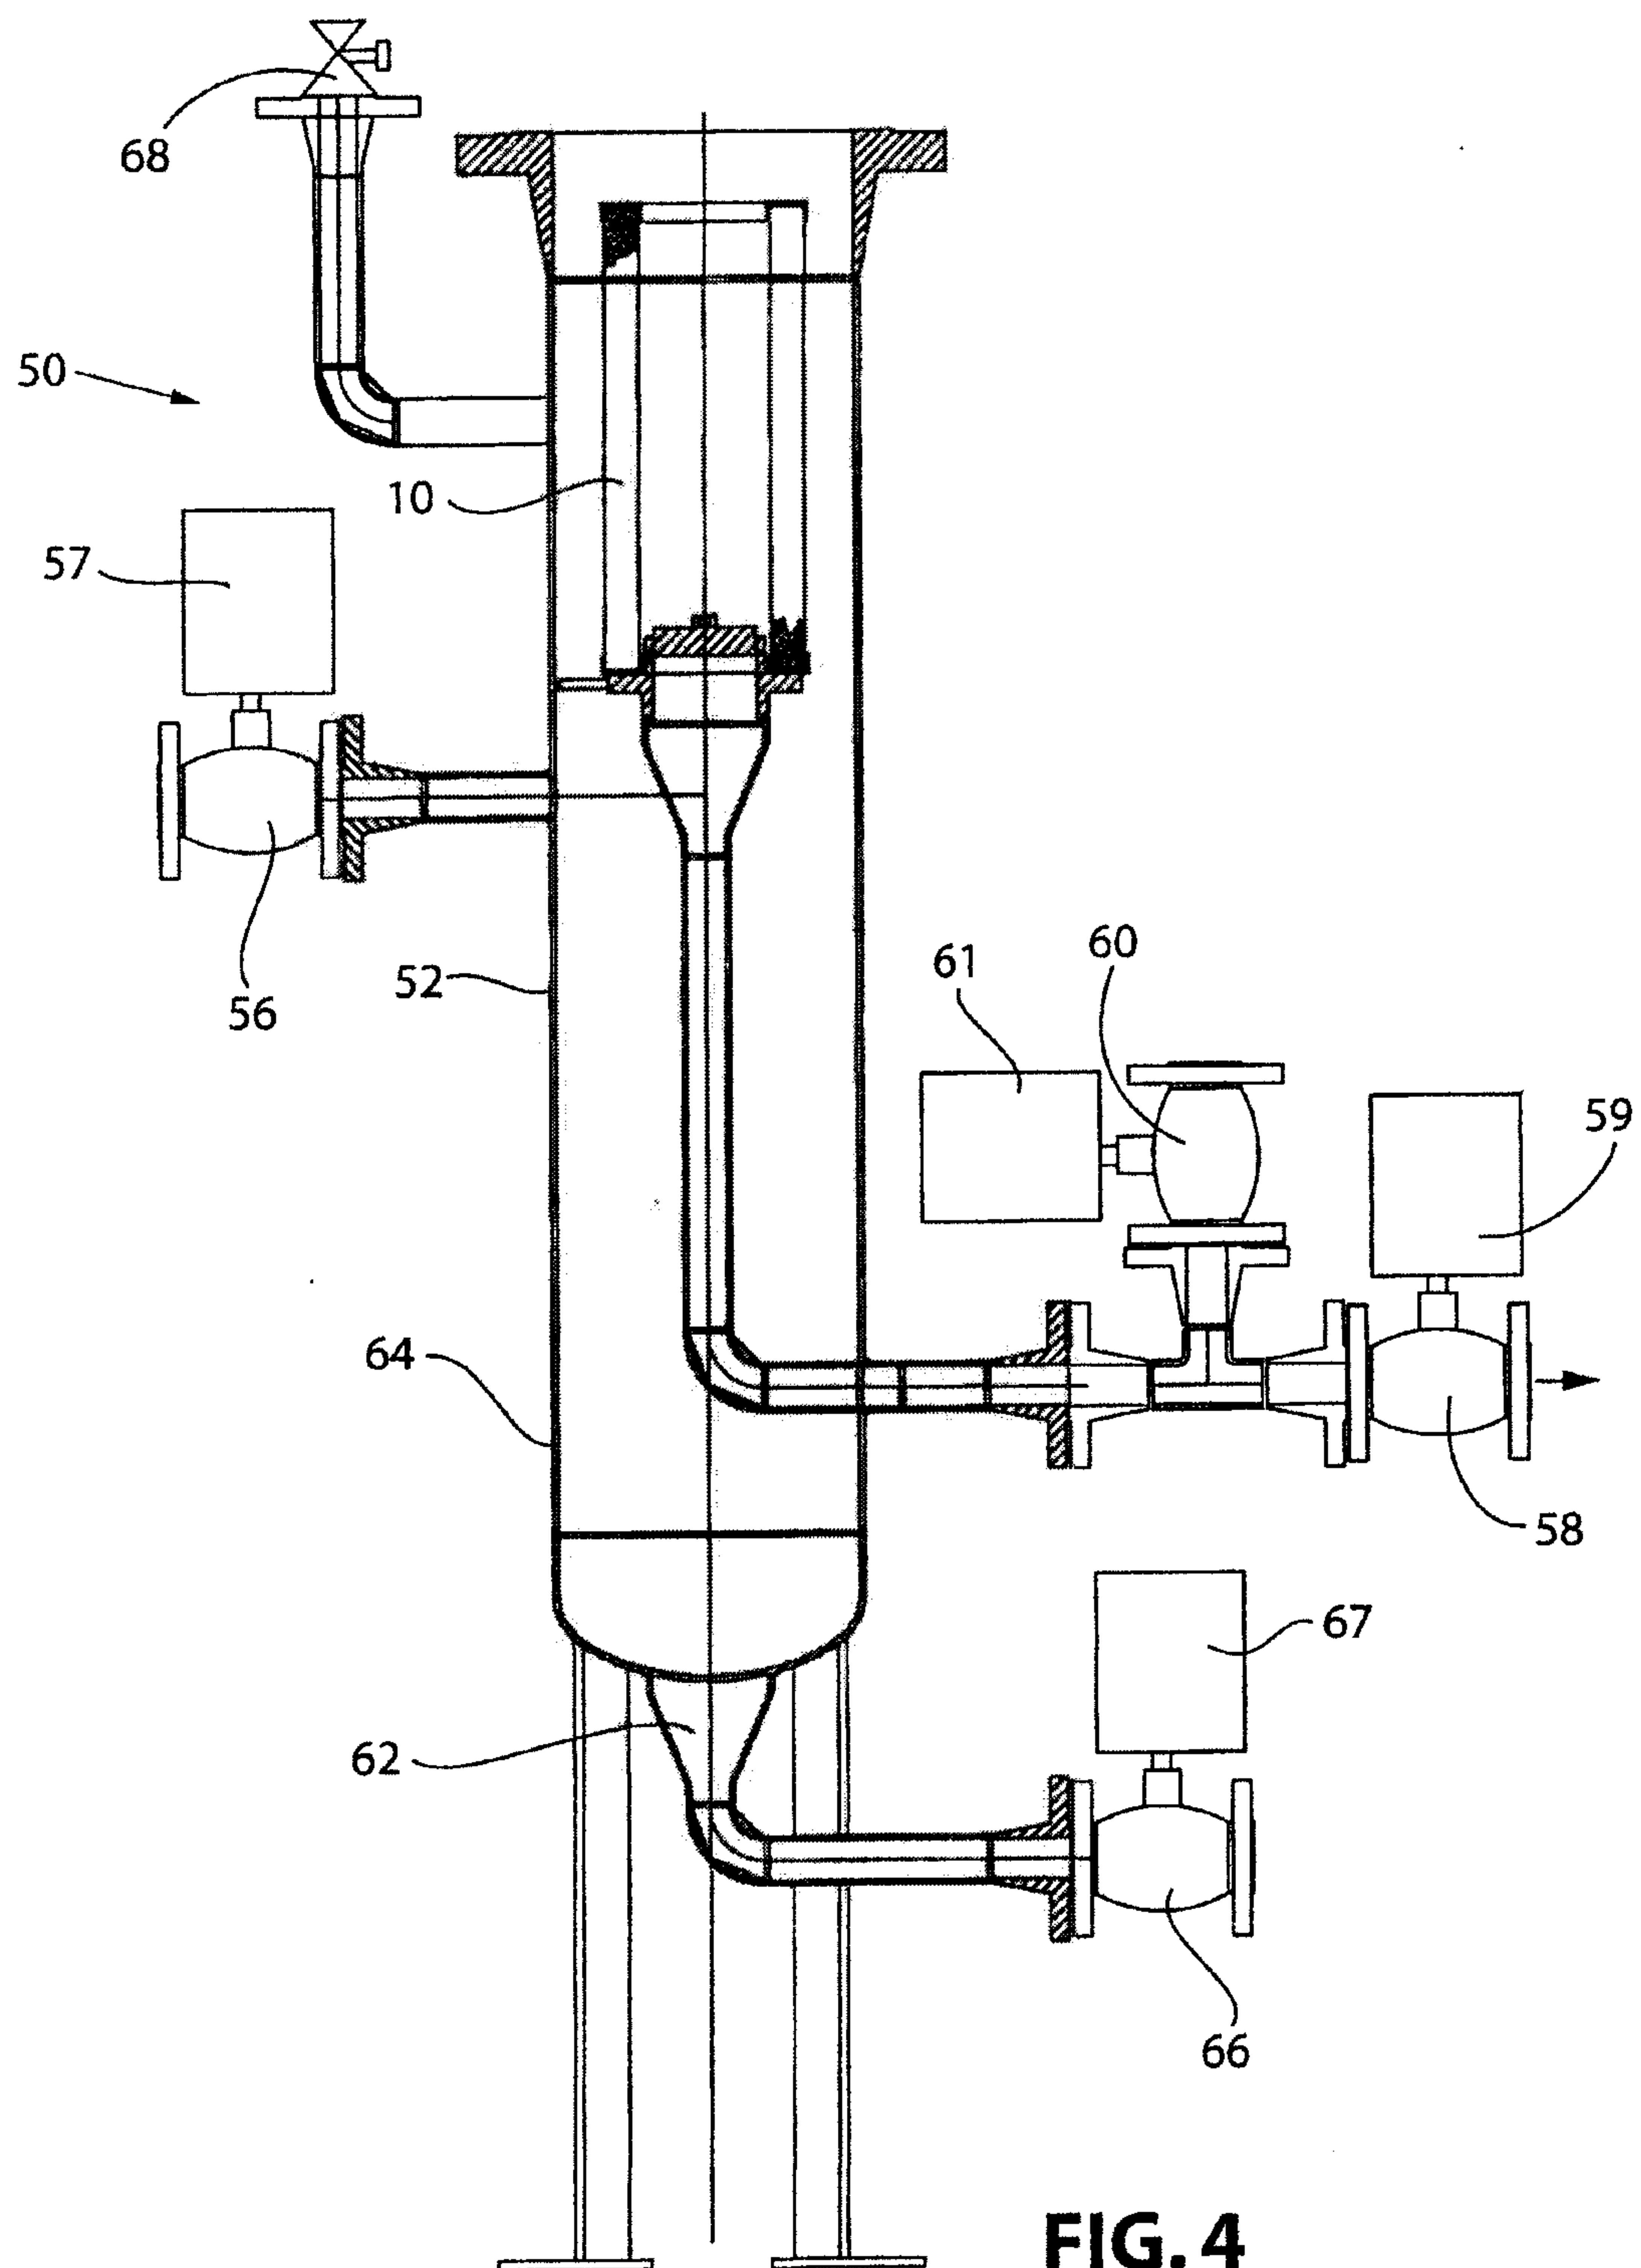

Gas	Standard Operation	Off (No Flow)	Vent (Opt)	Backflush
Inlet (56)	Open	Closed	Closed	Closed
Outlet (58)	Open	Closed	Closed	Closed
Drain (66)	Closed	Closed	Closed	Open
Vent (68)	Closed	Closed	Open	Closed
Purge (60)	Closed	Closed	Closed	Pulsed Open

FIG. 4A

Liquid	Standard Operation	Off (No Flow)	Vent (Opt)	Backflush
Inlet (56)	Open	Closed	Closed	Closed
Outlet (58)	Open	Closed	Closed	Closed
Drain (66)	Closed	Closed	Closed	Open
Vent (68)	Closed	Closed	Open	Closed
Purge (60)	Closed	Closed	Closed	Pulsed Open

FIG. 4B

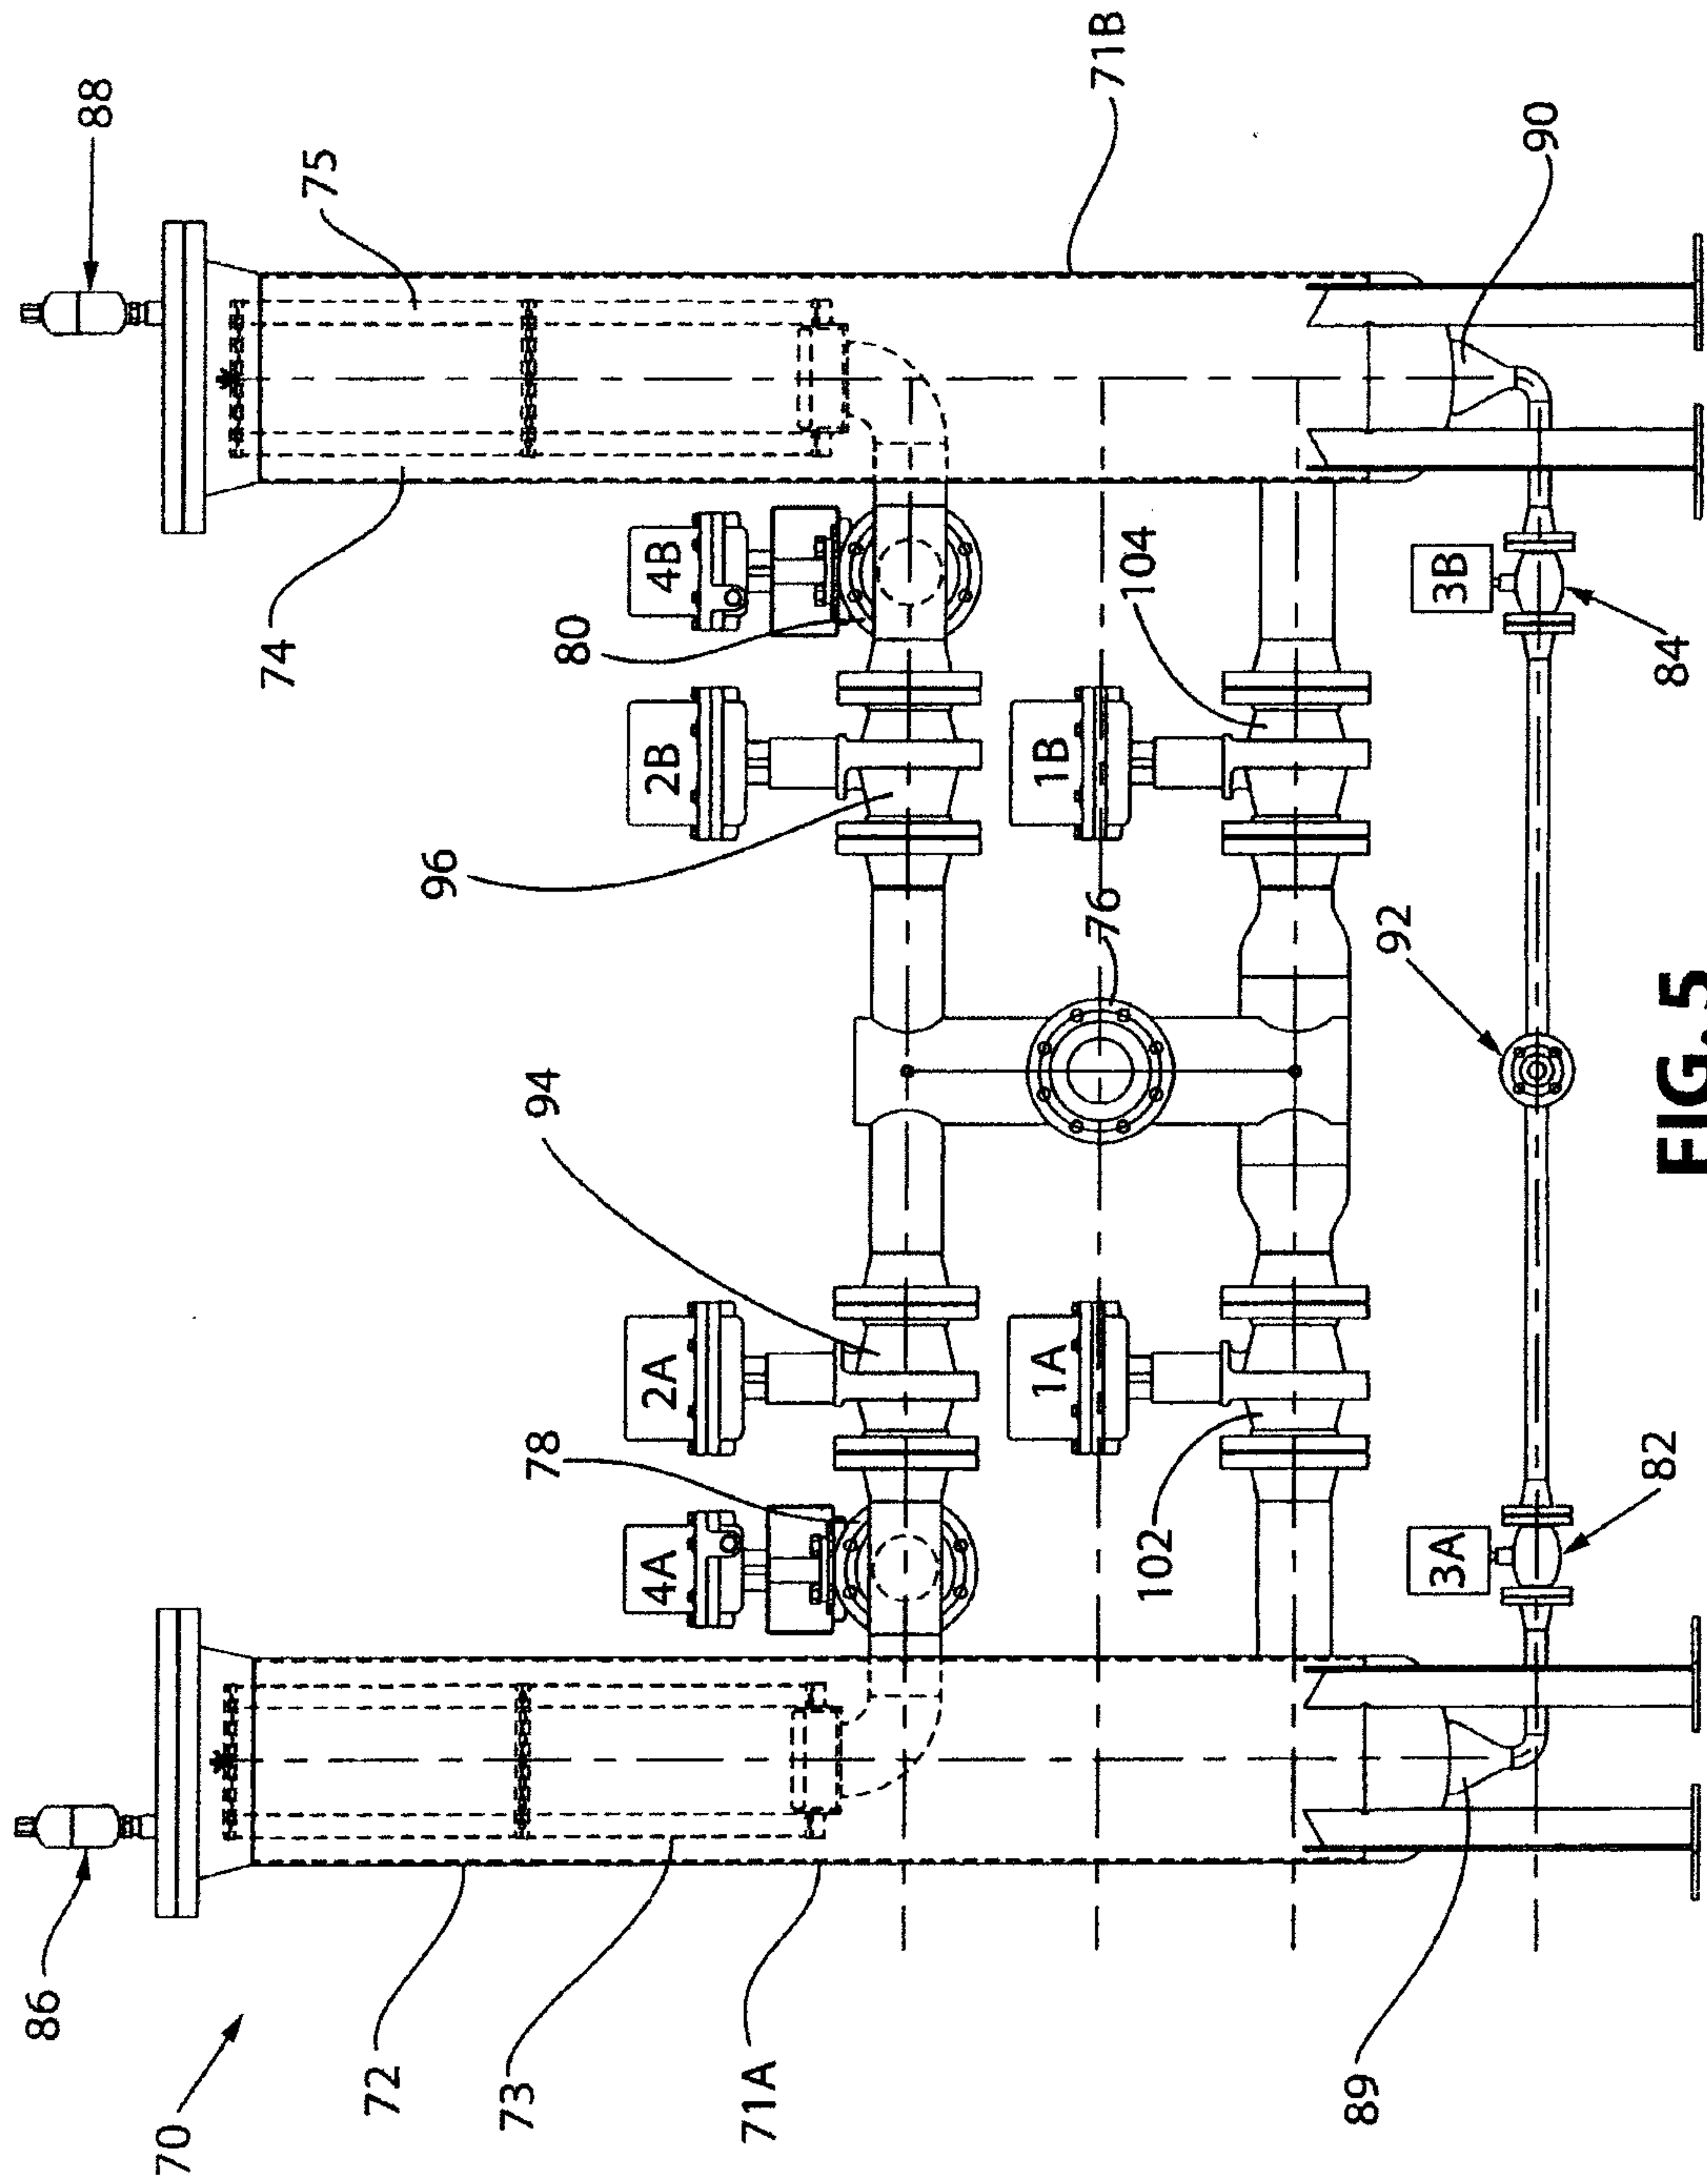


FIG. 5

		Vessel A				Vessel B		
Liquid	Off (No Flow)	Start Up Operation	Hi DP Dwell	Backflush	Start Up Operation	Hi DP Dwell	Backflush	
Valve 1A	Closed	Open	Closed	Closed	Closed	Open	Open	
Valve 2A	Closed	Open	Closed	Closed	Closed	Open	Open	
Valve 3A	Closed	Closed	Open	Open	Closed	Closed	Closed	
Valve 4A	Closed	Closed	Closed	Open	Closed	Closed	Closed	
Valve 1B	Closed	Closed	Open	Open	Open	Closed	Closed	
Valve 2B	Closed	Closed	Open	Open	Open	Closed	Closed	
Valve 3B	Closed	Closed	Closed	Closed	Closed	Open	Open	
Valve 4B	Closed	Closed	Closed	Closed	Closed	Closed	Open	

FIG. 5A

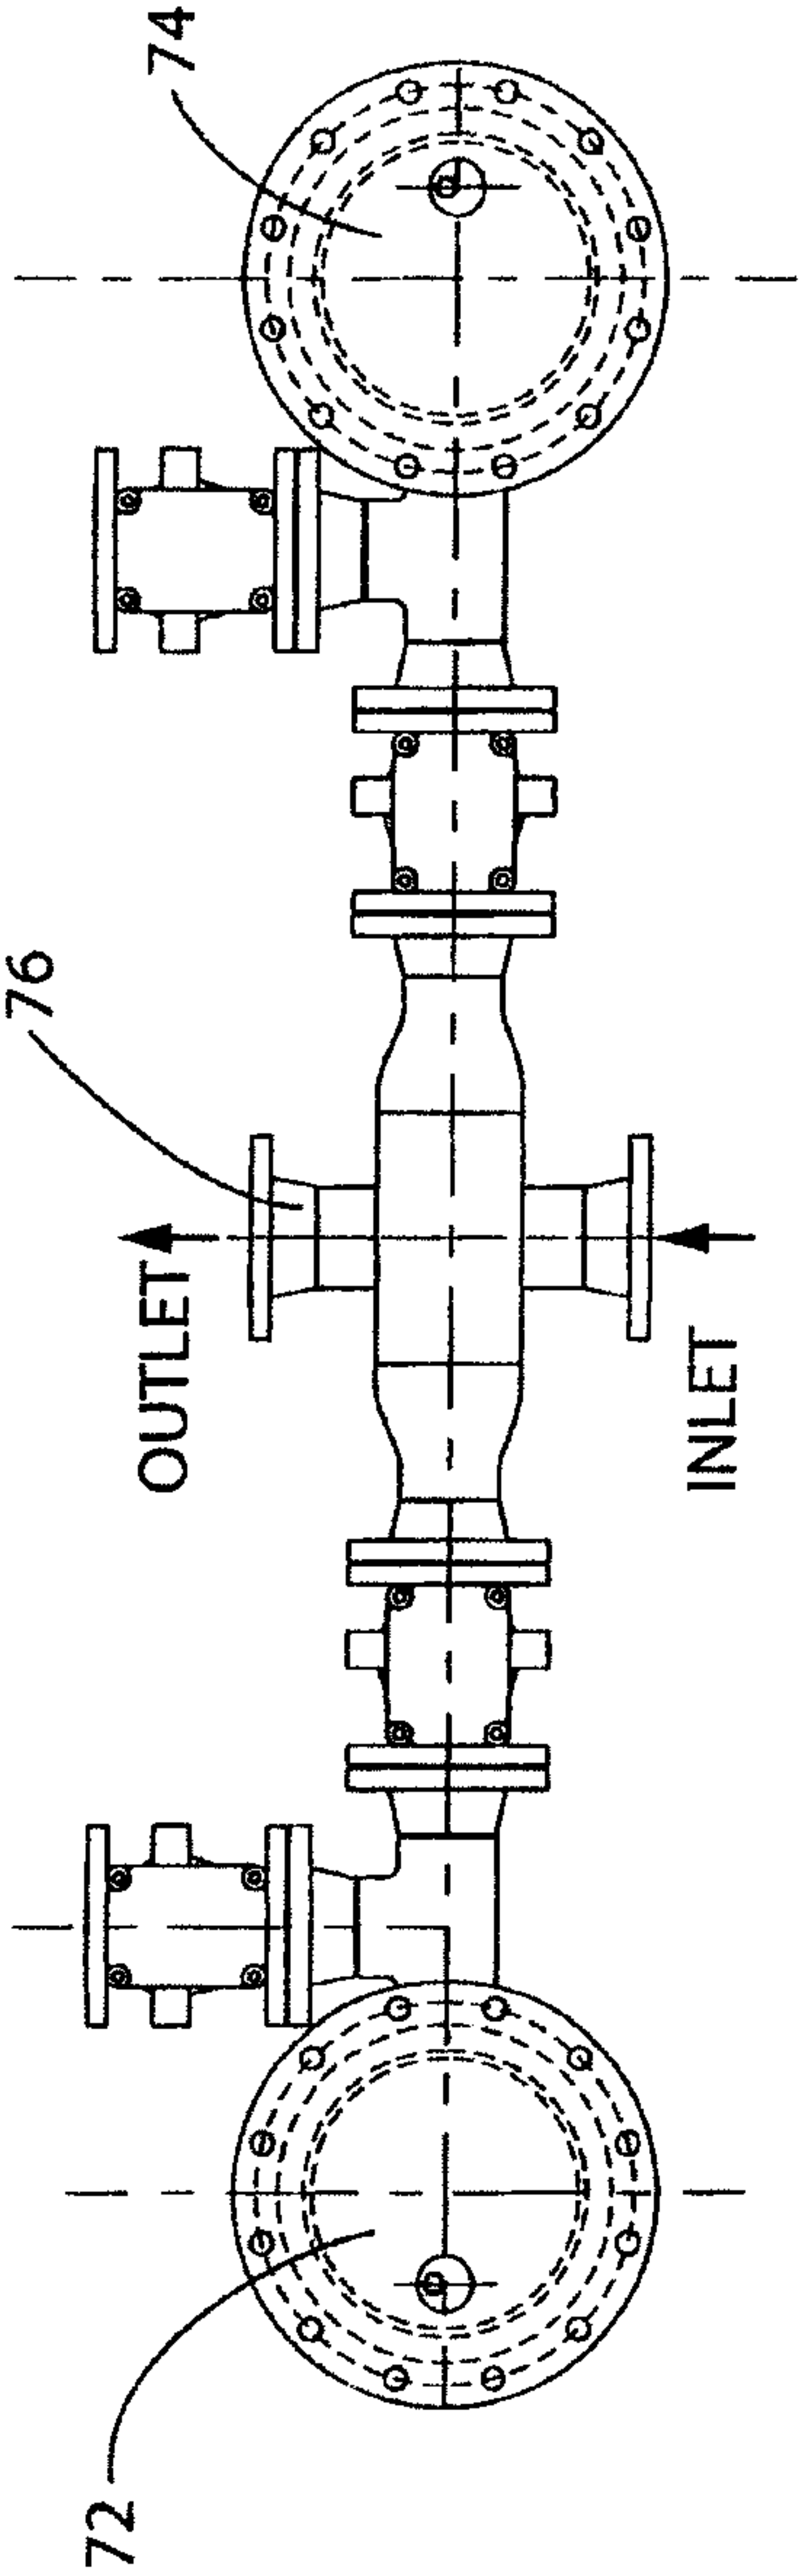


FIG. 6

MICRONIC FILTER CLOTH SPECIFICATIONS

Twilled Dutch Weave Wire Cloth Catalog

Nominal Filter Mesh Count	Wire Diameter Inches	Absolute Particle Retention	Nominal Particle Retention
warp/weft	warp/weft	Microns	Microns
500 x 3500	.0010 / .0006	5	< 1
450 x 2750	.0010 / .0008	6 - 7	< 1
325 x 2300	.0015 / .0010	8 - 9	2
250 x 1400	.0022 / .0016	11 - 12	4
200 x 1400	.0028 / .0016	11 - 13	5
165 x 1400	.0028 / .0016	16 - 18	10
165 x 1100		20 - 21	12
165 x 800	.0028 / .0020	24 - 26	15
200 x 600	.0024 / .0018	28 - 32	20
80 x 700	.0040 / .0030	34 - 36	25
120 x 600	.0040 / .0025	40 - 45	30
120 x 400	.0040 / .0026	50 - 55	40
40 x 560	.0070 / .0040	71 - 80	50
30 x 360	.0098 / .0060	95 - 106	80
30 x 250		100 - 112	90
20 x 250	.0098 / .0079	110 - 120	100

FIG. 8

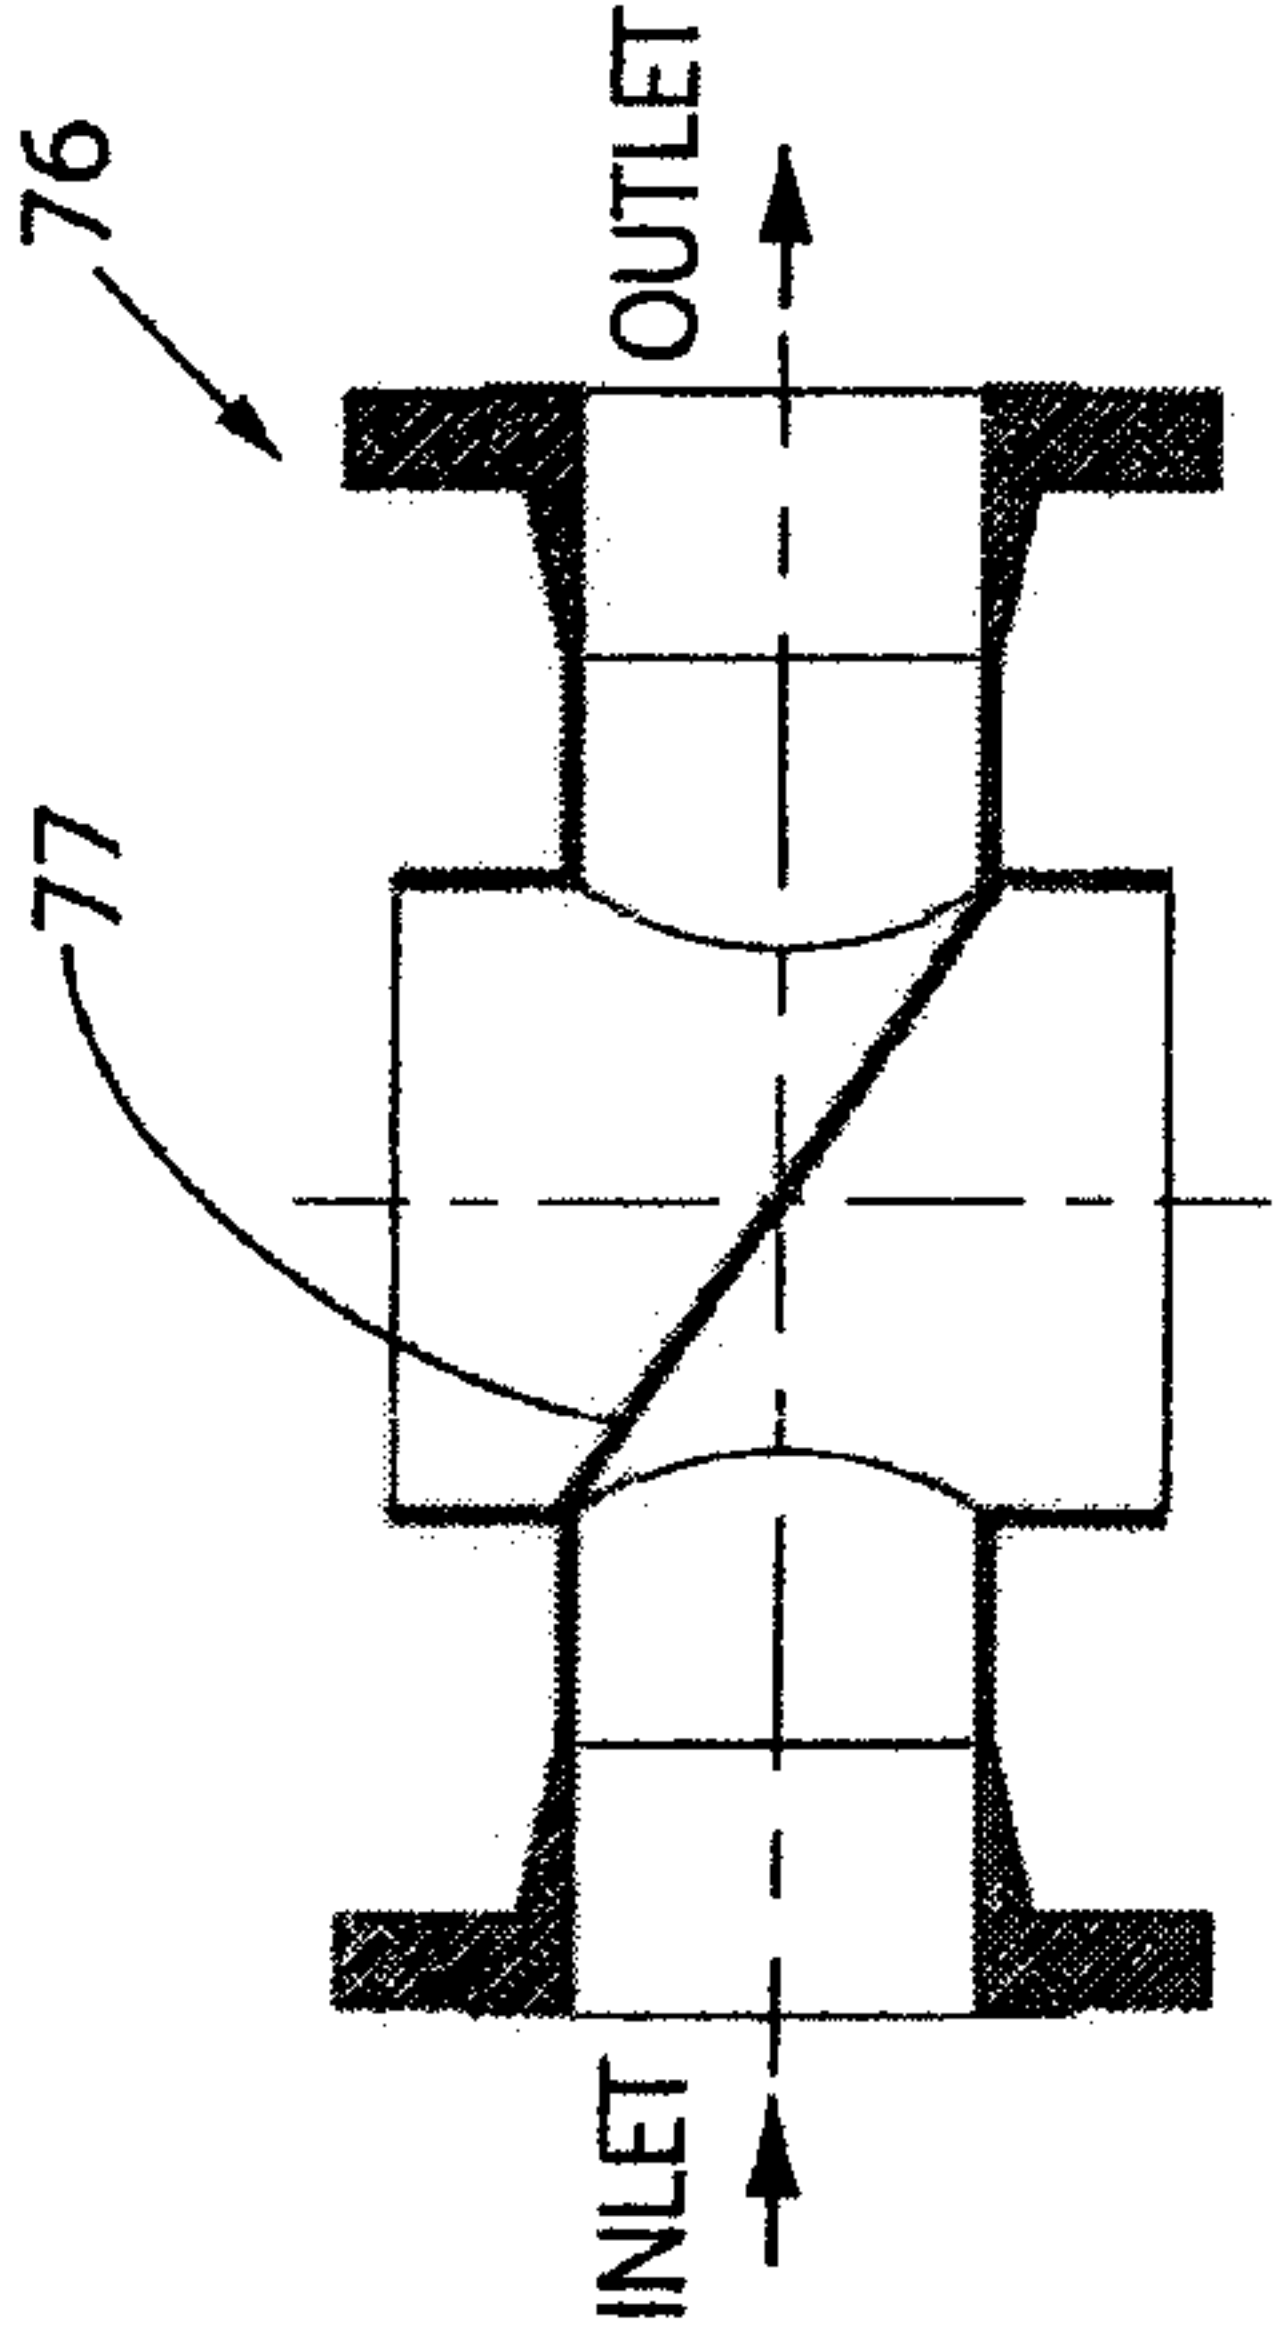


FIG. 7

TWILL DUTCH WEAVE FILTER CLOTH

Nominal Filter Mesh Count	Wire Diameter Inches	Absolute Particle Retention	Nominal Particle Retention	Nominal Particle Retention
warp/weft	warp/weft	Microns	Microns	Inches
500 x 3500	.0010 / .0006	5	< 1	0.000035"
450 x 2750	.0010 / .0008	6 - 7	< 1	
325 x 2300	.0015 / .0010	8 - 9	2	0.0000787"
250 x 1400	.0022 / .0016	11 - 12	4	0.0001574"
200 x 1400	.0028 / .0016	11 - 13	5	0.0001968"
165 x 1400	.0028 / .0016	16 - 18	10	0.0003937"
165 x 1100		20 - 21	12	0.0004724"
165 x 800	.0028 / .0020	24 - 26	15	0.0005905"
200 x 600	.0024 / .0018	28 - 32	20	0.0007874"
80 x 700	.0040 / .0030	34 - 36	25	0.0009842"
120 x 600	.0040 / .0025	40 - 45	30	0.0011811"
120 x 400	.0040 / .0026	50 - 55	40	0.0015748"
40 x 560	.0070 / .0040	71 - 80	50	0.0019685"
30 x 360	.0098 / .0060	95 - 106	80	0.0031496"
30 x 250		100 - 112	90	0.0035433"
20 X 260		110 - 120	100	0.0039370"
20 x 250	.0098 / .0079	110 - 120	100	0.0039370"

FIG. 9

