



(51) International Patent Classification:
G06Q 50/10 (2012.01)

(21) International Application Number:
PCT/US2015/010141

(22) International Filing Date:
5 January 2015 (05.01.2015)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant: **LANDMARK GRAPHICS CORPORATION** [US/US]; 2107 City West Blvd., Bldg. 2, Houston, TX 77042 (US).

(72) Inventors: **PRATT, DeWayne**; 5944 S. Lee Way, Littleton, CO 80127 (US). **COLVIN, Richard, Daniel**; 920 E. Creek Dr., Dripping Springs, TX 78620 (US). **SAMUEL, Robello**; 11306 Dawnheath Dr., Cypress, TX 77433 (US).

(74) Agent: **JENSEN, William, P.**; Crain, Caton & James, 1401 McKinney Street, Suite 1700, Houston, TX 77010 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,

[Continued on next page]

(54) Title: CREATING PLATFORM POSITIONING MAPS REPRESENTING SURFACE PAD LOCATION FEASIBILITY

(57) Abstract: Systems and methods for creating platform positioning maps representing surface pad location feasibility for visually validating a current surface pad location and/or determining the suitability of another surface pad location.

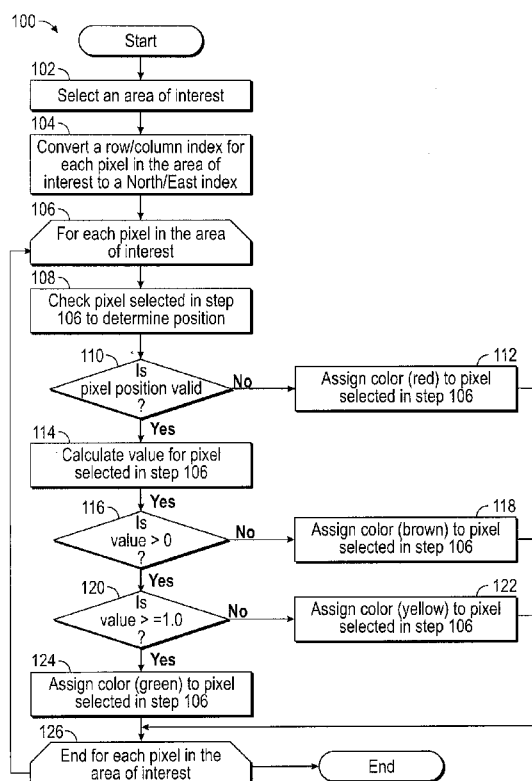


FIG. 1



SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,

DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT,
LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE,
SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

**CREATING PLATFORM POSITIONING MAPS
REPRESENTING SURFACE PAD LOCATION FEASIBILITY**

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application and U.S. Patent No. 8,073,664 and U.S. Patent Application Serial No. 14/389,729, which are incorporated herein by reference, are commonly assigned to Landmark Graphics Corporation.

STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH

[0002] Not applicable.

FIELD OF THE DISCLOSURE

[0003] The present disclosure generally relates to systems and methods for creating platform positioning maps representing surface pad location feasibility. More particularly, the present disclosure relates to creating platform positioning maps representing surface pad location feasibility for visually validating a current surface pad location and/or determining the suitability of another surface pad location.

BACKGROUND

[0004] Often, when considering a wells surface location, sometimes referred to as pads or a platform, the need for a location to be manually adjusted to a more optimal location is often recognized but difficult to visualize. Further, more than any other type of well, horizontal wells, sometimes referred to as laterals, need to be planned at the reservoir level with knowledge of where the surface pad will be located. Likewise, the location and spacing of the horizontal wells must be taken into account when planning the positions of these surface pads. In addition to the well positions, spacing, length and the like, boundaries and hazards must also be taken into account when positioning the surface pads. Hazards can come in the form of

subsurface hazards such as faults or shallow gas, or surface hazards such as roads, buildings, bodies of water, pipelines, railroads, environmentally sensitive areas and the like. In addition to surface hazards, the terrain itself is not always conducive to drilling. It might be too high, or contain too much slope so that the site preparation becomes too expensive.

[0005] Once an optimal surface pad location is determined using conventional techniques such as, for example, automated platform positioning techniques, the current surface pad location may need to be validated and/or the suitability of another surface pad location may need to be determined for various reasons. Under such circumstances, it is often difficult to understand the basis for current surface pad location compared to other potential locations, particularly when it was determined using an automated platform-positioning technique, and it is manually intensive and time consuming to determine whether other potential locations are suitable.

BRIEF DESCRIPTION OF THE DRAWINGS

[0006] The present disclosure is described below with references to the accompanying drawings in which like elements are referenced with like reference numerals, and in which:

[0007] **FIG. 1** is a flow diagram illustrating one embodiment of a method for implementing the present disclosure.

[0008] **FIGS. 2A-2B** are a flow diagram illustrating another embodiment of a method for implementing the present disclosure.

[0009] **FIG. 3** is a graphical display illustrating a platform positioning map created according to the methods in **FIGS. 1** or **2A-2B**.

[0010] **FIG. 4** is a graphical display illustrating another platform positioning map created according to the methods in **FIGS. 1** or **2A-2B**.

[0011] **FIG. 5** is a block diagram illustrating one embodiment of a computer system for implementing the present disclosure.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0012] The present disclosure overcomes one or more deficiencies in the prior art by providing systems and methods for creating platform positioning maps representing surface pad location feasibility for visually validating a current surface pad location and/or determining the suitability of another surface pad location.

[0013] In one embodiment, the present disclosure includes a method of creating a platform positioning map for validating a current surface pad location and determining the suitability of another surface pad location, which comprises: i) determining a position for each pixel in an area of interest; ii) determining if each pixel position is valid; iii) assigning one of a first color and a first grey-scale shade to each pixel subject to an invalid pixel position, the first color and the first grey-scale shade representing an invalid position for a surface pad location where drilling cannot be conducted without at least one of a surface constraint and a subsurface constraint; iv) calculating a value for each pixel with a valid pixel position using a computer processor; v) assigning one of a second color and a second grey-scale shade to each pixel subject to the respective value, the second color and the second grey-scale shade representing at least (1) lateral well but less than a full set of lateral wells can be planned from a valid pixel position for a surface pad location; and vi) assigning one of a third color and a third grey-scale shade to each pixel subject to the respective value, the third color and the third grey-scale shade representing a full set of lateral wells can be planned from a valid pixel position for a surface pad location.

[0014] In another embodiment, the present disclosure includes a non-transitory program

carrier device tangibly carrying computer-executable instructions for creating a platform positioning map for validating a current surface pad location and determining the suitability of another surface pad location, which comprises: i) determining a position for each pixel in an area of interest; ii) determining if each pixel position is valid; iii) assigning one of a first color and a first grey-scale shade to each pixel subject to an invalid pixel position, the first color and the first grey-scale shade representing an invalid position for a surface pad location where drilling cannot be conducted without at least one of a surface constraint and a subsurface constraint; iv) calculating a value for each pixel with a valid pixel position; v) assigning one of a second color and a second grey-scale shade to each pixel subject to the respective value, the second color and the second grey-scale shade representing at least (1) lateral well but less than a full set of lateral wells can be planned from a valid pixel position for a surface pad location'; and vi) assigning one of a third color and a third grey-scale shade to each pixel subject to the respective value, the third color and the third grey-scale shade representing a full set of lateral wells can be planned from a valid pixel position for a surface pad location.

[0015] In yet another embodiment, the present disclosure includes a non-transitory program carrier device tangibly carrying computer-executable instructions for creating a platform positioning map for validating a current surface pad location and determining the suitability of another surface pad location, the instructions being executable to implement: i) determining a position for each pixel in an area of interest; ii) assigning one of a first color and a first grey-scale shade to each pixel subject to an invalid pixel position, the first color and the first grey-scale shade representing an invalid position for a surface pad location where drilling cannot be conducted without at least one of a surface constraint and a subsurface constraint; iii) calculating a value for each pixel with a valid pixel position; iv) assigning one of a second

color and a second grey-scale shade to each pixel subject to the respective value, the second color and the second grey-scale shade representing at least (1) lateral well but less than a full set of lateral wells can be planned from a valid pixel position for a surface pad location; v) assigning one of a third color and a third grey-scale shade to each pixel subject to the respective value, the third color and the third grey-scale shade representing a full set of lateral wells can be planned from a valid pixel position for a surface pad location; and vi) displaying each pixel in the area of interest.

[0016] The subject matter of the present disclosure is described with specificity; however, the description itself is not intended to limit the scope of the disclosure. The subject matter thus, might also be embodied in other ways, to include different steps or combinations of steps similar to the ones described herein, in conjunction with other present or future technologies. Moreover, although the term “step” may be used herein to describe different elements of methods employed, the term should not be interpreted as implying any particular order among or between various steps herein disclosed unless otherwise expressly limited by the description to a particular order. While the present disclosure may be applied in the oil and gas industry, it is not limited thereto and may also be applied in other industries to achieve similar results.

Method Description

[0001] The methods described herein for implementing the disclosure may consider different surface constraints, restrictions and parameters in creating the platform positioning map such as, for example, cost and/or risk factors. In considering cost, for example, the methods may take into account where different costs are associated with different pre-construction activities, thus enabling a surface pad to be repositioned to a more cost effective

location. The methods may also take into account the financial impact of construction to a planned location, based on distance and cost to connect to the existing infrastructure. And, the platform positioning map may be created on the fly (in real-time) in the manner described herein and displayed in different ways to visually convey surface pad location feasibility.

[0002] Referring now to **FIG. 1**, a flow diagram of one embodiment of a method **100** for implementing the present disclosure is illustrated.

[0003] In step **102**, an area of interest is automatically selected or may be selected using the client interface and/or the video interface described further in reference to **FIG. 5**. The area of interest may be any polygonal shape or a point and radius (circle) that represents an area where a surface pad may be located. The area of interest also includes a plurality of pixels therein that will represent a raster image of the platform positioning map.

[0004] In step **104**, a row/column index for each pixel in the area of interest is converted to a North/East index using techniques well known in the art.

[0005] In step **106**, the method **100** selects a pixel in the area of interest for steps **108-124**. The method **100** may select a pixel at random or using any other predetermined criteria.

[0006] In step **108**, the pixel selected in step **106** is checked to determine its position.

[0007] In step **110**, the method **100** determines if the pixel position determined in step **108** is valid using techniques well known in the art. A pixel position is valid if its position represents a potentially available location for a surface pad in the area of interest where drilling may be conducted free of any surface and/or subsurface constraints (e.g. hazards). If the pixel position is valid, then the method **100** proceeds to step **114**. Otherwise, the method **100** proceeds to step **112**.

[0008] In step **112**, the pixel selected in step **106** is assigned a color, such as red, to

represent an invalid position for the surface pad location. Alternatively, the pixel selected in step **106** may be assigned a shade using a grey-scale to represent an invalid position for the surface pad location. The method **100** then proceeds to step **126**.

[0009] In step **114**, a value is calculated for the pixel selected in step **106** using techniques well known in the art to determine the value based upon the number of wells, which may be horizontal (i. e. lateral) or deviated, that can be planned from the surface pad at that pixel position. If, for example, a surface pad is placed at a valid position and there is no reservoir accessible from it, then it is effectively worthless. In this case, the pixel value would be 0. If, however, there is an accessible reservoir from the valid position for the surface pad, but the full capacity of the surface pad cannot be utilized at that position, then the pixel value may be greater than 0 but less than 1. In the event that there is an accessible reservoir from the valid position and the full capacity of the surface pad can be utilized at that position (i.e. an optimal or full set of lateral wells can be planned from that position), then the pixel value would be greater than or equal to 1. Alternatively, the value may be calculated for the pixel selected in step **106** using techniques well known in the art to determine the value based upon some other set of surface and/or subsurface constraints, restrictions and parameters associated with cost and/or risk factors.

[0010] In step **116**, the method **100** determines if the value calculated in step **114** is greater than 0. If the value is greater than 0, then lateral wells can be planned and the method **100** proceeds to step **120**. Otherwise, lateral wells cannot be planned and the method **100** proceeds to step **118**.

[0011] In step **118**, the pixel selected in step **106** is assigned a color, such as brown, to represent that no lateral wells can be planned from that position for the surface pad location.

Alternatively, the pixel selected in step **106** may be assigned a shade using a grey-scale to represent that no lateral wells can be planned from that position for the surface pad location. The method **100** then proceeds to step **126**.

[0012] In step **120**, the method **100** determines if the value calculated in step **114** is greater than or equal to 1. If the value is greater than or equal to 1, then an optimal or full set of lateral wells can be planned and the method **100** proceeds to step **124**. Otherwise, less than an optimal or full set of lateral wells can be planned and the method **100** proceeds to step **122**.

[0013] In step **122**, the pixel selected in step **106** is assigned a color, such as yellow, to represent that less than an optimal or full set of lateral wells can be planned from that position for the surface pad location. Alternatively, the pixel selected in step **106** may be assigned a shade using a grey-scale to represent that less than an optimal or full set of lateral wells can be planned from that position for the surface pad location. The method **100** then proceeds to step **126**.

[0014] In step **124**, the pixel selected in step **106** is assigned a color, such as green, to represent that an optimal or full set of lateral wells can be planned from that position for the surface pad location. Alternatively, the pixel selected in step **106** may be assigned a shade using a grey-scale to represent that an optimal or full set of lateral wells can be planned from that position for the surface pad location. The method **100** then proceeds to step **126**.

[0015] In step **126**, the method **100** determines if additional pixels are available from step **104** that were not selected in step **106**. If there are additional pixels available from step **104** that were not selected in step **106**, then the method **100** returns to step **106** to select another pixel. Otherwise, the method **100** ends.

[0016] Referring now to **FIGS. 2A-2B**, a flow diagram of another embodiment of a

method **200** for implementing the present disclosure is illustrated.

[0017] In step **202**, an area of interest is automatically selected or may be selected using the client interface and/or the video interface described further in reference to **FIG. 5**. The area of interest may be any polygonal shape or a point and radius (circle) that represents an area where a surface pad may be located. The area of interest also includes a plurality of pixels therein that will represent a raster image of the platform positioning map.

[0018] In step **204**, a row/column index for each pixel in the area of interest is converted to a North/East index using techniques well known in the art.

[0019] In step **206**, the method **200** selects a pixel in the area of interest for steps **208-230**. The method **200** may select a pixel at random or using any other predetermined criteria.

[0020] In step **208**, the pixel selected in step **206** is checked to determine its position.

[0021] In step **210**, the method **200** determines if the pixel position determined in step **208** is valid using techniques well known in the art. A pixel position is valid if its position represents a potentially available location for a surface pad in the area of interest where drilling may be conducted free of any surface and/or subsurface constraints (e.g. hazards). If the pixel position is valid, then the method **200** proceeds to step **214**. Otherwise, the method **200** proceeds to step **212**.

[0022] In step **212**, the pixel selected in step **206** is assigned a color, such as red, to represent an invalid position for the surface pad location. Alternatively, the pixel selected in step **206** may be assigned a shade using a grey-scale to represent an invalid position for the surface pad location. The method **200** then proceeds to step **232**.

[0023] In step **214**, the method **200** selects another pixel within a predetermined surface pad outline that is centered on the pixel selected in step **206** and within the area of interest for

steps **216-220**. The method **200** may select another pixel at random or using any other predetermined criteria. The predetermined surface pad outline is based on the size and shape of the entire surface pad facilities such that it not only includes the surface pad but also the full drilling site surrounding the surface pad within the area of interest.

[0024] In step **216**, the pixel selected in step **214** is checked to determine its position.

[0025] In step **218**, the method **200** determines if the pixel position determined in step **216** is valid using techniques well known in the art. A pixel position is valid if its position represents a potentially available location for a surface pad in the area of interest where drilling may be conducted free of any surface and/or subsurface constraints (e.g. hazards). If the pixel position is valid, then the method **200** proceeds to step **222**. Otherwise, the method **200** proceeds to step **220**.

[0026] In step **220**, the pixel selected in step **206** is assigned a color, such as brown, to represent that the predetermined surface pad outline cannot be centered on this pixel position. Alternatively, the pixel selected in step **206** may be assigned a shade using a grey-scale to represent that the predetermined surface pad outline cannot be centered on this pixel position. The method **200** then proceeds to step **232**.

[0027] In step **222**, the method **200** determines if additional pixels lie within the predetermined surface pad outline that were not selected in step **214**. If there are additional pixels that lie within the predetermined surface pad outline and were not selected in step **214**, then the method **200** returns to step **214** to select another pixel. Otherwise, the method **100** proceeds to step **224**. Alternatively, steps **214-222** may be replaced with the use of 2 bitmaps (e.g. matrices of true/false values) to look-up and confirm that each pixel position is valid for each pixel within a predetermined surface pad outline centered on the pixel selected in step **206**

within the area of interest. For example, one bitmap may represent the predetermined surface pad outline superimposed with every pixel in the outline designated true and every pixel outside the outline designated false. The other bitmap may represent the area of interest superimposed with each pixel in it designated true if that particular pixel position is valid. When a particular pixel position needed to be validated, its (relative) position within the outline bitmap could be determined and, if valid, its value returned at the pixel position in the area of interest bitmap. If, however, the pixel position in the outline bitmap is invalid, then its value may be returned at the pixel position in the area of interest bitmap, since that position is not in the outline bitmap and therefore, doesn't matter whether it is valid.

[0028] In step **224**, a value is calculated for the pixel selected in step **206** using techniques well known in the art to determine the value based upon the number of wells, which may be horizontal (i. e. lateral) or deviated, that can be planned from the surface pad at that pixel position. If, for example, a surface pad is placed at a valid position near an accessible reservoir and less than half of an optimal or full set of lateral wells can be planned from that position, then the pixel value would be <50%. If, however, a surface pad is placed at a valid position near an accessible reservoir and at least half of an optimal or full set of lateral wells can be planned from that position, then the pixel value would be >=50%. Alternatively, the value may be calculated for the pixel selected in step **206** using techniques well known in the art to determine the value based upon some other set of surface and/or subsurface constraints, restrictions and parameters associated with cost and/or risk factors.

[0029] In step **226**, the method **200** determines if the value calculated in step **224** is greater than or equal to 50%. If the value is greater than or equal to 50%, then at least half of an optimal or full set of lateral wells can be planned and the method **200** proceeds to step **230**.

Otherwise, less than half of an optimal or full set of lateral wells can be planned and the method **200** proceeds to step **228**.

[0030] In step **228**, the pixel selected in step **206** is assigned a color, such as yellow, to represent that less than half of an optimal or full set of lateral wells can be planned from that position for the surface pad location. Alternatively, the pixel selected in step **206** may be assigned a shade using a grey-scale to represent that less than half of an optimal or full set of lateral wells can be planned from that position for the surface pad location. The method **200** then proceeds to step **232**.

[0031] In step **230**, the pixel selected in step **206** is assigned a color, such as green, to represent that at least half of an optimal or full set of lateral wells can be planned from that position for the surface pad location. Alternatively, the pixel selected in step **206** may be assigned a shade using a grey-scale to represent that at least half of an optimal or full set of lateral wells can be planned from that position for the surface pad location. The method **200** then proceeds to step **232**.

[0032] In step **232**, the method **200** determines if additional pixels are available from step **204** that were not selected in step **206**. If there are additional pixels available from step **204** that were not selected in step **206**, then the method **200** returns to step **206** to select another pixel. Otherwise, the method **200** ends.

[0033] Referring now to **FIGS. 3-4**, graphical displays **300**, **400** of platform positioning maps created according to the methods in **FIGS. 1** or **2** are illustrated. As illustrated in **FIG. 3**, each pixel in the selected area of interest **302** defining a platform positioning map is visible and is assigned a respective grey-scale shade according to the methods in **FIGS. 1** or **2**. Alternatively, each pixel in the selected area of interest **302** defining a platform positioning

map is assigned a respective grey-scale shade according to the methods in **FIGS. 1** or **2**, however, may not be visible as illustrated in **FIG. 4**. In **FIG. 4**, each pixel in the selected area of interest **402** defining a platform positioning map is assigned a respective grey-scale shade according to the methods in **FIGS. 1** or **2**, however, is only visible within a predetermined area **404** of the cursor **406**. In this manner, extraneous information in the platform positioning map outside the predetermined area **404** is not a distraction. The cursor **406** may therefore, be moved interactively using the client interface and/or the video interface described further in reference to **FIG. 5** anywhere in the area of interest **402** and each pixel in the predetermined area **404** will be visibly displayed in real-time. In either platform positioning map, the color or shading of each pixel is associated with a respective level of cost and/or risk for a surface pad located at that pixel position. If the pixel is green or red, for example, the associated level of cost and/or risk for a surface pad located at that pixel position may be low (green) or high (red).

[0034] A platform positioning map thus, may be effectively used to represent surface pad location feasibility for visually validating a current surface pad location and/or determining the suitability of another surface pad location.

System Description

[0035] The present disclosure may be implemented through a computer-executable program of instructions, such as program modules, generally referred to as software applications or application programs executed by a computer. The software may include, for example, routines, programs, objects, components, data structures, etc., that perform particular tasks or implement particular abstract data types. The software forms an interface to allow a computer to react according to a source of input. DecisionSpace® Geosciences, which is a commercial

software application marketed by Landmark Graphics Corporation, may be used as an interface application to implement the present disclosure. The software may also cooperate with other code segments to initiate a variety of tasks in response to data received in conjunction with the source of the received data. Other code segments may provide optimization components including, but not limited to, neural networks, earth modeling, history-matching, optimization, visualization, data management, reservoir simulation and economics. The software may be stored and/or carried on any variety of memory such as CD-ROM, magnetic disk, bubble memory and semiconductor memory (*e.g.*, various types of RAM or ROM). Furthermore, the software and its results may be transmitted over a variety of carrier media such as optical fiber, metallic wire, and/or through any of a variety of networks, such as the Internet.

[0036] Moreover, those skilled in the art will appreciate that the disclosure may be practiced with a variety of computer-system configurations, including hand-held devices, multiprocessor systems, microprocessor-based or programmable-consumer electronics, minicomputers, mainframe computers, and the like. Any number of computer-systems and computer networks are acceptable for use with the present disclosure. The disclosure may be practiced in distributed-computing environments where tasks are performed by remote-processing devices that are linked through a communications network. In a distributed-computing environment, program modules may be located in both local and remote computer-storage media including memory storage devices. The present disclosure may therefore, be implemented in connection with various hardware, software or a combination thereof, in a computer system or other processing system.

[0037] Referring now to **FIG. 5**, a block diagram illustrates one embodiment of a system for implementing the present disclosure on a computer. The system includes a

computing unit, sometimes referred to as a computing system, which contains memory, application programs, a client interface, a video interface, and a processing unit. The computing unit is only one example of a suitable computing environment and is not intended to suggest any limitation as to the scope of use or functionality of the disclosure.

[0038] The memory primarily stores the application programs, which may also be described as program modules containing computer-executable instructions, executed by the computing unit for implementing the present disclosure described herein and illustrated in **FIGS. 1-4**. The memory therefore, includes a platform positioning module, which enables steps **110, 114, 210, 218** and **224** in **FIGS. 1-2**. The platform positioning module may integrate functionality from the remaining application programs illustrated in **FIG. 5**. In particular, DecisionSpace® Geosciences may be used as an interface application to perform the remaining steps in **FIGS. 1-2**. Although DecisionSpace® Geosciences may be used as an interface application, other interface applications may be used, instead, or the platform positioning module may be used as a stand-alone application.

[0039] Although the computing unit is shown as having a generalized memory, the computing unit typically includes a variety of computer readable media. By way of example, and not limitation, computer readable media may comprise computer storage media and communication media. The computing system memory may include computer storage media in the form of volatile and/or nonvolatile memory such as a read only memory (ROM) and random access memory (RAM). A basic input/output system (BIOS), containing the basic routines that help to transfer information between elements within the computing unit, such as during start-up, is typically stored in ROM. The RAM typically contains data and/or program modules that are immediately accessible to and/or presently being operated on by the processing unit. By

way, of example, and not limitation, the computing unit includes an operating system, application programs, other program modules, and program data.

[0040] The components shown in the memory may also be included in other removable/non-removable, volatile/nonvolatile computer storage media or they may be implemented in the computing unit through an application program interface (“API”) or cloud computing, which may reside on a separate computing unit connected through a computer system or network. For example only, a hard disk drive may read from or write to non-removable, nonvolatile magnetic media, a magnetic disk drive may read from or write to a removable, nonvolatile magnetic disk, and an optical disk drive may read from or write to a removable, nonvolatile optical disk such as a CD ROM or other optical media. Other removable/non-removable, volatile/nonvolatile computer storage media that can be used in the exemplary operating environment may include, but are not limited to, magnetic tape cassettes, flash memory cards, digital versatile disks, digital video tape, solid state RAM, solid state ROM, and the like. The drives and their associated computer storage media discussed above provide storage of computer readable instructions, data structures, program modules and other data for the computing unit.

[0041] A client may enter commands and information into the computing unit through the client interface, which may be input devices such as a keyboard and pointing device, commonly referred to as a mouse, trackball or touch pad. Input devices may include a microphone, joystick, satellite dish, scanner, voice recognition or gesture recognition, or the like. These and other input devices are often connected to the processing unit through the client interface that is coupled to a system bus, but may be connected by other interface and bus structures, such as a parallel port or a universal serial bus (USB).

[0042] A monitor or other type of display device may be connected to the system bus via an interface, such as a video interface. A graphical user interface (“GUI”) may also be used with the video interface to receive instructions from the client interface and transmit instructions to the processing unit. In addition to the monitor, computers may also include other peripheral output devices such as speakers and printer, which may be connected through an output peripheral interface.

[0043] Although many other internal components of the computing unit are not shown, those of ordinary skill in the art will appreciate that such components and their interconnection are well known.

[0044] While the present disclosure has been described in connection with presently preferred embodiments, it will be understood by those skilled in the art that it is not intended to limit the disclosure to those embodiments. It is therefore, contemplated that various alternative embodiments and modifications may be made to the disclosed embodiments without departing from the spirit and scope of the disclosure defined by the appended claims and equivalents thereof.

CLAIMS

1. A method of creating a platform positioning map for validating a current surface pad location and determining the suitability of another surface pad location, which comprises:

determining a position for each pixel in an area of interest;

determining if each pixel position is valid;

assigning one of a first color and a first grey-scale shade to each pixel subject to an invalid pixel position, the first color and the first grey-scale shade representing an invalid position for a surface pad location where drilling cannot be conducted without at least one of a surface constraint and a subsurface constraint;

calculating a value for each pixel with a valid pixel position using a computer processor;

assigning one of a second color and a second grey-scale shade to each pixel subject to the respective value, the second color and the second grey-scale shade representing at least (1) lateral well but less than a full set of lateral wells can be planned from a valid pixel position for a surface pad location; and

assigning one of a third color and a third grey-scale shade to each pixel subject to the respective value, the third color and the third grey-scale shade representing a full set of lateral wells can be planned from a valid pixel position for a surface pad location.

2. The method of claim 1, further comprising:

displaying each pixel in the area of interest; and

validating a current surface pad location using the display of each pixel.

3. The method of claim 1, further comprising:

displaying each pixel in the area of interest; and

determining a suitability of another surface pad location using the display of each pixel.

4. The method of claim 1, wherein the value for each pixel assigned the one of a third color and a third grey-scale shade is one of at least (1) and at least 50%.

5. The method of claim 1, wherein the value for each pixel assigned the one of a second color and a second grey-scale shade is one of less than (1) and less than 50%.

6. The method of claim 5, wherein the value for each pixel assigned the one of a second color and a second grey-scale shade is less than 50%, and the second color and the second grey-scale shade represent less than half of a full set of lateral wells can be planned from a valid pixel position for a surface pad location.

7. The method of claim 1, further comprising:

a) determining a position for each pixel within a predetermined surface pad outline centered on a pixel in the area of interest;

b) determining if each pixel position within the predetermined surface pad outline is valid;

c) assigning one of a fourth color and a fourth grey-scale shade to each pixel in the predetermined surface pad outline subject to another invalid pixel position, the fourth color and the fourth grey-scale shade representing the predetermined surface pad outline cannot be centered on the pixel in the area of interest; and

d) repeating steps a) – c) for each pixel in the area of interest.

8. The method of claim 1, further comprising assigning one of a fourth color and a fourth grey-scale shade to each pixel subject to the respective value, the fourth color and the fourth grey-scale shade representing no lateral wells can be planned from a valid pixel position for a surface pad location.

9. A non-transitory program carrier device tangibly carrying computer-executable instructions for creating a platform positioning map for validating a current surface pad location and determining the suitability of another surface pad location, the instructions being executable to implement:

determining a position for each pixel in an area of interest;

determining if each pixel position is valid;

assigning one of a first color and a first grey-scale shade to each pixel subject to an invalid pixel position, the first color and the first grey-scale shade representing an

invalid position for a surface pad location where drilling cannot be conducted without at least one of a surface constraint and a subsurface constraint;

calculating a value for each pixel with a valid pixel position;

assigning one of a second color and a second grey-scale shade to each pixel subject to the respective value, the second color and the second grey-scale shade representing at least (1) lateral well but less than a full set of lateral wells can be planned from a valid pixel position for a surface pad location; and

assigning one of a third color and a third grey-scale shade to each pixel subject to the respective value, the third color and the third grey-scale shade representing a full set of lateral wells can be planned from a valid pixel position for a surface pad location.

10. The program carrier device of claim 9, further comprising:

displaying each pixel in the area of interest; and

validating a current surface pad location using the display of each pixel.

11. The program carrier device of claim 9, further comprising:

displaying each pixel in the area of interest; and

determining a suitability of another surface pad location using the display of each pixel.

12. The program carrier device of claim 9, wherein the value for each pixel assigned the one of a third color and a third grey-scale shade is one of at least (1) and at least 50%.

13. The program carrier device of claim 9, wherein the value for each pixel assigned the one of a second color and a second grey-scale shade is one of less than (1) and less than 50%.

14. The program carrier device of claim 13, wherein the value for each pixel assigned the one of a second color and a second grey-scale shade is less than 50%, and the second color and the second grey-scale shade represent less than half of a full set of lateral wells can be planned from a valid pixel position for a surface pad location.

15. The program carrier device of claim 9, further comprising:

a) determining a position for each pixel within a predetermined surface pad outline entered on a pixel in the area of interest;

b) determining if each pixel position within the predetermined surface pad outline is valid;

c) assigning one of a fourth color and a fourth grey-scale shade to each pixel in the predetermined surface pad outline subject to another invalid pixel position, the fourth color and the fourth grey-scale shade representing the predetermined surface pad outline cannot be centered on the pixel in the area of interest; and

d) repeating steps a) – c) for each pixel in the area of interest.

16. The program carrier device of claim 9, further comprising assigning one of a fourth color and a fourth grey-scale shade to each pixel subject to the respective value, the fourth color and the fourth grey-scale shade representing no lateral wells can be planned from a valid pixel position for a surface pad location.

17. A non-transitory program carrier device tangibly carrying computer-executable instructions for creating a platform positioning map for validating a current surface pad location and determining the suitability of another surface pad location, the instructions being executable to implement:

determining a position for each pixel in an area of interest;

assigning one of a first color and a first grey-scale shade to each pixel subject to an invalid pixel position, the first color and the first grey-scale shade representing an invalid position for a surface pad location where drilling cannot be conducted without at least one of a surface constraint and a subsurface constraint;

calculating a value for each pixel with a valid pixel position;

assigning one of a second color and a second grey-scale shade to each pixel subject to the respective value, the second color and the second grey-scale shade representing at least (1) lateral well but less than a full set of lateral wells can be planned from a valid pixel position for a surface pad location;

assigning one of a third color and a third grey-scale shade to each pixel subject to the respective value, the third color and the third grey-scale shade representing a full set of lateral wells can be planned from a valid pixel position for a surface pad location; and

displaying each pixel in the area of interest.

18. The program carrier device of claim 17, further comprising one of:

validating a current surface pad location using the display of each pixel; and

determining a suitability of another surface pad location using the display of each pixel.

19. The program carrier device of claim 17, wherein the value for each pixel assigned the one of a third color and a third grey-scale shade is one of at least (1) and at least 50%.

20. The program carrier device of claim 17, wherein the value for each pixel assigned the one of a second color and a second grey-scale shade is one of less than (1) and less than 50%.

1/4

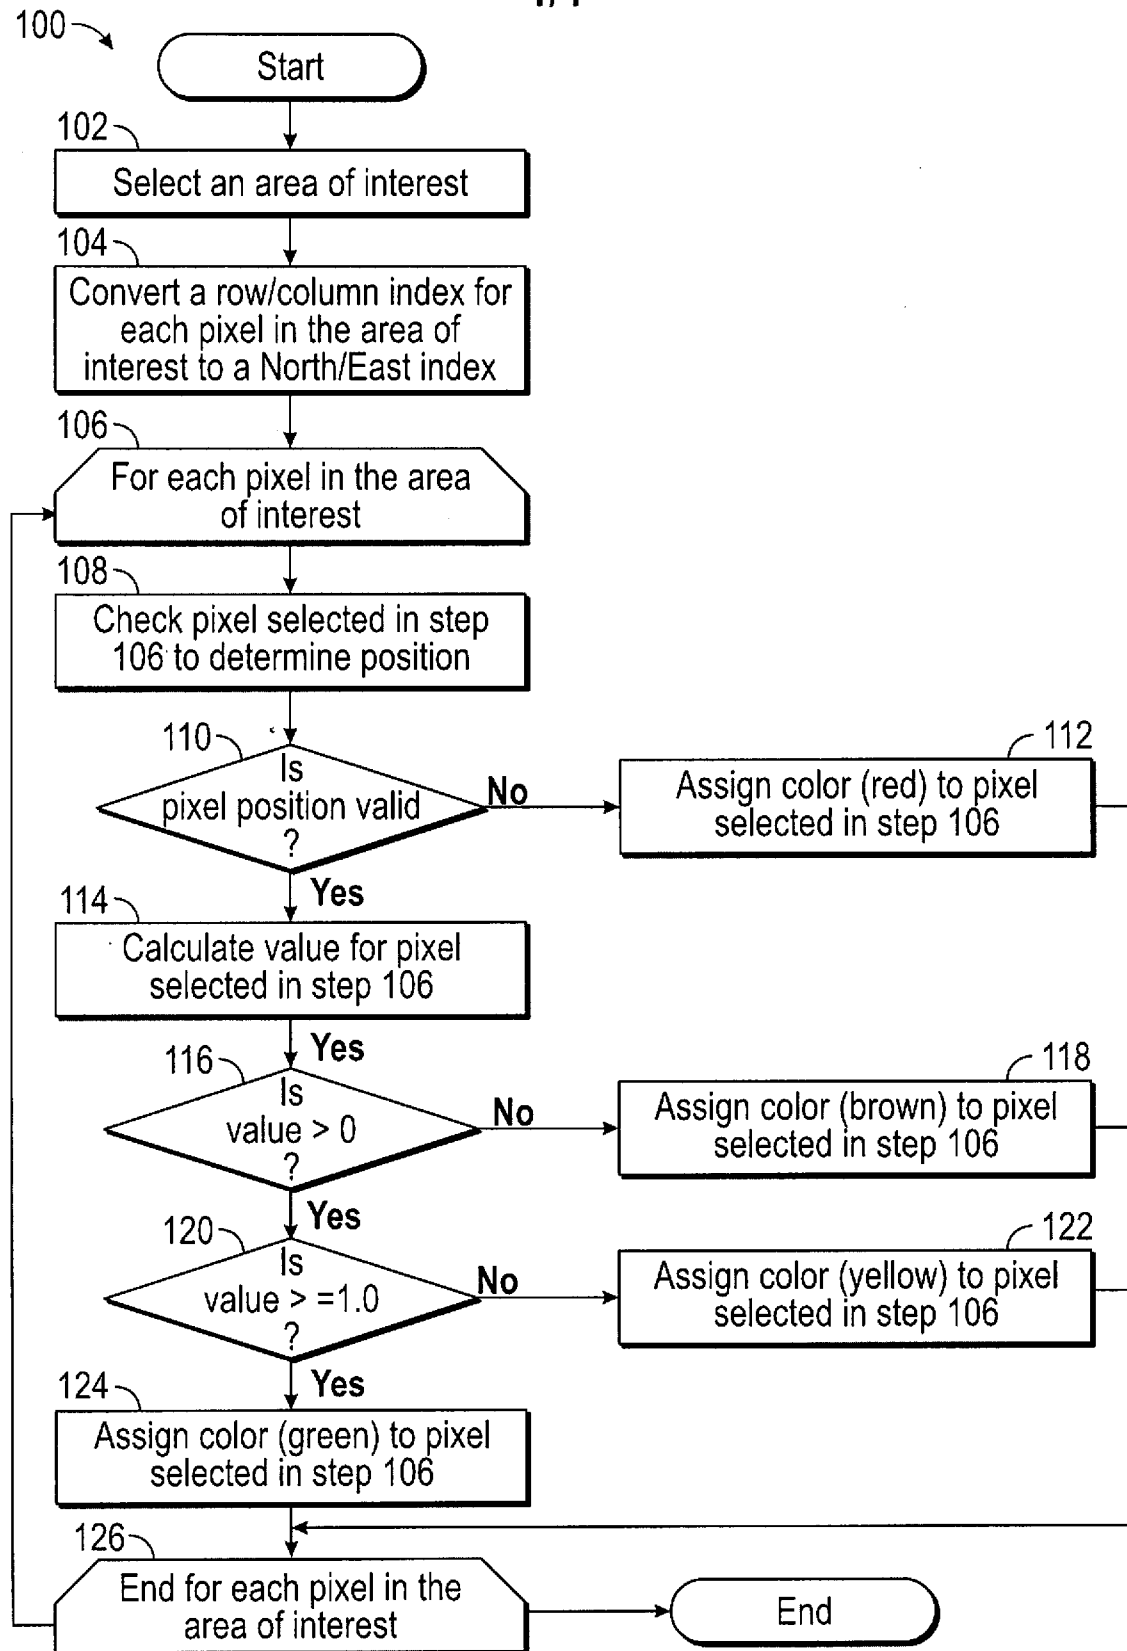


FIG. 1

2/4

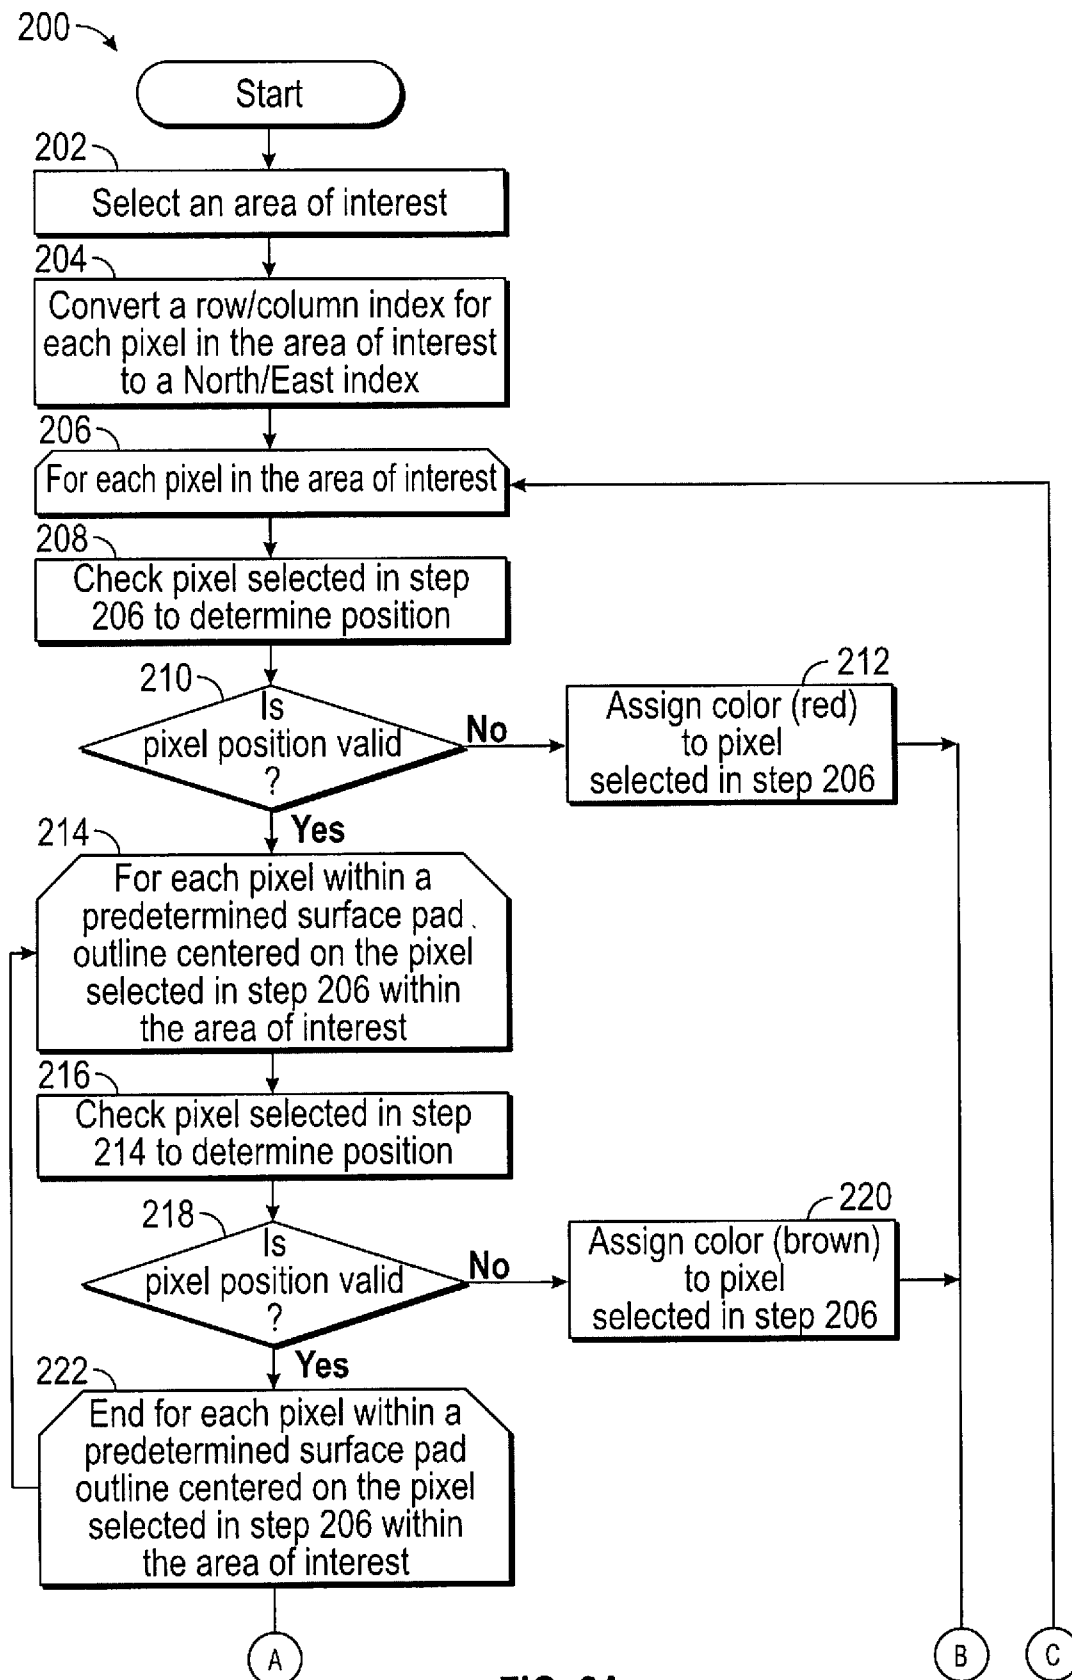


FIG. 2A

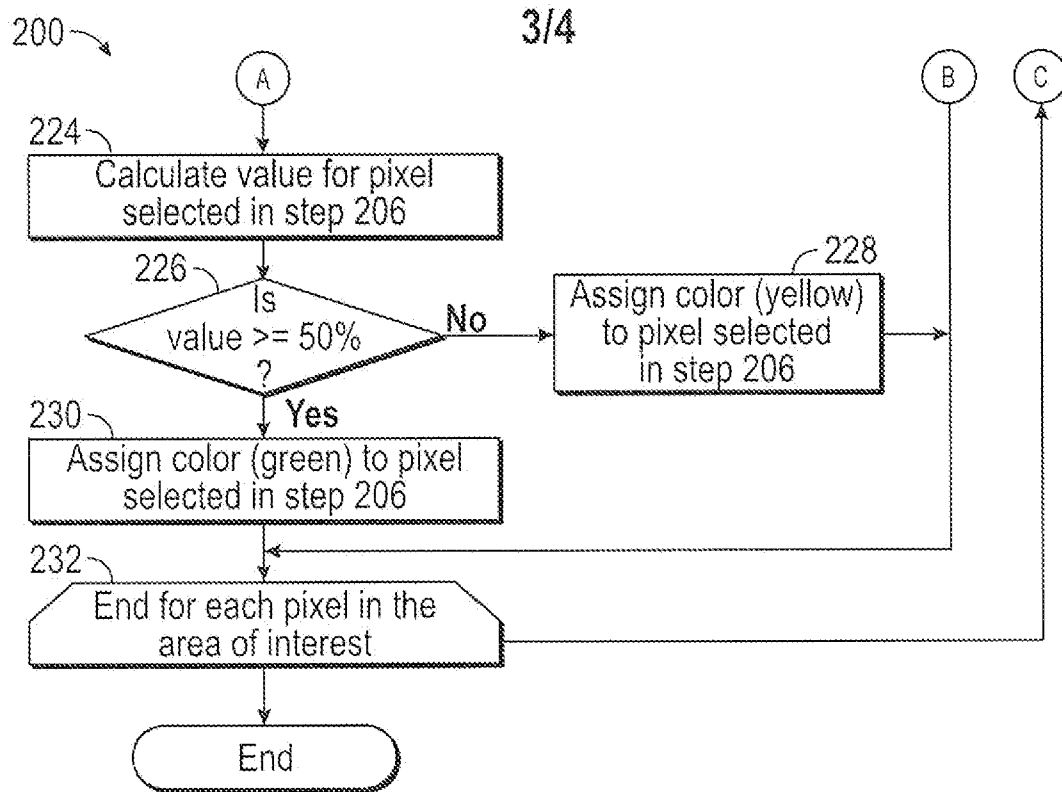


FIG. 2B



FIG. 3

4/4

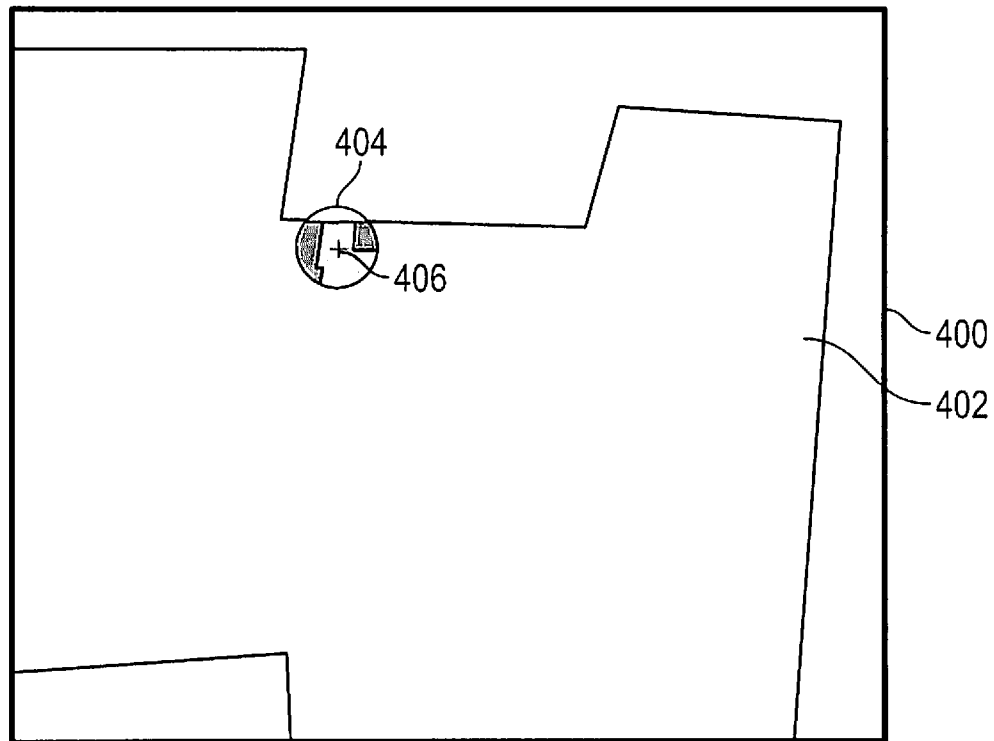


FIG. 4

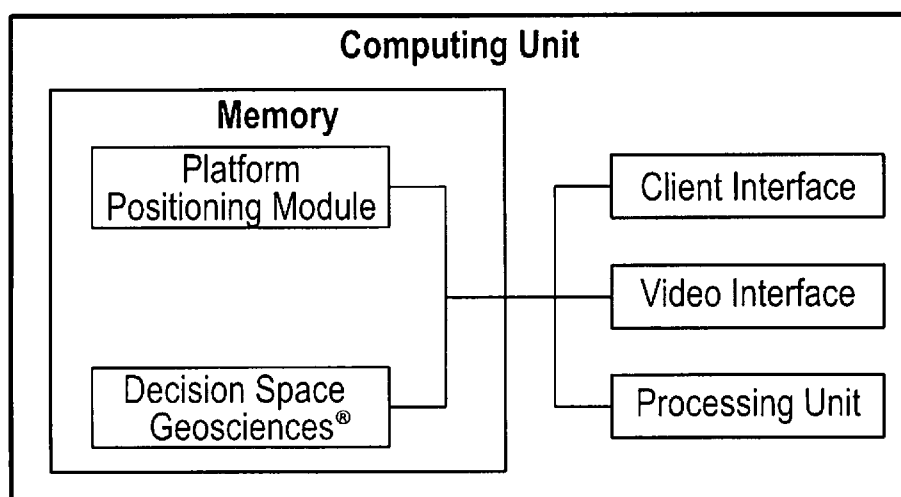


FIG. 5

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2015/010141**A. CLASSIFICATION OF SUBJECT MATTER****G06Q 50/10(2012.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G06Q 50/10; G06G 7/48; G06F 19/00; G06F 3/0481; E21B 43/30; G01V 1/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: surface pad, platform, location, map, pixel, validation, feasibility

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2004-0153299 A1 (RICHARD DANIEL COLVIN et al.) 05 August 2004 See abstract, claims 1-3 and figures 9,13.	1-20
A	US 2011-0153300 A1 (JAMES E. HOLL et al.) 23 June 2011 See abstract, paragraph [0039], claims 1-2,4,10 and figures 1-3.	1-20
A	US 2013-0231901 A1 (ZHENGANG LU et al.) 05 September 2013 See abstract, claims 1-10 and figures 2-4.	1-20
A	US 7596481 B2 (MARIO ZAMORA et al.) 29 September 2009 See abstract, claims 1,4-6 and figure 2.	1-20
A	US 2013-0073209 A1 (DAN COLVIN et al.) 21 March 2013 See abstract and claims 1-6,13.	1-20



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

30 September 2015 (30.09.2015)

Date of mailing of the international search report

30 September 2015 (30.09.2015)

Name and mailing address of the ISA/KR

International Application Division
Korean Intellectual Property Office
189 Cheongsa-ro, Seo-gu, Daejeon Metropolitan City, 35208,
Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

Jang, Gijeong

Telephone No. +82-42-481-8364



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/010141

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2004-0153299 A1	05/08/2004	AU 2004-209418 A1	19/08/2004
		AU 2004-209418 B2	12/11/2009
		AU 2004-209418 B9	12/11/2009
		AU 2004-210330 A1	19/08/2004
		AU 2004-210330 B2	17/09/2009
		CA 2514029 A1	19/08/2004
		CA 2514029 C	24/03/2015
		CA 2514042 A1	19/08/2004
		EP 1588313 A2	26/10/2005
		EP 1588313 A4	29/10/2014
		EP 1595206 A2	16/11/2005
		NO 20053897 A	31/10/2005
		NO 20053897 D0	19/08/2005
		US 2004-0153298 A1	05/08/2004
		US 7096172 B2	22/08/2006
		US 7200540 B2	03/04/2007
		WO 2004-069960 A2	19/08/2004
		WO 2004-069960 A3	14/10/2004
		WO 2004-070544 A2	19/08/2004
		WO 2004-070544 A3	14/10/2004
US 2011-0153300 A1	23/06/2011	AU 2009-311619 A1	14/05/2010
		AU 2009-313392 A1	14/05/2010
		CA 2737415 A1	14/05/2010
		CA 2741630 A1	14/05/2010
		CA 2742863 A1	14/05/2010
		CN 102209792 A	05/10/2011
		EP 2352844 A1	10/08/2011
		EP 2356611 A1	17/08/2011
		EP 2358683 A1	24/08/2011
		EP 2358683 B1	01/04/2015
		JP 05727937 B2	03/06/2015
		JP 2012-506711 A	22/03/2012
		JP 2012-508248 A	05/04/2012
		US 2010-0167952 A1	01/07/2010
		US 2010-0216989 A1	26/08/2010
		US 8314090 B2	20/11/2012
		US 8849640 B2	30/09/2014
		WO 2010-051978 A1	14/05/2010
		WO 2010-053618 A1	14/05/2010
		WO 2010-054215 A1	14/05/2010
US 2013-0231901 A1	05/09/2013	BR 102012023270 A2	06/08/2013
		CA 2788934 A1	15/03/2013
		GB 2494768 A	20/03/2013
		GB 2494768 A8	20/08/2014
		GB 2494768 B	13/11/2013
		GB 2494768 B8	20/08/2014
		NO 20121032 A	18/03/2013

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/010141

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 7596481 B2	29/09/2009	US 2005-0216197 A1	29/09/2005
		US 2006-0190178 A1	24/08/2006
		US 2006-0293872 A1	28/12/2006
		US 7603264 B2	13/10/2009
		US 7657414 B2	02/02/2010
US 2013-0073209 A1	21/03/2013	AR 080520 A1	11/04/2012
		AU 2010-348348 A1	20/09/2012
		AU 2010-348348 B2	26/02/2015
		CA 2792836 A1	22/09/2011
		CN 102812204 A	05/12/2012
		EA 201201285 A1	30/05/2013
		EG 26825 A	12/10/2014
		EP 2547862 A1	23/01/2013
		MX 2012010558 A	21/02/2013
		WO 2011-115600 A1	22/09/2011