




(86) Date de dépôt PCT/PCT Filing Date: 2015/05/08	(51) Cl.Int./Int.Cl. <i>G02C 7/04</i> (2006.01), <i>C08J 7/04</i> (2006.01), <i>G02B 1/04</i> (2006.01)
(87) Date publication PCT/PCT Publication Date: 2015/11/12	
(45) Date de délivrance/Issue Date: 2018/08/21	(72) Inventeurs/Inventors: LEE, SOO CHANG, KR; OH, KYUNG HEE, KR
(85) Entrée phase nationale/National Entry: 2016/11/02	(73) Propriétaire/Owner: INTEROJO INC., KR
(86) N° demande PCT/PCT Application No.: KR 2015/004656	(74) Agent: CASSAN MACLEAN IP AGENCY INC.
(87) N° publication PCT/PCT Publication No.: 2015/170936	
(30) Priorité/Priority: 2014/05/09 (KR10-2014-0055401)	

(54) Titre : LENTILLE DE CONTACT A HYDROGEL AYANT UNE SURFACE HUMIDE, ET SON PROCEDE DE FABRICATION
(54) Title: HYDROGEL CONTACT LENS HAVING WET SURFACE, AND MANUFACTURING METHOD THEREFOR

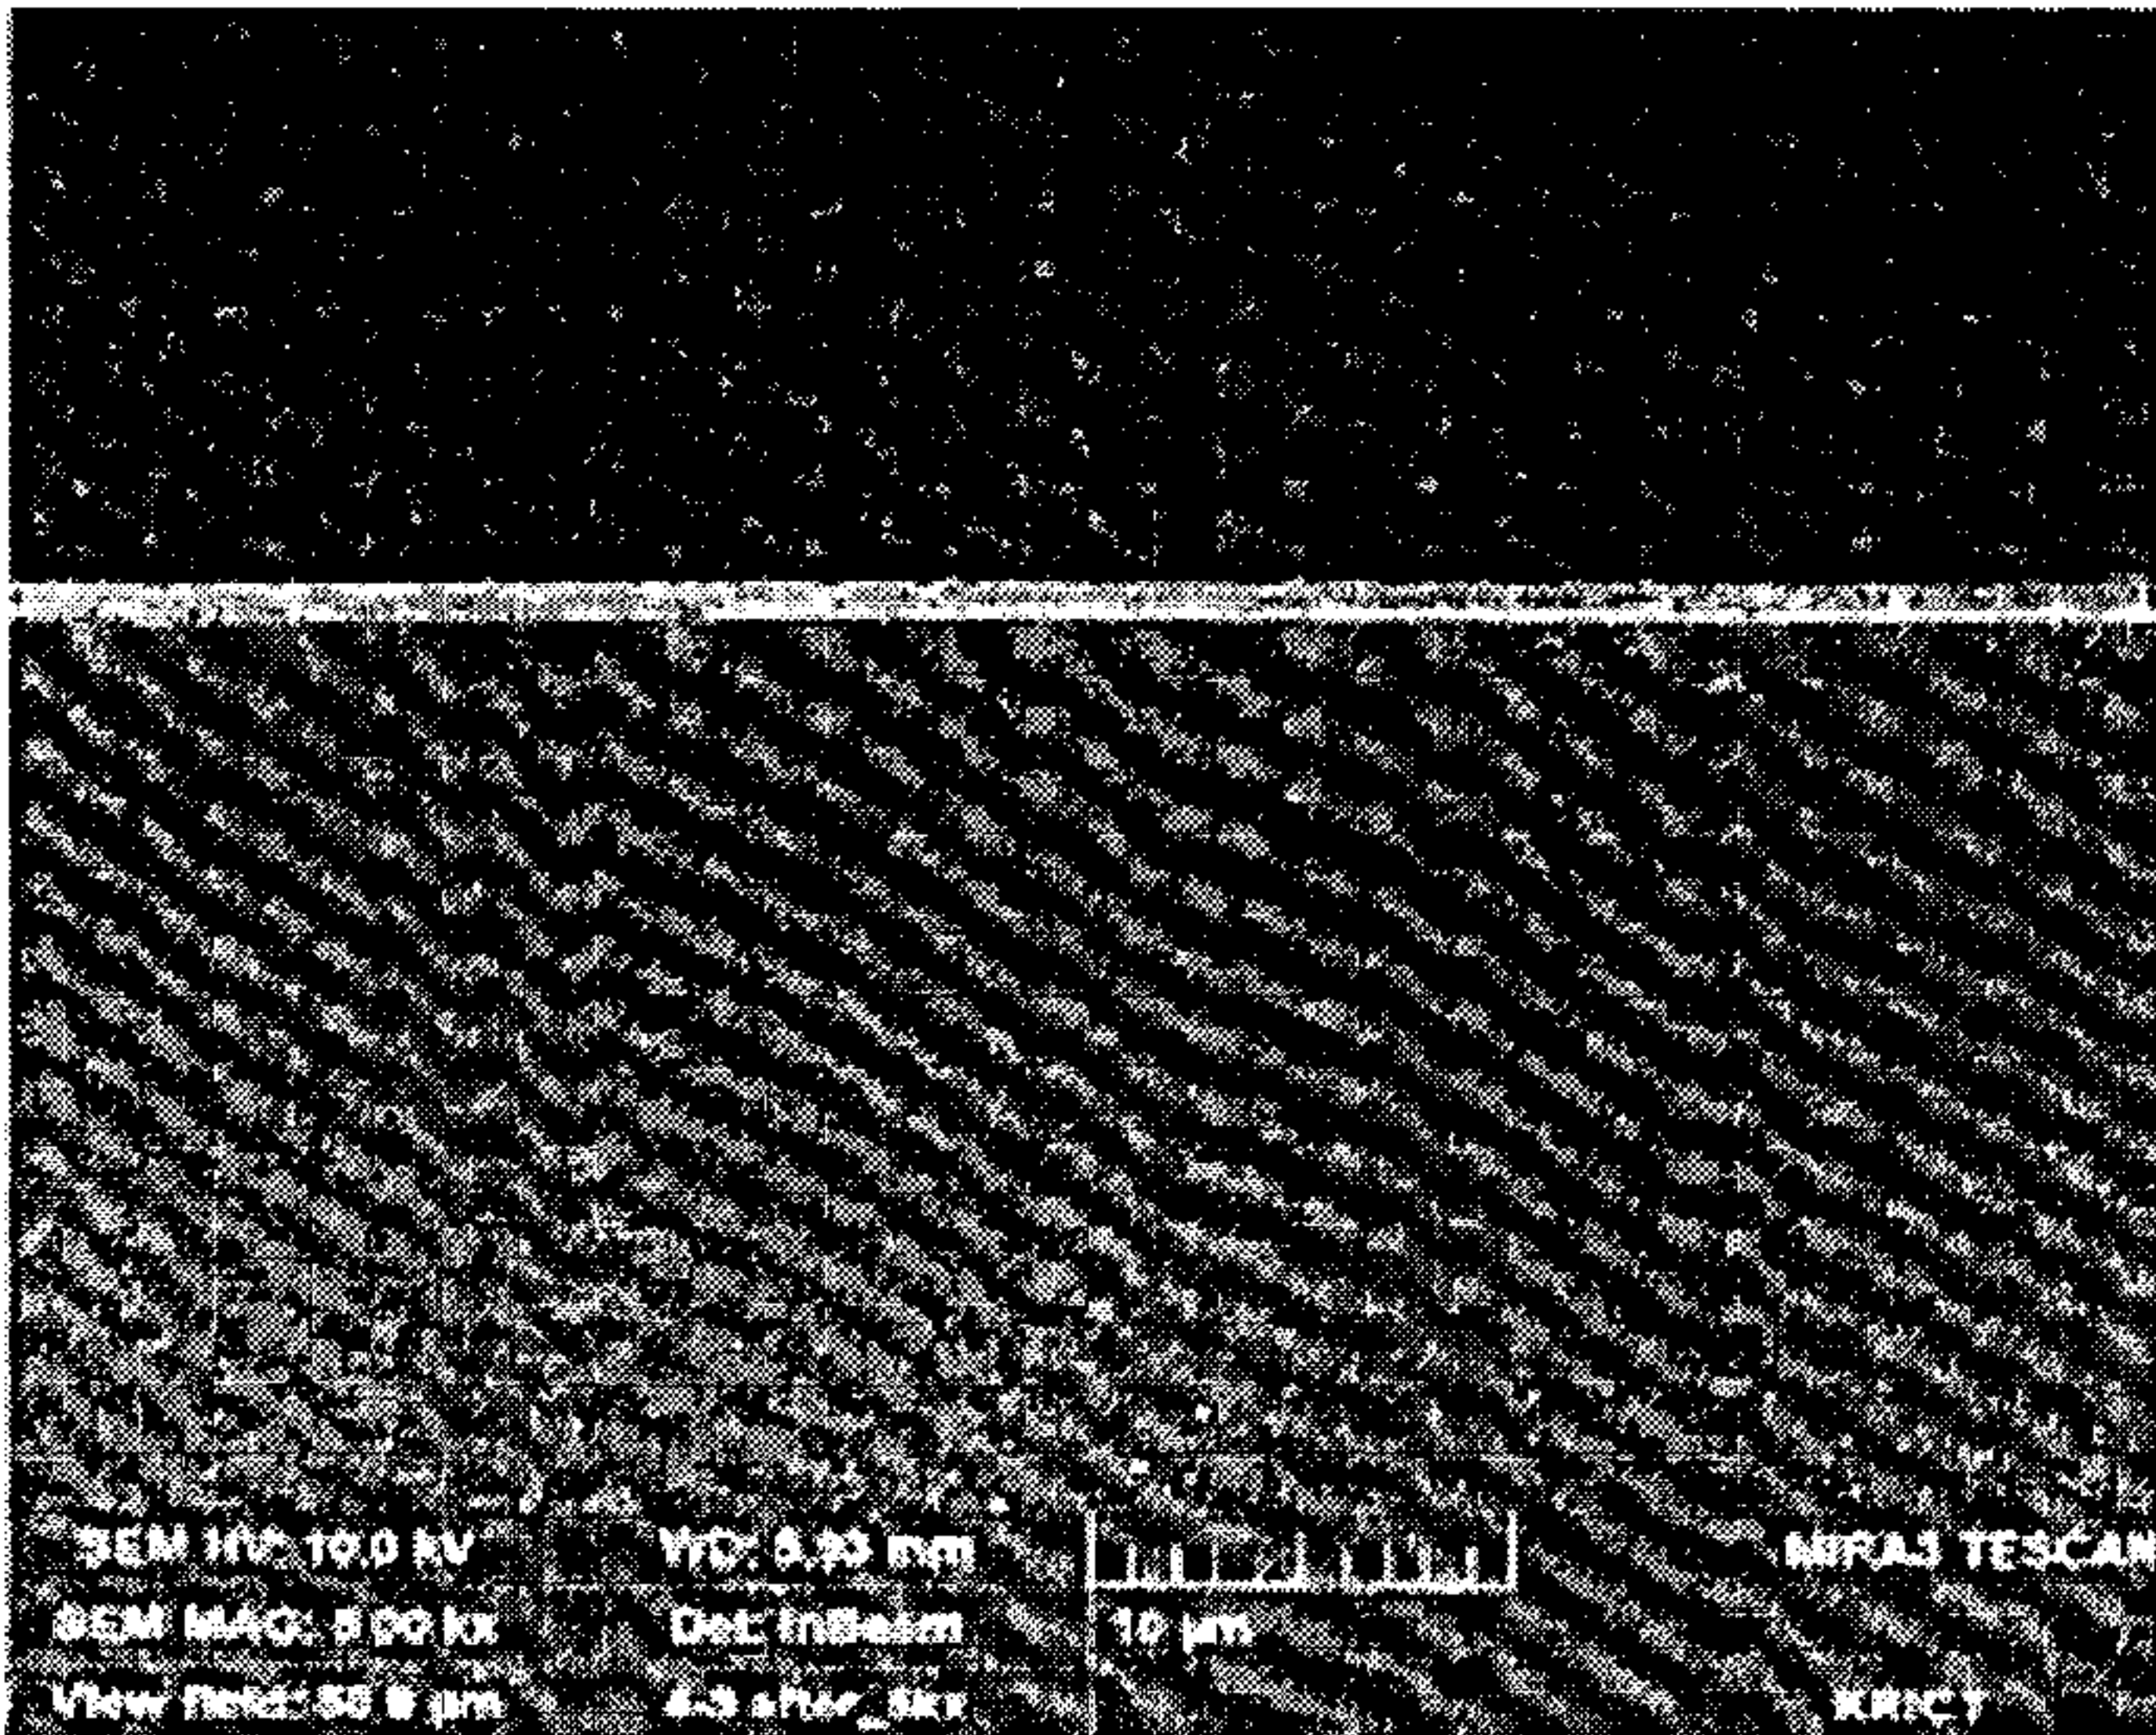

(57) **Abrégé/Abstract:**
The present invention relates to a hydrogel contact lens having a wet surface, and a manufacturing method therefor and, more specifically, to a hydrogel contact lens and a manufacturing method therefor wherein the hydrogel contact lens satisfies basic physical properties of a hydrogel contact lens and has excellent wettability by forming a hydrophilic surface layer of an interpenetrating polymer network (IPN) network structure on a surface of the hydrogel contact lens.

【ABSTRACT】

The present invention relates to a hydrogel contact lens having a wet surface, and a manufacturing method therefor and, more specifically, to a hydrogel contact lens and a manufacturing method therefor wherein the hydrogel contact lens satisfies basic physical properties of a hydrogel contact lens and has excellent wettability by forming a hydrophilic surface layer of an interpenetrating polymer network (IPN) structure on a surface of the hydrogel contact lens.

【DESCRIPTION】**【Invention Title】**

HYDROGEL CONTACT LENS HAVING WET SURFACE, AND MANUFACTURING
METHOD THEREFOR

5

【Technical Field】

[1] The present invention relates to a hydrogel contact lens having a wet surface, and a manufacturing method therefor, and more specifically, to a hydrogel contact lens that satisfies basic physical properties as the hydrogel contact lens and that has excellent wettability by forming a hydrophilic surface layer having an interpenetrating polymer network (IPN) structure on a surface of the hydrogel contact lens, and a manufacturing method therefor.

15

【Background Art】

[2] A contact lens directly contact an eyeball, such that it is required to maintain transparency and surface wettability while simultaneously maintaining eye safety and efficacy, and thus, oxygen needs to be appropriately supplied from the atmosphere, and carbon dioxide needs to be properly released from a cornea.

20

[3] In addition, the contact lens needs to have a tear

layer with smooth flow, and should be designed in consideration of a clinical aspect so as to avoid excessive friction between an eyelid and an eye surface. Further, the contact lens should satisfy conditions such as tensile
5 strength of a material, biocompatibility, non-toxicity, optical transparency of a material, refractive index, surface wet ability, water content appropriate for the cornea, a welling rate, oxygen permeability, etc., to be used.

[4] In general, the contact lens may be largely divided
10 into a hard contact lens and a soft contact lens according to the material, and is classified for vision correction, treatment, cosmetic contact lens, etc., according to function. A hydrogel is a typical material of a soft contact lens that is used for purposes such as vision correction, treatment,
15 etc. Here, most of the hydrogel contact lenses include silicone-based or acrylate-based materials as a main material.

[5] The cornea of a human eye has no blood vessels, and has a structure in which oxygen is directly received from the external environment. However, when the contact lens is worn,
20 the lens itself acts as a kind of barrier, which reduces oxygen permeability. A number of people prefer to wear a general hydrogel contact lens due to comfort wearability when it is worn, but the hydrogel contact lens has problems such

as hypoxia (corneal edema) due to a low oxygen permeability and reduction in the wettability of a lens surface due to leaking components attached to the lens surface. Accordingly, the hydrogel contact lens requires not only superior
5 wearability but also a high oxygen permeability, wettability, etc.

[6] For example, when the silicone-based hydrogel contact lens is worn, oxygen is sufficiently supplied to the eye, and thus, a side effect of the corneal edema due to the hypoxia
10 is not caused.

[7] However, the silicone-based hydrogel contact lens has low wearability. That is, due to properties of the silicone-based hydrogel material, as a silicone content is increased, the oxygen permeability is sufficiently increased, but
15 hydrophilicity of the lens surface is reduced. Accordingly, the silicone-based hydrogel material causes discomfort, and has problems such as eye irritation, corneal staining, attachment of the lens to the cornea, etc.

[8] In order to overcome these disadvantages, Korean Patent
20 No. 10-0594414 (Patent Document 001) used a method of increasing hydrophilicity by plasma surface treating the lens surface in initial first-generation silicone hydrogel contact lens products. However, this method still has low surface

wettability, which causes discomfort to a wearer, and further includes a complicate process which is called a plasma surface treatment in a manufacturing process, which causes an increase in production costs.

5 **[9]** Further, Korean Patent No. 10-0748379 (Patent Document 002) suggested a wettable silicone hydrogel lens according to Johnson & Johnson as a second-generation silicone-based hydrogel contact lens. The second-generation silicone-based hydrogel contact lens is manufactured by using a polyvinyl
10 pyrrolidone (PVP) polymer as an internal wetting agent to increase wettability and a water content without the plasma post-processing step. However, the internal wetting agent (PVP) has worse wearability as it is slowly released out of the lens, and thus, the second-generation silicone-based
15 hydrogel contact lens still has discomfort when it is worn.

[10] Meanwhile, Korean Patent Laid-Open Publication No. 10-2007-0067679 (Patent Document 003) suggested a contact lens according to Asahi Kasei Aime Co., and CooperVision as a third-generation silicone-based hydrogel contact lens. The
20 third-generation silicone-based hydrogel contact lens is manufactured by synthesizing a silicone macromer having hydrophilic property to a raw material itself. However, a high level of molecular design and a synthesis technique for

the raw material are required.

[11] Further, there are problems in that a manufacturing method for a raw material includes complicated various stages, and accordingly, stimulating residues in manufacturing the raw material are left in a final product.

[12] In addition, a technology of increasing surface wettability has been attempted in the acrylate-based hydrogel contact lens. For example, Korean Patent No. 10-1249705 (Patent Document 004) suggested a method of modifying a contact lens surface by immersing the contact lens in an oligosaccharide solution. However, the method has a problem in that the oligosaccharide does not have sufficient physical and chemical binding force with a polymer matrix, which is released out of the lens surface.

[13] [Patent Document]

[14] (Patent Document 001) Korean Patent No. 10-0594414

[15] (Patent Document 002) Korean Patent No. 10-0748379

[16] (Patent Document 003) Korean Patent Laid-Open Publication No. 10-2007-0067679

[17] (Patent Document 004) Korean Patent No. 10-1249705

【Disclosure】

【Technical Problem】

[18] An object of the present invention is to provide a hydrogel contact lens that satisfies basic physical properties required as the hydrogel contact lens and that has an excellent wet surface.

5 **[19]** In addition, another object of the present invention is to provide a manufacturing method for the hydrogel contact lens as described above.

【Technical Solution】

10 **[20]** In one general aspect,

[21] a hydrogel contact lens includes: a hydrogel contact lens substrate; and

[22] a hydrophilic surface layer having an interpenetrating polymer network (IPN) structure on the hydrogel contact lens
15 substrate,

[23] wherein a physical intermixed layer with the hydrophilic surface layer is formed in the contact lens substrate to have a thickness of 20 nm or more.

[24] The hydrophilic surface layer may include a hyaluronate
20 compound, a hydrophilic monomer, and a crosslinking agent.

[25] The hydrophilic surface layer may include 0.2 to 10 parts by weight of the hydrophilic monomer with regard to 0.05 to 2 parts by weight of the hyaluronate compound.

[26] The crosslinking agent may have an amount of 0.001 to 0.1 mol per 1 mol of the hydrophilic monomer.

[27] The hyaluronate compound may be one or two or more selected from the group consisting of sodium hyaluronic acid
5 and sodium acetylated hyaluronate.

[28] The hyaluronate compound may have a weight average molecular weight (Mw) of 50,000 to 3,000,000.

[29] The crosslinking agent may be one or two or more selected from the group consisting of ethylene glycol
10 dimethacrylate (EGDMA), diethylene glycol methacrylate (DEGMA), glycerol dimethacrylate (GDMA), divinylbenzene (DVB), and trimethylolpropane trimethacrylate (TMPTMA).

[30] In another general aspect, a manufacturing method for a hydrogel contact lens includes:

15 **[31]** a first step of preparing a hydrogel contact lens substrate; and

[32] a second step of immersing the hydrogel contact lens substrate in a surface-modifying solution including a hyaluronate compound, a hydrophilic monomer, and a
20 crosslinking agent.

[33] The manufacturing method may further include: swelling the hydrogel contact lens substrate that is performed between the first step and the second step.

[34] The second step of immersing in the surface-modifying solution may be performed for at least 1 hour, and

[35] the surface-modifying solution may include 0.05 to 2 wt% of the hyaluronate compound, 0.2 to 10 wt% of the hydrophilic monomer, and 0.001 to 0.5 wt% of an initiator, and a residual amount of water, and the crosslinking agent may have an amount of 0.001 to 0.1 mol per 1 mol of the hydrophilic monomer.

10 **【Advantageous Effects】**

[36] According to the present invention, the hydrogel contact lens may include the hydrophilic surface layer formed by surface-modification to have excellent wettability. Specifically, the sodium hyaluronate and the hydrophilic monomer that form the interpenetrating polymer network (IPN) structure through a crosslinking agent are introduced onto the surface of the contact lens, and accordingly, the physical intermixed layer is formed with a predetermined thickness between the contact lens substrate and the hydrophilic surface layer, thereby remarkably improving wettability while satisfying basic physical properties such as a water content, an oxygen permeability, mechanical strength, etc.

[37] In addition, some of the physical properties are more improved as compared to those of the related art.

【Description of Drawings】

5 [38] FIG. 1 is a Cryo-SEM image of a front cross section of a silicone hydrogel contact lens manufactured by an exemplary embodiment of the present invention.

[39] FIG. 2 is a Cryo-SEM image of a side cross section of the silicone hydrogel contact lens manufactured by an
10 exemplary embodiment of the present invention.

[40] FIG. 3 is a scanning electron microscope (SEM) image of a surface of the silicone hydrogel contact lens manufactured by an exemplary embodiment of the present invention.

[41] FIG. 4 is a scanning electron microscope (SEM) image of
15 a cross section of the silicone hydrogel contact lens manufactured by an exemplary embodiment of the present invention.

【Best Mode】

20 [42] Hereinafter, the present invention will be described in detail.

[43] The present invention provides a hydrogel contact lens including a hydrogel contact lens substrate; and a

hydrophilic surface layer having an interpenetrating polymer network (IPN) structure on the hydrogel contact lens substrate. Specifically, the hydrogel contact lens according to the present invention (hereinafter, abbreviated as "contact lens") has the existing conventional acrylate-based hydrogel contact lens or silicone-based hydrogel contact lens as a substrate, and includes the hydrophilic surface layer formed to have the interpenetrating polymer network (IPN) structure on a surface of the substrate, and a physical intermixed layer formed with the hydrophilic surface layer in the contact lens substrate.

[44] Here, according to a preferable exemplary embodiment of the present invention, the hydrophilic surface layer includes a hyaluronate compound, a hydrophilic monomer, and a crosslinking agent, and has the interpenetrating polymer network (IPN) structure. Specifically, the hyaluronate compound and the hydrophilic monomer form the interpenetrating polymer network (IPN) structure on the surface of the contact lens. Hereinafter, an exemplary embodiment of the contact lens according to the present invention is provided by describing a manufacturing method for a contact lens according to the present invention.

[45] The manufacturing method for a contact lens according

to the present invention includes: a first step of preparing a hydrogel contact lens substrate; and a second step of immersing the hydrogel contact lens substrate in a surface-modifying solution including a hyaluronate compound, a hydrophilic monomer, and a crosslinking agent (a surface-modification step). In addition, the manufacturing method for a contact lens according to the present invention may further include: swelling the hydrogel contact lens substrate that is performed between the first step and the second step (a swelling step).

[46]

[47] Each step is described as follows.

[48] (1) Preparation of hydrogel contact lens substrate

[49] In the present invention, the hydrogel contact lens substrate is a general hydrogel contact lens, and for example, may be selected from the existing acrylate-based hydrogel contact lens or the existing silicon-based hydrogel contact lens that is generally used as the hydrogel contact lens. In addition, in the present invention, the hydrogel contact lens substrate may be a transparent contact lens, or a colored contact lens added with pigments.

[50] The hydrogel contact lens substrate may include a hydrophilic acrylic polymer, a hydrophilic silicone-based

polymer or a hydrophilic silicone-acrylic polymer as a main material, wherein these polymers are not particularly limited as long as they are able to form the hydrogel. In addition, the hydrogel contact lens substrate may include 80 wt% or
5 more of the polymer on the basis of a total weight. Specifically, for example, the polymer may have a content of 80 wt% to 100 wt%, 85 wt% to 99.9 wt%, or 88 wt% to 98 wt%.

[51] Further, the hydrogel contact lens substrate may be manufactured by methods such as a cast molding method, a spin
10 casting method, etc., but a manufacturing method for the hydrogel contact lens substrate is not particularly limited.

[52] In one example, the hydrogel contact lens substrate is manufactured by the cast molding method, wherein a mixed solution including the hydrophilic monomer, the crosslinking
15 agent, and an initiator may be injected into a casting mold, and may be polymerized by applying heat, and at the same time, may be molded in a lens shape. Here, the hydrophilic monomer is not particularly limited, but may be any material generally used in the art, for example, a hydrophilic acrylic
20 monomer or a hydrophilic silicone acrylic monomer, etc.

[53] The hydrophilic acrylic monomer may be, for example, one or more selected from the group consisting of C1-C15 hydroxyalkyl methacrylate substituted with 1 to 3 hydroxyl

group(s), C1-C15 hydroxyalkyl acrylate substituted with 1 to 3 hydroxyl group(s), acrylamide, vinyl pyrrolidone, glycerol methacrylate, acrylic acid, methacrylic acid, etc. More specifically, the hydrophilic acrylic monomer may be, for example, one or more selected from the group consisting of 2-hydroxyethyl methacrylate (HEMA), N,N-dimethyl acrylamide (DMA), N-vinyl pyrrolidone (NVP), glycerol monomethacrylate (GMMA), and methacrylic acid (MAA), etc.

[54] In addition, the hydrophilic silicone acrylic monomer may include a polydimethylsiloxane-based compound, etc. More specifically, the hydrophilic silicone acrylic monomer may be, for example, one or more selected from the group consisting of

tris(3-methacryloxypropyl)silane,	2-
(trimethylsilyloxy)ethyl methacrylate,	3-
tris(trimethylsilyloxy)silylpropyl methacrylate,	3-
methacryloxypropyl tris(trimethylsilyl)silane (MPTS),	3-
methacryloxy-2-	
(hydroxypropyloxy)propylbis(trimethylsiloxy)methylsilane, and	
4-methacryloxybutyl terminated polydimethylsiloxane, etc.	

[55] Further, the crosslinking agent may be, for example, one or more selected from the group consisting of ethylene glycol dimethacrylate (EGDMA), diethylene glycol methacrylate (DEGMA), divinylbenzene, and trimethylolpropane

trimethacrylate (TMPTMA), etc. In addition, the initiator is used for the polymerization, and may be, for example, one or more selected from the group consisting of azodiisobutyronitrile (AIBN), benzoin methyl ether (BME),
5 2,5-dimethyl-2,5-di-(2-ethylhexanoylperoxy)hexane, and dimethoxyphenyl acetophenone (DMPA), etc.

[56]

[57] (2) Surface-modification (formation of hydrophilic surface layer)

10 **[58]** The hydrogel contact lens substrate is prepared, and is surface-modified to form a hydrophilic surface layer. Here, according to a preferable exemplary embodiment, the hydrophilic surface layer includes the sodium hyaluronate compound, the hydrophilic monomer, and the crosslinking agent.

15 **[59]** Specifically, the surface-modifying solution including the hyaluronate compound, the hydrophilic monomer, and the crosslinking agent is prepared, and the hydrogel contact lens substrate is immersed in the surface-modifying solution. More specifically, the hydrogel contact lens substrate is
20 immersed in the surface-modifying solution in which the hyaluronate compound and the hydrophilic monomer are dissolved to thereby form the hydrophilic surface layer on the surface of the hydrogel contact lens substrate. Here,

the hydrophilic monomer may form the interpenetrating polymer network (IPN) structure with the hyaluronate compound in a process in which the hydrophilic monomer is polymerized through the crosslinking agent to the hydrophilic polymer.

5 Specifically, the hydrophilic surface layer is formed from a mixture including the hyaluronate compound, the hydrophilic monomer, and the crosslinking agent. The hydrophilic polymer formed by the crosslinking of the hydrophilic monomer forms the interpenetrating polymer network (IPN) structure with the

10 hyaluronate compound, which is introduced onto the surface of the substrate, and the physical intermixed layer may be formed between the contact lens substrate and the hydrophilic surface layer. In the present invention, 'introduction' means that the hyaluronate compound and the hydrophilic

15 polymer are formed into a polymer brush through a physical and chemical bond onto the surface of the contact lens, and a binding position of the hyaluronate compound and the hydrophilic polymer has no limitation.

[60] In addition, term 「IPN」 used herein means a state in

20 which at least two crosslinking structures are present in the hydrophilic surface layer, and in one example, the crosslinking structure may be present in a state in which the hyaluronate compound and the hydrophilic polymer formed by

the polymerization of the hydrophilic monomer are entangled with each other, or linked with each other, or in a penetration state thereof. Due to the IPN structure, the hyaluronate compound and the hydrophilic polymer have
5 chemically and physically strong bonding force, which may not be released outside, and further, a contact angle, a water content, etc., may be enhanced to provide excellent wettability, and in addition thereto, physical properties such as an oxygen permeability, Young's modulus, etc., may be
10 enhanced.

[61] Further, the hydrophilic surface layer may include 0.2 to 10 parts by weight of the hydrophilic monomer with regard to 0.05 to 2 parts by weight of the hyaluronate compound. Specifically, the hydrophilic surface layer may include the
15 hyaluronate compound and the hydrophilic monomer at a weight ratio of 0.05 to 2 : 0.2 to 10. That is, it is preferred that the IPN structure is formed at the weight ratio of 0.05 to 2 (hyaluronate compound) : 0.2 to 10 (hydrophilic monomer).

[62] Here, when a content of the hyaluronate compound is
20 less than 0.05 part by weight, an effect in which wettability (hydrophilic property), etc., are enhanced according to use thereof, may not be significant. In addition, when the content of the hyaluronate compound is more than 2 parts by

weight, for example, it may be difficult to form the IPN structure. Further, when a content of the hydrophilic monomer is less than 0.2 part by weight, it may be difficult to form an excellent IPN structure. In addition, when the
5 content of the hydrophilic monomer is more than 10 parts by weight, for example, the effect in which wettability is enhanced, may be reduced.

[63] In consideration of these points, it is preferred that the hydrophilic surface layer includes 0.5 to 5 parts by
10 weight of the hydrophilic monomer with regard to 0.1 to 1 part by weight of the hyaluronate compound.

[64] Further, in the present invention, the 'hydrophilic monomer' and the 'hydrophilic polymer' are not particularly limited as long as they have one or more hydrophilic groups
15 in a molecule. In addition, in the present invention, the 'hydrophilic polymer' means a homopolymer and a copolymer of the hydrophilic monomer. The hydrophilic monomer may be, for example, one or more selected from the group consisting of the hydrophilic acrylic monomer, the hydrophilic silicone-
20 acrylic monomer, etc. According to a preferable exemplary embodiment, the hydrophilic monomer may be selected from the hydrophilic acrylic monomer.

[65] The hydrophilic acrylic monomer may be, for example,

one or more selected from the group consisting of C1-C15 hydroxyalkyl methacrylate substituted with 1 to 3 hydroxyl group(s), C1-C15 hydroxyalkyl acrylate substituted with 1 to 3 hydroxyl group(s), acrylamide, vinyl pyrrolidone, glycerol methacrylate, acrylic acid, methacrylic acid, etc. More specifically, the hydrophilic acrylic monomer may be, for example, one or more selected from the group consisting of 2-hydroxyethyl methacrylate (HEMA), N,N-dimethyl acrylamide (DMA), N-vinyl pyrrolidone (NVP), glycerol monomethacrylate (GMMA), and methacrylic acid (MAA), etc. In addition, the hydrophilic polymer may be the homopolymer of the hydrophilic acrylic monomer as described above, or the copolymer of these hydrophilic acrylic monomers.

[66] The hyaluronate (NaHA) compound is a natural polysaccharide material, and may improve wettability and provide moist wearability. In the present invention, the hyaluronate compound is not particularly limited as long as it includes a sodium hyaluronate component. The sodium hyaluronate compound may be, for example, one or more selected from the group consisting of sodium hyaluronic acid having a sodium salt form of hyaluronic acid, and sodium acetylated hyaluronate in which a hydroxyl group is partially acetylated, etc.

- [67]** Further, the hyaluronate compound may be a polymer having a weight average molecular weight (Mw) ranging from 50,000 to 3,000,000. As described above, when the hyaluronate compound having a high molecular weight is used, it may be favorable to form the IPN structure with the hydrophilic polymer, which is also preferred in view of improvement of physical properties such as wettability, etc., as compared to the hyaluronate compound having a low molecular weight.
- [68]** The surface-modifying solution is a solution at least including the hyaluronate compound and the hydrophilic monomer as described above, and for example, may be an aqueous solution. Specifically, the surface-modifying solution may include the hyaluronate compound, the hydrophilic monomer, the crosslinking agent, and water (distilled water).
- [69]** According to an exemplary embodiment of the present invention, the crosslinking agent is able to form a strong IPN structure through the polymerization reaction together with the hyaluronate compound and the hydrophilic monomer, and may remarkably improve the effect in which wettability (hydrophilic property), etc., are enhanced. The crosslinking agent may be, for example, one or more selected from the

group consisting of ethylene glycol dimethacrylate (EGDMA), diethylene glycol methacrylate (DEGMA), glycerol dimethacrylate (GDMA), divinylbenzene (DVB), and trimethylolpropane trimethacrylate (TMPTMA), etc. The crosslinking agent may have a content of 0.001 to 0.1 mol, and more preferably, 0.02 to 0.05 mol, per 1 mol of the hydrophilic monomer.

[70] It is effective that when the content of the crosslinking agent is within the above-described range since wettability is able to be remarkably improved without deterioration of basic physical properties such as a water content, an oxygen permeability, permeability, etc. When the content of the crosslinking agent is less than 0.02 per 1 mol of the hydrophilic monomer, formation of the IPN structure is not significant, such that a moisture evaporation rate is 160 seconds or less, and accordingly, the effect in which the wettability is enhanced may not be significant. When the content of the crosslinking agent is more than 0.05 per 1 mol of the hydrophilic monomer, the formation of the IPN structure is excessively dense, and accordingly, the effect in which the wettability is enhanced may be reduced.

[71] In addition, the surface-modifying solution may further include an initiator for the polymerization of the

hydrophilic monomer. Here, the initiator is not particularly limited as long as it initiates the polymerization reaction of the hydrophilic monomer. The initiator may be, for example, selected from an azo compound, and specifically, may
5 be, for example, one or more selected from the group consisting of azodiisobutyronitrile (AIBN), 2,2'-azobis(2-amidinopropane)dihydrochloride (ABAH), and 4,4'-azobis(4-cyanovaleric acid), etc.

[72] Further, the initiator is a commercially available
10 water-soluble product, and for example, may be Vazo 56WSP, and Vazo 68WSP, etc., of DuPont Company, but is not limited thereto.

[73] According to an exemplary embodiment, the surface-modifying solution may include 0.05 to 2 wt% of the
15 hyaluronate compound, 0.2 to 10 wt% of the hydrophilic monomer, and 0.001 to 0.5 wt% of the initiator on the basis of a total weight. In addition, when the surface-modifying solution is an aqueous solution, the surface-modifying solution may include 87.5 to 99.5% of water (distilled water)
20 as a residual content.

[74] In the surface-modifying solution, the crosslinking agent may have a content of 0.001 to 0.1 mol, and more preferably, 0.02 to 0.05 mol, per 1 mol of the hydrophilic

monomer.

[75] In regard to the content of each component composing the surface-modifying solution, when the content of the hyaluronate compound is less than 0.05 wt%, the effect in which the wettability (hydrophilic property), etc., are enhanced according to use thereof, may not be significant. In addition, when the content of the hyaluronate compound is more than 2 wt%, for example, the IPN structure may be destroyed. Further, when the content of the hydrophilic monomer is less than 0.2 wt%, it may be difficult to form an excellent IPN structure. In addition, when the content of the hydrophilic monomer is more than 10 wt%, for example, the effect in which the wettability is enhanced, may be reduced. Further, when the content of the initiator is less than 0.001 wt%, it may be difficult to perform the polymerization initiation reaction, and when the content of the initiator is more than 0.5 wt%, a synergy effect according to the over-use may not be large, and the molecular weight of the hydrophilic polymer may be decreased. In consideration of these points, the surface-modifying solution may include 0.1 to 1 wt% of the hyaluronate compound, 0.5 to 5 wt% of the hydrophilic monomer, and 0.005 to 0.2 wt% of the initiator on the basis of a total weight of the solution.

[76] Further, according to an exemplary embodiment of the present invention, the hydrophilic surface layer may be formed through the immersion in the above-described surface-modifying solution, wherein the surface-modifying solution
5 may include 0.5 to 49 wt% of the hyaluronate compound, 50 to 99.45 wt% of the hydrophilic monomer, and 0.05 to 5 wt% of the initiator on the basis of a solid content.

[77] In addition, according to a preferable exemplary embodiment of the present invention, it is preferred that the
10 hydrophilic surface layer (surface modification layer) has a thickness of 40 nm to 2 μm . Here, when the thickness of the hydrophilic surface layer (surface modification layer) is less than 40 nm, hydrophilic property may be low, and accordingly, the effect in which the wettability of the lens
15 surface is enhanced, may not be significant. In addition, when the thickness of the hydrophilic surface layer (surface modification layer) is more than 2 μm , a shape of a surface-modified contact lens may be deformed, or in some cases, the oxygen permeability and optical properties are low, which may
20 have a negative effect on the basic function that is required as the contact lens.

[78]

[79] (3) Swelling of hydrogel contact lens substrate

[80] Meanwhile, according to an exemplary embodiment of the present invention, a step of swelling the hydrogel contact lens substrate may be performed before the surface-modification, i.e., before forming the hydrophilic surface layer by immersion in the surface-modifying solution.

[81] Specifically, according to an exemplary embodiment, the manufacturing method for the hydrogel contact lens according to the present invention may include: the step of preparing the hydrogel contact lens substrate; and the step of swelling the hydrogel contact lens substrate; and the step of immersing the swollen hydrogel contact lens substrate in the surface-modifying solution including the hyaluronate compound, the hydrophilic monomer, and the crosslinking agent.

[82] The swelling may be performed by immersing the hydrogel contact lens substrate in an alcohol solution. As a specific example, the swelling may be performed by immersing the hydrogel contact lens substrate in the alcohol solution such as 20 to 60 wt% of aqueous ethanol solution, etc., for 10 minutes to 3 hours, but the swelling is not limited thereto. When the swelling is further performed, attachment force between the hydrogel contact lens substrate and the hydrophilic surface layer is improved, and the hydrophilic surface layer having the IPN structure may be effectively

introduced and formed onto the surface of the hydrogel contact lens substrate.

[83] According to an exemplary embodiment of the present invention, the swollen hydrogel contact lens substrate may be
5 immersed in the surface-modifying solution for at least 1 hour. Preferably, it is effective that time for immersion may be 1 to 10 hours, and more preferably, 1 to 5 hours. By immersing the swollen hydrogel contact lens substrate for the above-described time, the physical intermixed layer may be
10 formed with a dried thickness of 20 nm or more between the hydrogel contact lens substrate and the hydrophilic surface layer. When the physical intermixed layer is formed with the dried thickness of 20 nm or more, it is possible to form a more uniform and durable IPN structure, and to effectively
15 improve wettability.

[84] In addition, according to an exemplary embodiment of the present invention, after the surface modification is performed, i.e., after the hydrophilic surface layer is formed by immersing the hydrogel contact lens substrate in
20 the surface-modifying solution, a washing process, a sterilization process, etc., may be further performed at least once. Here, the washing process may be performed by impregnation with deionized water. The sterilization process

may be performed by using a high pressure steam sterilization method, etc.

[85] According to the present invention as described above, the physical intermixed layer is formed on the surface of the contact lens, and at the same time, the hyaluronate and the hydrophilic polymer are introduced while having the IPN structure, such that excellent wettability is obtained while satisfying the basic physical properties required as the hydrogel contact lens. In addition, some of the physical properties are more improved as compared to those of the related art.

[86]

[87] Hereinafter, Examples and Comparative Examples are provided. The following Examples are provided to assist in the understanding of the present invention, but should not be construed to limit the technical scope of the present invention.

[88] In addition, a method of measuring each physical property is described as follows.

20 **[89]**

[90] 1. Measurement of water content

[91] A water content (%) was evaluated by measuring a weight of a dried contact lens and a weight of a swollen contact

lens after impregnating the contact lens with 0.9 wt% of sodium chloride (NaCl) aqueous solution for 24 hours, and then calculating the water content according to Equation below. That is, the water content was evaluated as a ratio
5 of the weight of the swollen contact lens (W_{swell}) to the weight of the dried contact lens (W_{dry}).

[92] $\text{Water content (\%)} = (W_{\text{swell}} - W_{\text{dry}}) / W_{\text{dry}} \times 100$

[93]

[94] 2. Measurement of oxygen permeability (Dk)

10 **[95]** In order to evaluate the oxygen permeability (Dk), a specimen was impregnated with a PBS solution at room temperature for 24 hours, and then, kept at $35^{\circ}\text{C} \pm 0.5^{\circ}\text{C}$ which was the same as an eye temperature for at least 2 hours. In addition, the specimen was put into an incubator, and the
15 oxygen permeability (Dk) was measured by using an oxygen permeability measurement device [Model 201T, Rehder Development Co., West Lafayette, USA] in a lens moisture saturation state under an atmosphere of temperature of $35^{\circ}\text{C} \pm 0.5^{\circ}\text{C}$ and humidity of 98%.

20 **[96]**

[97] 3. Measurement of contact angle

[98] A contact angle ($^{\circ}$) was measured by a captive air bubble method using a contact angle measurement system (DSA

100).

[99]

[100] 4. Measurement of Young's modulus

[101] Young's modulus (Mpa) was measured by Young's modulus
5 measurement method using a universal test machine.

[102]

**[103] 5. Hydrophilic surface layer stability (Rubbing
stability)**

[104] The hydrogel contact lens was washed by 30 times
10 rubbing with an index finger using Renu-Fresh (Bausch Lomb
Company) lens cleaning solution, and immersed in a clean
cleansing solution for 1 hour. The washing process was
repeated ten times, and then, the content of hyaluronate of
the contact lens was measured by using HPLC (Agilent 1260
15 HPLC, C18 column, mobile phase: 0.3X PBS, acetonitrile), and
was shown as a content (g) of sodium hyaluronate per the lens
weight.

[105]

**[106] 6. Measurement of water vapor permeability (water
20 evaporation rate)**

[107] The hydrogel contact lens was swollen in 0.9 wt% sodium
chloride aqueous solution for 5 hours, and then, excess water
remaining on the lens surface layer was removed by a Whatman

Filter paper No.1. The lens from which water was removed was fixed to a polypropylene convex mold, and placed on an electronic scale installed in a thermo-hygrostat at a temperature of 35°C and 30% relative humidity. The weight of the lens was measured every 10 seconds, and time at which the water content of the lens was reduced by 10% was repeatedly measured five times, and then, an average value thereof was obtained.

[108]

10 **[109] 7. Measurement of thickness of physical intermixed layer**

[110] The manufactured lens specimen was subjected to XPS (X-ray photoelectron spectroscopy) analysis. ESCALAB 220i XL (Thermo VG Scientific) was used as analysis equipment, and a magnesium X-ray source ($h\nu = 1253.6\text{eV}$) in an ultra vacuum state of 10^{-7}Pa was used, and photoelectrons emitted at an angle of 45 degrees on the surface under condition of 15 kV and 25W, were detected. At the same time, thickness profile was obtained through ion sputtering, and specifically, sputtering was performed with Ar^+ ions in 1 kV voltage at an incident angle of 70 degrees with regard to a vertical direction of the sample. Ar^+ ion sputtering was performed at 1 minute interval, and Cls XPS spectrum was obtained at 1

minute interval, and then, surface composition was calculated according to each functional group. A section area in which the surface composition of the polymer forming the hydrophilic surface layer was changed from 95 wt% to 5wt%,
5 was calculated as the thickness of the physical intermixed layer.

[111]

[112] [Manufacturing Example 1]

[113] < Manufacture of acrylate-based hydrogel contact lens
10 substrate >

[114] 98 g of 2-hydroxyethyl methacrylate (HEMA) and 1.6 g of methacrylic acid (MAA) were mixed as the hydrophilic acrylate monomer, and then, 0.4 g of ethylene glycol dimethacrylate (EGDMA) as the crosslinking agent, and 0.5 g of
15 azodiisobutyronitrile (AIBN) as the initiator were added thereto, followed by stirring for 30 minutes, thereby preparing a mixed solution.

[115] The prepared mixed solution was injected into a female mold for cast molding, and a male mold was assembled in the
20 female mold. Next, the assembled mold was put into a heat oven maintained at 100°C, and polymerized for 2 hours, and then, the mold was separated to obtain a lens. The obtained lens was put in an aqueous solution including sodium

bicarbonate, followed by hydration, thereby manufacturing an acrylate hydrogel contact lens. (Manufacture of acrylate-based hydrogel contact lens substrate) Physical properties (water content, Young's modulus, and contact angle) of the above-manufactured acrylate hydrogel contact lens (acrylate-based hydrogel contact lens substrate) were evaluated, and results thereof were shown in [Table 1] below.

[116] [Manufacturing Example 2]

[117] < Manufacture of silicone-based hydrogel contact lens substrate >

[118] 50 g of 3-methacryloxy-2-(hydroxypropyloxy)propylbis(trimethylsiloxy)methylsilane (SIGMA, Gelest Company), 20 g of N,N-dimethyl acrylamide (DMA), and 20 g of N-vinyl pyrrolidone (NVP) were mixed as the silicone acrylate monomer, and then, 0.4 g of ethylene glycol dimethacrylate (EGDMA) as the crosslinking agent, and 0.5 g of azodiisobutyronitrile (AIBN) as the initiator were added thereto, followed by stirring for 30 minutes, thereby preparing a mixed solution.

[119] The prepared mixed solution was injected into a female mold for cast molding, and a male mold was assembled in the female mold. Next, the assembled mold was put into a heat oven maintained at 100°C, and polymerized for 2 hours, and

then, the mold was separated to obtain a lens. The obtained lens was sequentially put in 70% aqueous ethanol solution and deionized water, followed by hydration, thereby manufacturing a silicone hydrogel contact lens. (Manufacture of silicone-based hydrogel contact lens substrate)

[120] Physical properties (water content, Young's modulus, and contact angle) of the above-manufactured silicone hydrogel contact lens (silicone-based hydrogel contact lens substrate) were evaluated, and results thereof were shown in [Table 1] below.

[121] [Table 1] Physical properties of contact lens substrate

[122]

	Water content (%)	Young's modulus (MPa)	Contact angle (°)
Manufacturing Example 1	55	0.64	34
Manufacturing Example 2	40	1.20	49

[123] [Example 1]

[124] As shown in [Table 2] below, the silicone hydrogel contact lens substrate manufactured in Manufacturing Example 2 was immersed in 40 wt% aqueous ethanol solution, and swollen for 1 hour. Then, the contact lens was immersed in

the surface-modifying solution, and reacted at 80°C for 1 hour, such that the surface was modified (the hydrophilic surface layer was formed on the surface of the substrate). As the surface-modifying solution, the hyaluronate compound, the hydrophilic monomer, the crosslinking agent, and the water-soluble initiator, were mixed in distilled water to be used.

[125] Then, after the modification was completed, the lens was washed for 2 hours with 80°C deionized water, and sterilized by a high pressure steam sterilization method at 121°C for 20 minutes, thereby finally manufacturing the surface-modified silicone hydrogel contact lens. As described above, the physical properties of the obtained silicone hydrogel contact lens were evaluated, and results thereof were shown in [Table 3] below.

[126] [Examples 2 to 3]

[127] As shown in [Table 2] below, the silicone hydrogel contact lens was manufactured by the same method as Example 1 except that the content of the crosslinking agent was changed in the surface-modifying solution. The physical properties of the obtained product were evaluated, and results thereof were shown in [Table 3] below.

[128] [Example 4]

[129] As shown in [Table 2] below, the acrylate-based hydrogel contact lens substrate manufactured in Manufacturing Example 1 was immersed in 40 wt% aqueous ethanol solution, and swollen for 1 hour. Then, the contact lens was immersed
5 in the surface-modifying solution, and reacted at 80°C for 1 hour, such that the surface was modified (the hydrophilic surface layer was formed on the surface of the substrate). As the surface-modifying solution, the hyaluronate compound, the hydrophilic acrylate monomer, and the water-soluble
10 initiator, were mixed in distilled water to be used.

[130] Then, after the modification was completed, the lens was washed for 2 hours with 80°C deionized water, and sterilized by a high pressure steam sterilization method at 121°C for 20 minutes, thereby finally manufacturing the
15 surface-modified acrylate-based hydrogel contact lens. As described above, the physical properties of the obtained acrylate-based hydrogel contact lens were evaluated, and results thereof were shown in [Table 3] below.

[131] [Examples 5 to 6]

20 **[132]** As shown in [Table 2] below, the silicone hydrogel contact lens was manufactured by the same method as Example 1 except that the time for immersion in the surface-modifying solution was changed. Physical properties of the obtained

product were evaluated, and results thereof were shown in [Table 3] below.

[133] [Examples 7 to 8]

[134] As shown in [Table 2] below, the silicone hydrogel
5 contact lens was manufactured by the same method as Example 1 except that the hydrophilic monomer was changed in the surface-modifying solution. Physical properties of the obtained product were evaluated, and results thereof were shown in [Table 3] below.

10 **[135]** [Examples 9 to 10]

[136] As shown in [Table 2] below, the acrylate-based hydrogel contact lens was manufactured by the same method as Example 4 except that the hydrophilic monomer was changed in the surface-modifying solution. Physical properties of the
15 obtained product were evaluated, and results thereof were shown in [Table 3] below.

[137]

[138] [Comparative Example 1]

[139] The acrylate-based hydrogel contact lens substrate
20 manufactured in Manufacturing Example 1 was used as a specimen of Comparative Example 1. That is, the specimen of Comparative Example 1 was the acrylate hydrogel contact lens before the surface modification.

[140] [Comparative Example 2]

[141] The silicone hydrogel contact lens substrate manufactured in Manufacturing Example 2 was used as the specimen of Comparative Example 2. That is, the specimen of
5 Comparative Example 2 was the silicone hydrogel contact lens before the surface modification.

[142] [Comparative Example 3]

[143] As shown in [Table 2] below, the silicone hydrogel contact lens substrate manufactured in Manufacturing Example
10 2 was immersed in 40 wt% aqueous ethanol solution, and swollen for 1 hour. Then, the contact lens was immersed in the surface-modifying solution, and reacted at 80°C for 1 hour, such that the surface was modified (the hydrophilic surface layer was formed on the surface of the substrate).
15 As the surface-modifying solution, the hyaluronate compound was mixed in distilled water to be used.

[144] Then, after the modification was completed, the lens was washed for 2 hours with 80°C deionized water, and sterilized by a high pressure steam sterilization method at
20 121°C for 20 minutes, thereby finally manufacturing the surface-modified silicone hydrogel contact lens. As described above, the physical properties of the obtained silicone hydrogel contact lens were evaluated, and results

thereof were shown in [Table 3] below.

[145] [Comparative Examples 4 to 5]

[146] As shown in [Table 2] below, the silicone hydrogel contact lens was manufactured by the same method as Example 1
 5 except that the content of the crosslinking agent was changed in the surface-modifying solution. Physical properties of the obtained product were evaluated, and results thereof were shown in [Table 3] below.

[147] [Comparative Example 6]

10 **[148]** As shown in [Table 2] below, the silicone hydrogel contact lens was manufactured by the same method as Example 1 except that the time for immersion in the surface-modifying solution was changed. Physical properties of the obtained product were evaluated, and results thereof were shown in
 15 [Table 3] below.

[149]

[150] [Table 2]

[151]

	Composition (weight ratio) of surface- modifying	Crosslinki ng agent (mol)	Time for immersion in ethanol	Time for immersion in surface- modifying	Substrat e

	solution			solution	
Example 1	NVP (1), NaHA (0.2), Vazo 56WSP (0.01), Distilled water (98.75)	GDMA 0.022	1 hour	1 hour	Silicone
Example 2	NVP (1), NaHA (0.2), Vazo 56WSP (0.01), Distilled water (98.73)	GDMA 0.034	1 hour	1 hour	Silicone
Example 3	NVP (1), NaHA (0.2), Vazo 56WSP (0.01), Distilled water (98.715)	GDMA 0.042	1 hour	1 hour	Silicone
Example 4	NVP (1), NaHA (0.2), Vazo 56WSP (0.01), Distilled water (98.79)	GDMA 0.022	1 hour	1 hour	Acrylate
Example 5	NVP (1), NaHA	GDMA 0.022	1 hour	2 hour	Acrylate

	(0.2), Vazo 56WSP (0.01), Distilled water (98.79)				
Example 6	NVP (1), NaHA (0.2), Vazo 56WSP (0.01), Distilled water (98.79)	GDMA 0.022	1 hour	4 hour	Acrylate
Example 7	HEMA (1), NaHA (0.2), Vazo 56WSP (0.01), Distilled water (98.75)	GDMA 0.026	1 hour	1 hour	Silicone
Example 8	GMMA (1), NaHA (0.2), Vazo 56WSP (0.01), Distilled water (98.75)	GDMA 0.040	1 hour	1 hour	Silicone
Example 9	HEMA (1), NaHA (0.2),	GDMA 0.026	1 hour	1 hour	Acrylate

	Vazo 56WSP (0.01), Distilled water (98.75)				
Example 10	GMMA (1), NaHA (0.2), Vazo 56WSP (0.01), Distilled water (98.75)	GDMA 0.040	1 hour	1 hour	Acrylate
Comparative Example 1	Before surface- modification (Manufacturin g Example 1)	-	-	-	Acrylate
Comparative Example 2	Before surface- modification (Manufacturin g Example 2)	-	-	-	Silicone
Comparative Example 3	NaHA (0.2), Distilled water (98.79)	-	1 hour	1 hour	Silicone

Comparative Example 4	NVP (1), NaHA (0.2), Vazo 56WSP (0.01), Distilled water (98.76)	GDMA 0.017	1 hour	1 hour	Silicone
Comparative Example 5	NVP (1), NaHA (0.2), Vazo 56WSP (0.01), Distilled water (98.70)	GDMA 0.051	1 hour	1 hour	Silicone
Comparative Example 6	NVP (1), NaHA (0.2), Vazo 56WSP (0.01), Distilled water (98.79)	GDMA 0.017	1 hour	0.5 hour	Acrylate
- NVP: N-vinyl pyrrolidone - GDMA: glycerol dimethacrylate - NaHA: sodium hyaluronate, weight average molecular weight 1.2 million - Vazo 56WSP: water-soluble thermal initiator (DuPont) - Content of crosslinking agent: A molar ratio of crosslinking agent added per 1 mole of hydrophilic monomer					

[153] [Table 3]

[154]

	Water conten t (%)	Oxygen permeab ility (Dk)	Young 's modul us (MPa)	Cont act angl e (°)	Stabil ity of hydrop hilic surfac e layer (NaHA mg/g)	Moistu re evapor ation rate (sec)	Thick ness of surfa ce layer (μm)	Dried thickn ess of physic al interm ixed layer (nm)
Example 1	42	108	0.76	32	0.54	209	1.30	55
Example 2	43	109	0.75	32	0.71	215	1.25	58
Example 3	44	110	0.77	30	0.87	211	1.32	53
Example 4	57	23	0.50	28	0.56	192	1.54	60
Example 5	58	25	0.47	26	0.67	215	1.87	85
Example 6	60	28	0.42	23	0.78	240	2.10	102

Example 7	44	110	0.75	32	0.53	210	1.25	45
Example 8	45	111	0.71	32	0.83	208	1.24	79
Example 9	58	25	0.45	28	0.64	206	1.52	59
Example 10	57	27	0.43	26	0.89	220	1.75	88
Compara tive Example 1	55	22	0.64	34	-	80	-	-
Compara tive Example 2	40	110	1.20	49	-	60	-	-
Compara tive Example 3	40	110	0.79	32	0.02	180	0.57	10
Compara tive Example	42	110	0.77	35	0.25	160	1.11	54

4								
Comparative Example 5	40	110	0.78	37	0.75	170	1.25	55
Comparative Example 6	58	25	0.70	45	0.21	198	0.78	16

[155] As shown in [Table 3] above, it could be appreciated that the contact angle, the water content, the Young's modulus, and the oxygen permeability of the lens specimens (after the surface modification) according to the respective

5 Examples were generally excellent as compared to the lens specimens (before the surface modification) according to the respective Comparative Examples. In addition, it could be appreciated that the moisture evaporation rate, the thickness of the hydrophilic surface layer, and the thickness of the

10 physical intermixed layer were also excellent.

[156] It is determined that these characteristics were shown in the specimens according to the respective Examples since the sodium hyaluronate and the hydrophilic acrylic polymer formed the hydrophilic surface layer (surface modification

layer) with the interpenetrating polymer network (IPN) structure on the contact lens surface. In addition, it could be appreciated that when the crosslinking agent had the specific content, remarkable effect was obtained.

5 [157] In addition, it could be appreciated that as the time for immersion in the surface-modifying solution was increased, the thickness of the physical intermixed layer was thickened, and accordingly, the Young's modulus was reduced, which increased a soft property, such that wearability of the
10 contact lens was improved.

[158] As shown in Comparative Example 6, it could be appreciated that when the time for immersion in the surface-modifying solution was less than 1 hour, the thickness of the physical intermixed layer was less than 20 nm, and the
15 formation of the IPN structure was also insignificant, such that the thickness of the hydrophilic surface layer was also thin, which reduced wettability.

[159] The attached FIGS. 1 and 2 are Cryo-SEM images of cross sections of the silicone hydrogel contact lenses according to
20 an exemplary embodiment of the present invention, and FIGS. 3 and 4 are SEM images of the surface and the cross section of the silicone hydrogel contact lenses according to an exemplary embodiment of the present invention.

[160] As shown in Tables 1 to 4, it could be confirmed that the sodium hyaluronate and the hydrophilic acrylic polymer formed the hydrophilic surface layer (surface modification layer) with the interpenetrating polymer network (IPN) structure on the contact lens surface.

[161] As confirmed in the above-described experimental Examples, it could be confirmed that when not only the surface of the acrylate-based hydrogel contact lens but also the surface of the silicone-based hydrogel contact lens were formed with the hydrophilic surface layer having the IPN structure and the physical intermixed layer, wettability of the lens surface was remarkably increased, and general physical properties such as the water content, the oxygen permeability, the Young's modulus, etc., were also improved.

[162]

What is claimed is:

1. A hydrogel contact lens comprising:

a hydrogel contact lens substrate; and

a hydrophilic surface layer having an interpenetrating polymer network (IPN) structure on the hydrogel contact lens substrate,

wherein a physical intermixed layer with the hydrophilic surface layer is formed in the contact lens substrate to have a thickness of 20 nm or more, and

wherein the hydrophilic surface layer is formed from a mixture including a hyaluronate compound, a hydrophilic monomer, and a crosslinking agent having a content of 0.02 to 0.05 mol per 1 mol of the hydrophilic monomer.

2. The hydrogel contact lens of claim 1, wherein the mixture includes 0.2 to 10 parts by weight of the hydrophilic monomer with regard to 0.05 to 2 parts by weight of the hyaluronate compound.

3. The hydrogel contact lens of claim 1, wherein the hyaluronate compound is one or more selected from the group consisting of sodium hyaluronic acid and sodium acetylated hyaluronate.

4. The hydrogel contact lens of claim 1, wherein the hyaluronate compound has a weight average molecular weight (Mw) of 50,000 to 3,000,000.

5. The hydrogel contact lens of claim 1, wherein the crosslinking agent is one or two or more selected from the group consisting of ethylene glycol dimethacrylate (EGDMA), diethylene glycol methacrylate (DEGMA), glycerol dimethacrylate (GDMA), divinylbenzene (DVB), and trimethylolpropane trimethacrylate (TMPTMA).

6. A manufacturing method for a hydrogel contact lens comprising:

a first step of preparing a hydrogel contact lens substrate;

swelling the hydrogel contact lens substrate by immersing the hydrogel contact lens substrate in an alcohol solution; and

a second step of immersing the hydrogel contact lens substrate in a surface-modifying solution including a hyaluronate compound, a hydrophilic monomer, and a crosslinking agent for at least 1 hour,

wherein the surface-modifying solution includes 0.05 to 2 wt% of the hyaluronate compound, 0.2 to 10 wt% of the hydrophilic monomer, and 0.001 to 0.5 wt% of an initiator, and a residual content of water, and the crosslinking agent has a content of 0.02 to 0.05 mol per 1 mol of the hydrophilic monomer.

1/2

FIG. 1


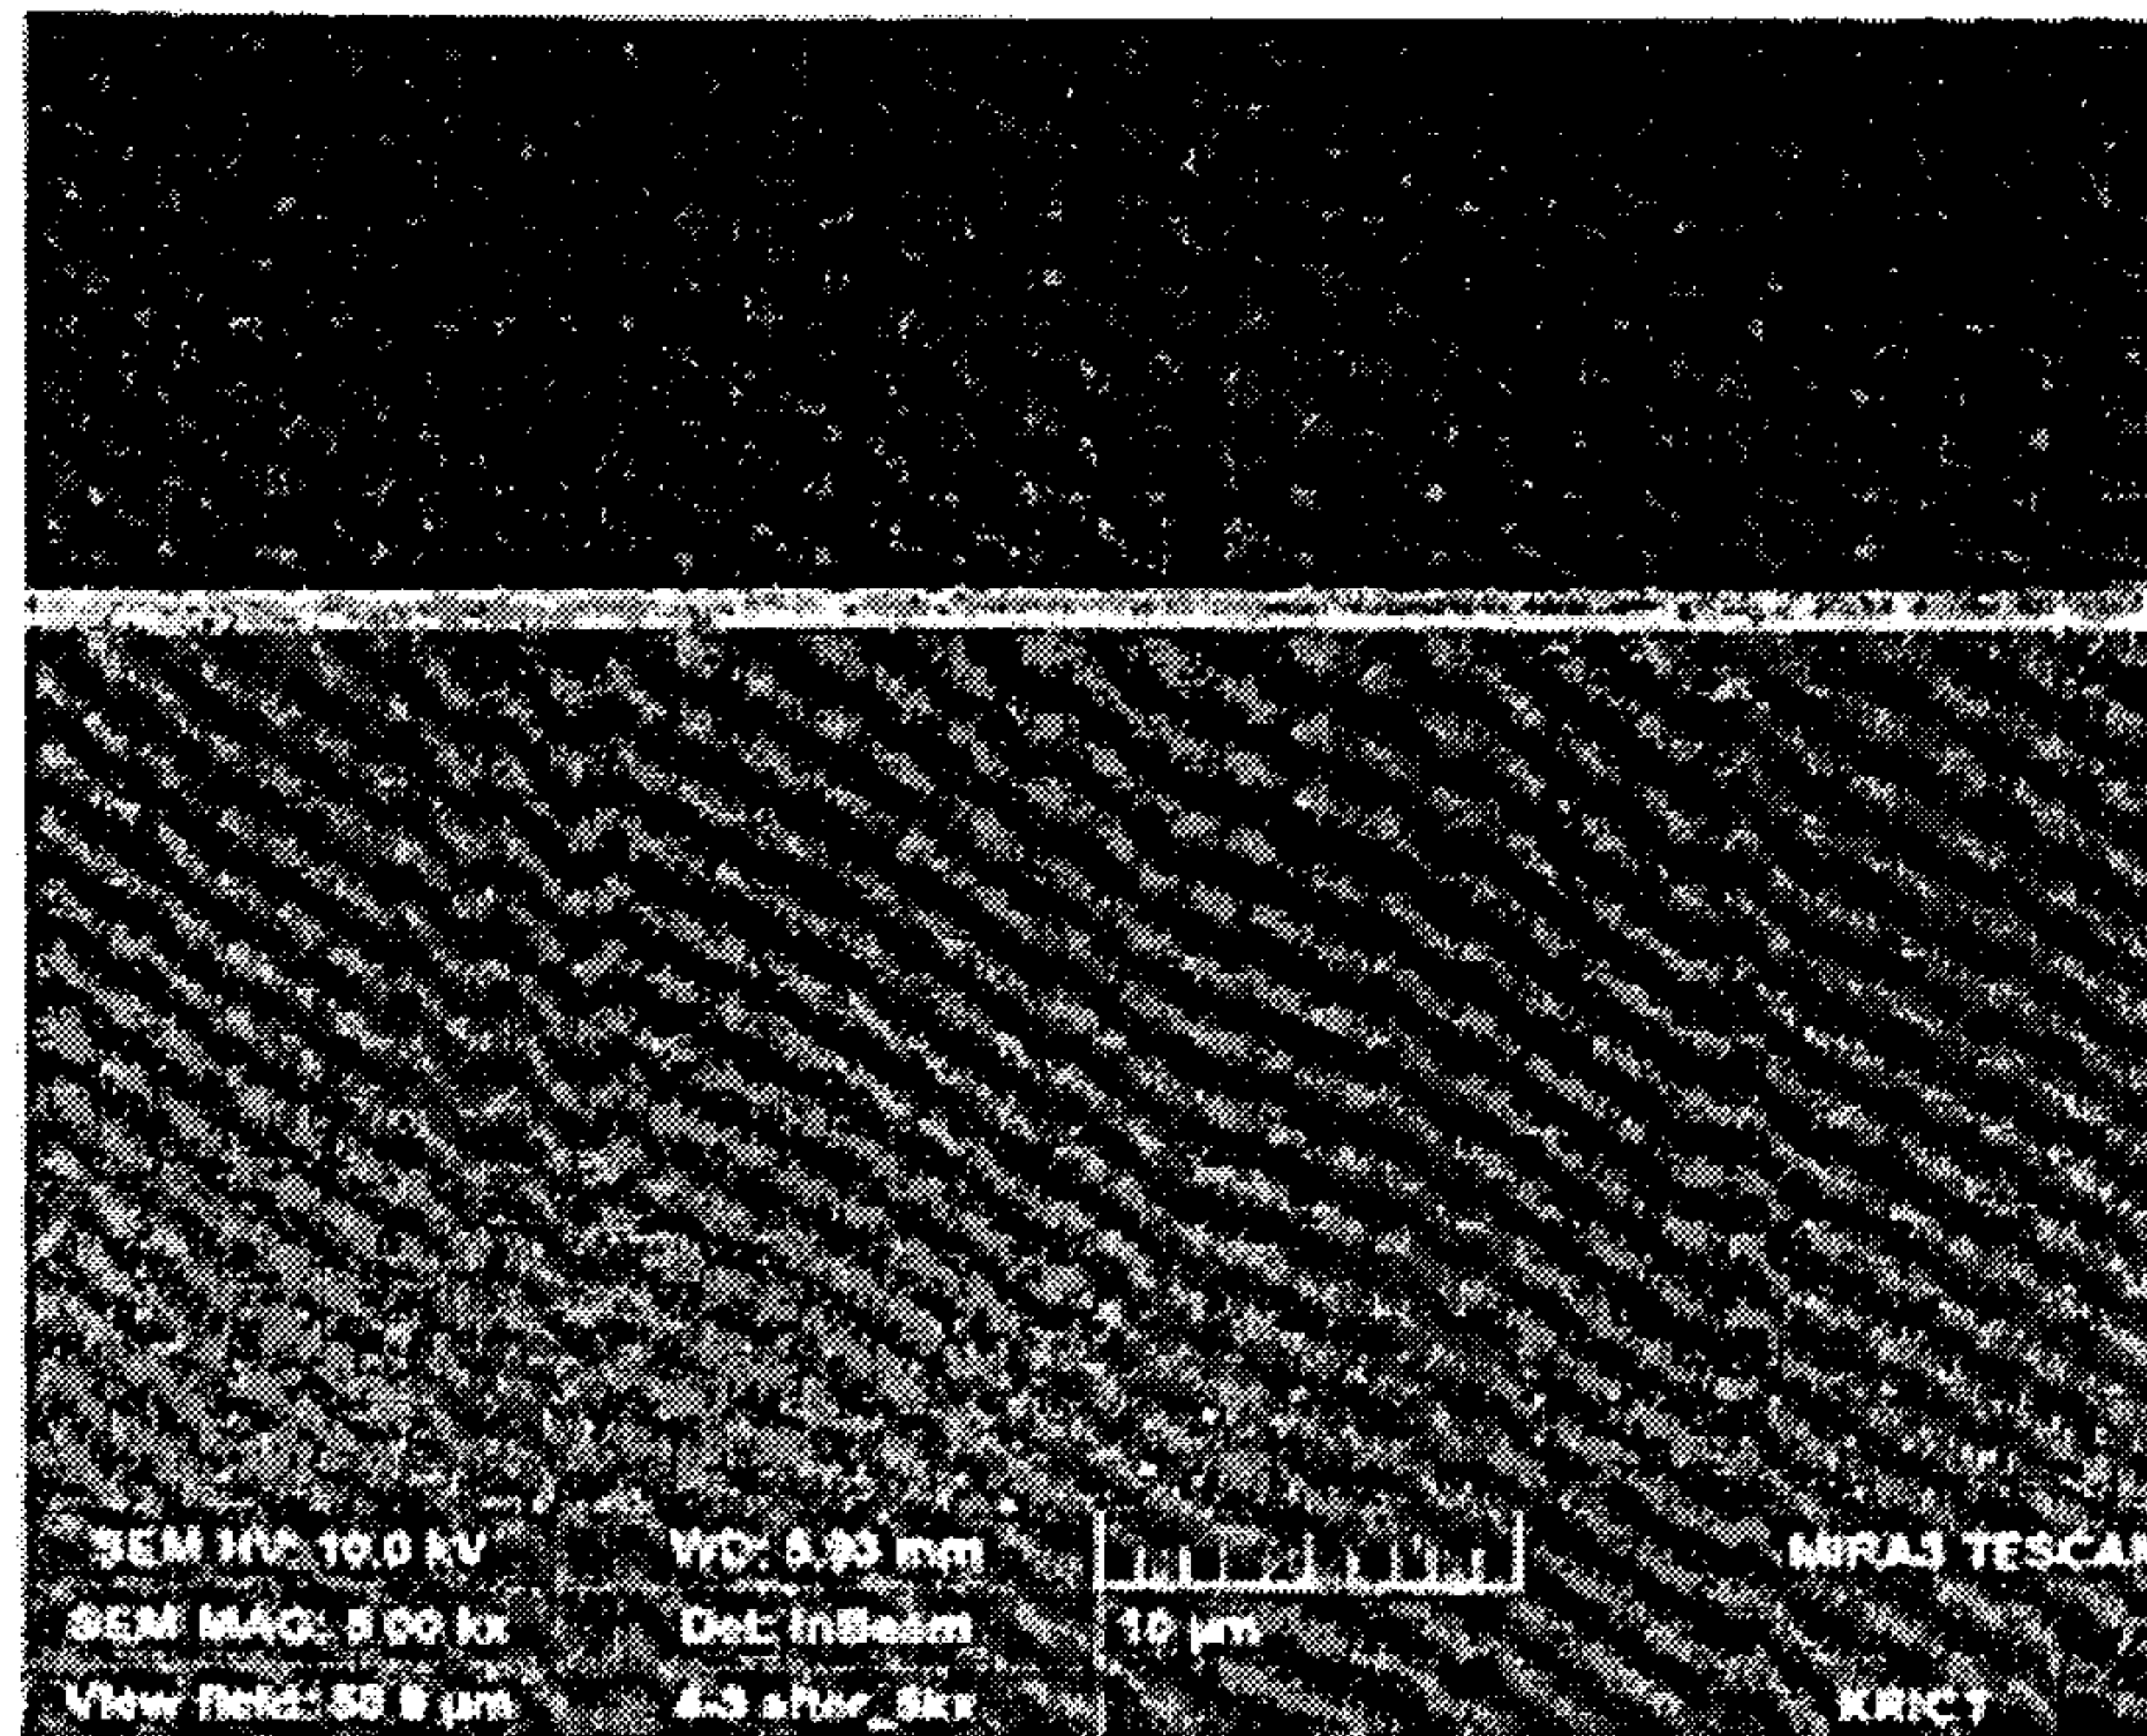


FIG. 2

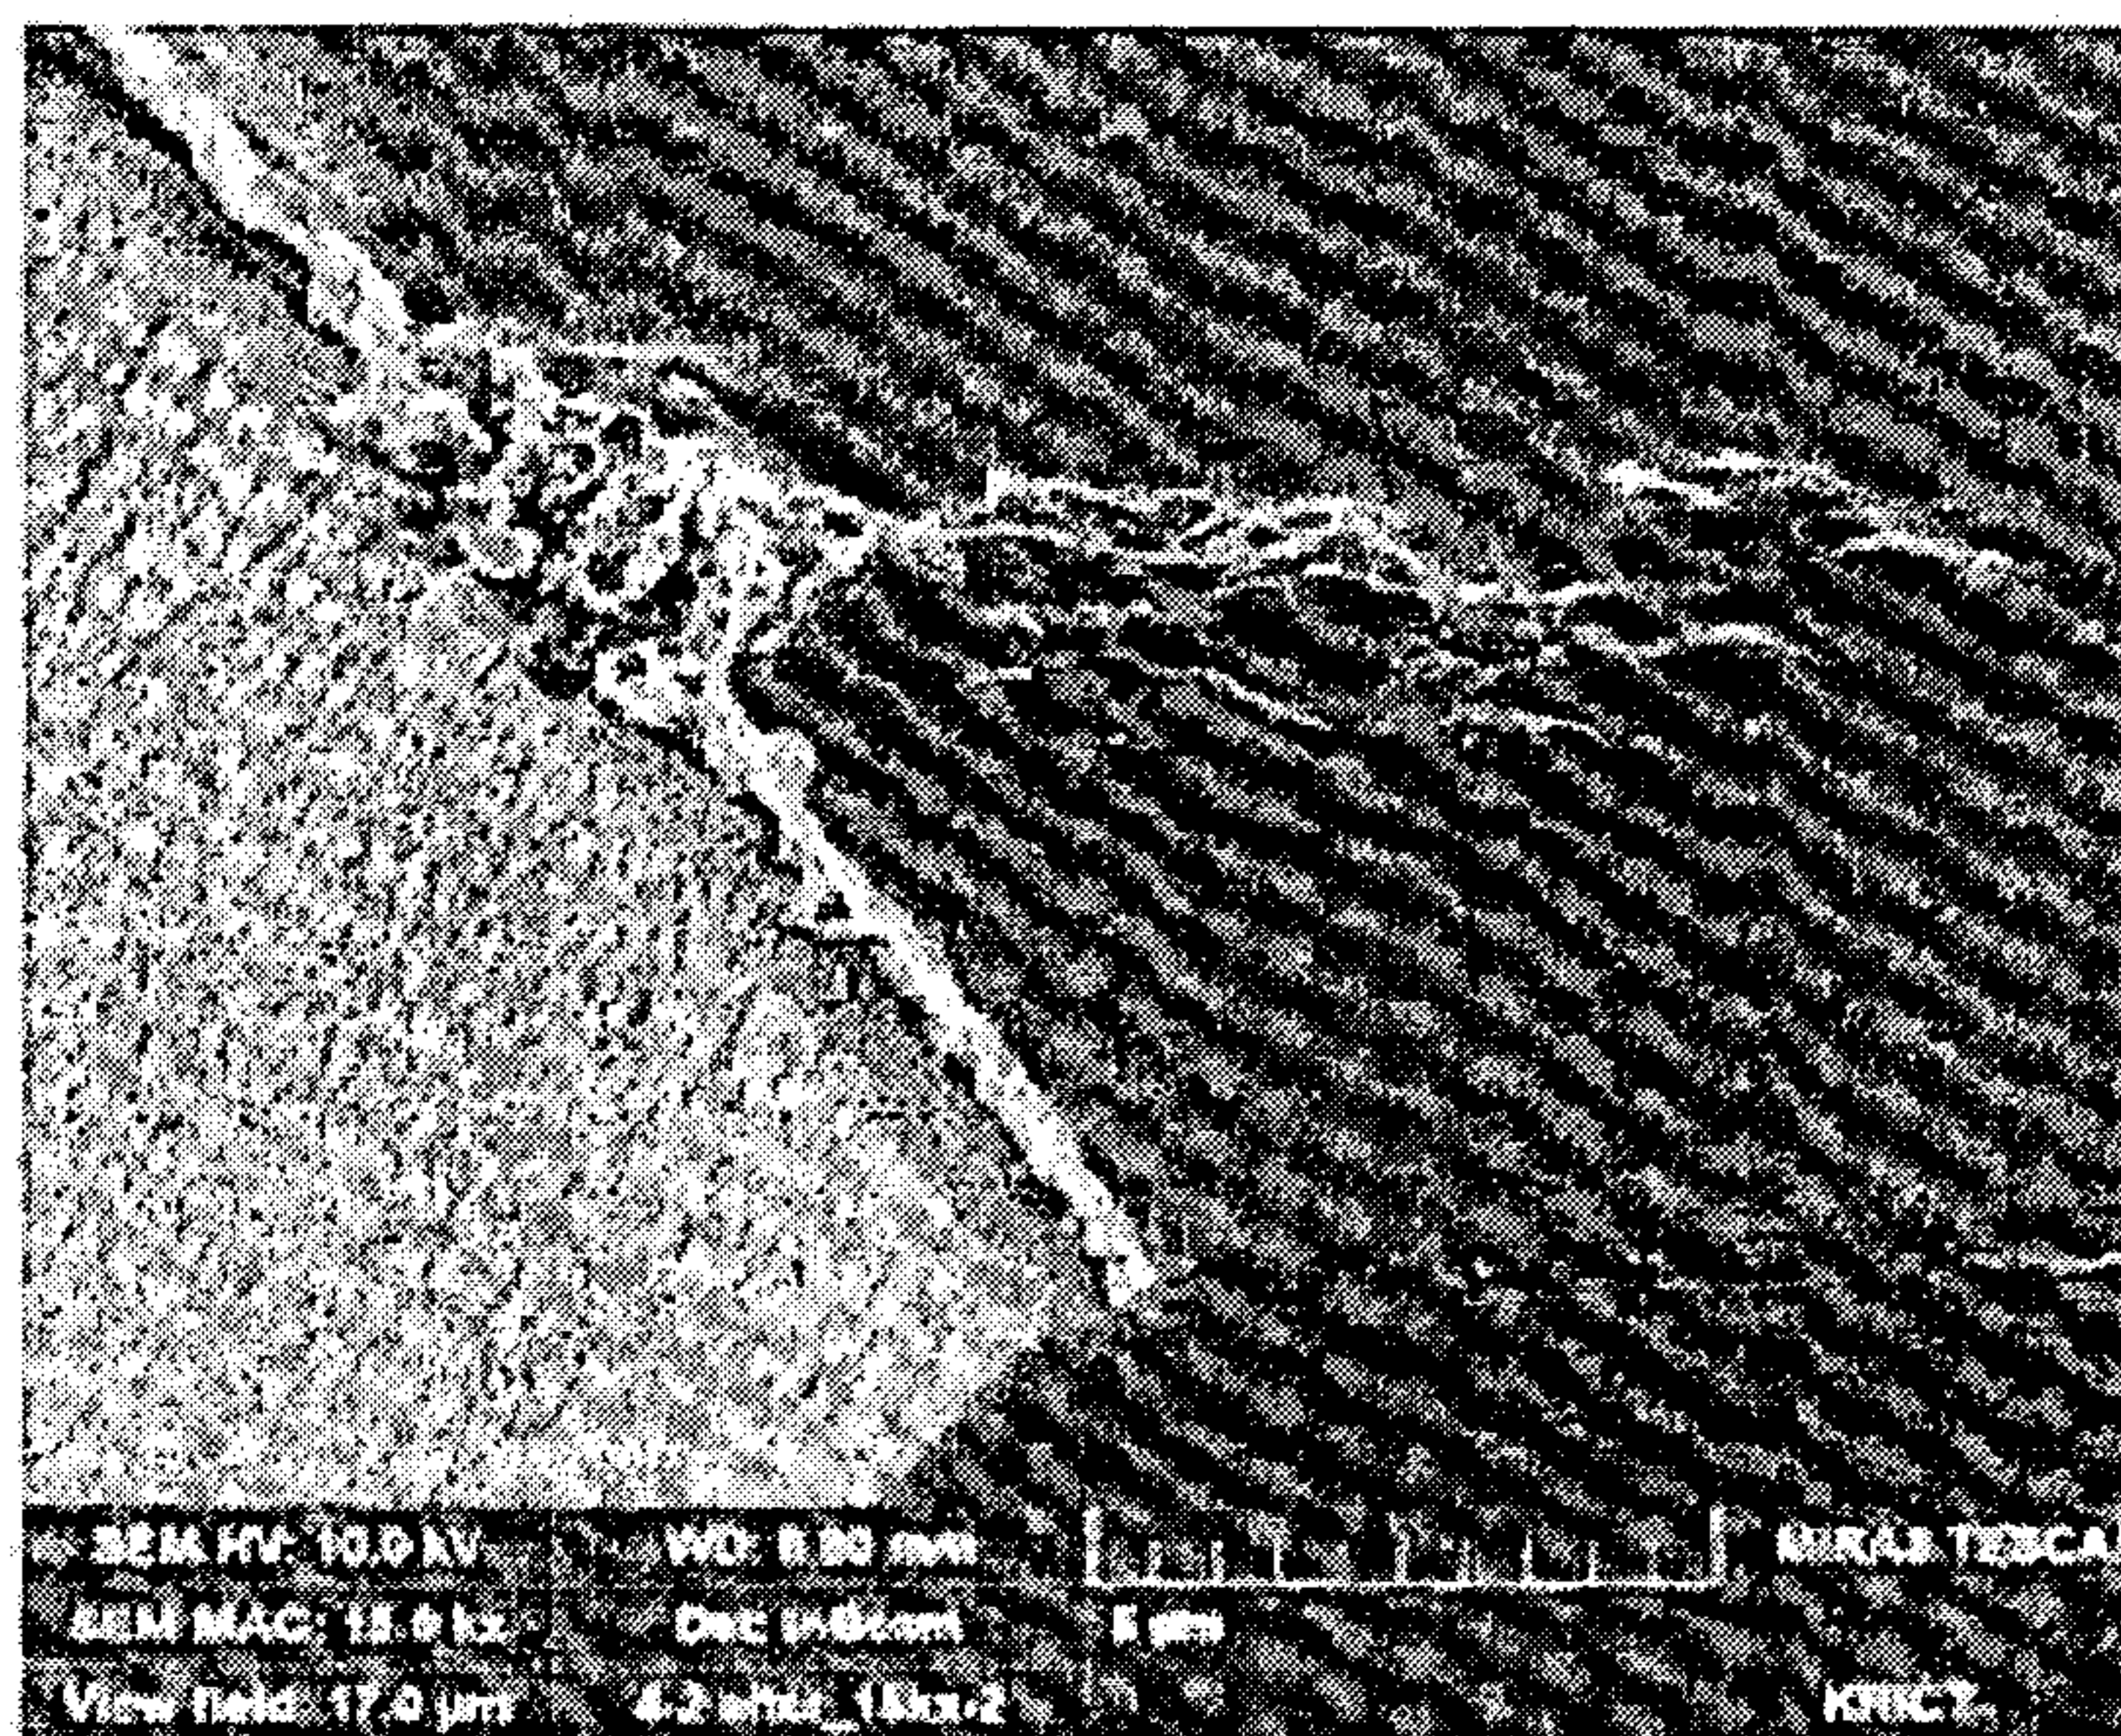

2/2

FIG. 3

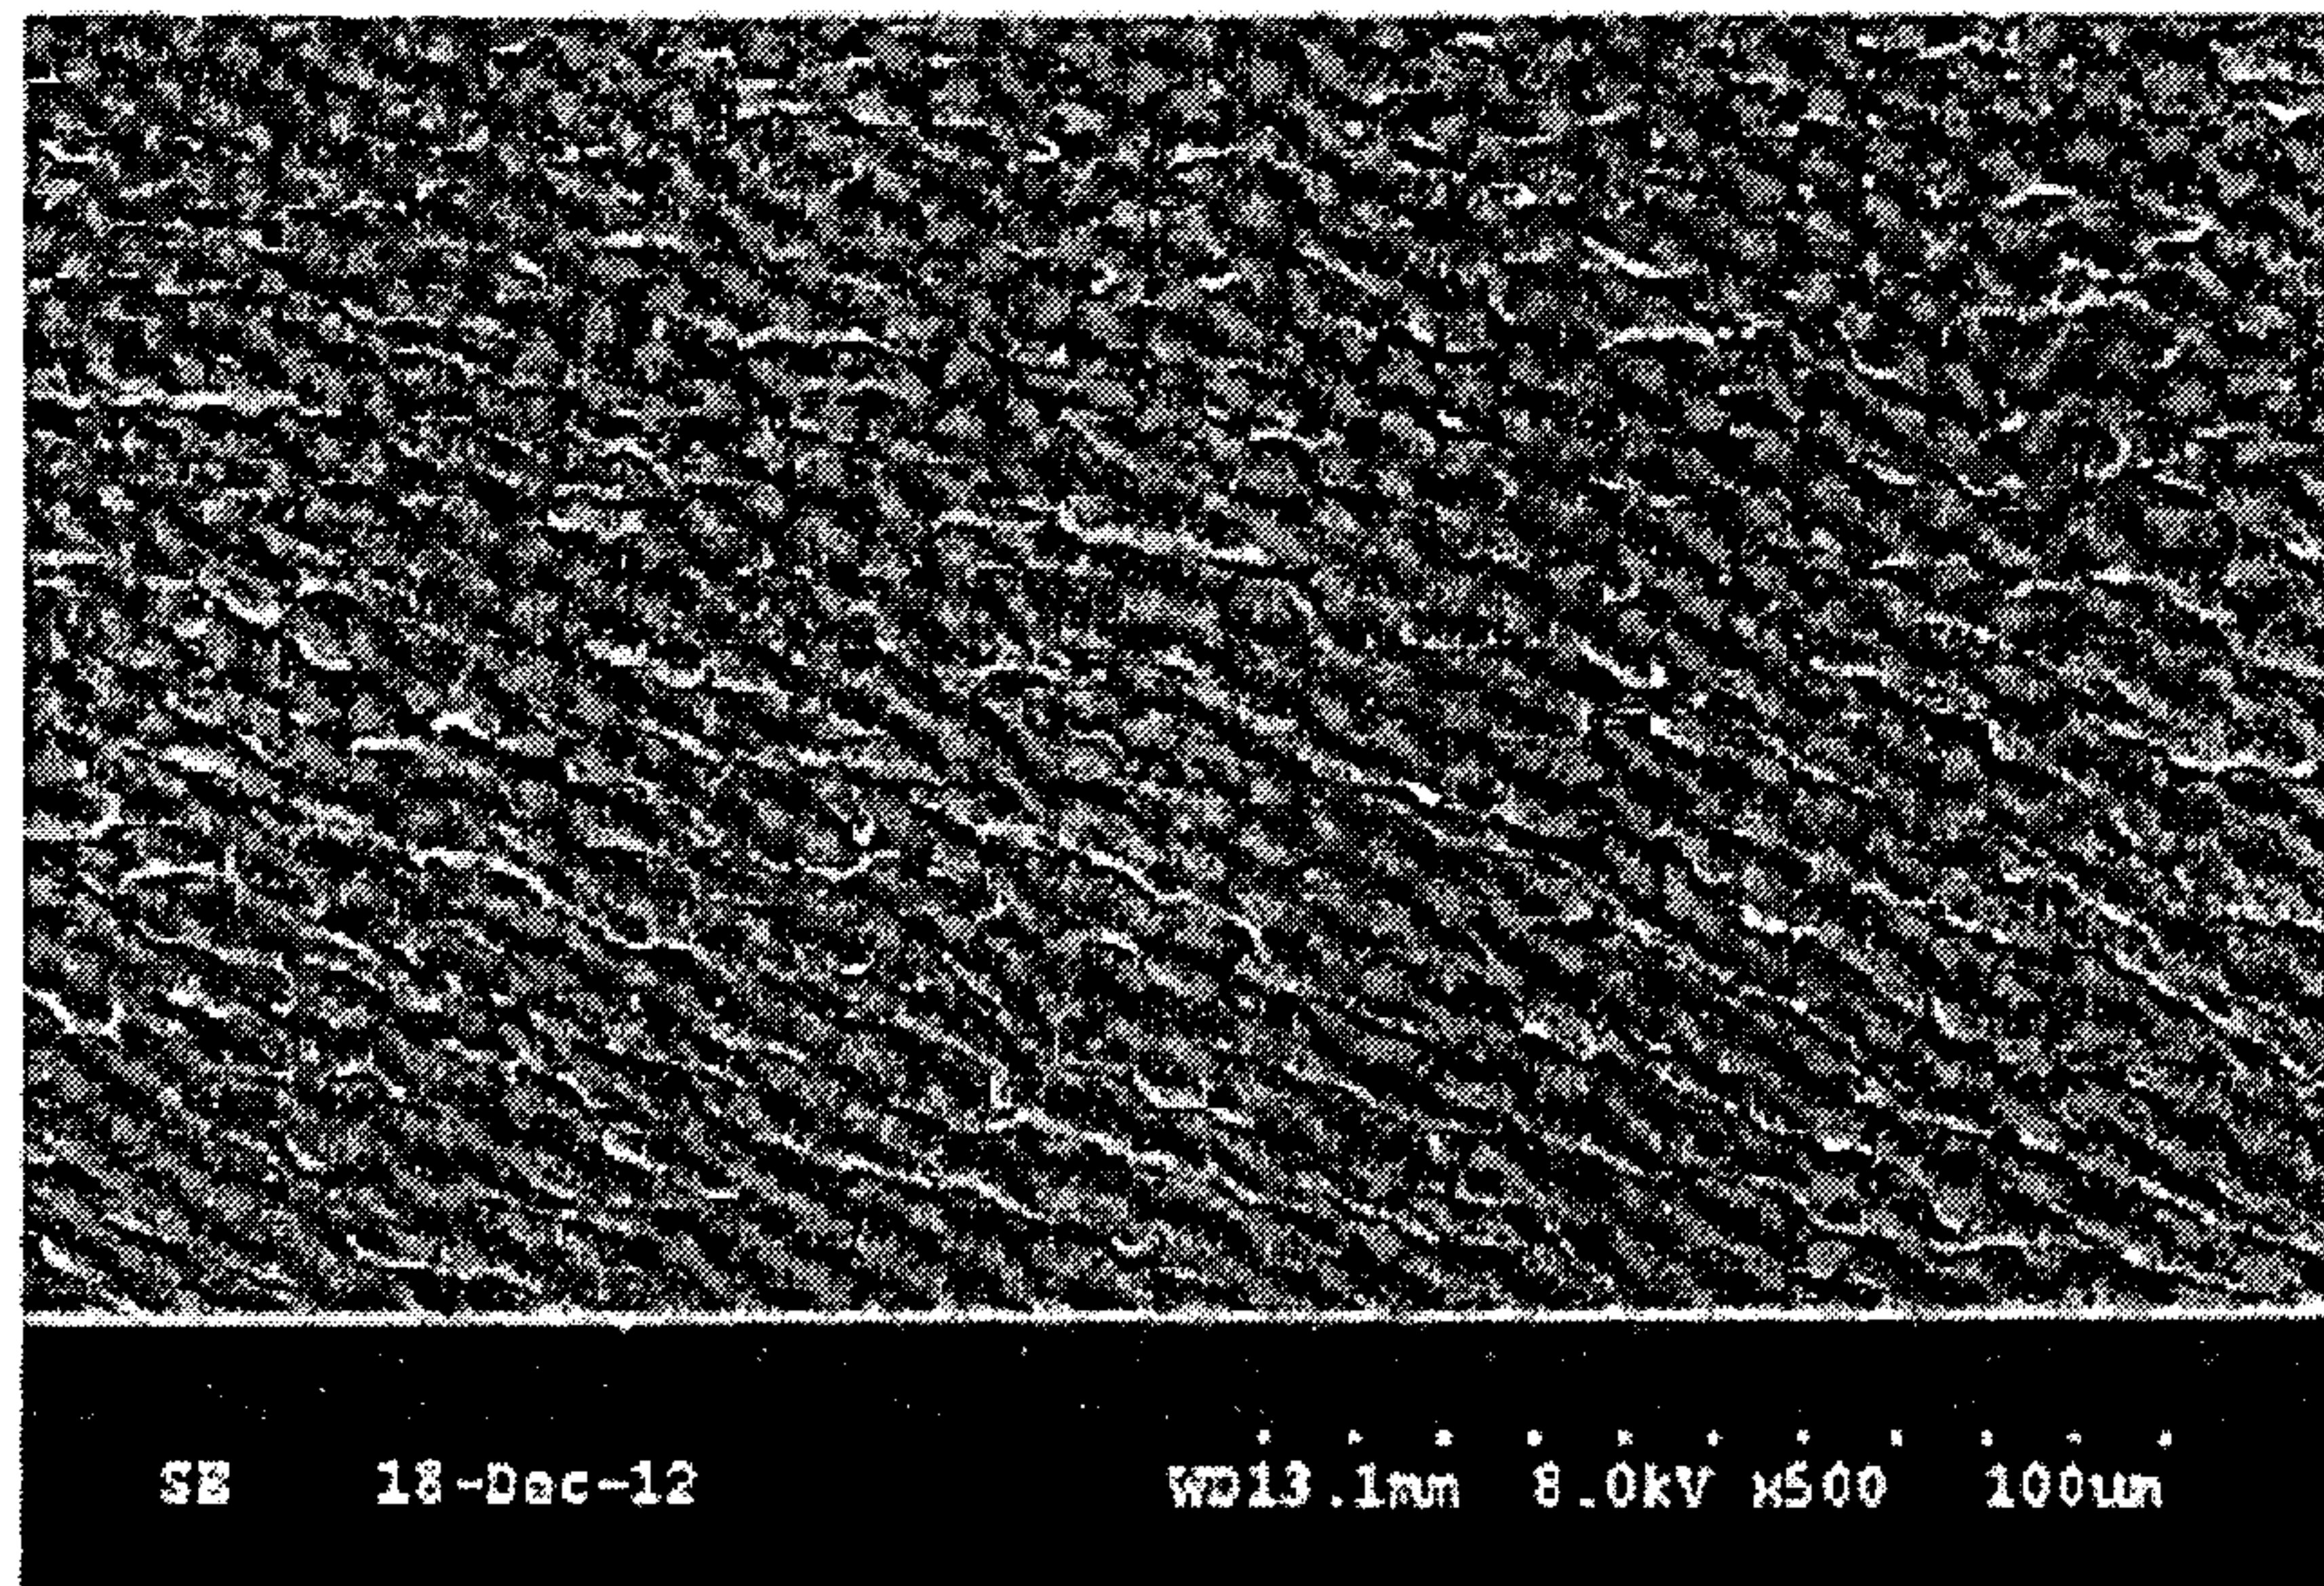


FIG. 4

