

(12) STANDARD PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. **AU 2021225277 B2**

(54) Title
Image cropping method and apparatus, and device and storage medium

(51) International Patent Classification(s)
G06T 7/12 (2017.01)

(21) Application No: **2021225277** (22) Date of Filing: **2021.02.18**

(87) WIPO No: **WO21/169827**

(30) Priority Data

(31) Number	(32) Date	(33) Country
202010113486.5	2020.02.24	CN

(43) Publication Date: **2021.09.02**

(44) Accepted Journal Date: **2024.04.18**

(71) Applicant(s)
Beijing Bytedance Network Technology Co., Ltd.

(72) Inventor(s)
LI, Linxing

(74) Agent / Attorney
Griffith Hack, Level 15 376-390 Collins St, MELBOURNE, VIC, 3000, AU

(56) Related Art
CN 104991725 A
US 9917957 B1
US 2016/0378292 A1
CN 105205780 A
US 10101891 B1
US 2013/0198679 A1
US 2009/0023472 A1
US 2013/0009997 A1
US 2012/0139950 A1
US 2013/0016122 A1
US 2016/0139780 A1

(12) 按照专利合作条约所公布的国际申请

(19) 世界知识产权组织
国际局

(43) 国际公布日
2021 年 9 月 2 日 (02.09.2021)



(10) 国际公布号
WO 2021/169827 A1

(51) 国际专利分类号:
G06T 7/12 (2017.01)

(21) 国际申请号: PCT/CN2021/076687

(22) 国际申请日: 2021 年 2 月 18 日 (18.02.2021)

(25) 申请语言: 中文

(26) 公布语言: 中文

(30) 优先权:
202010113486.5 2020 年 2 月 24 日 (24.02.2020) CN

(71) 申请人: 北京字节跳动网络技术有限公司 (BEIJING BYTEDANCE NETWORK TECHNOLOGY CO., LTD.) [CN/CN]; 中国北京市石景山区实兴大街 30 号院 3 号楼 2 层 B-0035 房间, Beijing 100041 (CN)。

(72) 发明人: 李林兴 (LI, Linxing); 中国北京市海淀区知春路 63 号中国卫星通信大厦今日头条小邮局, Beijing 100190 (CN)。

(74) 代理人: 泰和泰律师事务所 (TAHOTA LAW FIRM); 中国北京市朝阳区东四环中路 56 号远洋国际中心 A 座 12 层, Beijing 100025 (CN)。

(81) 指定国 (除另有指明, 要求每一种可提供的国家保护): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW。

(84) 指定国 (除另有指明, 要求每一种可提供的地区保护): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), 欧亚 (AM, AZ, BY, KG, KZ, RU, TJ, TM), 欧洲 (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT,

(54) Title: IMAGE CROPPING METHOD AND APPARATUS, AND DEVICE AND STORAGE MEDIUM

(54) 发明名称: 图像裁剪方法、装置、设备及存储介质

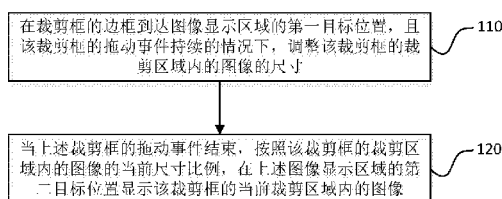


图 2

110 Adjust the size of an image in a cropping area of a cropping box under the condition that the frame of the cropping box reaches a first target position of an image display area and a dragging event of the cropping box is continuous

120 When the dragging event of the cropping box is finished, display the image in the current cropping area of the cropping box at a second target position of the image display area according to the current size proportion of the image in the cropping area of the cropping box

(57) Abstract: Embodiments of the present application provide an image cropping method and apparatus, and a device and a storage medium. The image cropping method comprises: adjusting the size of an image in a cropping area of a cropping box under the condition that the frame of the cropping box reaches a first target position of an image display area and a dragging event of the cropping box is continuous; and when the dragging event of the cropping box is finished, displaying the image in the current cropping area of the cropping box at a second target position of the image display area according to the current size proportion of the image in the cropping area of the cropping box. The embodiments of the present application reduce the cropping operation difficulty and improve the cropping operation efficiency.

(57) 摘要: 本申请实施例提供了一种图像裁剪方法、装置、设备及存储介质。其方法包括: 在裁剪框的边框到达图像显示区域的第一目标位置, 且所述裁剪框的拖动事件持续的情况下, 调整所述裁剪框的裁剪区域内的图像的尺寸; 当所述裁剪框的拖动事件结束, 按照所述裁剪框的裁剪区域内的图像的当前尺寸比例, 在所述图像显示区域的第二目标位置显示所述裁剪框的当前裁剪区域内的图像。本申请实施例降低裁剪操作难度、提高裁剪操作效率。

RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI,
CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG)。

根据细则4.17的声明:

- 关于申请人有权申请并被授予专利(细则
4.17(ii))

本国际公布:

- 包括国际检索报告(条约第21条(3))。

IMAGE CROPPING METHOD AND APPARATUS, AND DEVICE AND STORAGE MEDIUM

CROSS REFERENCE TO RELATED APPLICATION

[0001] The present application claims priority to Chinese Patent Application No. 202010113486.5, titled "IMAGE CROPPING METHOD AND APPARATUS, AND DEVICE AND STORAGE MEDIUM", filed on February 24, 2020, which is incorporated herein by reference in its entirety.

TECHNICAL FIELD

[0002] Embodiments of this disclosure relate to the technical field of image processing, and in particular, to an image cropping method, an image cropping device, an apparatus and storage medium.

BACKGROUND

[0003] An image cropping function is a basic function of an image retouching software of most mobile terminals. As shown in Figure 1A, after the image cropping function is triggered, a target image 102 and a cropping block 103 are superimposed and displayed on an image display area 101 of a display screen 100 of a mobile terminal. As shown in Figure 1B, the image retouching software of the mobile terminal adjusts a size of the cropping block 103 in response to a dragging event of a user on a border of the cropping block 103. As shown in Figure 1C, after the dragging event ends, a cropped image 104 is displayed in the image display area 101 based on a border ratio of the cropping block 103 when the dragging event ends, and the cropped image 104 is a part of the target image 102 within the cropping block 103 when the dragging event ends. The above-mentioned operation on the cropping block is also referred to as a hand following operation.

[0004] When the border of the cropping block 103 is dragged to the edge of the image display area 101, the current cropping ends. If a cropping effect expected by the user is not achieved, the user needs to drag the border of the cropping block 103 again in the same way, and repeat

the process for several times to achieve the expected cropping effect. As a size of the cropped image approaches a size of the target image, a draggable range of the cropping block 103 becomes smaller and smaller, and an operation difficulty increases.

[0005] In addition, in the process of dragging the cropping block 103 by the user, only the size of the cropping block 103 changes accordingly, neither a position nor a size of the target image changes. For some special cropping requirements, for example, if the user wishes to preserve a screen in a central area of the image by cropping, the existing image cropping implementation may increase an operation complexity.

[0005A] Any discussion of documents, acts, materials, devices, articles or the like which has been included in the present specification is not to be taken as an admission that any or all of these matters form part of the prior art base or were common general knowledge in the field relevant to the present disclosure as it existed before the priority date of each of the appended claims.

SUMMARY

[0006] An image cropping method, an image cropping device, an apparatus and/or storage medium provided according to one or more embodiments of the present disclosure may reduce a difficulty of a cropping operation and improve an efficiency of the cropping operation.

[0007] In a first aspect, an image cropping method is provided according to an embodiment of the present disclosure. The method includes: adjusting a size of an image in a cropping area of a cropping block in a case that a border of the cropping block reaches a first target position of an image display area and a dragging event for the cropping block continues; and displaying, on a second target position of the image display area, an image in a current cropping area of the cropping block based on a current size ratio of the image in the cropping area of the cropping block when the dragging event for the cropping block ends, wherein the first target position of the image display area is any of following positions: a boundary of the image display area, and a position of the border of the cropping block on the image display area when the border of the cropping block reaches a set minimum size.

[0008] In one or more embodiments of the image cropping method, when the border of the cropping block reaches the first target position of the image display area, for example, reaches

a boundary of the image display area, if the cropping block is not released, that is, the dragging event for the cropping block still continues, the image cropping process may still continue, that is, in this case, a size of the image in the cropping area of the cropping block may be adjusted. Therefore, when the user drags the cropping block to the boundary of the image display area, as long as the cropping block is not released, an application for implementing the method may continue to adjust the size of the image to achieve continuing cropping, which can avoid a case that the user frequently drags the cropping block in the same way to achieve an expected effect. Therefore, a difficulty of an image cropping operation may be reduced and an efficiency of the image cropping may be improved.

[0009] In one or more embodiments, the size of the image in the cropping area of the cropping block is adjusted in a case that the border of the cropping block reaches the first target position of the image display area and the dragging event for the cropping block continues, until the dragging event for the cropping block ends or the border of the cropping block reaches a boundary of a target image. The image in the cropping area of the cropping block may be a part of the target image.

[0010] It should be pointed out that the purpose of image cropping may be to preserve a screen required by the user by cropping. Generally, when the border of the cropping block reaches the boundary of the target image, the screen required by the user may already appear, so there is no need to continue to adjust the size of the image. Therefore, "the border of the cropping block reaches the boundary of the target image" may be preset as a stopping condition for image size adjustment. When the stopping condition is met, the image cropping may be automatically stopped to improve a quality and effect of image cropping.

[0011] In one or more embodiment of the present disclosure, when the border of the cropping block reaches the boundary of the image display area, the image cropping may still be continued. In addition, when the border of the cropping block reaches the set minimum size, the image cropping may still be continued.

[0012] In a case that the border of the cropping block reaches the boundary of the image display area, the border of the cropping block does not coincide with the boundary of the target image when the dragging event for the cropping block starts, and the dragging event for the cropping block continues, the adjusting a size of an image in a cropping area of a cropping

block may include: reducing the size of the image in the cropping area of the cropping block; in a case that the border of the cropping block reaches the boundary of the image display area, the border of the cropping block coincides with the boundary of the target image when the dragging event for the cropping block starts, and the dragging event for the cropping block continues, the adjusting a size of an image in a cropping area of a cropping block may include: increasing the size of the image in the cropping area of the cropping block; and in a case that the border of the cropping block reaches the set minimum size and the dragging event for the cropping block continues, the adjusting a size of an image in a cropping area of a cropping block may include: increasing the size of the image in the cropping area of the cropping block.

[0013] Optionally, the size of the image in the cropping area of the cropping block is reduced to make a proportion of the image displayed in the cropping area of the cropping block in the target image increase.

[0014] On the basis of any of the above method embodiments, in a case that the border of the cropping block reaches the first target position of the image display area and the dragging event for the cropping block continues, on the one hand, a display size of the image in the cropping area of the cropping block may be continuously adjusted, correspondingly, the current size ratio of the image in the cropping area of the cropping block is determined based on a current display size, in this case, in an image cropping process, the effect of image cropping can be previewed in real time, which helps to improve the efficiency of image cropping. On the other hand, a size parameter of the image in the cropping area of the cropping block may be adjusted, correspondingly, the current size ratio of the image in the cropping area of the cropping block is determined based on the size parameter when the dragging event for the cropping block ends. In this case, although the effect of image cropping cannot be previewed in real time during the image cropping process, since the size parameter of the image is recorded, a result of image cropping may be displayed accurately after the dragging event ends.

[0015] On the basis of any of the above method embodiments, an image size adjustment speed may be determined based on a parameter of the dragging event for the cropping block, and the size of the image in the cropping area of the cropping block may be adjusted based on the image size adjustment speed.

[0016] During the process of implementing the present disclosure, the inventor found, by

analysing the user's usage habits, that some dragging habits of the user when dragging the cropping block reflect the user's expectation on the image size adjustment speed. These dragging habits may be reflected in the parameter of the dragging event. Therefore, in one or more embodiments, the image size adjustment speed is determined based on the parameter of the dragging event, and a dragging operation may be controlled to conform to or be close to the user's expectation on the image size adjustment speed.

[0017] The parameter of the dragging event for the cropping block may include a dragging distance, where a greater dragging distance indicates a greater image size adjustment speed.

[0018] During the process of implementing the present disclosure, the inventor found, by analysing the user's usage habits, that when the user drags the cropping block, a greater dragging range, i.e., a greater dragging distance of the dragging event indicates a greater image size adjustment speed expected by the user. Therefore, determining the image size adjustment speed based on the dragging distance is in line with the user's expectation.

[0019] Any of the above method embodiments may further include: adjusting, when the dragging event for the cropping block continues, a display position of a target image to make a centre of the target image always coincide with a centre of the cropping area of the cropping block or make the centre of the target image approach the centre of the cropping area of the cropping block based on a specified path.

[0020] If a screen that the user expects to preserve is close to or located in a centre region of the target image, during the image cropping process, if the display position of the target image remains unchanged, the border of the cropping block needs to be adjusted multiple times in multiple directions. If the display position of the target image is adjusted in the above manner, it is possible to avoid missing the screen that the user expects to preserve during the image cropping process, and the expected effect can be achieved by a few adjustments in a few number of directions, and the cropping efficiency can be improved.

[0021] In a second aspect, an image cropping device is provided according to an embodiment of the disclosure. The device includes: an image adjusting module, configured to adjust a size of an image in a cropping area of a cropping block in a case that a border of the cropping block reaches a first target position of an image display area and a dragging event for the cropping block continues; and an image displaying module, configured to display, on a second target

position of the image display area, an image in a current cropping area of the cropping block based on a current size ratio of the image in the cropping area of the cropping block when the dragging event for the cropping block ends, wherein the first target position of the image display area is any of following positions: a boundary of the image display area, and a position of the border of the cropping block on the image display area when the border of the cropping block reaches a set minimum size.

[0022] In one or more embodiment of the image cropping device, when the border of the cropping block reaches the first target position of the image display area, for example, reaches a boundary of the image display area, if the cropping block is not released, that is, the dragging event for the cropping block still continues, the image cropping process may still continue, that is, in this case, a size of the image in the cropping area of the cropping block may be adjusted. Therefore, with one or more embodiment of the device, when the user drags the cropping block to the boundary of the image display area, as long as the cropping block is not released, an application for implementing the device may continue to adjust the size of the image to achieve continuing cropping, which can avoid a case that the user frequently drags the cropping block in the same way to achieve an expected effect. Therefore, a difficulty of an image cropping operation may be reduced and an efficiency of the image cropping may be improved.

[0023] Optionally, the image adjusting module is configured to adjust the size of the image in the cropping area of the cropping block in a case that the border of the cropping block reaches the first target position of the image display area and the dragging event for the cropping block continues, until the dragging event for the cropping block ends or the border of the cropping block reaches a boundary of a target image. The image in the cropping area of the cropping block may be a part of the target image.

[0024] It should be pointed out that the purpose of image cropping may be to preserve a screen required by the user by cropping. Generally, when the border of the cropping block reaches the boundary of the target image, the screen required by the user may already appear, so there is no need to continue to adjust the size of the image. Therefore, "the border of the cropping block reaches the boundary of the target image" may be preset as a stopping condition for image size adjustment. When the stopping condition is met, the image cropping may be automatically stopped to improve a quality and effect of image cropping.

[0025] In one or more embodiment of the device, when the border of the cropping block reaches the boundary of the image display area, the image cropping may still be continued. In addition, when the border of the cropping block reaches the set minimum size, the image cropping may still be continued.

[0026] In a case that the border of the cropping block reaches the boundary of the image display area, the border of the cropping block does not coincide with the boundary of the target image when the dragging event for the cropping block starts, and the dragging event for the cropping block continues, the adjusting a size of an image in a cropping area of a cropping block may include: reducing the size of the image in the cropping area of the cropping block; in a case that the border of the cropping block reaches the boundary of the image display area, the border of the cropping block coincides with the boundary of the target image when the dragging event for the cropping block starts, and the dragging event for the cropping block continues, the adjusting a size of an image in a cropping area of a cropping block may include: increasing the size of the image in the cropping area of the cropping block; and in a case that the border of the cropping block reaches the set minimum size and the dragging event for the cropping block continues, the adjusting a size of an image in a cropping area of a cropping block may include: increasing the size of the image in the cropping area of the cropping block.

[0027] On the basis of any of the above device embodiments, in a case that the border of the cropping block reaches the first target position of the image display area and the dragging event for the cropping block continues, on the one hand, the image adjusting module may continuously adjust a display size of the image in the cropping area of the cropping block, correspondingly, the current size ratio of the image in the cropping area of the cropping block is determined based on a current display size, in this case, in an image cropping process, the effect of image cropping can be previewed in real time, which helps to improve the efficiency of image cropping. On the other hand, the image adjusting module may adjust a size parameter of the image in the cropping area of the cropping block, correspondingly, the current size ratio of the image in the cropping area of the cropping block is determined based on the size parameter when the dragging event for the cropping block ends. In this case, although the effect of image cropping cannot be previewed in real time during the image cropping process, since the size parameter of the image is recorded, a result of image cropping may be displayed accurately after the dragging event ends.

[0028] On the basis of any of the above device embodiments, an image size adjustment speed may be determined based on a parameter of the dragging event for the cropping block, and the size of the image in the cropping area of the cropping block may be adjusted based on the image size adjustment speed.

[0029] During the process of implementing the present disclosure, the inventor found, by analysing the user's usage habits, that some dragging habits of the user when dragging the cropping block reflect the user's expectation on the image size adjustment speed. These dragging habits may be reflected in the parameter of the dragging event. Therefore, in one or more embodiments, the image size adjustment speed is determined based on the parameter of the dragging event, and a dragging operation may be controlled to conform to or be close to the user's expectation on the image size adjustment speed.

[0030] The parameter of the dragging event for the cropping block may include a dragging distance, where a greater dragging distance indicates a greater image size adjustment speed.

[0031] During the process of implementing the present disclosure, the inventor found, by analysing the user's usage habits, that when the user drags the cropping block, a greater dragging range, i.e., a greater dragging distance of the dragging event indicates a greater image size adjustment speed expected by the user. Therefore, determining the image size adjustment speed based on the dragging distance is in line with the user's expectation.

[0032] In a device according to any of the above embodiments, the image adjusting module may further be configured to: adjust, when the dragging event for the cropping block continues, a display position of a target image to make a centre of the target image always coincide with a centre of the cropping area of the cropping block or make the centre of the target image approach the centre of the cropping area of the cropping block based on a specified path.

[0033] If a screen that the user expects to preserve is close to or located in a centre region of the target image, during the image cropping process, if the display position of the target image remains unchanged, the border of the cropping block may need to be adjusted multiple times in multiple directions. If the display position of the target image is adjusted in the above manner, it is possible to avoid missing the screen that the user expects to preserve during the image cropping process, and the expected effect can be achieved by a few adjustments in a few number of directions, and the cropping efficiency can be improved.

[0034] In a third aspect, a mobile terminal is provided according to an embodiment of the disclosure. The mobile terminal includes: a memory configured to store a program for executing the method according to the method embodiments in the first aspect; and a processor configured to execute the program stored in the memory.

[0035] In one or more embodiment of the mobile terminal, when the border of the cropping block reaches the first target position of the image display area, for example, reaches a boundary of the image display area, if the cropping block is not released, that is, the dragging event for the cropping block still continues, the image cropping process may still continue, that is, in this case, a size of the image in the cropping area of the cropping block may be adjusted. Therefore, with one or more embodiment of the mobile terminal, when the user drags the cropping block to the boundary of the image display area, as long as the cropping block is not released, an application for implementing the processor of the terminal may continue to adjust the size of the image to achieve continuing cropping, which can avoid a case that the user frequently drags the cropping block in the same way to achieve an expected effect. Therefore, a difficulty of an image cropping operation may be reduced and an efficiency of image cropping may be improved.

[0036] In a fourth aspect, a computer-readable storage medium is provided according to an embodiment of the disclosure. The medium stores one or more program for executing embodiments of the method according to the first aspect.

[0037] In use of one or more embodiment of the program stored in the computer-readable storage medium, when the border of the cropping block reaches the first target position of the image display area, for example, reaches a boundary of the image display area, if the cropping block is not released, that is, the dragging event for the cropping block still continues, the image cropping process may still continue, that is, in this case, a size of the image in the cropping area of the cropping block may be adjusted. Therefore, with one or more embodiment of the program stored in the computer-readable storage medium, when the user drags the cropping block to the boundary of the image display area, as long as the cropping block is not released, the program may continue to adjust the size of the image to achieve continuing cropping, which can avoid a case that the user frequently drags the cropping block in the same way to achieve an expected effect. Therefore, a difficulty of an image cropping operation may be reduced and an efficiency of image cropping may be improved.

[0038] An image cropping method, an image cropping device, an apparatus and storage medium are provided according to embodiments of the disclosure may reduce a complexity of a cropping operation.

[0039] In a fifth aspect, an image cropping method is provided according to an embodiment of the disclosure. The method includes: adjusting, when a dragging event for a cropping block is detected and the dragging event for the cropping block continues, a display position of a target image to make a centre of the target image always coincide with a centre of a cropping area of the cropping block or make the centre of the target image approach the centre of the cropping area of the cropping block based on a specified path; and displaying, on a target position of an image display area, an image in a current cropping area of the cropping block based on a current size ratio of an image in the cropping area of the cropping block when the dragging event for the cropping block ends, wherein the image in the cropping area of the cropping block is a part of the target image.

[0040] If a screen that the user expects to preserve is close to or located in a centre region of the target image, during the image cropping process, if the display position of the target image remains unchanged, the border of the cropping block may need to be adjusted multiple times in multiple directions. If the display position of the target image is adjusted according to one or more embodiment of the method provided of the fifth aspect, it is possible to avoid missing the screen that the user expects to preserve during the image cropping process, and the expected effect can be achieved by a few adjustments in a few number of directions, and the cropping efficiency can be improved, and a complexity of the cropping operation can be reduced.

[0041] In a sixth aspect, an image cropping device is provided according to an embodiment of the disclosure. The device may include: an image adjusting module configured to adjust, when a dragging event for a cropping block is detected and the dragging event for the cropping block continues, a display position of a target image to make a centre of the target image always coincide with a centre of a cropping area of the cropping block or make the centre of the target image approach the centre of the cropping area of the cropping block based on a specified path; and an image displaying module configured to display, on a target position of an image display area, an image in a current cropping area of the cropping block based on a current size ratio of an image in the cropping area of the cropping block when the dragging event for the cropping block ends.

[0042] If a screen that the user expects to preserve is close to or located in a centre region of the target image, during the image cropping process, if the display position of the target image remains unchanged, the border of the cropping block may need to be adjusted multiple times in multiple directions. If the display position of the target image is adjusted according to one or more embodiment of the device provided in the sixth aspect, it is possible to avoid missing the screen that the user expects to preserve during the image cropping process, and the expected effect can be achieved by a few adjustments in a few number of directions, and the cropping efficiency can be improved, and a complexity of the cropping operation can be reduced.

[0043] In a seventh aspect, a mobile terminal is provided according to an embodiment of the disclosure. The mobile terminal includes: a memory configured to store a program for executing embodiments of the method of the fifth aspect; and a processor configured to execute the program stored in the memory.

[0044] If a screen that the user expects to preserve is close to or located in a centre region of the target image, during the image cropping process, if the display position of the target image remains unchanged, the border of the cropping block may need to be adjusted multiple times in multiple directions. If the display position of the target image is adjusted according to one or more embodiment of the mobile terminal provided of the seventh aspect, it is possible to avoid missing the screen that the user expects to preserve during the image cropping process, and the expected effect can be achieved by a few adjustments in a few number of directions, and the cropping efficiency can be improved, and a complexity of the cropping operation can be reduced.

[0045] In an eighth aspect, a computer-readable storage medium is provided according to an embodiment of the disclosure. The medium stores a program for executing embodiments of the method of the fifth aspect.

[0046] If a screen that the user expects to preserve is close to or located in a centre region of the target image, during the image cropping process, if the display position of the target image remains unchanged, the border of the cropping block may need to be adjusted multiple times in multiple directions. If the display position of the target image is adjusted according to the program stored in one or more embodiment of the computer-readable storage medium of the eighth aspect, it is possible to avoid missing the screen that the user expects to preserve during

the image cropping process, and the expected effect can be achieved by a few adjustments in a few number of directions, and the cropping efficiency can be improved, and a complexity of the cropping operation can be reduced.

[0048A] Throughout this specification the word "comprise", or variations such as "comprises" or "comprising", will be understood to imply the inclusion of a stated element, integer or step, or group of elements, integers or steps, but not the exclusion of any other element, integer or step, or group of elements, integers or steps.

BRIEF DESCRIPTION OF THE DRAWINGS

[0048B] One or more embodiment of principles disclosed herein will now be described, by way of example only, with reference to the accompanying drawings, in which:

[0047] Figure 1A is an interface display diagram of an image cropping function of an image retouching software of a mobile terminal.

[0048] Figure 1B is another interface display diagram of an image cropping function of an image retouching software of a mobile terminal.

[0049] Figure 1C is another interface display diagram of an image cropping function of an image retouching software of a mobile terminal.

[0050] Figure 1D is a schematic diagram of dragging directions of inward dragging according to an embodiment of the present disclosure.

[0051] Figure 1E is a schematic diagram of dragging directions of outward dragging according to an embodiment of the present disclosure.

[0052] Figure 1F is a schematic diagram of dragging directions of inward dragging according to an embodiment of the present disclosure.

[0053] Figure 1G is a schematic diagram of dragging directions of outward dragging according to an embodiment of the present disclosure.

[0054] Figure 2 is a flowchart of an image cropping method according to an embodiment of the present disclosure.

[0055] Figure 3A is a schematic diagram of a cropping state according to an embodiment of

the present disclosure.

[0056] Figure 3B is a schematic diagram of another cropping state according to an embodiment of the present disclosure.

[0057] Figure 4A is a schematic diagram of a first cropping state according to another embodiment of the present disclosure.

[0058] Figure 4B is a schematic diagram of a second cropping state according to another embodiment of the present disclosure.

[0059] Figure 5 is a block diagram of an image cropping device according to an embodiment of the present disclosure.

[0060] Figure 6 is a schematic structural diagram of a mobile terminal according to an embodiment of the present disclosure.

[0061] Figure 7 is a flowchart of an image cropping method according to another embodiment of the present disclosure.

[0062] Figure 8 is a flowchart of an image cropping method according to another embodiment of the present disclosure.

DETAILED DESCRIPTION

[0063] Embodiments and technical features in the embodiments may be combined with each other without conflict.

[0064] Before describing the embodiments of the present disclosure in detail, some concepts involved therein are first described.

[0065] An image display area, also known as an operable area, is a maximum cropping area of a cropping block and a maximum display area of the target image. For example, if a size of the image display area is $N \times M$, then the maximum size of the cropping block is $N \times M$. If a size of the target image is $N \times M'$, and M' is greater than M , then when the target image is displayed in the image display area, the size of the target image will be compressed to $N' \times M$, and N' is smaller than N . Here, N , M , N' , and M' are positive integers and represent the number of pixels.

[0066] The cropping block may be a drag control displayed in the image display area and

superimposed with the target image to be cropped. The area enclosed by the border of the cropping box is called the cropping area. When the cursor or the user's finger presses the border of the cropping box and drags it, the border of the cropping box will be deformed accordingly in response to the dragging event. A shape of the border of the cropping block is not limited in the embodiments of the present disclosure. In the following embodiments, a rectangular cropping block is used as an example to describe the embodiments of the present disclosure. However, in practice, cropping blocks of other shapes may also be used, such as circular cropping block, cropping blocks with a shape of ellipses, triangles, polygons, irregular shapes and so on. Taking the rectangular cropping block as an example, the border may include four side areas and four corner areas. If one of the side areas is dragged, based on the current specific scene, following responses may be generated: a side area opposite to the dragged side area is fixed, the dragged side area is translated along a dragging direction, two side regions adjacent to the dragged side region extend/shrink along the dragging direction (depending on the scene and design, the two side regions may also be translated toward each other or away from each other while extending/shrinking, or one of the two side regions is also translated in the direction of approaching or away from the other of the two side regions while extending/contracting); a side area opposite to the dragged side area is translated in the opposite direction of the dragging direction, the dragged side area is translated along the dragging direction, two side regions adjacent to the dragged side region extend/shrink along the dragging direction (depending on the scene and design, the two side regions may also be translated toward each other or away from each other while extending/shrinking, or one of the two side regions is also translated in the direction of approaching or away from the other of the two side regions while extending/contracting); and the entire cropping block is translated along the dragging direction, the size of the cropping block remains unchanged. If one of the corner areas is dragged, based on the current specific scene, following responses may be generated: a corner area opposite to the dragged corner area is fixed, the dragged corner area is translated along a dragging direction, which causes side regions adjacent to the dragged corner region to be translated and to extend/shrink, the translation of the side region cause adjacent side regions to extend/shrink; a corner area opposite to the dragged corner area is translated in the opposite direction of the dragging direction, which causes side regions adjacent to the dragged corner region to be translated and to extend/shrink, the dragged corner area is translated along the dragging direction, which cause side regions adjacent to the dragged corner region to be translated and

to extend/shrink; and the entire cropping block is translated along the dragging direction, the size of the cropping block remains unchanged. It should be pointed out that the above only illustrates the response of the cropping block to the dragging event in the form of an example, and does not limit the response of the cropping block to the dragging event. In practice, the response mode may be defined according to different scenarios.

[0067] In a rough division method, the dragging direction may be divided into inward dragging and outward dragging, the arrow direction shown in Figure 1D is the inward dragging, the arrow direction shown in Figure 1E is the outward dragging. Further, the inward dragging may be abstracted into eight dragging directions shown in FIG. 1F, and the outward dragging may be abstracted into eight dragging directions shown in FIG. 1G. In practice, if the dragging path of the dragging event is detected to extend away from the clipping area, the dragging direction is outward dragging, otherwise, the dragging direction is inward dragging. Furthermore, it is determined an angle between which of the eight directions and a reference line is the closest to an angle between the connecting line of the two sampling points on the dragging path and the reference line, the determined direction is taken as the dragging direction of the dragging event. In embodiments, in practice, the dragging direction may also be defined as required, and other methods may also be used to determine the dragging direction, which is not limited in this embodiment of the present disclosure.

[0068] As shown in Figure 2, an image cropping method is provided according to an embodiment of the present disclosure. The method includes steps 110 to 120.

[0069] In step 110, a size of an image in a cropping area of a cropping block is adjusted in a case that a border of the cropping block reaches a first target position of an image display area and a dragging event for the cropping block continues.

[0070] The dragging event for the cropping block refers to a dragging event acting on the border of the cropping block.

[0071] The cropping block and the target image to be cropped are superimposed and displayed in the image display area, and the image in the cropping area of the cropping block is the part of the target image in the cropping area.

[0072] A judgment condition of "the dragging event for the cropping block continues" is not limited in the embodiment of the present disclosure. In practice, the judgment condition may

be determined according to the usage scenario and product design requirements. Taking a mobile terminal as an example, after the user drags the cropping block, as long as the cropping block is not released and the user's finger is always within a touch area of the mobile terminal, it is determined that "the dragging event for the cropping block continues". Alternatively, after the user drags the cropping block, as long as the cropping block is not released and the user's finger is always in the image display area, it is determined that "the dragging event for the cropping block continues". Once the user's finger leaves the image display area, it is determined that "the dragging event for the cropping block ends".

[0073] The implementation manner of determining the above-mentioned situation is not limited in this embodiment of the present disclosure. In practice, existing implementation manners may be used to determine the above-mentioned situation. For example, a coordinate of the first target position is stored or a rule for the first target position is determined in advance, the position coordinate of the border of the cropping block is determined in real time, and the position coordinate of the border and the coordinate of the first target position are compared in real time, or it is determined whether the position coordinate of the border conforms to the description of the rule for the first target position in real time, so as to determine whether the border of the cropping block reaches the first target position of the image display area.

[0074] In step 120, an image in a current cropping area of the cropping block is displayed on a second target position of the image display area based on a current size ratio of the image in the cropping area of the cropping block when the dragging event for the cropping block ends.

[0075] The dragging event for the cropping block ending means that the cropping block is released.

[0076] The second target position may be a predetermined fixed position, or may be a position determined based on a predetermined rule. The specific implementation for the predetermined fixed position and the predetermined rule is not limited in the embodiments of the present disclosure. In practice, they are set as required.

[0077] The current size ratio of the image in the cropping area of the cropping block refers to the adjusted size ratio of the image when the dragging event ends.

[0078] Displaying the image based on the current size ratio of the image in the cropping area of the cropping block refers to displaying the image based on the current size ratio in a manner

of proportionally enlarging, proportionally narrowing, or invariant proportion.

[0079] The current cropping area of the cropping block refers to the cropping area of the cropping block when the dragging event the ends.

[0080] In the image cropping method provided according to the embodiment of the present disclosure, when the border of the cropping block reaches the first target position of the image display area, for example, reaches a boundary of the image display area, if the cropping block is not released, that is, the dragging event for the cropping block still continues, the image cropping process may still continue, that is, in this case, a size of the image in the cropping area of the cropping block may be adjusted. Therefore, with the method provided by the embodiment of the present disclosure, when the user drags the cropping block to the boundary of the image display area, as long as the cropping block is not released, an application for implementing the method provided by the embodiment of the present disclosure may continue to adjust the size of the image to achieve continuing cropping, which can avoid a case that the user frequently drags the cropping block in the same way to achieve an expected effect. Therefore, a difficulty of an image cropping operation is reduced and an efficiency of the image cropping is improved.

[0081] Optionally, the size of the image in the cropping area of the cropping block is adjusted in a case that the border of the cropping block reaches the first target position of the image display area and the dragging event for the cropping block continues, until the dragging event for the cropping block ends or the border of the cropping block reaches a boundary of a target image. The image in the cropping area of the cropping block is a part of the target image.

[0082] The border of the cropping block reaches the boundary of the target image may mean that a part of the border of the cropping block (such as a certain side area or a certain corner area) reaches a part of the boundary of the target image (such as a certain side or a certain corner on the boundary of the target image), or mean that the border of the cropping block coincides with the boundary of the target image, which is not limited in this embodiment of the present disclosure and may be defined according to requirements in practice.

[0083] The boundary of the target image may refer to the boundary of the target image under the display size (such as the above $N' \times M$) before cropping, or it may refer to the boundary of the target image under the original size (such as the above $N \times M'$) of the target image, which is not limited in this embodiment of the present disclosure and may be defined according to

requirements in practice.

[0084] In embodiments, an aim of image cropping is to preserve a screen required by the user by cropping. Generally, when the border of the cropping block reaches the boundary of the target image, the screen required by the user may already appear, so there is no need to continue to adjust the size of the image. Therefore, "the border of the cropping block reaches the boundary of the target image" is preset as a stopping condition for image size adjustment. When the stopping condition is met, the image cropping is automatically stopped to improve a quality and effect of image cropping.

[0085] In embodiments, according to different application scenarios and product design requirements, no stopping condition may be set for image size adjustment during the dragging process, and other stopping conditions may be set according to requirements, which is not limited in this embodiment of the present disclosure.

[0086] In any of the above method embodiments, the first target position of the image display area may be any of following positions: a boundary of the image display area, and a position of the border of the cropping block on the image display area when the border of the cropping block reaches a set minimum size.

[0087] In one or more embodiments, the border of the cropping block reaching a set minimum size means that any part of the border reaches the minimum size, for example, a length of a certain side area reaches the minimum size for the length of the certain side area. Alternatively, the border of the cropping block reaching a set minimum size may mean that a cropping area surrounded by the border of the cropping block reaches the set minimum size. The specific value of the minimum size is preset.

[0088] In addition, the first target position may also be other positions, which are not limited in this embodiment of the present disclosure, and are defined according to actual scenarios and/or product design requirements in practice.

[0089] It can be seen that, in the method provided by the embodiment of the present disclosure, when the border of the cropping block reaches the boundary of the image display area, the image cropping may still be continued. In addition, when the border of the cropping block reaches the set minimum size, the image cropping may still be continued.

[0090] On this basis, for different situations, the implementation of adjusting the size of the

image may be different. By way of example and not limitation, in a case that the border of the cropping block reaches the boundary of the image display area, the border of the cropping block does not coincide with the boundary of the target image when the dragging event for the cropping block starts, and the dragging event for the cropping block continues, the adjusting a size of an image in a cropping area of a cropping block includes: reducing the size of the image in the cropping area of the cropping block. In a case that the border of the cropping block reaches the boundary of the image display area, the border of the cropping block coincides with the boundary of the target image when the dragging event for the cropping block starts, and the dragging event for the cropping block continues, the adjusting a size of an image in a cropping area of a cropping block includes: increasing the size of the image in the cropping area of the cropping block. In a case that the border of the cropping block reaches the set minimum size and the dragging event for the cropping block continues, the adjusting a size of an image in a cropping area of a cropping block includes: increasing the size of the image in the cropping area of the cropping block.

[0091] In embodiments, it should be pointed out that since the image in the cropping area of the cropping block is a part of the target image, in the process of narrowing the image in the cropping area of the cropping block, an overall size ratio of the target image is continuously reduced. A part of the target image outside the cropping area will gradually appear inside the cropping area of the cropping block. Therefore, in an implementation manner of reducing the image size, the size of the image in the cropping area of the cropping block is reduced to make a proportion of the image displayed in the cropping area of the cropping block in the target image increase. More specifically, the display size of the image in the cropping area of the cropping block may be continuously reduced, so that the proportion of the image displayed in the cropping area of the cropping block in the target image continuously increases. In this implementation method, a cropping effect may be shown to the user during the image narrowing process, which helps to improve the efficiency of image cropping and improve user experience.

[0092] In addition to the above method, there may also be other implementation methods for reducing the size of the image. For example, the display size of the image in the cropping area of the cropping block is continuously reduced, and content of the image remains unchanged, that is, the proportion of the image displayed in the cropping area of the cropping block in the target image remains unchanged. Alternatively, a size parameter of the image in the cropping

area of the cropping block is reduced, and a display size of the image in the cropping area of the cropping block is not adjusted based on the size parameter before a preset trigger condition is met (for example, the dragging event ends). When the preset trigger condition is met, the image in the cropping area of the cropping block is narrowed based on the size parameter adjusted last time, so that the proportion of the image displayed in the cropping area of the cropping block in the target image increases.

[0093] The specific implementation logic for image size adjustment is not limited in the embodiment of the present disclosure, and may be determined according to usage scenarios and product design requirements in practice.

[0094] In the embodiment of the present disclosure, the border of the cropping block reaches the boundary of the image display area may mean that a part of the border of the cropping block (such as a certain side area or a certain corner area) reaches a part of the boundary of the image display area (such as a certain side or a certain corner on the boundary of the image display area), or mean that the border of the cropping block coincides with the boundary of the image display area, which is not limited in this embodiment of the present disclosure and may be defined according to requirements in practice.

[0095] While adjusting the image size, the border size of the cropping block may also be adjusted, which is not limited in this embodiment of the present disclosure. In practice, the border size adjustment logic for the cropping block is determined according to the usage scenario and product design requirements.

[0096] On the basis of any of the above method embodiments, in a case that the border of the cropping block reaches the first target position of the image display area and the dragging event for the cropping block continues, on the one hand, a display size of the image in the cropping area of the cropping block may be continuously adjusted, correspondingly, the current size ratio of the image in the cropping area of the cropping block is determined based on a current display size, in this case, in an image cropping process, the effect of image cropping can be previewed in real time, which helps to improve the efficiency of image cropping. On the other hand, a size parameter of the image in the cropping area of the cropping block may be adjusted, correspondingly, the current size ratio of the image in the cropping area of the cropping block is determined based on the size parameter when the dragging event for the cropping block ends.

In this case, although the effect of image cropping cannot be previewed in real time during the image cropping process, since the size parameter of the image is recorded, a result of image cropping may be displayed accurately after the dragging event ends.

[0097] In one or more embodiment, the display size of the image refers to the size of the image displayed in the image display area, and the display size of the image is continuously adjusted, that is, the adjustment result for the image size is previewed in real time.

[0100] In one or more embodiment, the size parameter of the image refers to a parameter stored in the memory, and the parameter determines the display size of the image. The size parameter of the image is adjusted, that is, there is no need to preview the image size adjustment result in real time, only the size parameter in the memory is adjusted. When the adjustment result needs to be displayed, the image is displayed based on the last adjusted size parameter.

[0101] On the basis of any of the above method embodiments, an image size adjustment speed may be determined based on a parameter of the dragging event for the cropping block, and the size of the image in the cropping area of the cropping block may be adjusted based on the image size adjustment speed.

[0102] During the process of implementing the present disclosure, the inventor found, by analysing the user's usage habits, that some dragging habits of the user when dragging the cropping block reflect the user's expectation on the image size adjustment speed. These dragging habits may be reflected in the parameter of the dragging event. Therefore, in one or more embodiment, the image size adjustment speed is determined based on the parameter of the dragging event, and a dragging operation may be controlled to conform to or be close to the user's expectation on the image size adjustment speed.

[0103] The parameter of the dragging event for the cropping block may include a dragging distance, a greater dragging distance indicates a greater image size adjustment speed. The parameter of the dragging event for the cropping block may also include touch pressure, the number of touch points, and the like.

[0104] The specific control logic for the image size adjustment speed is not limited in the embodiment of the present disclosure, which may be determined according to the usage scenario and product design requirements in practice. Taking the dragging distance as an example, the image size adjustment speed may be determined in real time, and in each

determination period, the image size adjustment speed is determined based on the straight-line distance dragged in the determination period. There is a predetermined function relationship between the dragging distance and image size adjustment speed. If the dragging distance is 0, the image dragging speed is a fixed value, and the fixed value may be a predetermined value or a value determined in real time at the last time.

[0105] During the process of implementing the present disclosure, the inventor found, by analysing the user's usage habits, that when the user drags the cropping block, a greater dragging range, i.e., a greater dragging distance of the dragging event indicates a greater image size adjustment speed expected by the user. Therefore, determining the image size adjustment speed based on the dragging distance is in line with the user's expectation.

[0106] On the basis of any of the above method embodiments, the method provided by the embodiment of the present disclosure may further include: adjusting, when the dragging event for the cropping block continues, a display position of a target image to make a centre of the target image always coincide with a centre of the cropping area of the cropping block or make the centre of the target image approach the centre of the cropping area of the cropping block based on a specified path.

[0107] More specifically, in a case that the dragging event continues and the border of the cropping block has not yet reached the boundary of the image display area, the display position of the image is adjusted based on the above adjustment logic. In a case that the dragging event continues and the border of the cropping block reaches the boundary of the image display area, the display position of the image is adjusted based on the other adjustment logics, or the display position of the target image is not adjusted no longer. The display position of the image may also be adjusted based on the above adjustment logic during the entire duration of the dragging event.

[0108] The specific implementation means for adjusting the display position of the target image is not limited in the embodiments of the present disclosure, which may be a conventional means. For example, in order to make the centre of the target image always coincide with the centre of the cropping area of the cropping block, a coordinate value of a centre point of the cropping area of the cropping block may be acquired in real time, and the coordinate value may be assigned to the centre point of the target image. The display position of the target image is

adjusted based on the coordinate value of the centre point of the target image after the value assignment.

[0109] The specified path may be predetermined or calculated based on a predetermined rule.

[0110] If the centre of the target image approaches the centre of the cropping area of the cropping block based on the specified path, the target image may also be moved based on the image size adjustment speed determined above.

[0111] If a screen that the user expects to preserve is close to or located in a centre region of the target image, during the image cropping process, if the display position of the target image remains unchanged, the border of the cropping block needs to be adjusted multiple times in multiple directions. If the display position of the target image is adjusted in the above manner, it is possible to avoid missing the screen that the user expects to preserve during the image cropping process, and the expected effect can be achieved by a few adjustments in a few number of directions, and the cropping efficiency can be improved.

[0112] The image cropping method provided by the embodiment of the present disclosure will be described below with respect to different image cropping modes and cropping block dragging manners in combination with specific application scenarios.

[0113] In this specific scenario, after the user selects the target image and triggers the cropping function, as shown in Figure 1A, a target image 102 and a cropping block 103 are superimposed and displayed on an image display area 101 of a display screen 100 of a mobile terminal. A border of the cropping block 103 coincides with a boundary of the target image 102.

[0114] In this embodiment, in a first image cropping mode, an image cropping ratio is not limited, which means that a border ratio of the cropping block may be arbitrarily changed within the image display area.

[0115] In this embodiment, in a first cropping block dragging manner based on the first image cropping mode, the cropping block is dragged inward. In this embodiment, if a dragged border area is a length-side area, then a width of the cropping block is adjusted based on a dragging distance. If the dragged border area is a width-side area, then a length of the cropping block is adjusted based on the dragging distance. If the dragged border area is a corner area, then the length and width of the cropping block are proportionally adjusted based on the dragging distance.

[0116] In this embodiment, no matter which border area of the cropping block is dragged, the size of the cropping block will be changed. During the dragging event, both the display size and the display position of the target image are not adjusted, or the display size of the target image is not adjusted and the display position of the target image is adjusted. For the adjustment manner, the description of the above-mentioned embodiment may be referred.

[0117] In this embodiment, if the length-side area and/or width-side area of the cropping block is dragged to a preset minimum size, the size of the cropping block will not change. At this time, if the dragging event still continues, the size of the image in the cropping block is increased to continue the image cropping. In this embodiment, since the part of the target image outside the cropping block is not displayed, only the size of the image in the cropping block is increased; or the size of the whole target image is increased, so as to increase the size of the image in the cropping block.

[0118] In this embodiment, during the image enlargement process, as shown in Figure 3A, the centre of the image in the cropping block is always kept at the centre of the cropping block. In practice, there may also be other implementation logics. For example, as shown in Figure 3B, the image boundary corresponding to the dragging event is fixed and the image is enlarged.

[0119] In this embodiment, after the border of the cropping block reaches the minimum size, the basis for performing the operation of enlarging the image is that the dragging event continues all the time, and the dragging direction is inward dragging.

[0120] In this embodiment, after the border of the cropping block reaches the minimum size, if the user's finger continues to drag the cropping block, and the dragging position does not change, then the image is enlarged at a constant speed. If the user's finger continues to drag the cropping block and the dragging position changes, a real-time image size adjustment speed is calculated based on the real-time dragging distance, and the image is enlarged in real time based on the image size adjustment speed determined in real time.

[0121] In a second cropping block dragging manner based on the first image cropping mode, on the basis of the aforementioned operation of dragging the cropping block inward, the cropping block is dragged outward. The initial state is shown in Figure 1C. In this embodiment, if a dragged border area is a length-side area, then a width of the cropping block is adjusted based on a dragging distance. If the dragged border area is a width-side area, then a length of

the cropping block is adjusted based on the dragging distance. If the dragged border area is a corner area, then the length and width of the cropping block are proportionally adjusted based on the dragging distance.

[0122] In this embodiment, no matter which border area of the cropping block is dragged, the size of the cropping block will be changed. During the dragging event, both the display size and the display position of the target image are not adjusted, or the display size of the target image is not adjusted and the display position of the target image is adjusted. For the adjustment manner, the description of the above-mentioned embodiment may be referred.

[0123] In this embodiment, if the length-side area and/or width-side area of the cropping block is dragged to the boundary of the image display area, the size of the cropping block will not change. At this time, if the dragging event still continues, the size of the image in the cropping block is reduced to continue the image cropping. In this embodiment, the size of the whole target image may be reduced, so as to reduce the size of the image in the cropping block, until the border of the cropping block coincides with the boundary of the target image.

[0124] As shown in Figure 4A, the right border of the cropping block 103 is dragged outward until the right boundary of the image display area 101 is reached. If the dragging event continues, then the size of the image is reduced as shown in Figure 4B. When the right border of the cropping block 103 coincides with the right boundary of the target image, if the dragging event continues, the width of the cropping block is adjusted until the upper and lower borders of the cropping block coincide with the upper and lower boundaries of the target image. It should be pointed out that the image narrowing logic shown in Figure 4B is that the left boundary of the image is fixed. If other implementation logic is adopted, a following case may occur, the right border of the cropping block 103 overlaps with the right boundary of the target image, but the left border of the cropping block 103 does not overlap with the left boundary of the target image, if the dragging event continues, the target image will continue to be narrowed until the left border of the cropping block 103 overlaps with the left boundary of the target image.

[0125] By comparing Figures 4A and 4B, it can be seen that in the process of narrowing the image in the cropping area of the cropping block, the part of the target image that was originally located outside the cropping area will be gradually displayed in the cropping area of the cropping block, the proportion of the image displayed in the cropping area of the cropping block

in the target image gradually increases.

[0126] In this embodiment, during the image narrowing process, the border size of the cropping block may be adjusted according to a preset rule until it overlaps with the boundary of the target image. The preset rule is not limited in this disclosure, which may be determined according to usage scenarios and product design requirements.

[0127] In this embodiment, during the image narrowing process, the left boundary of the image in the cropping block always coincides with the left border of the cropping block. In practice, there may be other implementation logics. For example, the boundary of the image corresponding to the dragging event may be fixed, and the image may be narrowed. For another example, the centre of the target image may always be kept at the centre of the cropping block. For another example, the centre of the target image may continuously approach the centre of the cropping box. For another example, the centre of the image in the cropping box may always be kept at the centre of the cropping box.

[0128] In this embodiment, after the border of the cropping block reaches the boundary of the image display area, the basis for performing the operation of narrowing the image is that the dragging event continues all the time, and the dragging direction is outward dragging.

[0129] In this embodiment, after the border of the cropping block reaches the boundary of the image display area, if the user's finger continues to drag the cropping block, and the dragging position does not change, then the image is narrowed at a constant speed. If the user's finger continues to drag the cropping block and the dragging position changes, a real-time image size adjustment speed is calculated based on the real-time dragging distance, and the image is narrowed in real time based on the image size adjustment speed determined in real time.

[0130] In a third cropping block dragging manner based on the first image cropping mode, after the user selects the target image and triggers the cropping function, the user drags the cropping block outward, and the initial state is shown in Figure 1A. At this point, the left and right borders of the cropping block have reached the left and right boundaries of the image display interface.

[0131] If the opposite corner areas or the left and right side areas of the cropping block are dragged outward, in this embodiment, the size of the cropping block will not change, but the image will be enlarged according to the dragging direction. For the specific enlargement manner and enlargement logic, reference may be made to the descriptions of the foregoing embodiments,

which will not be repeated here.

[0132] In a second image cropping mode, the image cropping ratio is specified, which means that a border ratio of the cropping block remains unchanged in the image display area, and the image is scaled according to the specified ratio. The cropping implementation process corresponding to each cropping block dragging manner based on the second image cropping mode may refer to the corresponding process in the first image cropping mode, which will not be repeated here. The only difference is that in the process of scaling the image in the second image cropping mode, the specified ratio is always unchanged.

[0133] Based on the same inventive concept as the method shown in Figure 2, an image cropping device is provided according to an embodiment of the disclosure. As shown in Figure 5, the device includes: an image adjusting module 501, configured to adjust a size of an image in a cropping area of a cropping block in a case that a border of the cropping block reaches a first target position of an image display area and a dragging event for the cropping block continues; and an image displaying module 502, configured to display, on a second target position of the image display area, an image in a current cropping area of the cropping block based on a current size ratio of the image in the cropping area of the cropping block when the dragging event for the cropping block ends.

[0134] In the image cropping device provided according to the embodiment of the present disclosure, when the border of the cropping block reaches the first target position of the image display area, for example, reaches a boundary of the image display area, if the cropping block is not released, that is, the dragging event for the cropping block still continues, the image cropping process may still continue, that is, in this case, a size of the image in the cropping area of the cropping block may be adjusted. Therefore, with the device provided by the embodiment of the present disclosure, when the user drags the cropping block to the boundary of the image display area, as long as the cropping block is not released, an application for implementing the device provided by the embodiment of the present disclosure may continue to adjust the size of the image to achieve continuing cropping, which can avoid a case that the user frequently drags the cropping block in the same way to achieve an expected effect. Therefore, a difficulty of an image cropping operation is reduced and an efficiency of the image cropping is improved.

[0135] Optionally, the image adjusting module is configured to adjust the size of the image

in the cropping area of the cropping block in a case that the border of the cropping block reaches the first target position of the image display area and the dragging event for the cropping block continues, until the dragging event for the cropping block ends or the border of the cropping block reaches a boundary of a target image. The image in the cropping area of the cropping block is a part of the target image.

[0136] It should be pointed out that in embodiments, an aim of image cropping is to preserve a screen required by the user by cropping. Generally, when the border of the cropping block reaches the boundary of the target image, the screen required by the user may already appear, so there is no need to continue to adjust the size of the image. Therefore, "the border of the cropping block reaches the boundary of the target image" is preset as a stopping condition for image size adjustment. When the stopping condition is met, the image cropping is automatically stopped to improve a quality and effect of image cropping.

[0137] In any of the above device embodiments, the first target position of the image display area may be any of following positions: a boundary of the image display area, and a position of the border of the cropping block on the image display area when the border of the cropping block reaches a set minimum size.

[0138] It can be seen that, in the device provided by the embodiment of the present disclosure, when the border of the cropping block reaches the boundary of the image display area, the image cropping may still be continued. In addition, when the border of the cropping block reaches the set minimum size, the image cropping may still be continued.

[0139] On this basis, in a case that the border of the cropping block reaches the boundary of the image display area, the border of the cropping block does not coincide with the boundary of the target image when the dragging event for the cropping block starts, and the dragging event for the cropping block continues, the adjusting a size of an image in a cropping area of a cropping block includes: reducing the size of the image in the cropping area of the cropping block; in a case that the border of the cropping block reaches the boundary of the image display area, the border of the cropping block coincides with the boundary of the target image when the dragging event for the cropping block starts, and the dragging event for the cropping block continues, the adjusting a size of an image in a cropping area of a cropping block includes: increasing the size of the image in the cropping area of the cropping block; and in a case that

the border of the cropping block reaches the set minimum size and the dragging event for the cropping block continues, the adjusting a size of an image in a cropping area of a cropping block includes: increasing the size of the image in the cropping area of the cropping block.

[0140] On the basis of any of the above device embodiments, in a case that the border of the cropping block reaches the first target position of the image display area and the dragging event for the cropping block continues, on the one hand, the image adjusting module may continuously adjust a display size of the image in the cropping area of the cropping block, correspondingly, the current size ratio of the image in the cropping area of the cropping block is determined based on a current display size, in this case, in an image cropping process, the effect of image cropping can be previewed in real time, which helps to improve the efficiency of image cropping. On the other hand, the image adjusting module may adjust a size parameter of the image in the cropping area of the cropping block, correspondingly, the current size ratio of the image in the cropping area of the cropping block is determined based on the size parameter when the dragging event for the cropping block ends. In this case, although the effect of image cropping cannot be previewed in real time during the image cropping process, since the size parameter of the image is recorded, a result of image cropping may be displayed accurately after the dragging event ends.

[0141] On the basis of any of the above device embodiments, an image size adjustment speed may be determined based on a parameter of the dragging event for the cropping block, and the size of the image in the cropping area of the cropping block may be adjusted based on the image size adjustment speed.

[0142] During the process of implementing the present disclosure, the inventor found, by analysing the user's usage habits, that some dragging habits of the user when dragging the cropping block reflect the user's expectation on the image size adjustment speed. These dragging habits may be reflected in the parameter of the dragging event. Therefore, in one or more embodiments, the image size adjustment speed is determined based on the parameter of the dragging event, and a dragging operation may be controlled to conform to or be close to the user's expectation on the image size adjustment speed.

[0143] The parameter of the dragging event for the cropping block may include a dragging distance, where a greater dragging distance indicates a greater image size adjustment speed.

[0144] During the process of implementing the present disclosure, the inventor found, by analysing the user's usage habits, that when the user drags the cropping block, a greater dragging range, i.e., a greater dragging distance of the dragging event indicates a greater image size adjustment speed expected by the user. Therefore, determining the image size adjustment speed based on the dragging distance is in line with the user's expectation.

[0145] On the basis of any of the above device embodiments, the image adjusting module may further be configured to: adjust, when the dragging event for the cropping block continues, a display position of the image in the cropping area of the cropping block to make a centre of the target image always coincide with a centre of the cropping area of the cropping block or make the centre of the target image approach the centre of the cropping area of the cropping block based on a specified path.

[0146] If a screen that the user expects to preserve is close to or located in a centre region of the target image, during the image cropping process, if the display position of the target image remains unchanged, the border of the cropping block may need to be adjusted multiple times in multiple directions. If the display position of the target image is adjusted in the above manner, it is possible to avoid missing the screen that the user expects to preserve during the image cropping process, and the expected effect can be achieved by a few adjustments in a few number of directions, and the cropping efficiency can be improved.

[0147] Based on the same inventive concept as the method shown in Figure 2, a mobile terminal is provided according to an embodiment of the disclosure. As shown in Figure 6, the mobile terminal includes: a memory configured to store a program for executing the method according to the method embodiments; and a processor configured to execute the program stored in the memory.

[0148] In the mobile terminal provided according to the embodiment of the present disclosure, when the border of the cropping block reaches the first target position of the image display area, for example, reaches a boundary of the image display area, if the cropping block is not released, that is, the dragging event for the cropping block still continues, the image cropping process may still continue, that is, in this case, a size of the image in the cropping area of the cropping block may be adjusted. Therefore, with the mobile terminal provided by the embodiment of the present disclosure, when the user drags the cropping block to the boundary of the image display

area, as long as the cropping block is not released, an application for implementing the processor of the terminal provided by the embodiment of the present disclosure may continue to adjust the size of the image to achieve continuing cropping, which can avoid a case that the user frequently drags the cropping block in the same way to achieve an expected effect. Therefore, a difficulty of an image cropping operation is reduced and an efficiency of image cropping is improved.

[0149] As shown in Figure 6, the mobile terminal provided in this embodiment of the present disclosure further includes an input device (such as a touch screen, a camera, a microphone), an output device (such as a display screen, a speaker), a communication module, and a power supply module.

[0150] The memory, the input device, the output device, the communication module, and the power module are connected to the processor through a serial port, a bus or a USB interface.

[0151] For a mobile terminal with a single processor, the processor is a CPU (central processing unit). For a mobile terminal with two processors, the processors include a main processor and a slave processor, and the main processor executes an application program to implement the method provided by the embodiments of the present disclosure. If it is necessary to communicate with the outside world, the communication is implemented by the communication module controlled by the processor. For a mobile terminal including a GPU (graphics processing unit) and a CPU, the processor refers to the GPU and the CPU, and the GPU and the CPU cooperate with to each other to implement the method provided by the embodiments of the present disclosure or CPU alone implements the method provided by the embodiments of the present disclosure.

[0152] In embodiments, different mobile terminals (single-processor smartphones, dual-processor smartphones, smart wearable devices, tablet computers, etc.) may include more or less hardware structures than those of the mobile terminal shown in Figure 6. All the mobile terminals which include a memory and a processor and can implement the functions of the above method embodiments fall within the protection scope of the present disclosure.

[0153] Those skilled in the art may clearly understand that, for the convenience and conciseness of description, the specific working processes of the above-described devices and units may refer to the corresponding processes in the above-mentioned method embodiments,

and therefore are not necessarily described in detail here.

[0154] Based on the same inventive concept as the method shown in Figure 2, a computer-readable storage medium is provided according to an embodiment of the disclosure. The medium stores a program for executing the method according to the above embodiments.

[0155] According to the program stored in the computer-readable storage medium according to the embodiment of the disclosure, when the border of the cropping block reaches the first target position of the image display area, for example, reaches a boundary of the image display area, if the cropping block is not released, that is, the dragging event for the cropping block still continues, the image cropping process may still continue, that is, in this case, a size of the image in the cropping area of the cropping block may be adjusted. Therefore, with the program stored in the computer-readable storage medium according to the embodiment of the disclosure, when the user drags the cropping block to the boundary of the image display area, as long as the cropping block is not released, the program may continue to adjust the size of the image to achieve continuing cropping, which can avoid a case that the user frequently drags the cropping block in the same way to achieve an expected effect. Therefore, a difficulty of an image cropping operation is reduced and an efficiency of image cropping is improved.

[0156] As shown in Figure 7, an image cropping method is provided according to an embodiment of the disclosure. The method includes: step 710 of adjusting, when a dragging event for a cropping block is detected and the dragging event for the cropping block continues, a display position of a target image to make a centre of the target image always coincide with a centre of a cropping area of the cropping block; and step 720 of displaying, on a target position of an image display area, an image in a current cropping area of the cropping block based on a current size ratio of an image in the cropping area of the cropping block when the dragging event for the cropping block ends.

[0157] As shown in Figure 8, an image cropping method is provided according to an embodiment of the disclosure. The method includes: step 810 of adjusting, when a dragging event for a cropping block is detected and the dragging event for the cropping block continues, a display position of a target image to make the centre of the target image approach the centre of the cropping area of the cropping block based on a specified path; and step 820 of displaying, on a target position of an image display area, an image in a current cropping area of the cropping

block based on a current size ratio of an image in the cropping area of the cropping block when the dragging event for the cropping block ends.

[0158] If a screen that the user expects to preserve is close to or located in a centre region of the target image, during the image cropping process, if the display position of the target image remains unchanged, the border of the cropping block may need to be adjusted multiple times in multiple directions. If the display position of the target image is adjusted according to an embodiment of the method of the fifth aspect, it may be possible to avoid missing the screen that the user expects to preserve during the image cropping process, and the expected effect can be achieved by a few adjustments in a few number of directions, and the cropping efficiency can be improved, and a complexity of the cropping operation can be reduced.

[0159] Based on the same inventive concept as the image cropping method shown in Figure 7, an image cropping device is provided according to an embodiment of the disclosure. The device includes: an image adjusting module configured to adjust, when a dragging event for a cropping block is detected and the dragging event for the cropping block continues, a display position of an image in the cropping area of the cropping block to make a centre of the target image always coincide with a centre of a cropping area of the cropping block; and an image displaying module configured to display, on a target position of an image display area, an image in a current cropping area of the cropping block based on a current size ratio of an image in the cropping area of the cropping block when the dragging event for the cropping block ends.

[0160] Based on the same inventive concept as the image cropping method shown in Figure 8, an image cropping device is provided according to an embodiment of the disclosure. The device includes: an image adjusting module configured to adjust, when a dragging event for a cropping block is detected and the dragging event for the cropping block continues, a display position of an image in the cropping area of the cropping block to make the centre of the target image approach the centre of the cropping area of the cropping block based on a specified path; and an image displaying module configured to display, on a target position of an image display area, an image in a current cropping area of the cropping block based on a current size ratio of an image in the cropping area of the cropping block when the dragging event for the cropping block ends.

[0161] If a screen that the user expects to preserve is close to or located in a centre region of

the target image, during the image cropping process, if the display position of the target image remains unchanged, the border of the cropping block may need to be adjusted multiple times in multiple directions. If the display position of the target image is adjusted according to an embodiment of the device of the sixth aspect, it may be possible to avoid missing the screen that the user expects to preserve during the image cropping process, and the expected effect can be achieved by a few adjustments in a few number of directions, and the cropping efficiency can be improved, and a complexity of the cropping operation can be reduced.

[0162] Based on the same inventive concept as the method shown in Figures 7 and 8, a mobile terminal is provided according to an embodiment of the disclosure. The mobile terminal includes: a memory configured to store a program for executing the method shown in Figures 7 and 8; and a processor configured to execute the program stored in the memory.

[0163] If a screen that the user expects to preserve is close to or located in a centre region of the target image, during the image cropping process, if the display position of the target image remains unchanged, the border of the cropping block may need to be adjusted multiple times in multiple directions. If the display position of the target image is adjusted according to an embodiment of the mobile terminal of the seventh aspect, it may be possible to avoid missing the screen that the user expects to preserve during the image cropping process, and the expected effect can be achieved by a few adjustments in a few number of directions, and the cropping efficiency can be improved, and a complexity of the cropping operation can be reduced.

[0164] Based on the same inventive concept as the method shown in Figures 7 and 8, a computer-readable storage medium is provided according to an embodiment of the disclosure. The medium stores a program for executing the method shown in Figures 7 and 8.

[0165] If a screen that the user expects to preserve is close to or located in a centre region of the target image, during the image cropping process, if the display position of the target image remains unchanged, the border of the cropping block may need to be adjusted multiple times in multiple directions. If the display position of the target image is adjusted according to the program stored in an embodiment of the computer-readable storage medium of the eighth aspect, it may be possible to avoid missing the screen that the user expects to preserve during the image cropping process, and the expected effect can be achieved by a few adjustments in a few number of directions, and the cropping efficiency can be improved, and a complexity of the cropping

operation can be reduced.

[0166] It should be pointed out that the methods provided by the various embodiments of the present disclosure may be implemented by a mobile terminal, specifically by the image retouching software of the mobile terminal, or may be implemented by a PC (personal computer) or a server.

[0167] The present disclosure is described with reference to flow charts and/or block diagrams of methods, devices (systems), and computer program products according to the embodiments of the present disclosure. It should be understood that each of the flows in the flow charts and/or each of blocks in the block diagrams, and a combination of flows in the flow charts and/or a combination of blocks in the block diagrams can be implemented by the computer program instructions. The computer program instructions may be installed in a general-purpose computer, a dedicated computer, an embedded processor or processors of other programmable data processing devices to generate a machine, such that the instructions executed by the computer or the processors of the other programmable data processing devices generate a device for implementing functions specified in one or more flows of the flow charts and/or one or more blocks of the block diagrams.

[0168] The computer program instructions may be stored in a computer readable memory which may direct a computer or other programmable data processing devices to operate in a manner, such that a manufacture including an instruction device is generated based on the instructions stored in the computer readable memory, and the instructions are executed to perform functions specified in one or more flows of the flow charts and/or one or more blocks of the block diagrams.

[0169] The computer program instructions may be loaded on a computer or other programmable data processing devices. Then, the computer or other programmable devices perform operation steps to realise the processing performed by the computer, so that the instructions are executed by the computer or other programmable devices to perform functions specified in one or more flows of the flow charts and/or one or more blocks of the block diagrams.

[0170] Although the preferred embodiments of the present disclosure are described, those skilled in the art may make additional changes and modifications to the embodiments once they

know the basic creative concepts. Therefore, the appended claims are intended to be explained as including the preferred embodiments and all changes and modifications falling within the scope of the present disclosure.

[0171] It is apparent that, those skilled in the art may make various changes and variations to the present disclosure without departing from the spirit and scope of the present disclosure. In this case, if the changes and variations of the present disclosure fall within the scope of the claims of the present disclosure and equivalent technologies thereof, the present disclosure is intended to include the changes and variations.

CLAIMS

1. An image cropping method, comprising:

adjusting a size of an image in a cropping area of a cropping block in a case that a border of the cropping block reaches a first target position of an image display area and a dragging event for the cropping block continues; the cropping block is a drag control displayed in the image display area and superimposed with a target image to be cropped; and

displaying, on a second target position of the image display area, an image in a current cropping area of the cropping block according to a current size ratio of the image in the cropping area of the cropping block when the dragging event for the cropping block ends,

wherein the first target position of the image display area is any of following positions: a boundary of the image display area, and a position of the border of the cropping block on the image display area when the border of the cropping block reaches a set minimum size;

the adjusting a size of an image in a cropping area of a cropping block comprises: determining an image size adjustment speed based on a parameter of the dragging event for the cropping block, and adjusting the size of the image in the cropping area of the cropping block according to the image size adjustment speed; and/or

the method further comprises: adjusting, when the dragging event for the cropping block continues, a display position of a target image to make a center of the target image always coincide with a center of the cropping area of the cropping block or make the center of the target image approach the center of the cropping area of the cropping block according to a specified path, wherein the image in the cropping area of the cropping block is a part of the target image.

2. The method according to claim 1, wherein

the size of the image in the cropping area of the cropping block is adjusted

in a case that the border of the cropping block reaches the first target position of the image display area and the dragging event for the cropping block continues, until the dragging event for the cropping block ends or the border of the cropping block reaches a boundary of a target image, wherein the image in the cropping area of the cropping block is a part of the target image; and/or

the adjusting a size of an image in a cropping area of a cropping block in a case that a border of the cropping block reaches a first target position of an image display area and a dragging event for the cropping block continues comprises: continuously adjusting a display size of the image in the cropping area of the cropping block in a case that the border of the cropping block reaches the first target position of the image display area and the dragging event for the cropping block continues, wherein the current size ratio of the image in the cropping area of the cropping block is determined based on a current display size; or adjusting a size parameter of the image in the cropping area of the cropping block in a case that the border of the cropping block reaches the first target position of the image display area and the dragging event for the cropping block continues, wherein the current size ratio of the image in the cropping area of the cropping block is determined based on the size parameter when the dragging event for the cropping block ends.

3. The method according to claim 2, wherein

in a case that the border of the cropping block reaches the boundary of the image display area, the border of the cropping block does not coincide with the boundary of the target image when the dragging event for the cropping block starts, and the dragging event for the cropping block continues, the adjusting a size of an image in a cropping area of a cropping block comprises: reducing the size of the image in the cropping area of the cropping block;

in a case that the border of the cropping block reaches the boundary of the image display area, the border of the cropping block coincides with the boundary of the target image when the dragging event for the cropping block starts, and the dragging event for the cropping block continues, the adjusting a size of an image

in a cropping area of a cropping block comprises: increasing the size of the image in the cropping area of the cropping block; and

in a case that the border of the cropping block reaches the set minimum size and the dragging event for the cropping block continues, the adjusting a size of an image in a cropping area of a cropping block comprises: increasing the size of the image in the cropping area of the cropping block.

4. The method according to claim 3, wherein the size of the image in the cropping area of the cropping block is reduced to make a proportion of the image displayed in the cropping area of the cropping block in the target image increase.

5. The method according to claim 1, wherein the parameter of the dragging event for the cropping block comprises a dragging distance, wherein a greater dragging distance indicates a greater image size adjustment speed.

6. An image cropping device, comprising:

an image adjusting module, configured to adjust a size of an image in a cropping area of a cropping block in a case that a border of the cropping block reaches a first target position of an image display area and a dragging event for the cropping block continues; the cropping block is a drag control displayed in a image display area and superimposed with the target image to be cropped; and

an image displaying module, configured to display, on a second target position of the image display area, an image in a current cropping area of the cropping block according to a current size ratio of the image in the cropping area of the cropping block when the dragging event for the cropping block ends,

wherein the first target position of the image display area is any of following positions: a boundary of the image display area, and a position of the border of the cropping block on the image display area when the border of the cropping block reaches a set minimum size;

the adjusting a size of an image in a cropping area of a cropping block comprises: determining an image size adjustment speed based on a parameter of the dragging event for the cropping block, and adjusting the size of the image in

the cropping area of the cropping block according to the image size adjustment speed; and/or

the image displaying module, configured to adjust, when the dragging event for the cropping block continues, a display position of the target image to make a center of the target image always coincide with a center of the cropping area of the cropping block or make the center of the target image approach the center of the cropping area of the cropping block according to a specified path, wherein the image in the cropping area of the cropping block is a part of the target image.

7. A mobile terminal, comprising:

a memory configured to store a program for executing the method according to any one of claims 1 to 5; and

a processor configured to execute the program stored in the memory.

8. A computer-readable storage medium storing one or more programs for executing the method according to any one of claims 1 to 5.

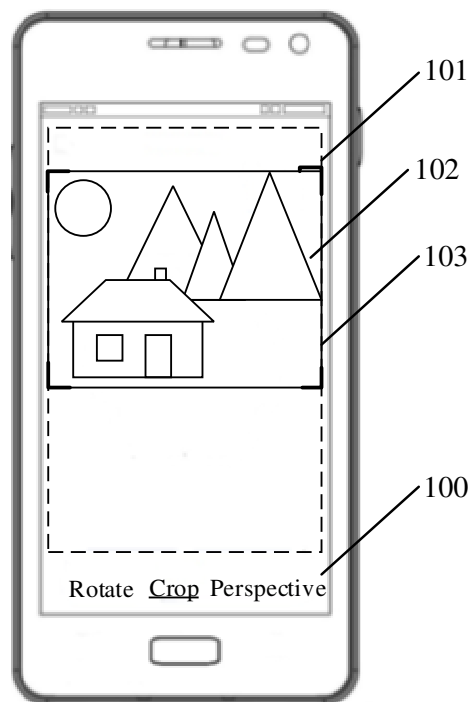


Figure 1A

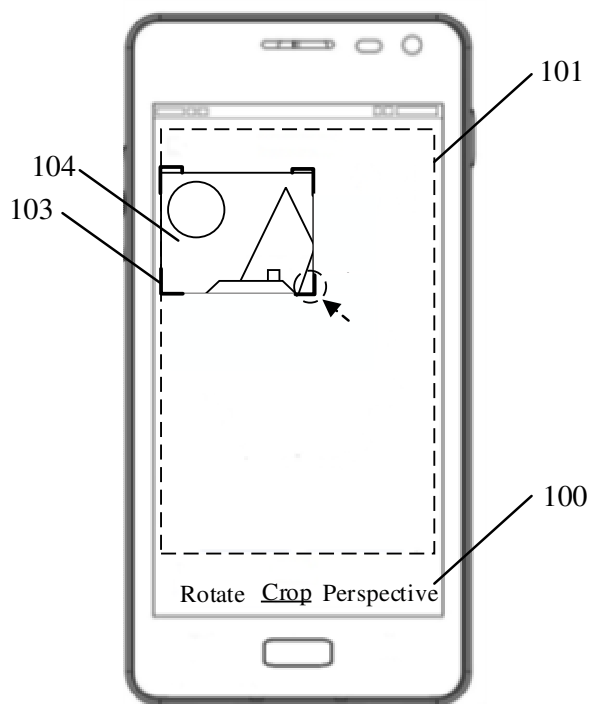


Figure 1B

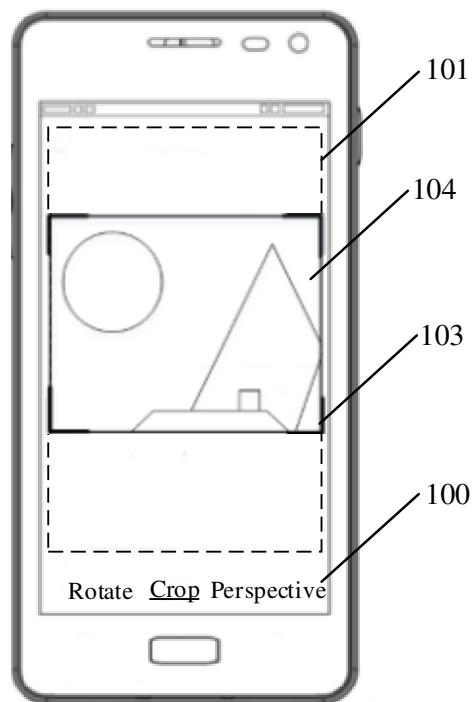


Figure 1C




Figure 1D




Figure 1E




Figure 1F

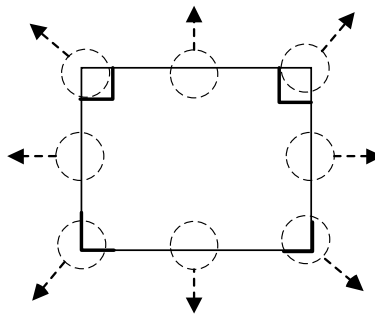


Figure 1G

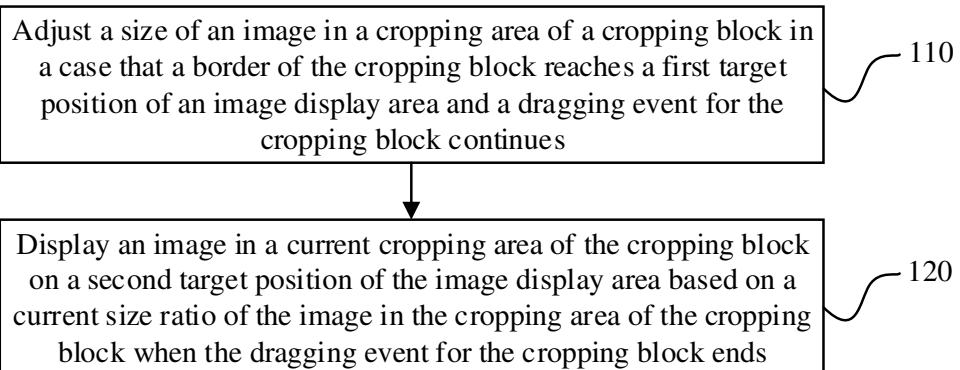


Figure 2

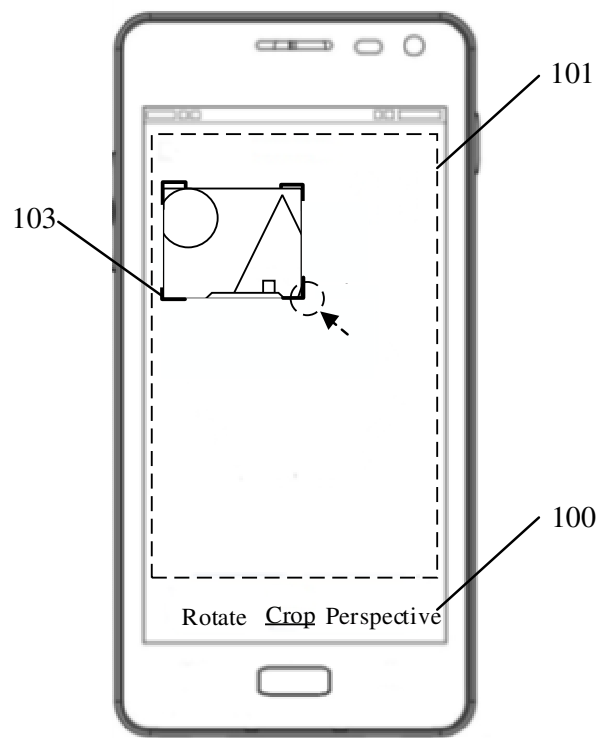


Figure 3A

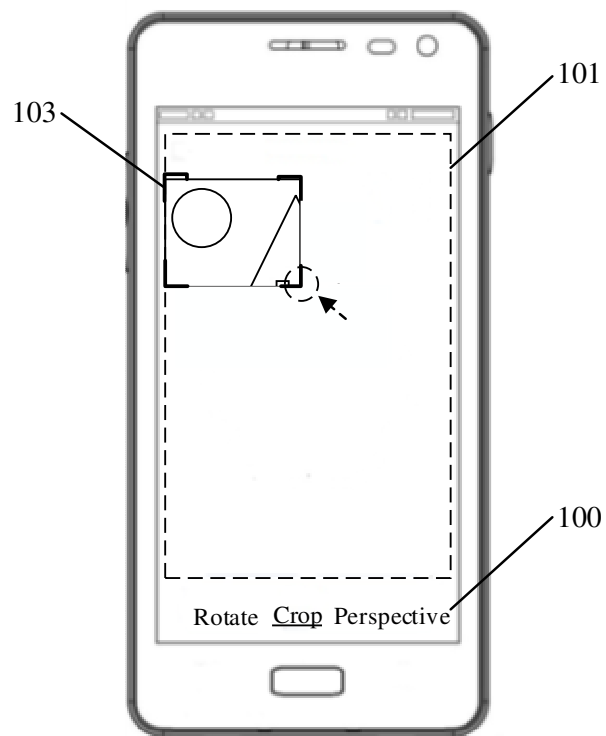


Figure 3B

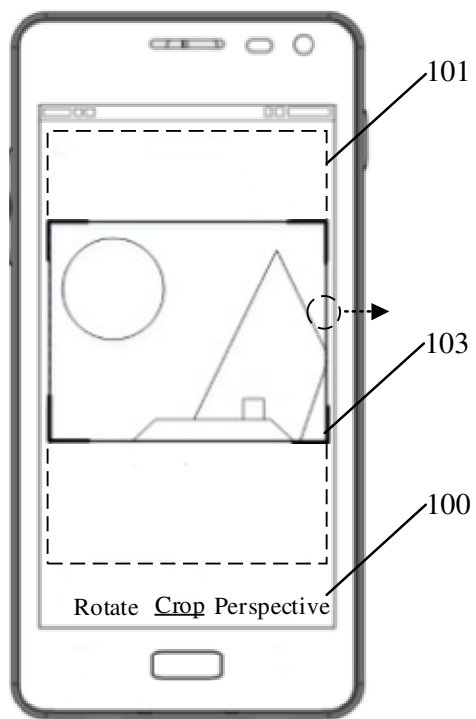


Figure 4A

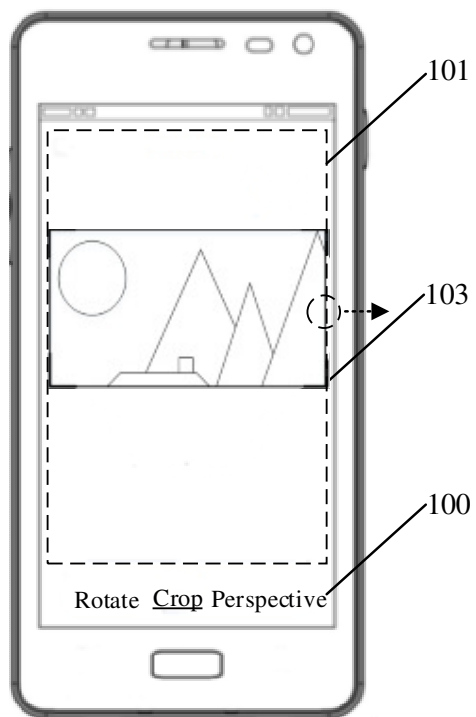


Figure 4B

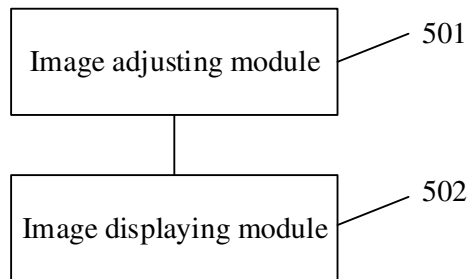


Figure 5

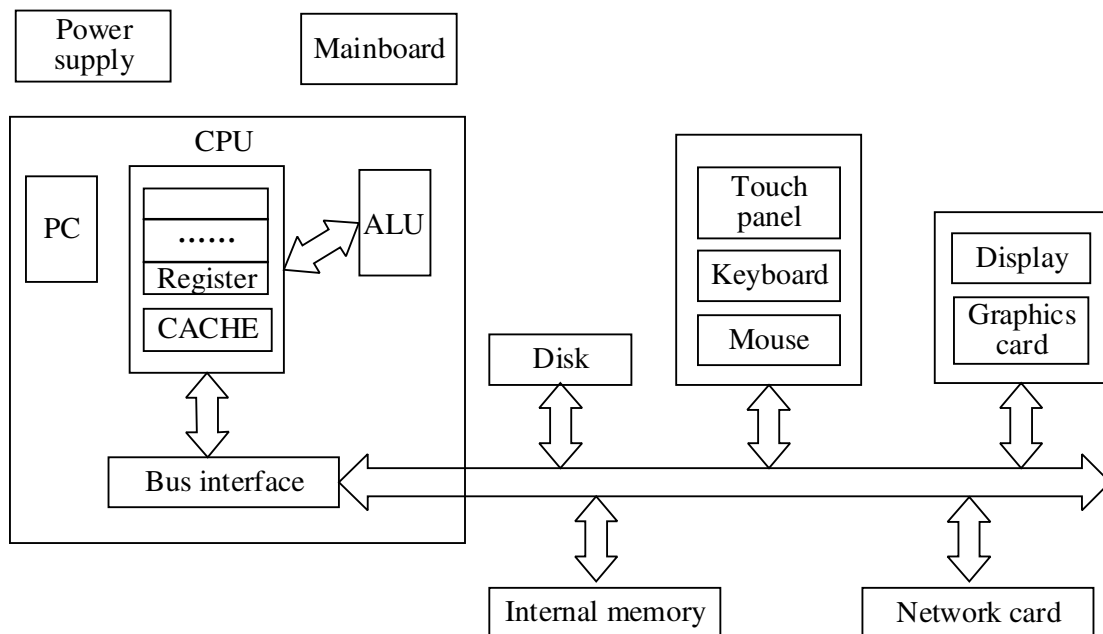


Figure 6

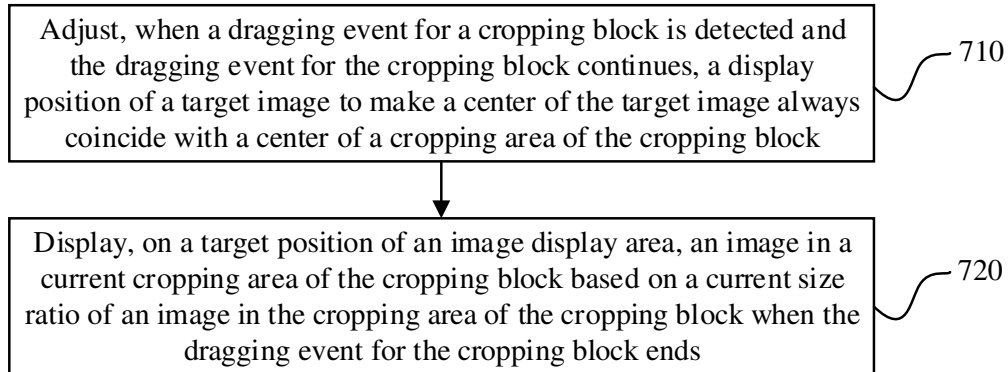


Figure 7

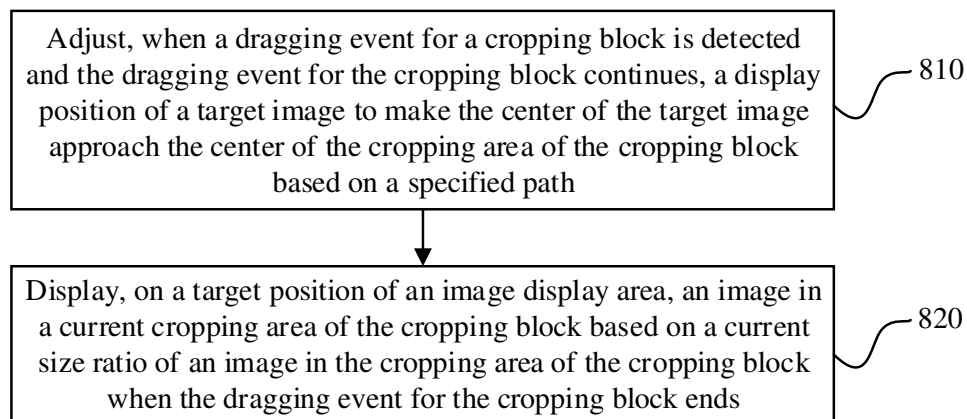


Figure 8