

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 355 831 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

11.08.2004 Bulletin 2004/33

(21) Application number: **01902289.6**

(22) Date of filing: **01.02.2001**

(51) Int Cl.7: **B65D 43/10**, B65D 47/06

(86) International application number:
PCT/DK2001/000074

(87) International publication number:
WO 2002/044048 (06.06.2002 Gazette 2002/23)

(54) **A DRINKING AND POURING DEVICE FOR A CAN**

VORRICHTUNG ZUM TRINKEN UND AUSGIESSEN FÜR EINE DOSE

DISPOSITIF PERMETTANT DE BOIRE ET DE VERSER LE CONTENU D'UNE BOITE-BOISSON

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**

(30) Priority: **01.12.2000 DK 200001812**

(43) Date of publication of application:
29.10.2003 Bulletin 2003/44

(73) Proprietor: **Olsen, Bent Hjort**
3400 Hiller d (DK)

(72) Inventor: **Olsen, Bent Hjort**
3400 Hiller d (DK)

(74) Representative: **Elmeros, Claus et al**
Patentgruppen ApS,
Arosgaarden,
Aaboulevarden 31
8000 Aarhus C (DK)

(56) References cited:
DE-U- 29 703 776 **US-A- 4 403 709**
US-A- 4 880 136 **US-A- 5 088 614**
US-A- 6 073 797

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 355 831 B1

Description

[0001] The present invention relates to a drinking and pouring device for a beverage can with opening means including a tear-up closure in the top surface including a tearing ring and an opening in the top surface.

[0002] Sprouts or similar devices for mounting on top of beverage cans are known for use in connection with drinking the content of the can from e.g. US-A-4,387,826 and US-A-5,062,552.

[0003] These known devices constitute some sort of cap or lid that is mounted on top of the can to block the top opening of the can after it has been opened. The devices are designed in such a way that it is possible to drink the content through a pouring attachment that may be opened and closed.

[0004] A device according to the preamble of claim 1 is known from US-A-6 073 797.

[0005] The problem with such known devices is that a portion of the liquid from the can flows into the enclosed gap between the lid and the top surface of the can when the beverage liquid is poured out of the can. In a similar fashion, an amount of beverage liquid remains in the gap between the lid and the top of the can after a portion of the beverage has been poured. This means that impurities from the surface around the can opening are washed out with the drinking liquid just as the impurities are flushed back into the can. This means that there is a risk that the beverage may be contaminated.

[0006] Another problem with drinking the content of the can is that a person may cut him- or herself on the sharp edges in the region around the opening.

[0007] On this basis, the object of the invention is to reduce this hygienic problem with the known spouts for cans, such as beer cans, fresh beverage cans and the like.

[0008] This object is achieved by a device of the initially mentioned kind, wherein the device comprises the features defined in claim 1.

[0009] By the present invention, a simple cap or lid for a can is provided, wherein the volume of the gap may be reduced or even eliminated so that the risk of releasing dirt particles or other impurities from the surface of the can is reduced which results in a hygienic pouring and drinking device. When the device is positioned on top of the can, the sealing flange makes contact with the top surface of the can, thus reducing the gap volume of the flow passage for the liquid. Due to the cover and the annular snap-on rim flange, the risk of being cut on the edges is eliminated, as the entire top surface of the can is covered by a the device according to the invention.

[0010] In order to ensure a tight fitting onto the top, an upwardly protruding dimple enclosing the tearing ring may be provided. Hereby, it is ensured that the device provides a liquid tight seal even if the tearing ring of the opening means on the can is not fully bent over.

[0011] In the preferred embodiment, the spout partly

encompasses a section of the outside of hole along an outer section of the hole. Hereby, the device is particularly suitable as a pouring device since the spout is semi-circular in its cross-section. This makes it possible for air to enter into the can whilst pouring the liquid out of the can and at the same time avoid liquid slashing out of the can which allows for a continuous and gentle flow of liquid out of the can.

[0012] In an embodiment of the invention, a protective flange extension is provided on the rim flange directly next to the spout. Hereby, the device covers the part of the can with which the mouth or chin would otherwise make contact when drinking directly from the can. Moreover, the flange extension may be used for assisting in the opening of the tear-up closure of the can.

[0013] In the preferred embodiment, the device is made in one single piece, preferably moulded in a biologically inert polymer material. Hereby, the hygienic aspect is taken a step further, as it is ensured that no fluid may be trapped in sharp corners in the device whilst either drinking or cleaning the device or during engagement with the material of the device. When producing the device in a single moulded piece, the device is provided with smooth transitions between the various portions.

[0014] According to the invention, the rim flange may slide on the periphery of the top surface for shifting the hole away from the opening of the can by turning the device. Hereby, a closure function is provided in addition to the other advantages in a simple but efficient way. In order for the closure function to work properly, the spring force created by the rim flange when snapped onto the top surface in its position allows this sliding movement. Since the tearing ring is usually able to be turned on the opening means of the can, this ring will rotate together with the device on the top surface of the can.

[0015] The invention is explained in detail with reference to the embodiments described in the accompanying drawings, in which

fig. 1 is a side view of a device according to a first embodiment of the invention,
fig. 2 to 4 are rear, bottom and top views, respectively, of same,
fig. 5 is a schematic side view of a device mounted onto a can, and
fig. 6 is a side view of a second embodiment of the invention.

[0016] In figures 1 to 5, a first embodiment of a device according to the invention for pouring and drinking the content of a beverage can is shown. The device comprises a cover 3 with an annular flange 4 dimensioned in such a manner that it can be mounted onto the top of a can. The flange 4 ensures that the device is mounted by snap-on mounting. The device is provided with a hole 6 placeable directly above the opening in the top surface 5 of the can 1 (see figs. 1 and 5). A spout 7 is provided

around a section of the hole 6. The device is formed so that the periphery of the hole 6 is in contact with the top surface 5 of the can 1 or at least around the section of the hole 6 provided with an upwardly protruding spout 7. Hereby, the liquid content of the can may be poured out of the can and into a glass or may be drunk directly from the can 1. In the cover flange opposite the hole 6, an upwardly protruding dimple 9 is formed so that the tearing ring 2 of the opening means of the can is enclosed. On the inside or lower side of the cover 3, a sealing flange 8 is provided around the periphery of the dimple 9 enclosing the tearing ring 2 and ensuring that the gap between the lower side of the cover 3 and the top surface 5 is limited, so that the flow communication between the opening and the peripheral regions on the top surface is blocked. This is important, since deposits of dirt and other impurities are often collected in these regions.

[0017] By the sealing flange 7, these deposits are prevented from being brought into contact with the beverage and thus from being washed out into the glass or the like.

[0018] The cover 3 may be provided with a hollow annular periphery 11 inside the rim flange 2. Hereby, drops of beverage running on the outside of the spout may be collected so that the can will not leave ring marks on e. g. the table where it is being placed after the content has been emptied out.

[0019] In the first embodiment, an extension flange 10 is provided on the rim flange 4 outside the spout 7. This extension ensures a comfortable drinking experience when drinking directly from the can 1, since the lips of the mouth are prevented from coming in contact with the can itself.

[0020] This extension flange 10 may be provided with an inscription, such as an advertisement, a logo, a personalised mark, a name, etc.

[0021] In a second embodiment, the device may be provided with a broad rim flange 4 as shown in fig. 4. Otherwise, the device may be provided with the same features as described in the first embodiment, i.e. the sealing flange 8, the spout 7, the hole 6, etc. The broad rim flange 4 may provide a better grip on the can.

[0022] The spout 7 is preferably and substantially semicircular shape so that a passage exists for letting air into the can whilst pouring the liquid out of the can. Hereby, slashing is avoided.

[0023] By the invention, it is understood that many variations of the drinking and pouring device may be made without departing from the scope of the inventions such as described in the accompanying claims.

Claims

1. A drinking and pouring device for a beverage can (1) with opening means including a tear-up closure in the top surface (5) including a tearing ring (2) and

an opening in the top surface (5), said device comprising a cover (3) with a rim flange (4) substantially circumscribing the upper perimeter of the top surface (5) of the can (1) for snap-on mounting of the device onto the can (1) and a hole (6) in the cover (3),

characterised in that

the device includes a spout (7) covering a section of the hole (6), and a sealing flange (8) enclosing the tearing ring (2) of the opening means on the can (1), and wherein the rim flange (4) may slide on the periphery of the top surface for shifting the hole (6) away from the opening of the can (1) by turning the device,

2. A drinking and pouring device according to claim 1, wherein an upwardly protruding dimple (9) for enclosing the tearing ring (2) is provided.
3. A drinking and pouring device according to claim 1 or 2, wherein the spout (7) encloses a section of the outside of hole (6) along an outer section of the hole (6).
4. A drinking and pouring device according to any of the preceding claims, wherein a protective flange extension (10) is provided on the rim flange (4) directly next to the spout (7).
5. A drinking and pouring device according to any of the preceding claims, wherein the device is made in one single piece.
6. A drinking and pouring device according to any of the preceding claims, wherein the device is moulded in a biologically inert polymer material.

Patentansprüche

1. Trink- und Ausgießeinrichtung für eine Getränkedose (1) mit Öffnungsmitteln einschließlich eines Aufreißverschlusses in der oberen Oberfläche (5), umfassend einen Aufziehring (2) und eine Öffnung in der oberen Oberfläche (5), wobei die Einrichtung einen Deckel (3) mit einem Randflansch (4), der im wesentlichen den oberen Umfang der oberen Oberfläche (5) der Dose (1) zur Einschnapp-Anbringung der Einrichtung auf der Dose eingrenzt, und ein Loch (6) in dem Deckel (3) umfaßt, dadurch gekennzeichnet, daß die Einrichtung eine Tülle (7), die einen Abschnitt des Loches (6) abdeckt, und einen Dichtungsflansch (8), der den Ziehring (2) der Öffnungsmittel auf der Dose (1) einschließt, umfaßt und wobei der Randflansch (4) auf der Peripherie der oberen Oberfläche zum Verschieben des Loches (6) weg von der Öffnung der Dose (1) durch Drehen der Ein-

richtung gleiten kann.

2. Eine Trink- und Ausgießeinrichtung nach Anspruch 1, bei der ein nach oben aufragender Eindruck (9) zum Umgeben des Aufziehringes (2) vorgesehen ist. 5
3. Trink- und Ausgießeinrichtung nach Anspruch 1 oder 2, bei der die Tülle (7) einen Abschnitt der Außenseite des Loches (6) entlang eines äußeren Abschnittes des Loches (6) einschließt. 10
4. Trink- und Ausgießeinrichtung nach einem der vorhergehenden Ansprüche, bei der eine Schutz-Flanschverlängerung (10) an dem Randflansch (4) direkt nächst der Tülle (7) vorgesehen ist. 15
5. Trink- und Ausgießeinrichtung nach einem der vorhergehenden Ansprüche, bei der die Einrichtung einstückig hergestellt ist. 20
6. Trink- und Ausgießeinrichtung nach einem der vorhergehenden Ansprüche, bei der die Einrichtung aus einem biologisch inerten polymeren Material geformt ist. 25

4. Dispositif pour boire et verser une boisson selon l'une quelconque des revendications précédentes, dans lequel une rallonge de rebord de protection (10) est placée sur le rebord périphérique (4) directement à côté du bec verseur (7).

5. Dispositif pour boire et verser une boisson selon l'une quelconque des revendications précédentes, dans lequel le dispositif est fabriqué d'une seule pièce.

6. Dispositif pour boire et verser une boisson selon l'une quelconque des revendications précédentes, dans lequel le dispositif est moulé dans un polymère inerte biologiquement.

Revendications

1. Dispositif pour boire et verser une boisson pour une canette (1) à boisson ayant un moyen d'ouverture comprenant une fermeture à arracher dans la surface supérieure (5) incluant une bague d'arrachage (2) et une ouverture dans la surface supérieure (5), ledit dispositif comprenant un couvercle (3) muni d'un rebord périphérique (4) délimitant sensiblement le périmètre supérieur de la surface supérieure (5) de la canette (1) destiné à être monté en pressant le dispositif sur la canette (1) et un orifice (6) dans le couvercle (3), 30
caractérisé en ce que 35
le dispositif comprend un bec verseur (7) couvrant une section de l'orifice (6), et un rebord d'étanchéité (8) entourant la bague d'arrachage (2) du moyen d'ouverture sur la canette (1), et dans lequel le rebord (4) peut glisser sur la périphérie de la surface supérieure pour décaler l'orifice (6) et l'éloigner de l'ouverture de la canette (1) en tournant le dispositif. 40 45
2. Dispositif pour boire et verser une boisson selon la revendication 1, dans lequel une bosse (9) en saillie vers le haut destinée à entourer la bague d'arrachage (2) est prévue. 50
3. Dispositif pour boire et verser une boisson selon la revendication 1 ou 2, dans lequel le bec verseur (7) entoure une section de l'extérieur de l'orifice (6) le long d'une section extérieure de l'orifice (6). 55

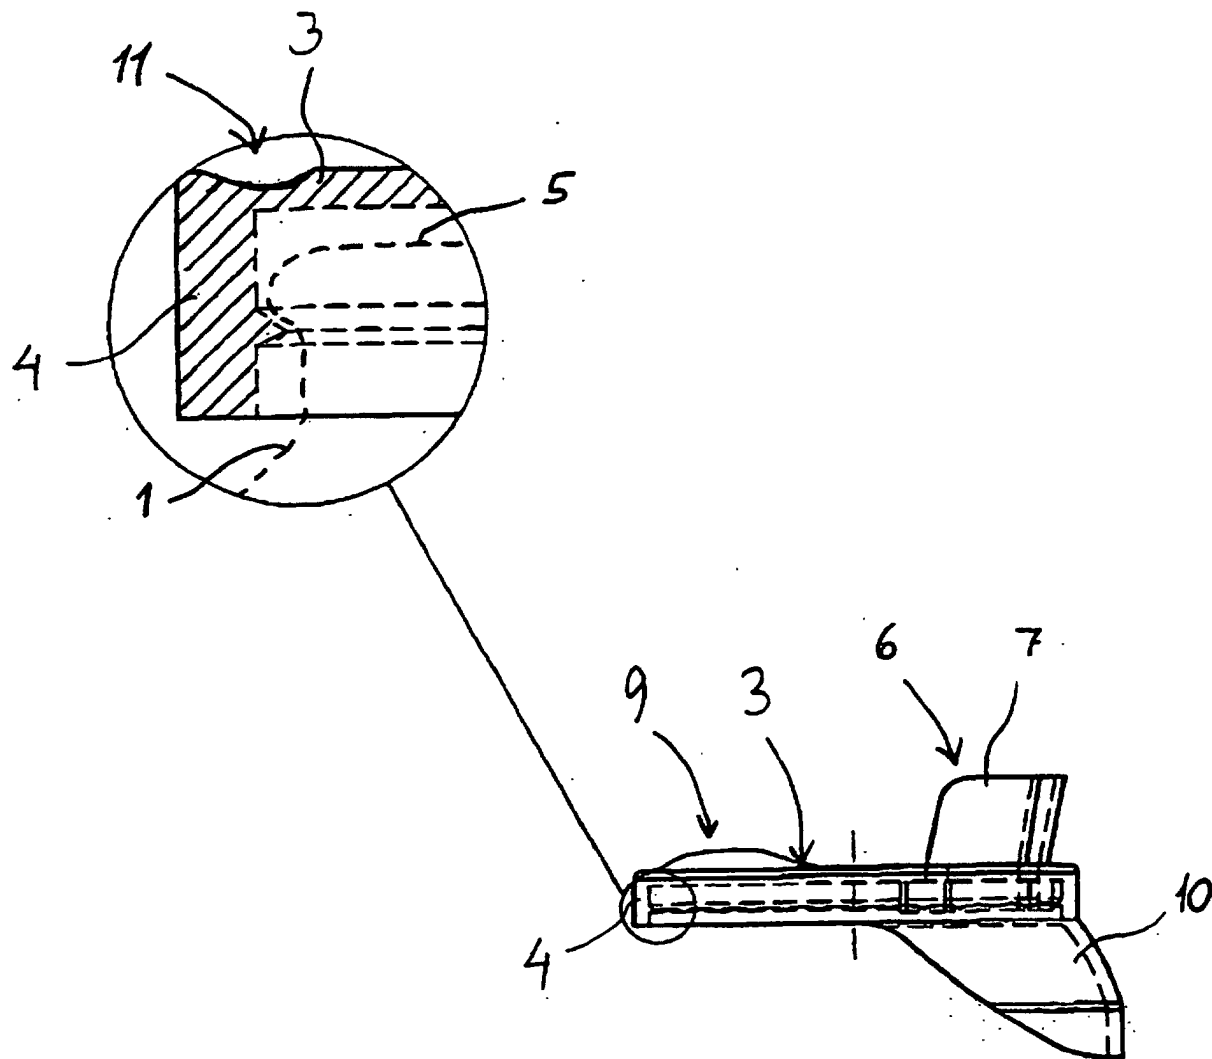
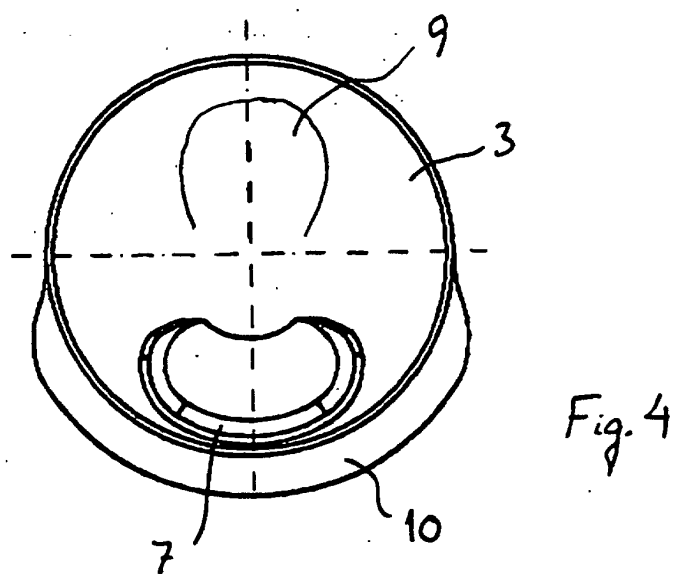
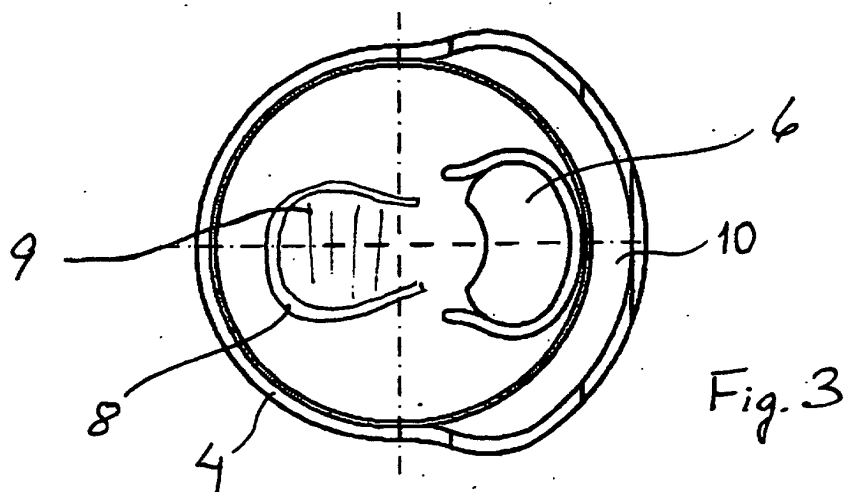
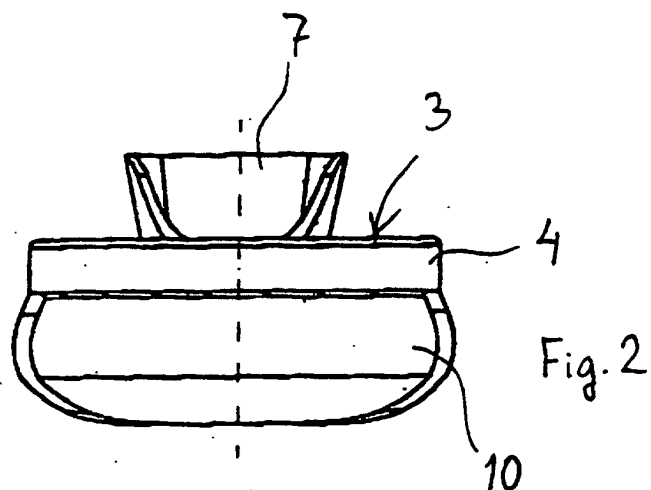


Fig. 1



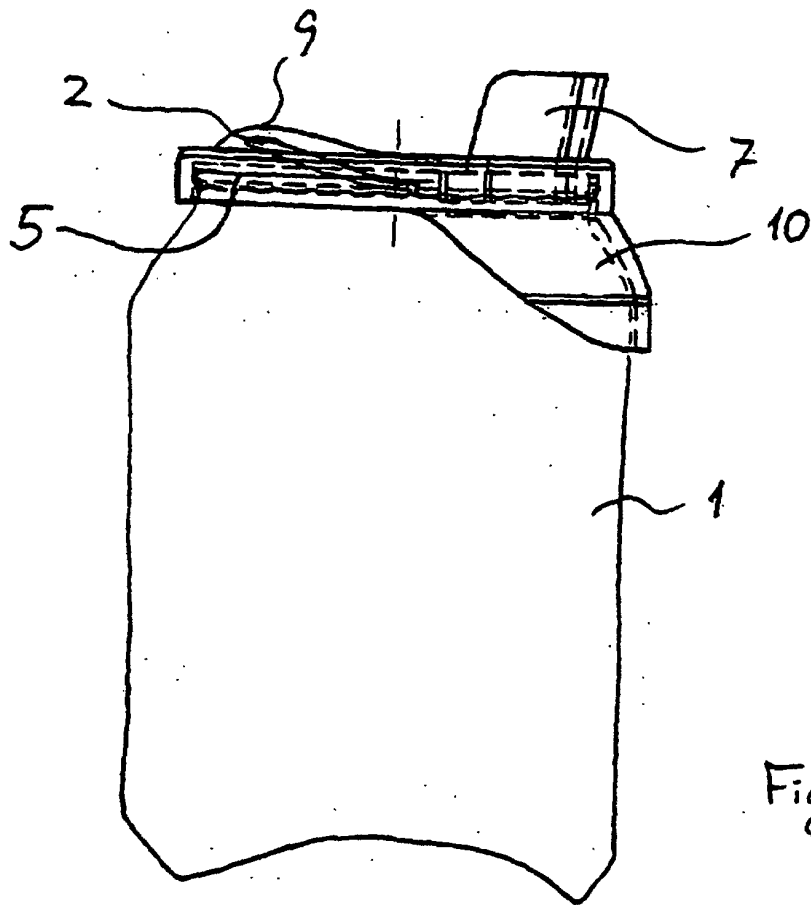


Fig. 5

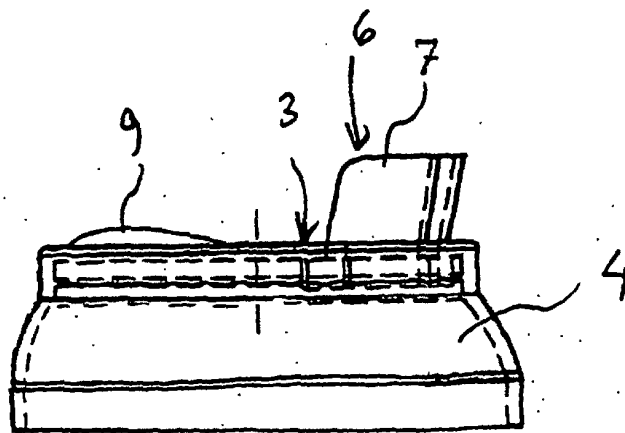


Fig. 6