



- (51) International Patent Classification:
G01F 23/02 (2006.01) *G01F 23/292* (2006.01)
- (21) International Application Number:
PCT/US2013/053933
- (22) International Filing Date:
7 August 2013 (07.08.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
13/569,629 8 August 2012 (08.08.2012) US
- (71) Applicant: **EATON CORPORATION** [US/US]; 1000
Eaton Boulevard, Cleveland, OH 44122 (US).
- (72) Inventors: **KOPANSKY, Gregory**; 317 Palmer Drive,
Philadelphia, PA 19115 (US). **BIRCH, George**; 25 Cape
Cod Drive, Turnersville, NJ 08012 (US). **JAMES,
Rolland**; 103 East Linden Avenue, Collingswood, NJ
08108 (US).
- (74) Agents: **MILLER, Amanda, M.** et al.; Benesch Fried-
lander Coplan & Aronoff LLP, 200 Public Square, Suite
2300, Cleveland, OH 44114 (US).
- (81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.
- (84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,

[Continued on next page]

(54) Title: VISUAL INDICATOR WITH SENSOR

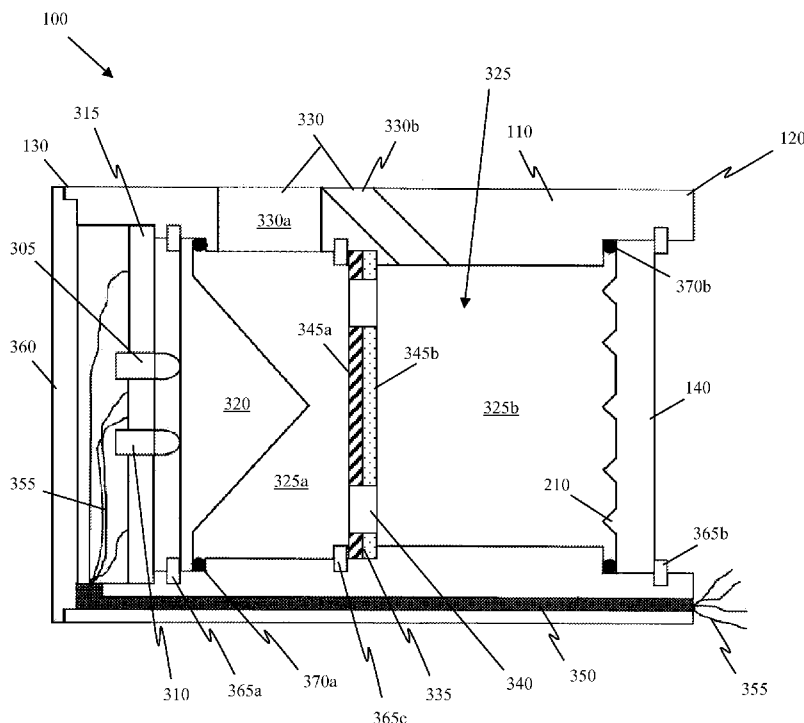


Figure 3

(57) Abstract: A fluid level gauge includes a housing having a first end and a second end, and a window disposed in the housing, proximate to the first end. The fluid level gauge further includes an optical sensor disposed in the housing, proximate to the second end. A prism is disposed in the housing, between the optical sensor and the window, such that the prism and the window define a fluid chamber therebetween. The housing further includes a plurality of through holes that provides a fluid path from outside the housing to the fluid chamber.



EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))*

Published:

— *with international search report (Art. 21(3))*

VISUAL INDICATOR WITH SENSOR

FIELD OF INVENTION

[0001] The present disclosure relates to sight glasses. More particularly, the present disclosure relates to sight glasses having a visual indicator and an electro optic sensor.

BACKGROUND

[0002] A sight glass is a transparent tube through which an operator of a tank, boiler, gear box, or other machine can observe a level of liquid (such as oil or hydraulic fluid) contained within. A sight glass includes glass or a polymeric material that acts as a reflector when no liquid is present. When liquid is in contact with the glass or polymeric material, light passes through the sight glass. Accordingly, the presence of liquid in the system can be quickly verified. In other known systems, the sight glass is replaced with a sensor.

SUMMARY OF THE INVENTION

[0003] In one embodiment, a fluid level gauge includes a housing having a first end and a second end, and a window disposed in the housing, proximate to the first end. The fluid level gauge further includes an optical sensor disposed in the housing, proximate to the second end. The optical sensor and the window define a fluid chamber therebetween. The housing further includes a plurality of through holes that provides a fluid path from outside the housing to the fluid chamber. The housing may include a light shield disposed between the window and the sensor.

[0004] In an additional embodiment, a fluid gauge includes a housing having a window disposed in a first end, and a sensor disposed in a second end, with a fluid chamber disposed between the window and the sensor. The housing includes a plurality of apertures that define a

plurality of fluid paths to the fluid chamber. The window provides an unobstructed view of the fluid chamber to an operator. The window at least partially reflects light when the fluid chamber is empty, and light at least partially passes through the window when fluid is in contact with the window. The housing may include a light shield disposed between the window and the sensor.

[0005] In another additional embodiment, a liquid level indicator includes a hollow housing defining a liquid chamber. The housing has a plurality of apertures defining a liquid path to the liquid chamber. The liquid level indicator also includes a window disposed proximate to a first end of the hollow housing and an optical sensor disposed proximate to the second end of the hollowing housing. The hollow housing may include a light shield disposed between the window and the sensor.

BRIEF DESCRIPTION OF DRAWINGS

[0006] In the accompanying drawings, structures are illustrated that, together with the detailed description provided below, describe exemplary embodiments of the claimed invention. Like elements are identified with the same reference numerals. It should be understood that elements shown as a single component may be replaced with multiple components, and elements shown as multiple components may be replaced with a single component. The drawings are not to scale and the proportion of certain elements may be exaggerated for the purpose of illustration.

[0007] **Figure 1** is a side view of one embodiment of a fluid level gauge;

[0008] **Figure 2** is a front view of the fluid level gauge;

[0009] **Figure 3** is a cross-section of the fluid level gauge; and

[0010] **Figure 4** is a front view of one embodiment of a light shield.

DETAILED DESCRIPTION

[0011] **Figure 1** illustrates a side view of one embodiment of a fluid level gauge **100**. The fluid level gauge **100** may also be referred to as a liquid level gauge or a fluid gauge. The fluid level gauge **100** includes a housing **110** having a first end **120** and a second end **130**, and a window **140** disposed in the housing **110**, proximate to the first end **120**.

[0012] The fluid level gauge **100** is configured to be placed in a fluid reservoir (not shown), such as a fluid tank in a vehicle or other machine, or a standalone fluid tank. The placement of the fluid gauge **100** is such that the first end **120** of the housing **110** extends outside of the reservoir, so that the window **140** may be viewed by an operator. The second end **130** of the housing is inside the machine and in contact with the fluid.

[0013] In the illustrated embodiment, the housing **110** includes a hexagonal portion, and several cylindrical portions of different diameters. However, it should be understood that the housing may take any shape that may be practical.

[0014] The fluid level gauge **100** further includes a pod **150** that is connected to the housing **110** by a cable **160**. The pod **150** may include electronics (not shown), such as a processor, and a power source (not shown), such as a battery. The pod **150** may further include a connector, cables, or wires (not shown) to interface with a machine, such as a vehicle, computer, or any other external device. The pod may include an indicator **170** that conveys information to an operator. Exemplary indicators include, without limitation, light emitting diodes, incandescent lights, an LCD display, and a touch screen, a pop out indicator, or other electro-mechanical, non-volatile device. However, it should be understood that any electro-mechanical indicator, or other indicator may be used. It may be preferable to position the indicator at an accessible location.

[0015] **Figure 2** illustrates a front view of the fluid level gauge **100**. As can be seen from this view, the window **140** may include a plurality of concentric circles **210**. In one embodiment,

the concentric circles are formed by ridges disposed on the window. In an alternative embodiment, the concentric circles **210** are etched into the window **140**. In an alternative embodiment, the concentric circles are painted or otherwise adhered to the window **140**.

[0016] The window **140** may also be referred to as a “sight glass” due to its function as a visual inspector and visual indicator of a fluid level. Although the window **140** may be referred to as a sight glass, it should be understood that the window **140** need not be constructed of glass, but may be constructed of a polymeric material. The window **140** at least partially reflects light when it is surrounded by air. However, when fluid is in contact with the window **140**, the window **140** allows at least a portion of light to pass through. The window may be configured, such that when the fluid is at a minimum fluid level, light passes through at least a portion of the window **140**. At any given fluid level, light that passes through the fluid at least partially passes through the window **140**, and light that travels above the fluid is at least partially reflected by the window **140**.

[0017] **Figure 3** illustrates a cross-section of the fluid level gauge **100**. As can be seen from this view, the fluid level gauge **100** further includes an optical sensor including a light transmitter **305**, a light receiver **310**, and a prism **320** disposed in the housing **110**, proximate to the second end **130** of the housing **110**. In the illustrated embodiment, the sensor is in signal communication with a printed circuit board **315**. The sensors may include infrared photosensors, photodiodes, phototransistors, or any photosensitive component. It should be understood that any light source and photosensing component may be used.

[0018] In the fluid level gauge **100**, the prism **320** of the optical sensor is disposed in the housing **110**, such that the prism **320** and the window **140** define a fluid chamber **325** therebetween. In one embodiment, the prism is constructed of a polymeric material. In other

embodiments, the prism may be constructed of glass, fused silica (quartz), or other light transmitting material. In an alternative embodiment, the prism may be omitted and the device may instead employ one or more reflective surfaces to define one or more light paths.

[0019] The housing **110** further includes a plurality of through holes **330** that provides a fluid path from outside the housing to the fluid chamber **325**. As can be seen in the illustrated embodiment, the window **140** provides an unobstructed view of the fluid chamber **325** to an operator. In the illustrated embodiment, the window **140** includes a plurality of ridges that define the concentric circles **210** that are visible to the operator. The ridges increase the contrast of visual indication by further bending light. In an alternative embodiment (not shown), the window may be flat. As one of ordinary skill would understand, the ridges may be more useful in instances where the fluid is similar in color to the window, or where the light must travel a relatively long distance.

[0020] A light shield **335** is disposed in the fluid chamber **325** between the prism **320** and the window **140**, thereby defining a first fluid chamber **325a** and a second fluid chamber **325b**. In an alternative embodiment (not shown), a plurality of light shields are employed. In another alternative embodiment (not shown), the light shield is omitted entirely.

[0021] **Figure 4** illustrates a front view of the light shield **335**. The features of the light shield **335** are described with reference to both **Figures 3** and **4**. The light shield **335** includes a plurality of apertures **340** that allow fluid to flow between the first fluid chamber **325a** and the second fluid chamber **325b**. While twelve apertures **340** are shown in the illustrated embodiment, it should be understood that any number of apertures may be employed. The apertures may be any shape. In an alternative embodiment (not shown), the light shield is a solid component without any apertures.

[0022] The light shield **335** includes a first side **345a** that faces the prism **320**, and a second side **345b** that faces the window **140**. In one embodiment, the first side **345a** is formed of an infrared light absorbing material, including, without limitation, infrared absorbent paint, or an absolute black coating. The second side **345b** may or may not need to absorb infrared light. It may be reflective. Accordingly, the second side **345b** may be constructed of metal, such as aluminum or steel, or a polymeric material. However, it should be understood that the second side may be the same material as the first side. In an alternative embodiment, neither side is formed of an infrared light absorbing material.

[0023] With reference back to **Figure 3**, the plurality of through holes **330** includes a first through hole **330a** that provides a fluid path to the first fluid chamber **325a**, and a second through hole **330b** that provides a fluid path to the second fluid chamber **325b**. In an alternative embodiment (not shown), the through holes only provide an external fluid path to one of the fluid chambers, and fluid passes between the first and second chamber via internal apertures.

[0024] The housing **110** also includes a bore **350** extending from the first end **120** to the second end **130**. Wires **355** extend from the printed circuit board **310** through the bore **350** to the first end **120** of the housing **110**. The wires may further extend through the cable **160** to the pod **150** and the indicator **170** or a connector or interface.

[0025] In operation, light is transmitted from the light transmitter **305**, into the base of the prism **320**. When fluid is not present in the fluid chamber **325**, the presence of air causes the light to be internally reflected within the prism. Accordingly, light is reflected back to the light receiver **310**. When the light is received by the light receiver **310**, the printed circuit board **315** transmits a signal through the wires **355** to the pod **160**, which provides an indication that the

fluid level is low. It should be understood that the sensor may transmit information in the form of an output voltage via one or more output pins of a connector.

[0026] When fluid is present in the fluid chamber **325**, light is transmitted through the prism and does not reach the light receiver **310**. The pod **160** then indicates that the fluid level is acceptable.

[0027] A cover **360** is disposed on the second end **130** of the housing **110**, covering the sensor components **305**, **315**, **320**. The cover **360** prevents the sensor components **305**, **310**, **320** from being directly exposed to the fluid. The cover **360** may be transparent, translucent, or opaque.

[0028] In the illustrated embodiment, the prism **320** is affixed to the housing **110** by a first snap-on ring **365a** and a first sealing o-ring **370a**. The window **140** is affixed to the housing **110** by a second snap-on ring **365b** and a second sealing o-ring **370b**. The light shield **335** is affixed to the housing **110** by a third snap-on ring **365c**. However it should be understood that any means may be employed to affix the components to the interior of the housing.

[0029] To the extent that the term “includes” or “including” is used in the specification or the claims, it is intended to be inclusive in a manner similar to the term “comprising” as that term is interpreted when employed as a transitional word in a claim. Furthermore, to the extent that the term “or” is employed (e.g., A or B) it is intended to mean “A or B or both.” When the applicants intend to indicate “only A or B but not both” then the term “only A or B but not both” will be employed. Thus, use of the term “or” herein is the inclusive, and not the exclusive use. See, Bryan A. Garner, A Dictionary of Modern Legal Usage 624 (2d. Ed. 1995). Also, to the extent that the terms “in” or “into” are used in the specification or the claims, it is intended to additionally mean “on” or “onto.” Furthermore, to the extent the term “connect” is used in the

specification or claims, it is intended to mean not only “directly connected to,” but also “indirectly connected to” such as connected through another component or components.

[0030] While the present application has been illustrated by the description of embodiments thereof, and while the embodiments have been described in considerable detail, it is not the intention of the applicants to restrict or in any way limit the scope of the appended claims to such detail. Additional advantages and modifications will readily appear to those skilled in the art. Therefore, the application, in its broader aspects, is not limited to the specific details, the representative apparatus and method, and illustrative examples shown and described. Accordingly, departures may be made from such details without departing from the spirit or scope of the applicant's general inventive concept.

CLAIMS

What is claimed is:

1. A fluid level gauge comprising:
 - a housing having a first end and a second end;
 - a window disposed in the housing, proximate to the first end;
 - an optical sensor disposed in the housing, proximate to the second end such that the optical sensor and the window define a fluid chamber therebetween, wherein the housing further includes a plurality of through holes that provides a fluid path from outside the housing to the fluid chamber.
2. The fluid level gauge of claim 1, wherein the window provides an unobstructed view of the fluid chamber to an operator.
3. The fluid level gauge of claim 1, further comprising a light shield disposed in the fluid chamber between the optical sensor and the window, thereby defining a first fluid chamber and a second fluid chamber.
4. The fluid level gauge of claim 3, wherein the light shield includes a plurality of apertures, allowing fluid to flow between the first fluid chamber and the second fluid chamber.
5. The fluid level gauge of claim 3, wherein the plurality of through holes includes a first through hole that provides a fluid path to the first fluid chamber, and a second through hole that provides a fluid path to the second fluid chamber.
6. The fluid level gauge of claim 3, wherein the light shield includes an infrared light absorbing side that faces the prism.

7. The fluid level gauge of claim 1, wherein the optical sensor includes a printed circuit board.
8. The fluid level gauge of claim 7, wherein the housing includes a bore extending from the first end to the second end, and wherein wires extend from the printed circuit board through the bore to the first end of the housing and to an indicator.
9. The fluid level gauge of claim 1, further comprising a cover disposed on the second end of the housing, covering the optical sensor.
10. A fluid gauge comprising:
 - a housing having a window disposed in a first end, and a sensor disposed in a second end, with a fluid chamber disposed between the window and the sensor,
 - wherein the housing includes a plurality of apertures that define a plurality of fluid paths to the fluid chamber,
 - wherein the window provides an unobstructed view of the fluid chamber to an operator, and
 - wherein the window at least partially reflects light when the fluid chamber is empty, and light at least partially passes through the window when fluid is in contact with the window.
11. The fluid gauge of claim 10, wherein the window is constructed of a material selected from the group consisting of glass and a polymeric material.
12. The fluid gauge of claim 10, further comprising a light shield disposed between the window and the sensor.

13. The fluid gauge of claim 10, wherein the sensor includes an optic sensor.
14. The fluid gauge of claim 10, wherein the sensor is in signal communication with an indicator selected from the group consisting of a light emitting diode, an incandescent light, and a liquid crystal display.
15. The fluid gauge of claim 10, wherein the window includes a plurality of visible concentric circles disposed thereon.
16. The fluid gauge of claim 10, wherein the window has a flat outer surface and a flat inner surface.
17. A liquid level indicator comprising:
 - a hollow housing defining a liquid chamber, the housing having a plurality of apertures defining a liquid path to the liquid chamber;
 - a window disposed proximate to a first end of the hollow housing; and
 - an optical sensor disposed proximate to the second end of the hollowing housing.
18. The liquid level indicator of claim 17, further comprising a light shield disposed between the optical sensor and the window.
19. The liquid level indicator of claim 17, wherein the window at least partially reflects light when the liquid chamber is empty, and light at least partially passes through the window when liquid is present in the liquid chamber and in contact with the window.
20. The liquid level indicator of claim 17, further comprising a seal adjacent the window.

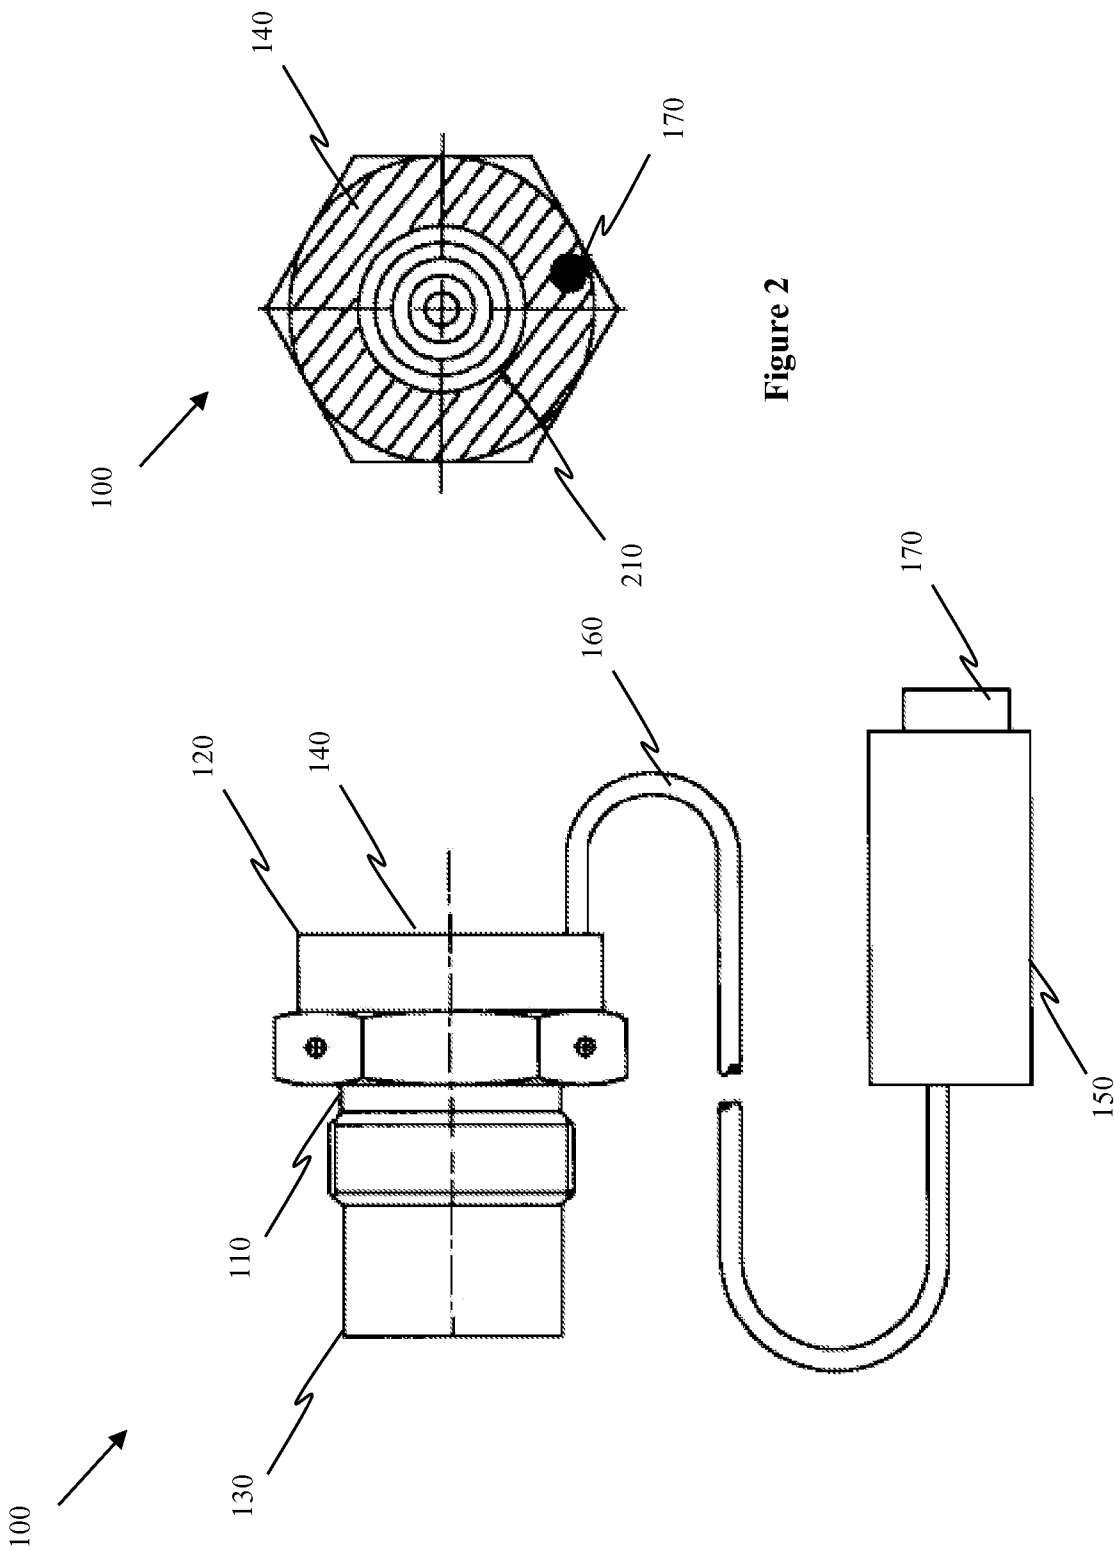


Figure 1

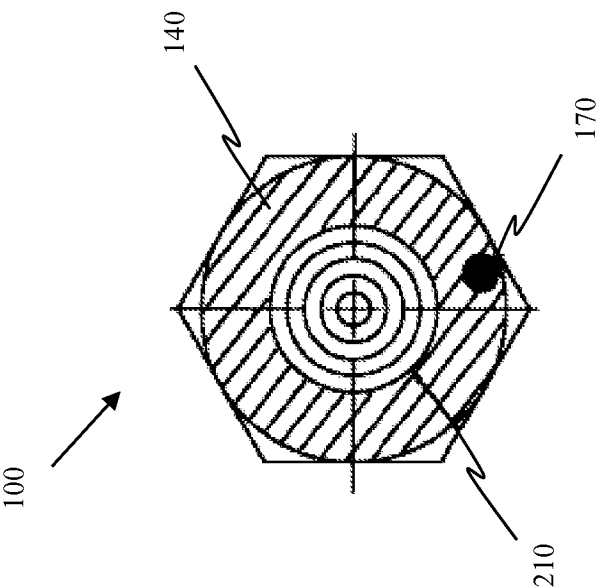


Figure 2

2 / 2

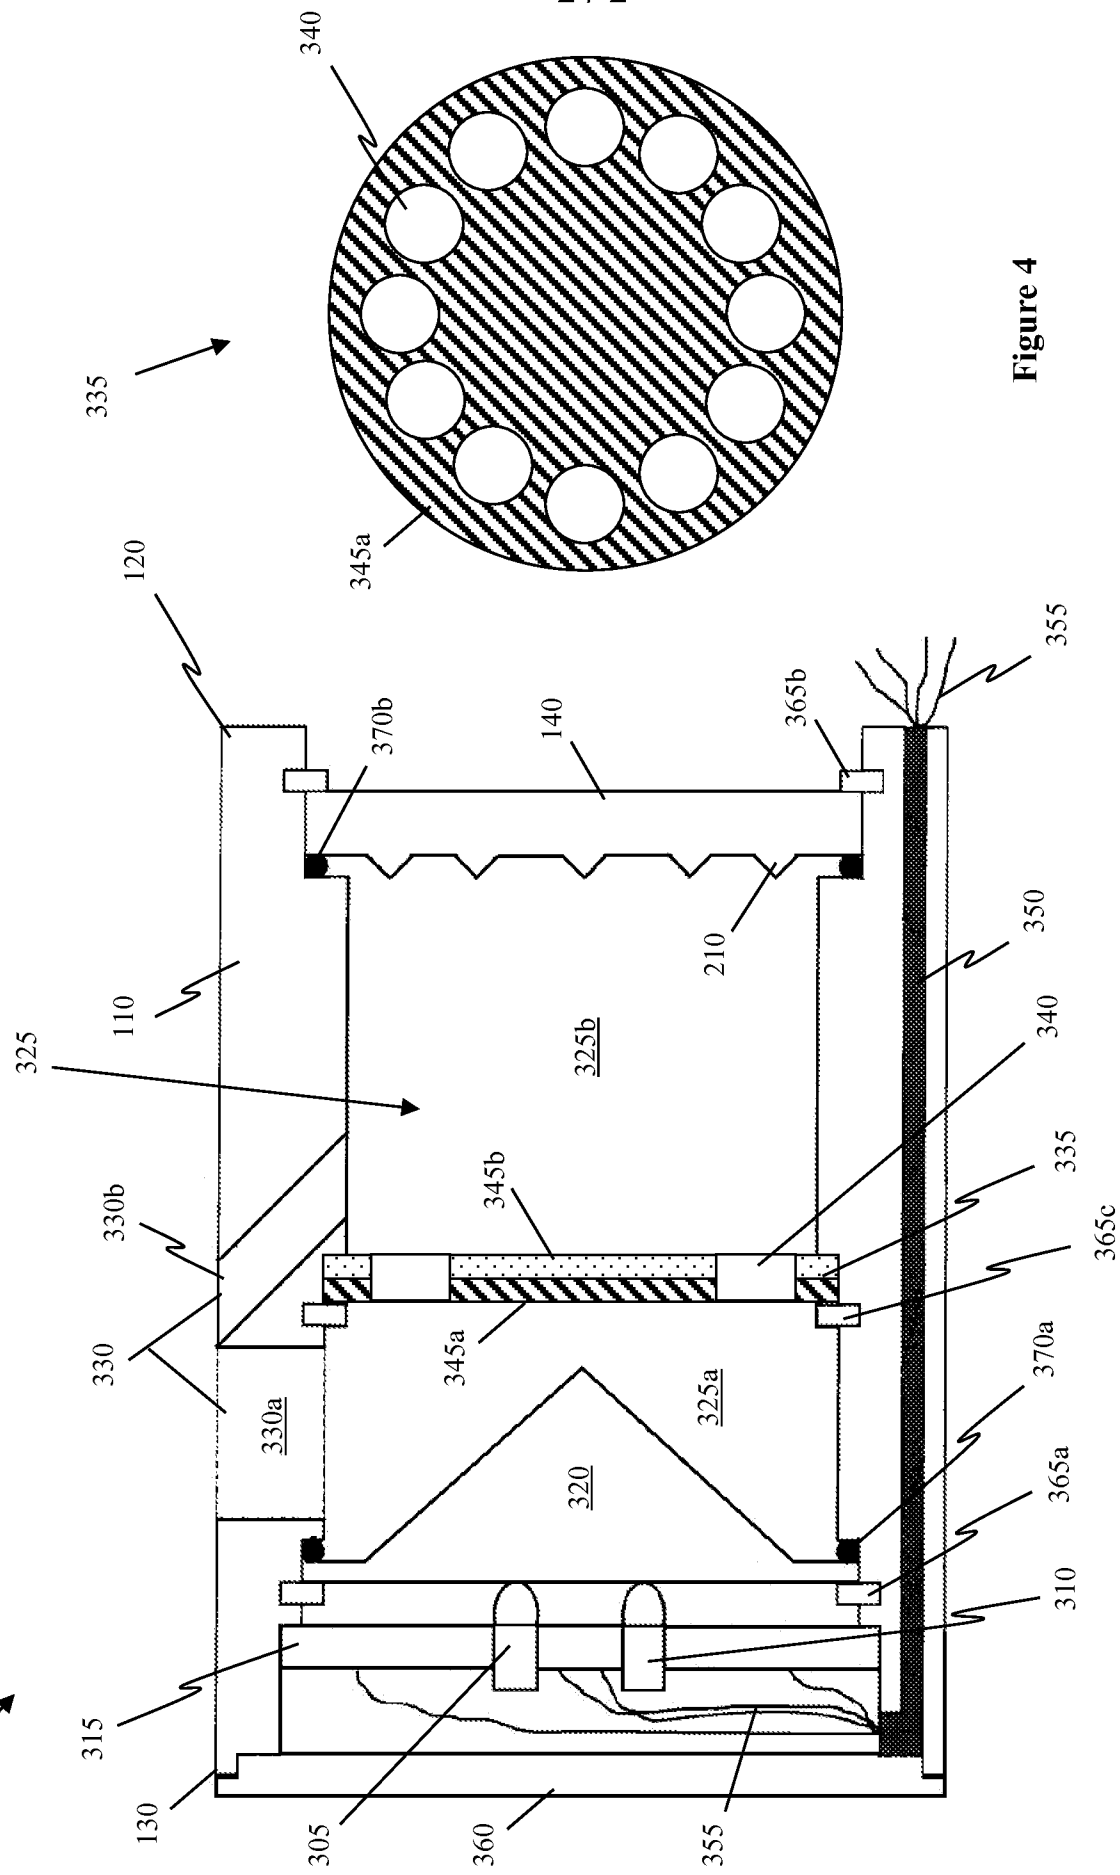


Figure 4

Figure 3

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2013/053933

A. CLASSIFICATION OF SUBJECT MATTER

INV. G01F23/02 G01F23/292
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
G01F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 87/01025 A1 (BIO FLOW INC [US]) 26 February 1987 (1987-02-26)	1-14, 16-20
Y	page 8, line 18 - page 14, line 9; figures 1-4,6-10	15
Y	----- US 5 279 157 A (MATTIS DONALD J [US] ET AL) 18 January 1994 (1994-01-18) column 7, line 44 - line 63; figures 9,10	15
A	----- GB 709 194 A (ANGLO IRANIAN OIL CO LTD; DENNIS OWEN CARTER) 19 May 1954 (1954-05-19) page 2, line 38 - line 69; figure 2 -----	1-20



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

17 December 2013

Date of mailing of the international search report

07/01/2014

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Papantoniou, E

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2013/053933

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 8701025	A1	26-02-1987	CA 1269007 A1 15-05-1990 EP 0232263 A1 19-08-1987 WO 8701025 A1 26-02-1987
US 5279157	A	18-01-1994	CA 2100603 A1 04-02-1994 DE 4318030 A1 10-02-1994 GB 2269455 A 09-02-1994 JP 3285669 B2 27-05-2002 JP H06102080 A 12-04-1994 US 5279157 A 18-01-1994
GB 709194	A	19-05-1954	NONE