


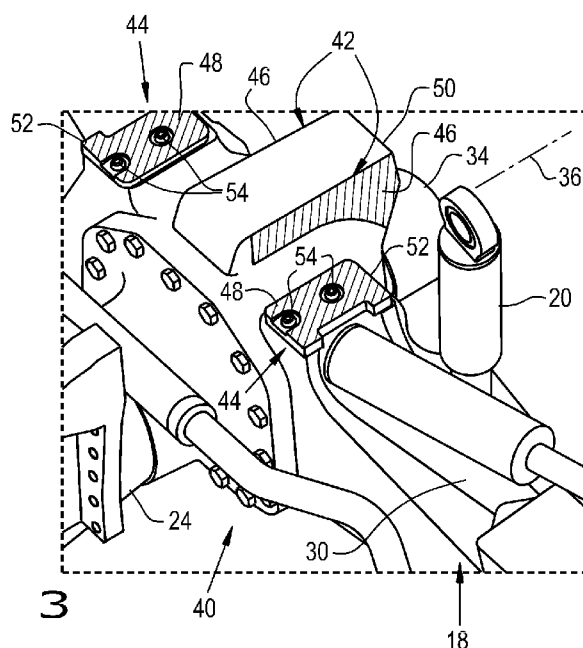

- (51) **International Patent Classification:**
B60G 9/02 (2006.01)
- (21) **International Application Number:**
PCT/EP2015/057636
- (22) **International Filing Date:**
8 April 2015 (08.04.2015)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
MO2014A000098 9 April 2014 (09.04.2014) IT
- (71) **Applicant (for all designated States except CN, US):** CNH INDUSTRIAL ITALIA S.P.A. [IT/IT]; Via Plava 8, I-10135 Turin (IT).
- (71) **Applicant (for US only):** CNH INDUSTRIAL AMERICA LLC [US/US]; P.O. Box 1895, 500 Diller Avenue, New Holland, Pennsylvania 17557 (US).
- (71) **Applicant (for CN only):** CNH (CHINA) MANAGEMENT CO., LTD [CN/CN]; Floor 10, No. 2, Maji Road, Waigaoqiao Trade Free Zone, Shanghai 200131 (CN).
- (72) **Inventor:** VESCOVINI, Maurizio; Via Budrione Migliarina Ovest, 86, I-41012 Carpi (MO) (IT).
- (74) **Agent:** BOYDENS, Kris R.; CNH Industrial Belgium nv, Leon Claeysstraat 3A, B-8210 Zedelgem (BE).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).
- Published:**
— with international search report (Art. 21(3))

(54) **Title:** ROLL ANGLE STOP ARRANGEMENT FOR A SUSPENSION SYSTEM IN AN OFF-ROAD VEHICLE**Fig. 3**

(57) **Abstract:** An off-road vehicle (10) includes a chassis (12), an axle carriage (16), a rigid axle (30) and a pair of suspension cylinders (20). The axle carriage (16) is attached to or forms a part of the chassis (12), and includes a generally vertically arranged slot (38). The rigid axle (30) is mounted to the axle carriage (16) with a wheel hub (32) at each end thereof, and is vertically movable relative to the axle carriage (16). The suspension cylinders (20) are connected between the axle carriage (16) and axle (30), and are operable to move the axle (30) in vertical directions relative to the axle carriage (16). The off-road vehicle (10) is characterized in that the axle (30) includes a first pair of roll angle stops (42) which engage the axle carriage (16) when the axle (30) is at or near a fully lowered position relative to the axle carriage (16), and a second pair of roll angle stops (44) which engage the axle carriage (16) when the axle (30) is at or near a fully raised position relative to the axle carriage (16).

- 1 -

ROLL ANGLE STOP ARRANGEMENT FOR A SUSPENSION SYSTEM IN AN OFF-ROAD VEHICLE.

BACKGROUND OF THE INVENTION

1. Field of the Invention

- 5 The present invention relates to suspension systems for vehicles, and, more particularly, to suspension systems for off-road vehicles.

2. Description of the Related Art

Vehicles in the form of off-road machines can take many forms, such as agricultural tractors, harvesters and sprayers, construction backhoes, and forestry
10 feller/bunchers. In the case of an agricultural tractor, a chassis typically supports front and rear laterally extending axles having wheels rotatably affixed at the ends of the axles. Rear axles are commonly rigidly connected to the chassis, and there is no suspension between the rear axle and the chassis. Tire deflection alone provides a cushioning between a rough surface and the chassis. In many tractors, the front
15 wheels are driven in addition to the rear driven wheels, typically known as mechanical front wheel drive (MFD or MFWD). Economics and simplicity typically dictate that rigid front axle assemblies are used in lieu of an independently articulated front suspension. Front axles are typically pivotally attached to the front of the chassis to rotate, transversely with respect to the longitudinal axis of the chassis,
20 around a pivot axis located proximate to the longitudinal middle of the axle. With this axle structure, when one front wheel is raised to overcome an obstacle the other front wheel goes down the same distance.

The productivity of an agricultural tractor can be increased by enabling faster travel speeds in the field and on the road. Limiting factors to the travel speed of an
25 agricultural tractor when traveling over rough surfaces are operator comfort and wheel traction. Faster travel speeds highlight shortcomings in the conventional pivotally attached rigid front axle, especially when both wheels simultaneously encounter a similar obstacle, such as a ditch. When both wheels must move in the same direction to traverse an obstacle, the entire front end of the vehicle is forced to
30 move in the same vertical direction.

- 2 -

Tractor front axle suspensions can solve these problems by enabling the entire axle to move in relation to the chassis. By damping such motion traction and operator comfort may be increased both of which may contribute to increased productivity. Additionally, front suspension systems for tractors provide better high-speed handling characteristics during high-speed operation on roads. The addition of more sophisticated actuators and control systems to these suspension systems further extend the capabilities of the tractor and provide additional improvements in vehicle ride and handling.

As a suspension system moves up and down, the degree to which the axle can roll about the pivot axis varies so that the wheels at the end of the axle do not hit the chassis, sheet metal or other parts of the vehicle. When the axle is further from the chassis the maximum roll angle can be greater, and when the axle is closer to the chassis the maximum roll angle must be less.

A front suspension system as describe above typically includes an axle carriage which is mounted to or part of the chassis, and the rigid front axle is mounted to the axle carriage. A suspension arm is pivotally mounted to the chassis at the rear of the arm, and pivotally coupled with the axle at the point of connection of the MFD drive shaft with the axle. As the axle moves up and down, the suspension arm pivots about the rear pivot attachment. It is known to provide two pairs of roll angle stops for limiting the roll angle of the axle when the axle is at a raised or lowered position relative to the axle carriage. When the axle is at a fully raised position (closest to the axle carriage), one pair of roll angle stops is between the axle and axle carriage to limit the roll angle of the axle. On the other hand, when the axle is at a predefined position in the suspension stroke such as the fully lowered position (furthest from the axle carriage), the other pair of roll angle stops is between the axle and suspension arm to limit the roll angle of the axle. High loads can be placed on the suspension arm when the roll angle stop of the axle hits the suspension arm, and thus the suspension arm is typically built very robust to withstand the loads. A heavily built suspension arm results in more weight and expense.

What is needed in the art is a front suspension system for an off-road vehicle which effectively limits the roll angle of the axle, depending on the height of the axle relative to the axle carriage.

SUMMARY OF THE INVENTION

The present invention provides a suspension system for an off-road vehicle which includes a first pair of roll angle stops when the axle is within a first predetermined range of movement, and a second pair of roll angle stops when the axle is within a
5 second predetermined range of movement.

The invention in one form is directed to an off-road vehicle including a chassis, an axle carriage, a rigid axle and a pair of suspension cylinders. The axle carriage is attached to or forms a part of the chassis, and includes a generally vertically arranged slot. The rigid axle is mounted to the axle carriage with a wheel hub at
10 each end thereof, and is vertically movable relative to the axle carriage. The suspension cylinders are connected between the axle carriage and axle, and are operable to move the axle in vertical directions relative to the axle carriage. The off-road vehicle is characterized in that the axle includes a first pair of roll angle stops which engage the axle carriage when the axle is at or near a fully lowered position
15 relative to the axle carriage, and a second pair of roll angle stops which engage the axle carriage when the axle is at or near a fully raised position relative to the axle carriage.

An advantage of the present invention is that the size and weight of the suspension arm can be reduced, thereby reducing the overall cost.

20 Another advantage is that high loads are no longer placed on the suspension arm by a roll angle stop of the axle.

Yet another advantage is that both pairs of roll angle stops are between the axle and axle carriage, regardless whether the axle is at a fully lowered position, fully raised position, or another position therebetween.

25 A further advantage is that the axle moves only along the predefined movement path between the axle and axle carriage, thereby limiting side movement and slippage of the axle and wheels.

A still further advantage is that a variable roll angle oscillation is provided, depending on the position of the axle relative to the axle carriage.

- 4 -

Yet another advantage is that the suspension system of the present invention provides a compact system which can be installed in low and short length vehicles for improved visibility and maneuverability.

5 A further advantage is that the reduced mass of the suspension arm reduces the unsprung masses of the system so that the suspension controls work better and the suspension dynamics are improved with better adherence between the tires and the road surface.

BRIEF DESCRIPTION OF THE DRAWINGS

10 The above-mentioned and other features and advantages of this invention, and the manner of attaining them, will become more apparent and the invention will be better understood by reference to the following description of an embodiment of the invention taken in conjunction with the accompanying drawings, wherein:

15 Fig. 1 is an exploded perspective view of an embodiment of a suspension system of the present invention;

Fig. 2 is an assembled perspective view of the suspension system shown in Fig. 1;

Fig. 3 is a top perspective view of the axle assembly shown in Figs. 1 and 2;

Fig. 4 is a bottom perspective view of the axle carriage shown in Figs. 1 and 2;

20 Fig. 5 is another bottom perspective view of the axle carriage shown in Figs. 1, 2 and 4;

Fig. 6 is a front view of the assembled suspension system, with the axle in a fully lowered position relative to the axle carriage, showing one of the generally vertical roll angle stops contacting the axle carriage;

25 Fig. 7 is a longitudinal sectional view of the axle and axle carriage, with the axle in the fully lowered position shown in Fig. 6;

Fig. 8 is a front view of the assembled suspension system, with the axle in a neutral position approximately half way between the fully lowered position and fully raised

- 5 -

position, showing one of the generally vertical roll angle stops contacting the axle carriage;

Fig. 9 is a longitudinal sectional view of the axle and axle carriage, with the axle in the neutral position shown in Fig. 8;

- 5 Fig. 10 is a front view of the assembled suspension system, with the axle in a transition position between the neutral and fully raised position, showing one of the generally vertical roll angle stops and one of the generally horizontal roll angle stops contacting the axle carriage;

- 10 Fig. 11 is a front sectional view of the assembled suspension system, with the axle in a fully raised position relative to the axle carriage, showing one of the generally horizontal roll angle stops contacting the axle carriage;

Fig. 12 is a longitudinal sectional view of the axle and axle carriage, with the axle in the fully raised position shown in Fig. 11; and

- 15 Fig. 13 is a graphical illustration of maximum roll angle versus vertical displacement using an example of the two pairs of roll angle stops of the present invention.

Corresponding reference characters indicate corresponding parts throughout the several views. The exemplifications set out herein illustrate embodiments of the invention, and such exemplifications are not to be construed as limiting the scope of the invention in any manner.

20 DETAILED DESCRIPTION OF THE INVENTION

- Referring now to the drawings, and more particularly to Figs. 1 and 2, there is shown a portion of an embodiment of an off-road vehicle 10. In the embodiment shown, the off-road vehicle 10 is configured as an agricultural tractor, but can be differently configured depending on the application. Tractor 10 generally includes an oil sump 12, a suspension arm 14, an axle carriage 16, an axle assembly 18, and a pair of suspension cylinders 20.

Oil sump 12 is typically part of and located at the bottom of an internal combustion (IC) engine which defines the prime mover for the tractor 10. The IC engine is usually a diesel engine, but can be a different type of engine such as a gasoline or

- 6 -

liquid propane (LP) engine. For most current day tractors, the cast body of the IC engine also defines part of the chassis of the tractor 10. However, it is also possible for the chassis to include separate frame members to which the engine is mounted. In the illustrated embodiment, the oil sump 12 is a casting which defines part of the
5 chassis of the tractor 10.

The suspension arm 14 includes a number of rear pivot arms 22 which are pivotally connected to the chassis of the tractor 10. In the illustrated embodiment, the rear pivot arms 22 are pivotally connected to the oil sump 12, as shown in Fig. 2. The front end of the suspension arm 14 has a circular housing 24 which fits around the
10 input coupler 26 of the axle assembly 18. The input coupler 26 can be coupled with the drive shaft 28 for the MFD of the axle assembly 18. As the axle assembly 18 moves up and down relative to the axle carriage 16, the circular housing 24 can also pivot a limited extent relative to the input coupler 26.

The axle carriage 16 is mounted to the front end of the oil sump 12. Like the oil
15 sump 12 described above, the axle carriage 16 can be attached to or form part of the chassis of the tractor 10. In the illustrated embodiment, the axle carriage 16 is formed from a heavy casting which is part of the chassis of the tractor 10.

The axle assembly 18 includes a rigid axle 30 and a pair of wheel hubs 32 mounted at each outboard end of the rigid axle 30. Wheels (not shown) are typically mounted
20 to the hubs 32 in known manner. In the illustrated embodiment, the axle assembly 18 also includes a pivot member 34 which is located approximately midway between the wheel hubs 32 and extends in a forward direction from the front of the rigid axle 18. The pivot member 34 can be in the form of a cylindrical member, as shown, and has a longitudinal axis 36 which extends in a fore-to-aft direction of the tractor 10
25 through the center of the input coupler 26. The pivot member 34 is positioned and movable within a generally vertically arranged slot 38 formed in the forward end of the axle carriage 16.

The pair of suspension cylinders 20 are each connected between the axle carriage 16 and the rigid axle 30. In the illustrated embodiment, the suspension cylinders 20
30 are positioned on opposite lateral sides of the pivot member 34. However, the suspension cylinders 20 can be located elsewhere, such as behind the rear axle and/or under the axle carriage 20. The pair of suspension cylinders 20 are operable

- 7 -

to move the rigid axle 30 in vertical directions relative to the axle carriage 16 using a controller (not shown).

According to an aspect of the present invention, and referring now to Figs. 3-5, a suspension system 40 includes the axle carriage 16, axle 30, suspension cylinders
5 20 and two pairs of roll angle stops 42 and 44 between the axle carriage 16 and axle 30. More particularly, the axle 30 includes a first pair of roll angle stops 42 which engage the axle carriage 16 when the axle 30 is at or near a compressed or fully lowered position relative to the axle carriage 16, and the axle 30 includes a second pair of roll angle stops 44 which engage the axle carriage 16 when the axle 30 is at
10 or near an extended or fully raised position relative to the axle carriage 16.

The first pair of roll angle stops 42 each include a generally vertically arranged stop surface 46, and the second pair of roll angle stops 44 each include a generally horizontally arranged stop surface 48. The axle 30 includes an upwardly extending block 50 with a pair of opposed side surfaces respectively defining the generally
15 vertically arranged stop surfaces 46. The vertically arranged stop surfaces 46 can be generally perpendicular to the longitudinal axis of the axle 30, as shown, and thus substantially vertical when the axle 30 is positioned horizontally. Alternatively, the vertically arranged stop surfaces 46 can be at some predetermined angle less than 90° relative to the longitudinal axis of the axle 30 (e.g., 80°-90°).

20 The second pair of roll angle stops 44 defined by the generally horizontally arranged stop surfaces 48 are positioned on each lateral side of the block 50. The second pair of roll angle stops 44 each include a plate 52 mounted to a top of the axle 30, with each plate 52 having an upper surface defining the generally horizontally arranged stop surface 48. The generally horizontally arranged stop surface 48 of each plate
25 52 is positioned at a predetermined angle relative to horizontal. In the illustrated embodiment, the generally horizontally arranged stop surface 48 is at a slight acute angle relative to a horizontal reference plane (e.g., 1 to 10°). In other embodiments, the generally horizontally arranged stop surface 48 can be parallel to the longitudinal axis of the axle 30 (i.e., horizontal). The plates 52 can be removably attached to the
30 axle 30 using any suitable fastening technique, such as by using fasteners 54 which pass through holes formed in plate 52 and are threaded into the top surface of the axle 30. The use of removable plates 52 allows the use of plates with different physical geometries, depending on the application. The plates 52 can also be non-

- 8 -

removably attached to the top of the axle 30, such as by welding the plates 52 to the axle 30.

The axle carriage 16 includes a pair of downwardly extending legs 56 at the forward end thereof which define the slot 38. Each leg 56 has a laterally inside surface
5 defining a mating stop surface 58 which is engageable with a corresponding vertically arranged stop surface 46 on the block 50, as will be described below. The axle carriage 16 also includes an upwardly extending recess 60 between and rearward of the legs 56. The block 50 fits within the recess 60 when the axle 30 is in the fully raised position relative to the axle carriage 16. A cover plate 62 is fastened to the
10 bottom end of the legs 56 and defines a stop limit when the axle 30 is at a fully lowered position relative to the axle carriage 16. In particular, when the pivot member 34 contacts the cover plate 62 the axle is at the fully lowered position.

The axle carriage 16 also includes a pair of bosses 64 formed at the bottom thereof which define a pair of mating stop surfaces 66 which are engageable with a
15 corresponding horizontally arranged stop surface 48 on the axle 30, as will be described below. The thickened area of the bosses 64 helps with loading when the horizontal stop surfaces 48 contact the bottom of the axle carriage 16. However, such a thickened area or boss may not be necessary, depending on the construction of the axle carriage 16, and the horizontal stop surfaces 48 may directly contact the
20 axle carriage 16 without such a boss or reinforced area. As another option, plates similar to the plates 52 can be attached to the bottom side of the axle carriage 16 at the places of contact with the plates 52.

The various components acting together to limit the roll angle of the axle 30 relative to the axle carriage 16 are collectively referred to as a roll angle stop arrangement of
25 the present invention. Such components can include the first pair of roll angle stops 42, the second pair of roll angle stops 44, the mating stop surfaces 58, the pivot member 34, the vertically arranged slot 38, and the mating stop surfaces 66. These various components work together to define the roll angle stop arrangement. The exterior shape of the axle 30 and axle carriage 16 also affect the size and shape of
30 the other components making up the roll angle stop arrangement.

Referring now to Figs. 6-12, operation of the suspension system 40 will be described in greater detail. The first pair of roll angle stops 42 engage the axle carriage 16

when the axle 30 is within a first predetermined range of movement relative to the axle carriage 16, and the second pair of roll angle stops 44 engage the axle carriage 16 when the axle 30 is within a second predetermined range of movement relative to the axle carriage 16. The first predetermined range of movement is adjacent to the
5 fully lowered position (i.e., in the lower region of the stroke length of the suspension cylinders 20), and the second predetermined range of movement is adjacent to the fully raised position (i.e., in the upper region of the stroke length of the suspension cylinders 20).

Referring to Figs. 6 and 7, the axle 30 is shown in a fully lowered position relative to
10 the axle carriage 16, with the pivot member 34 against the cover plate 62. In the illustrated embodiment, the pivot member 34 is movable an overall stroke length of approximately 110 mm, with a neutral position in the middle and a 55 mm stroke length above and below the neutral position. When in the fully lowered position, a vertically arranged stop surface 46 on the side of block 50 contacts a corresponding
15 mating stop surface 58 on the side of a leg 56 when the axle 30 is at approximately an 8.3° roll angle relative to a horizontal reference. The contact area 68 between the vertically arranged stop surface 46 and the corresponding mating stop surface 58 is shown in Fig. 6.

Referring now to Figs. 8 and 9, the axle 30 is shown in a neutral position
20 approximately midway between the upper and lower maximum positions. When in the neutral position, the vertically arranged stop surface 46 on the side of block 50 still contacts a corresponding mating stop surface 58 on the side of the legs 56 when the axle 30 is at approximately an 8° roll angle relative to a horizontal reference. The contact area 68 between the vertically arranged stop surface 46 and the
25 corresponding mating stop surface 58 is shown in Fig. 8.

Referring now to Fig. 10, the axle 30 is shown at the transition point where both the vertical stop surface 46 and the horizontal stop surface 48 contact the axle carriage 16 when the axle 32 reaches a maximum roll angle of approximately 7.25° relative to a horizontal reference. When the axle 30 is below this position only the vertical stop
30 surface 46 will contact the axle carriage 16, and when the axle 30 is above this position only the horizontal stop surface 48 will contact the axle carriage 16. The contact area 68 between the vertically arranged stop surface 46 and the corresponding mating stop surface 58, and the contact area 70 between the

horizontally arranged stop surface 48 and the corresponding mating stop surface 66, are each shown in Fig. 10.

In the illustration of Fig. 10, the transition point between the vertical stop surface 46 and a horizontal stop surface 48 occurs when the axle is at a stroke length of approximately 37 mm above the neutral position. The particular transition point
5 between the vertical stop surface 46 and a horizontal stop surface 48 can vary depending on the design and configuration of the first and second pair of roll angle stops 42 and 44 and/or the corresponding mating stop surfaces 58 and 66.

Referring to Figs. 11 and 12, the axle 30 is shown in a fully raised position relative to
10 the axle carriage 16. When in the fully raised position, a horizontally arranged stop surface 48 on the top of the axle 30 contacts a corresponding mating stop surface 66 on the bottom of the axle carriage 16 when the axle 30 is at approximately a 3° roll angle relative to a horizontal reference. The contact area 70 between the horizontally arranged stop surface 48 and the corresponding mating stop surface 66
15 is shown in Fig. 11. When the axle 30 is in the fully raised position, the maximum allowed roll angle is only 3° in the illustrated embodiment to prevent the wheel assembly from contacting the chassis, sheet metal or other component of the tractor 10. The particular maximum allowed roll angle when the axle is at the fully raised position can of course vary depending on the configuration.

20 As the axle 30 moves up and down relative to the axle carriage 16, the axle 30 has a maximum roll angle which varies according to a first mathematical relationship when the axle 30 is at any position within the first predetermined range of movement, and the axle has a roll angle which varies according to a second mathematical relationship when the axle 30 is at any position within the second predetermined
25 range of movement. The physical geometry of the first pair of roll angle stops 42 establishes the first mathematical relationship, and the physical geometry of the second pair of roll angle stops 44 and/or plates 52 establish the second mathematical relationship. The maximum roll angle is defined as the point at which one of the vertically arranged stop surfaces 46 and/or horizontally arranged stop surfaces 48
30 contacts the axle carriage 16, thereby stopping further pivoting movement of the axle 30 relative to the axle carriage 16. Referring now to Fig. 13, the first predetermined range of movement corresponds to the range of movement when the first pair of roll angle stops 42 establish the maximum allowed roll angle, and the second

predetermined range of movement corresponds to a range of movement when the second pair of roll angle stops 44 establish the maximum allowed roll angle. It can be seen that the line 80 representing the first mathematical relationship during the first predetermined range of movement has a very slight curve, but can be thought of as being a generally linear relationship. Further, the line 82 representing the second mathematical relationship during the second predetermined range of movement also has a very slight curve, but can likewise be thought of as being a generally linear relationship. At the intersection point 84 between the first line 80 and the second line 82, contact between the axle 30 and axle carriage 16 transitions from the first pair of roll angle stops 42 to the second pair of roll angle stops 44, or vice versa. The line representing the second mathematical relationship to the right of the intersection point 84 has a steeper slope than the line representing the first mathematical relationship to the left of the intersection point 84. The axle 30 has a smallest maximum roll angle when the axle 30 is at the fully raised position (to the right of the graph), and the axle 30 has a greatest maximum roll angle when the axle is at the fully lowered position (to the left of the graph). The dashed line represents the linear approximate overall axle stop using each of the first and second pair of roll angle stops 42 and 44.

While this invention has been described with respect to at least one embodiment, the present invention can be further modified within the spirit and scope of this disclosure. This application is therefore intended to cover any variations, uses, or adaptations of the invention using its general principles. Further, this application is intended to cover such

departures from the present disclosure as come within known or customary practice in the art to which this invention pertains and which fall within the limits of the appended claims.

- 12 -

CLAIMS

1. An off-road vehicle (10), comprising:

a chassis (12);

an axle carriage (16) attached to or forming a part of the chassis(12);

5 a rigid axle (30) mounted to the axle carriage (16) with a wheel hub (32) at each end thereof, the axle (30) being vertically movable relative to the axle carriage (16); and

a pair of suspension cylinders (20), each said suspension cylinder (20) being connected between said axle carriage (16) and said axle (30), said pair of suspension cylinders (20) being operable to move the axle (30) in vertical directions
10 relative to the axle carriage (16);

characterized in that:

the axle (30) includes a first pair of roll angle stops (42) which engage the axle carriage (16) when the axle (30) is at or near a fully lowered position relative to the axle carriage (16), and the axle (30) includes a second pair of roll angle stops (44)
15 which engage the axle carriage (16) when the axle (30) is at or near a fully raised position relative to the axle carriage (16).

2. The off-road vehicle (10) of claim 1, wherein the first pair of roll angle stops (42) each include a generally vertically arranged stop surface (46), and the second pair of roll angle stops (44) each include a generally horizontally arranged stop surface(48).

20 3. The off-road vehicle (10) of claim 2, wherein the axle carriage (16) includes a generally vertically arranged slot (38), and the axle (30) includes a generally cylindrical pivot member (43) located approximately midway between the ends of the axle (30) and having a longitudinal axis (36) extending generally in a fore-aft direction of the off-road vehicle (10), the pivot member (34) being positioned and vertically
25 movable within the slot (38) of the axle carriage (16).

4. The off-road vehicle (10) of claim 3, wherein the axle carriage (16) includes a pair of downwardly extending legs (56) defining said slot (38), and the axle (30) includes an upwardly extending block (50) with a pair of opposed side surfaces respectively

defining said generally vertically arranged stop surfaces (46), each said generally vertically arranged stop surface (46) being engagable with a corresponding said leg (56).

5 5. The off-road vehicle (10) of claim 4, wherein said axle carriage (16) includes an upwardly extending recess (60) between said legs (56) and said block (50) fits within said recess (60) when the axle (30) is in the fully raised position.

6. The off-road vehicle (10) of claim 4, wherein said pair of generally horizontally arranged stop surfaces (48) are positioned on each lateral side of the block (50).

10 7. The off-road vehicle (1) of claim 6, wherein said second pair of roll angle stops (44) each include a plate (52) mounted to a top of the axle (30), each said plate (52) having an upper surface defining the generally horizontally arranged stop surface (48).

8. The off-road vehicle (10) of claim 7, wherein the upper surface of each said plate (50) is positioned at a predetermined angle relative to horizontal.

15 9. The off-road vehicle (10) of claim 1, wherein the first pair of roll angle stops (42) engage the axle carriage (16) when the axle (30) is within a first predetermined range of movement relative to the axle carriage (16), and the second pair of roll angle stops (44) engage the axle carriage (16) when the axle (30) is within a second predetermined range of movement relative to the axle carriage (16).

20 10. The off-road vehicle (10) of claim 9, wherein the first predetermined range of movement is adjacent to the fully lowered position, and the second predetermined range of movement is adjacent to the fully raised position.

25 11. The off-road vehicle (10) of claim 9, wherein the axle (30) has a maximum roll angle which varies according to a first mathematical relationship when the axle (30) is at any position within the first predetermined range of movement, and wherein the axle (30) has a maximum roll angle which varies according to a second mathematical relationship when the axle (30) is at any position within the second predetermined range of movement.

30 12. The off-road vehicle (10) of claim 11, wherein the first mathematical relationship and the second mathematical relationship are each generally linear relationships,

- 14 -

with the second mathematical relationship having a steeper slope than the first mathematical relationship.

13. The off-road vehicle (10) of claim 12, wherein a distinct crossover point (84) exists between the first mathematical relationship and the second mathematical
5 relationship.

14. The off-road vehicle (10) of claim 11, wherein the axle (30) has a smallest roll angle when the axle (30) is at the fully raised position, and the axle has a greatest roll angle when the axle (30) is at the fully lowered position.

15. The off-road vehicle (10) of claim 1, wherein the axle (30) is at the fully lowered
10 position when the pivot member (34) is seated against a bottom of the slot (38).

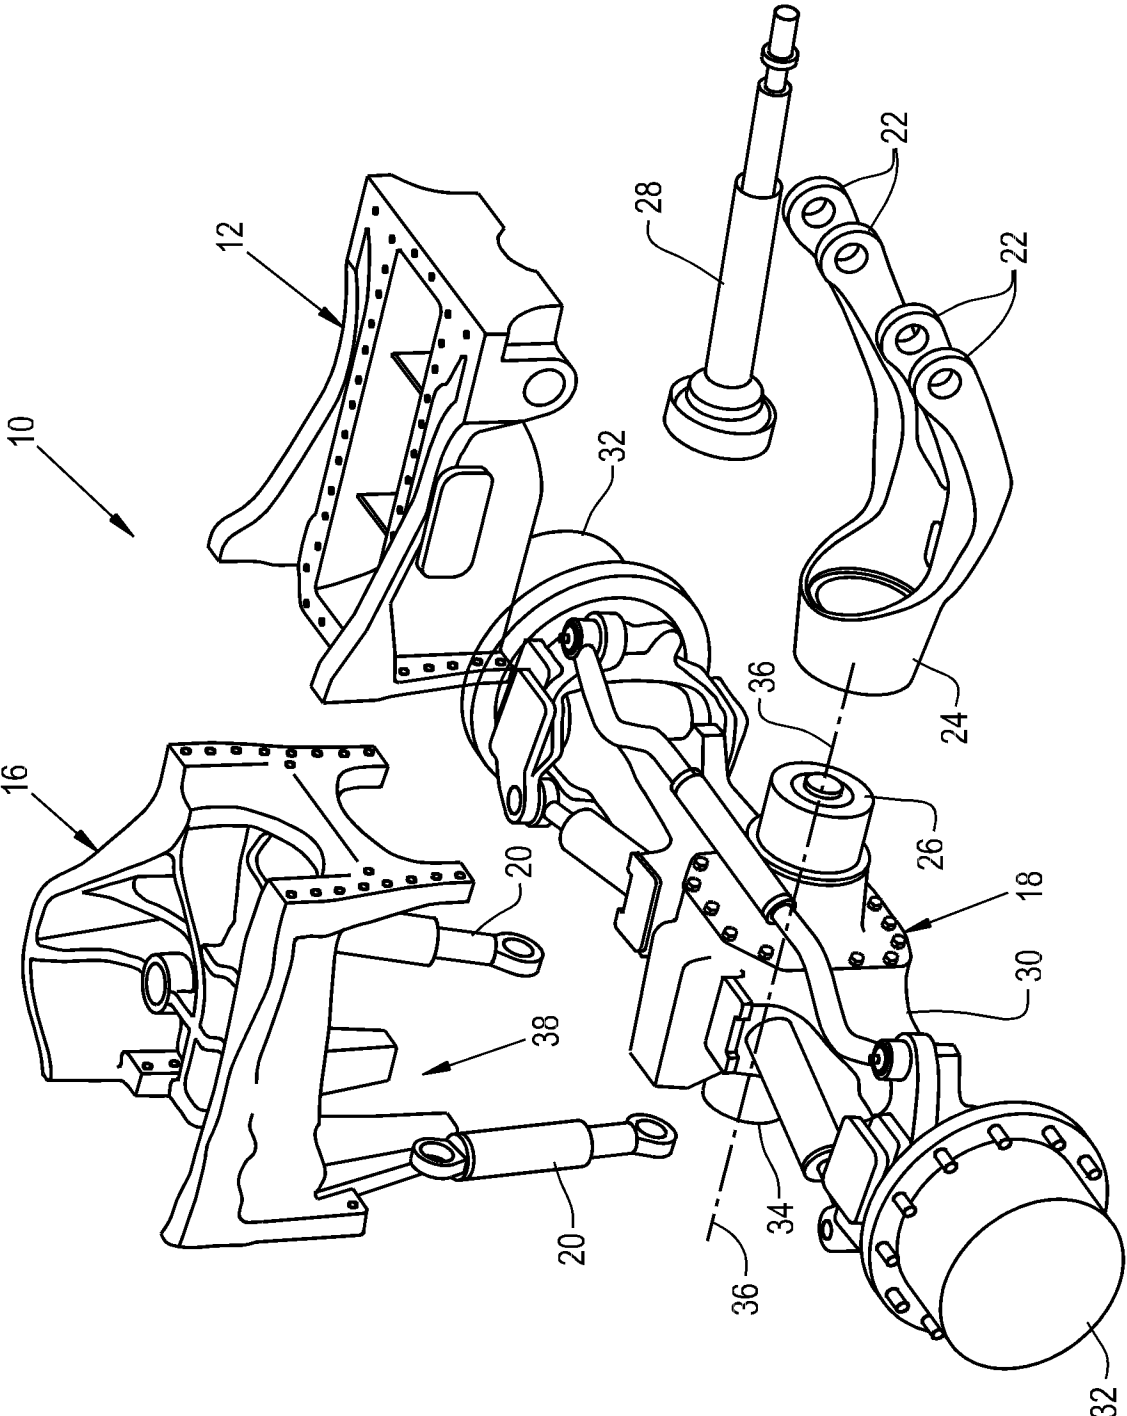


Fig. 1



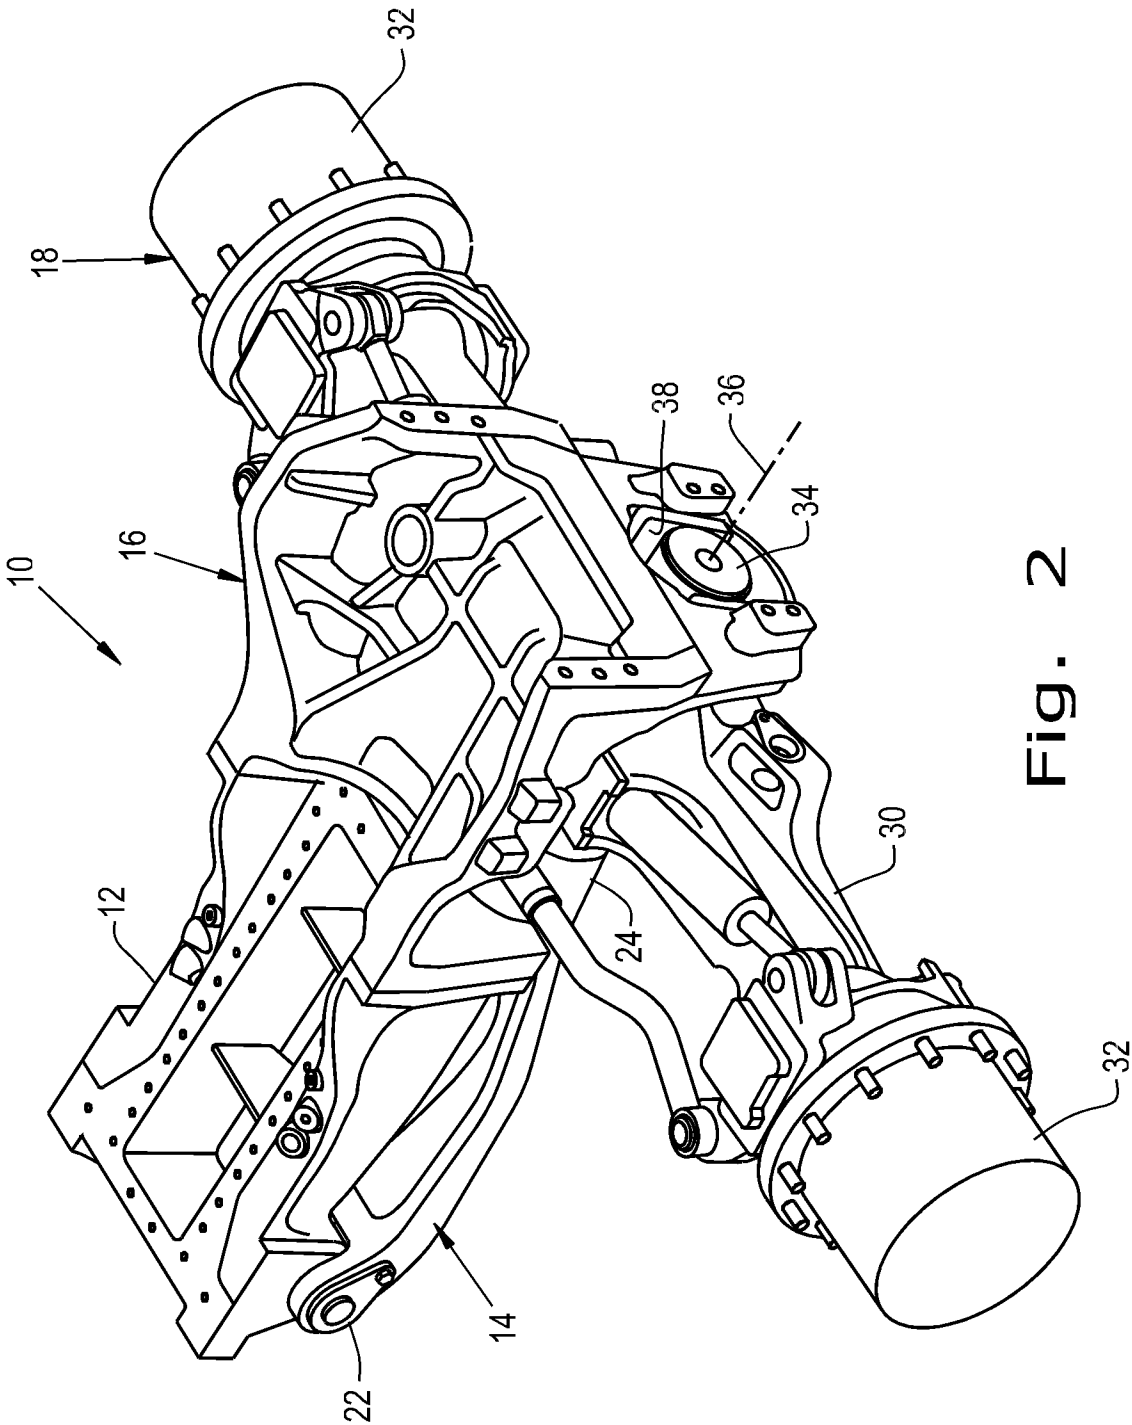


Fig. 2

3/12

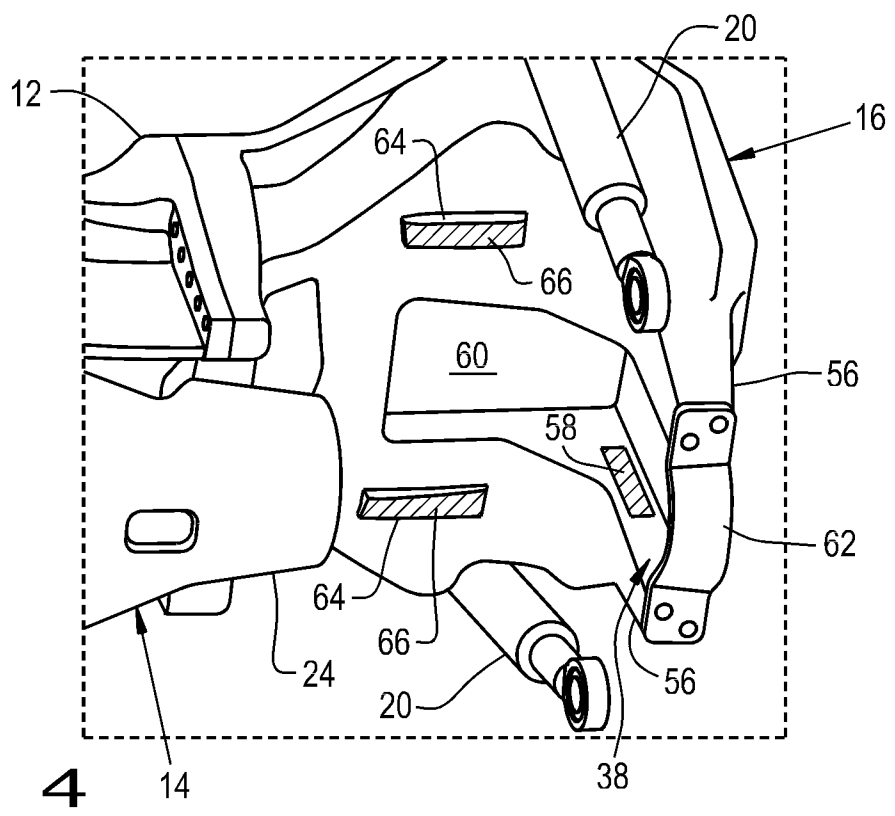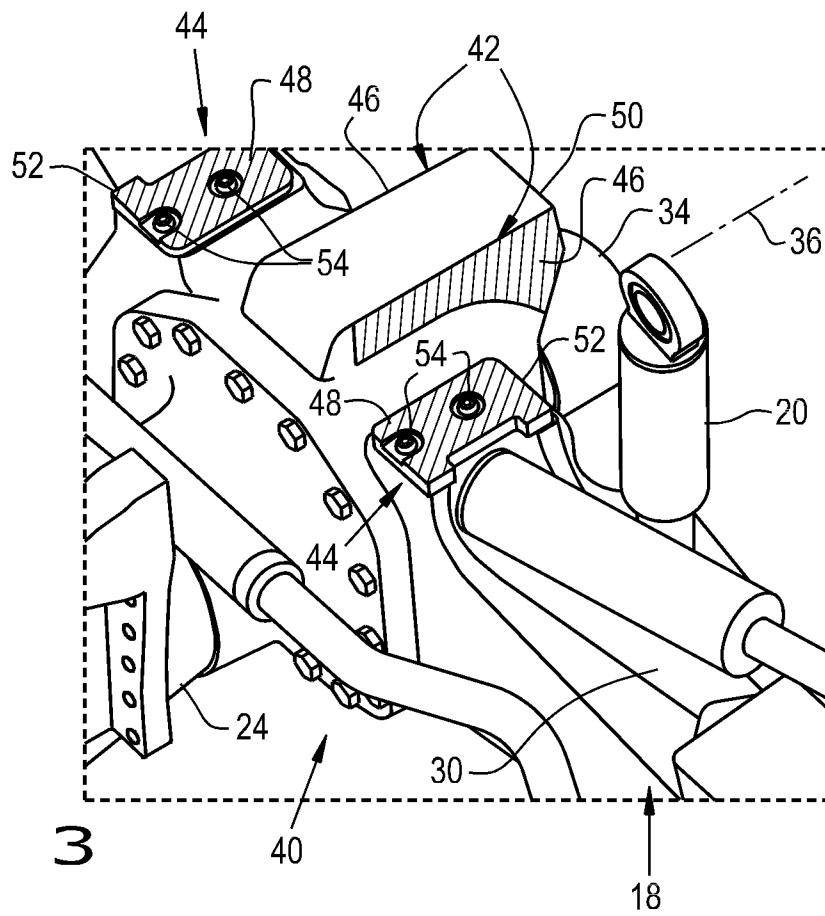

4/12

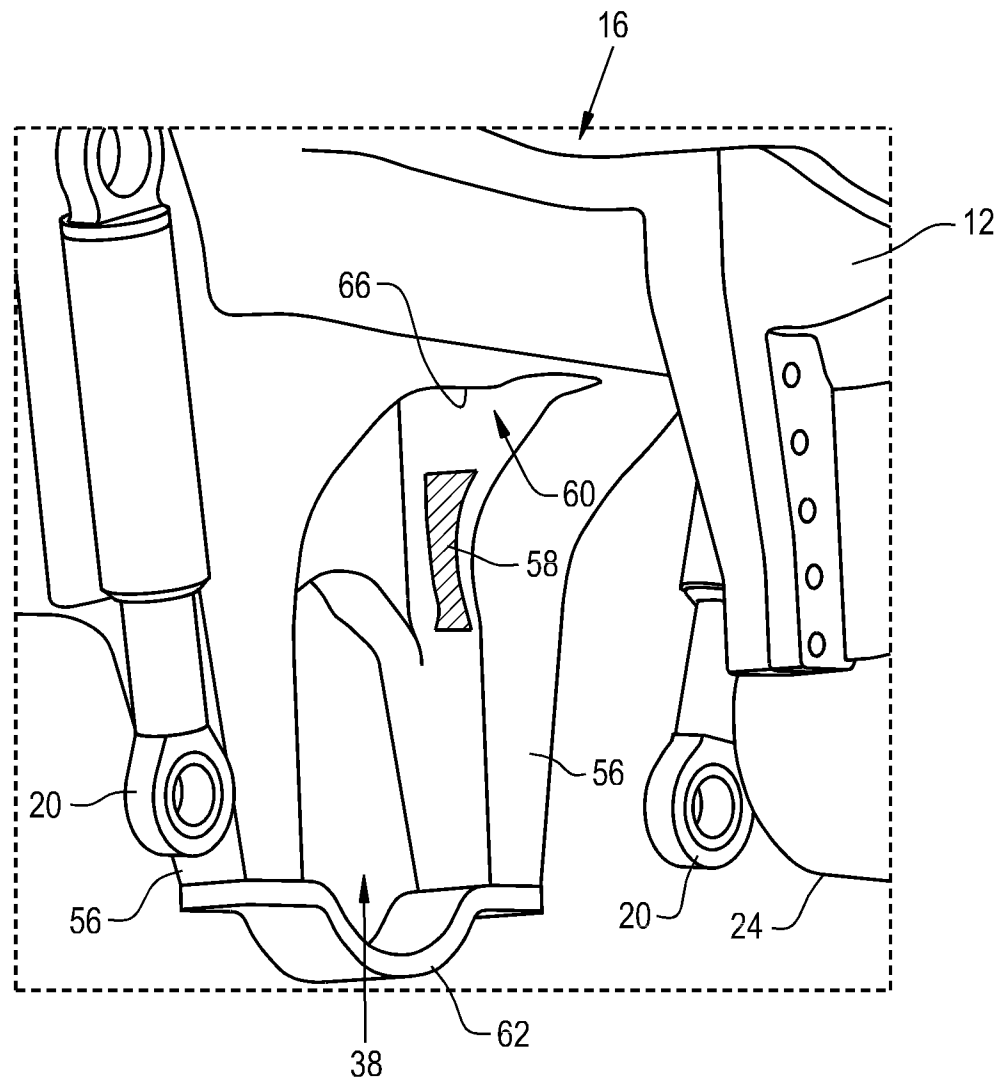


Fig. 5

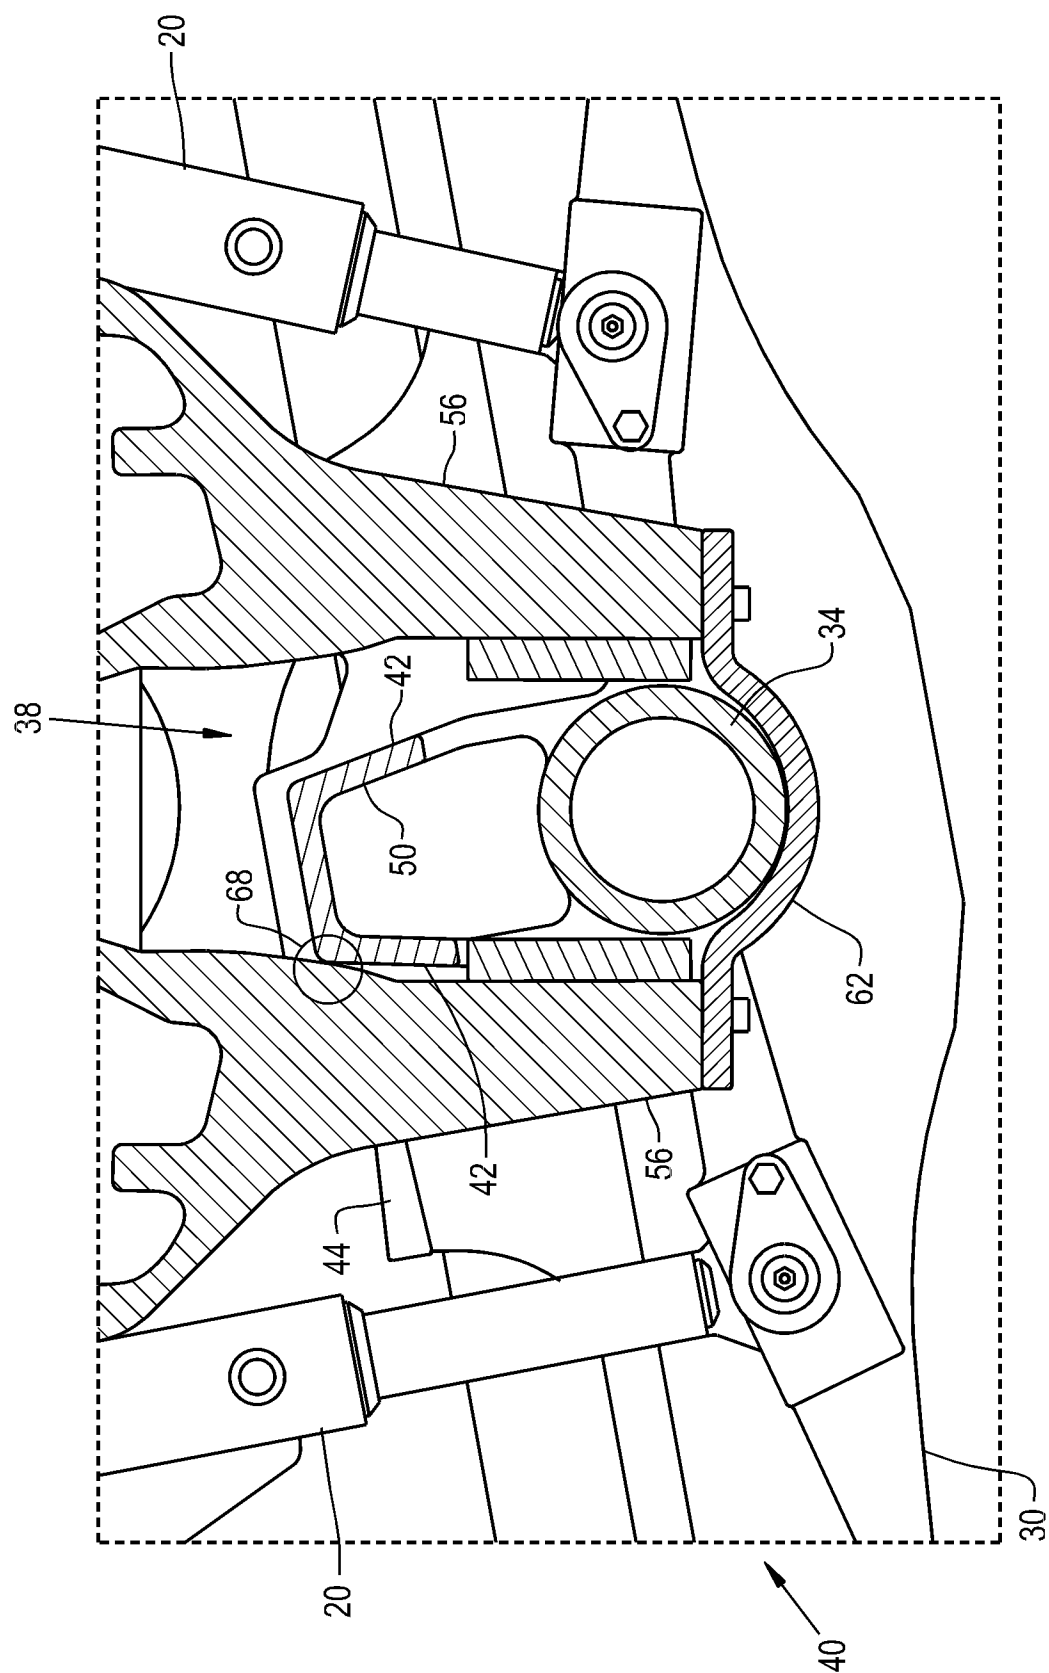


Fig. 6

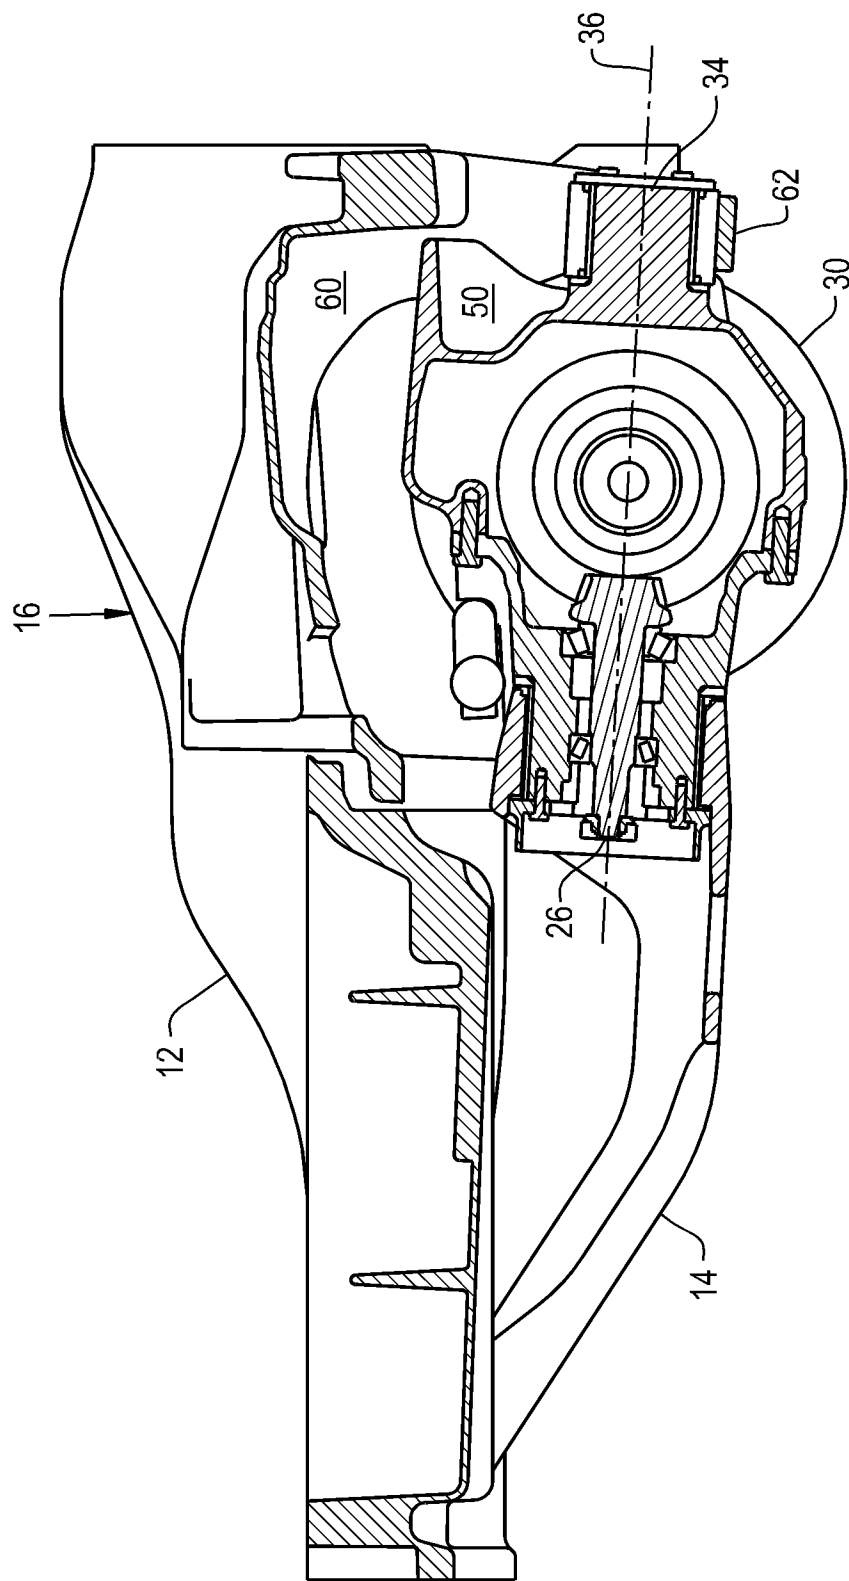


Fig. 7

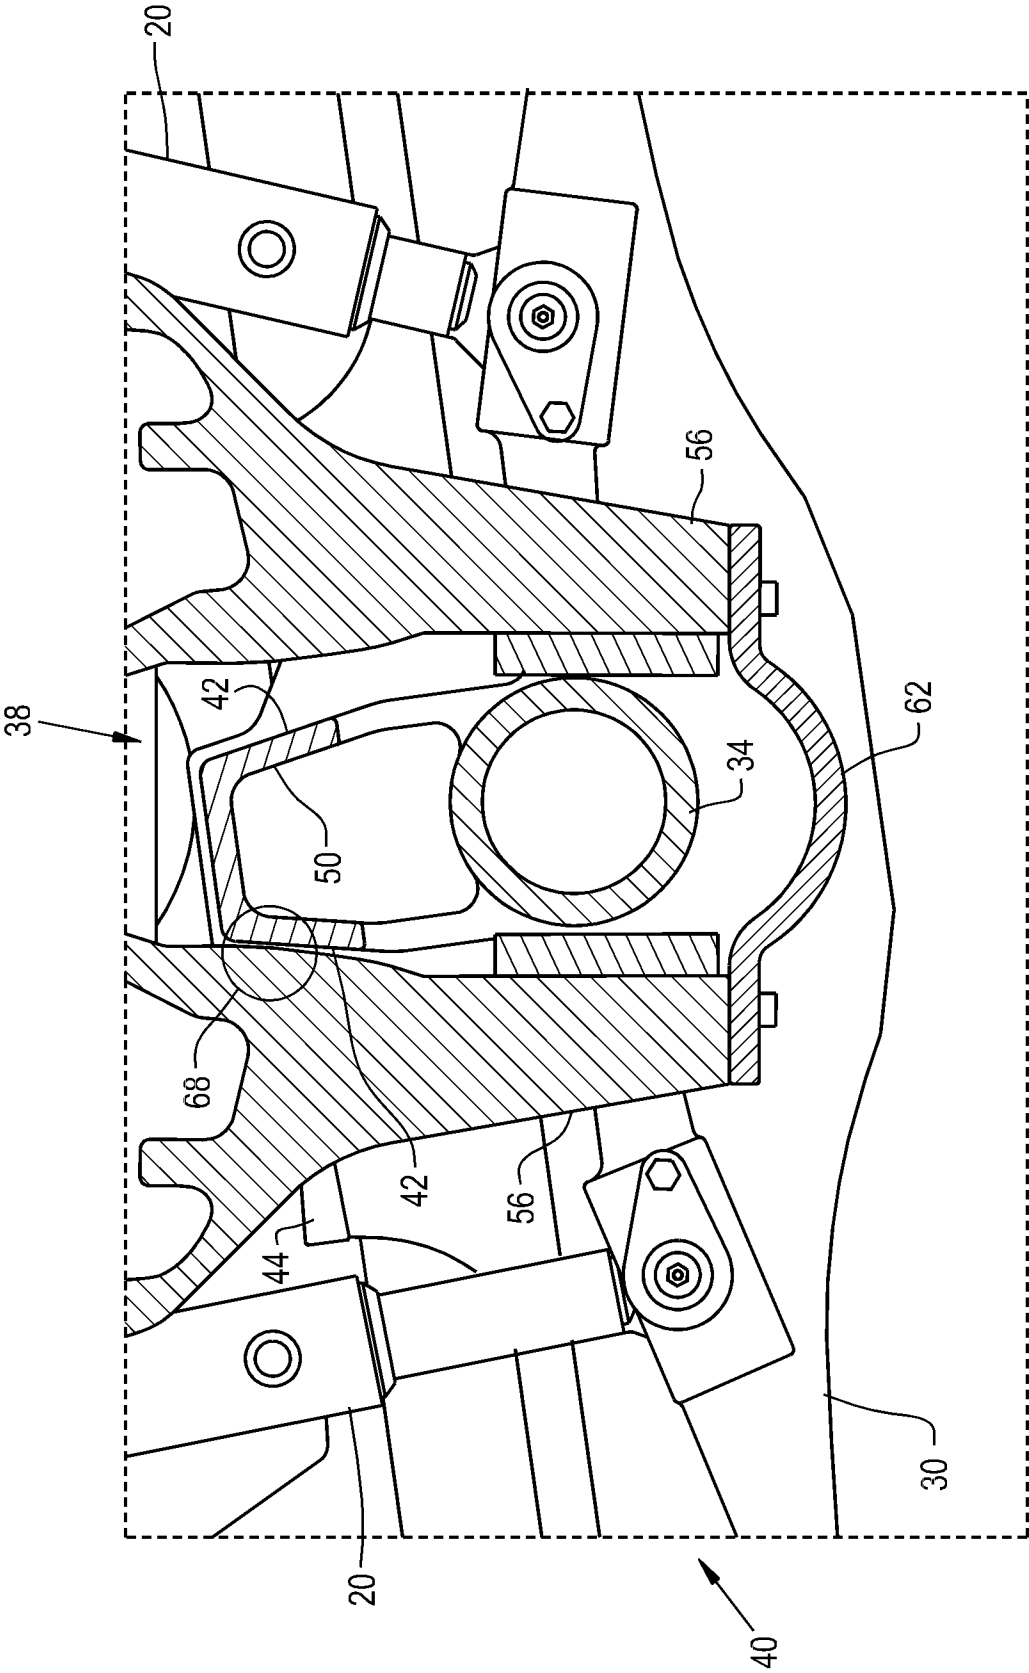


Fig. 8

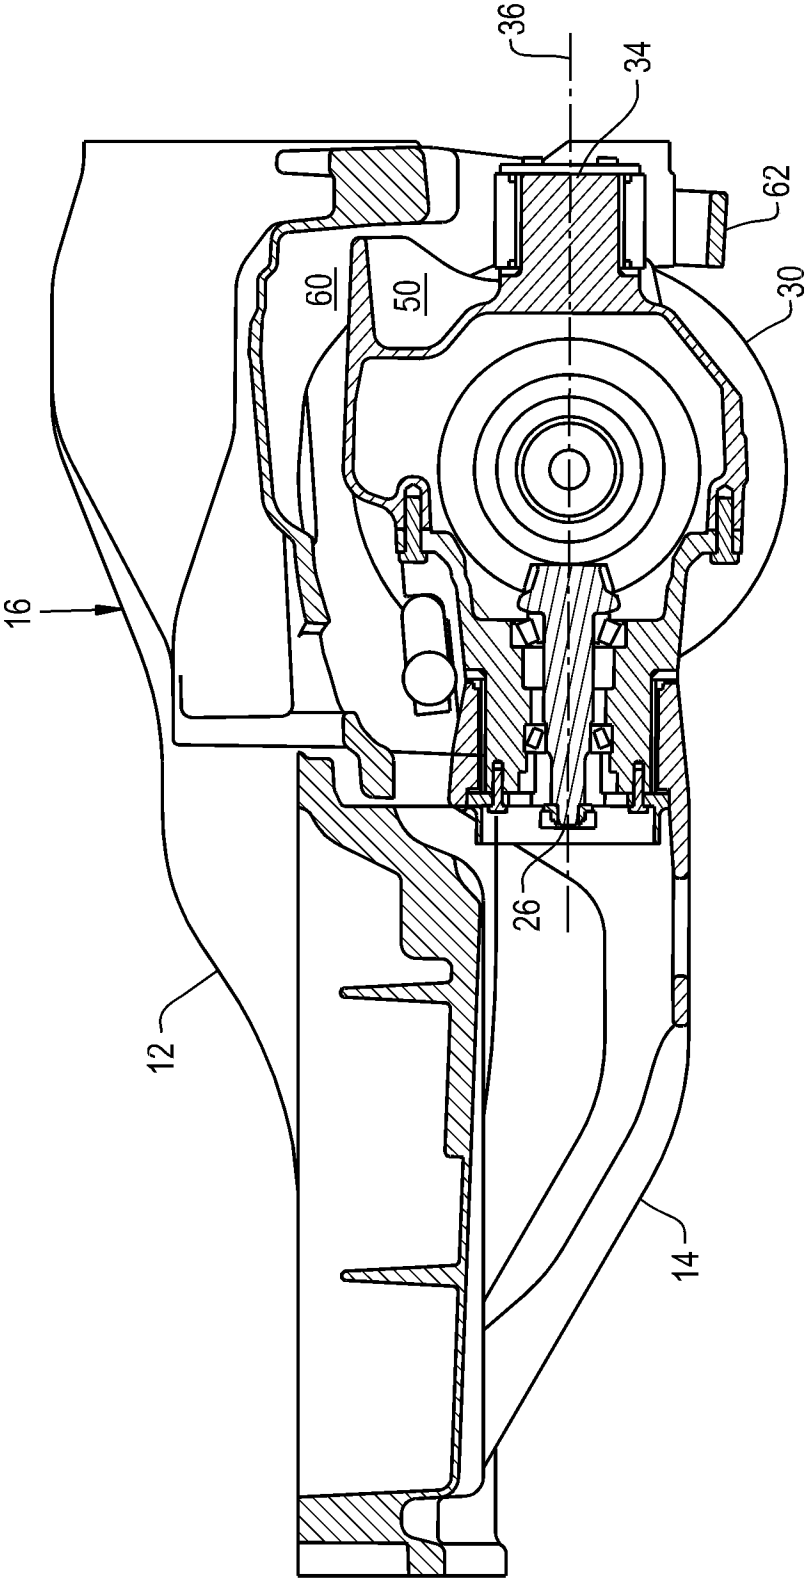


Fig. 9

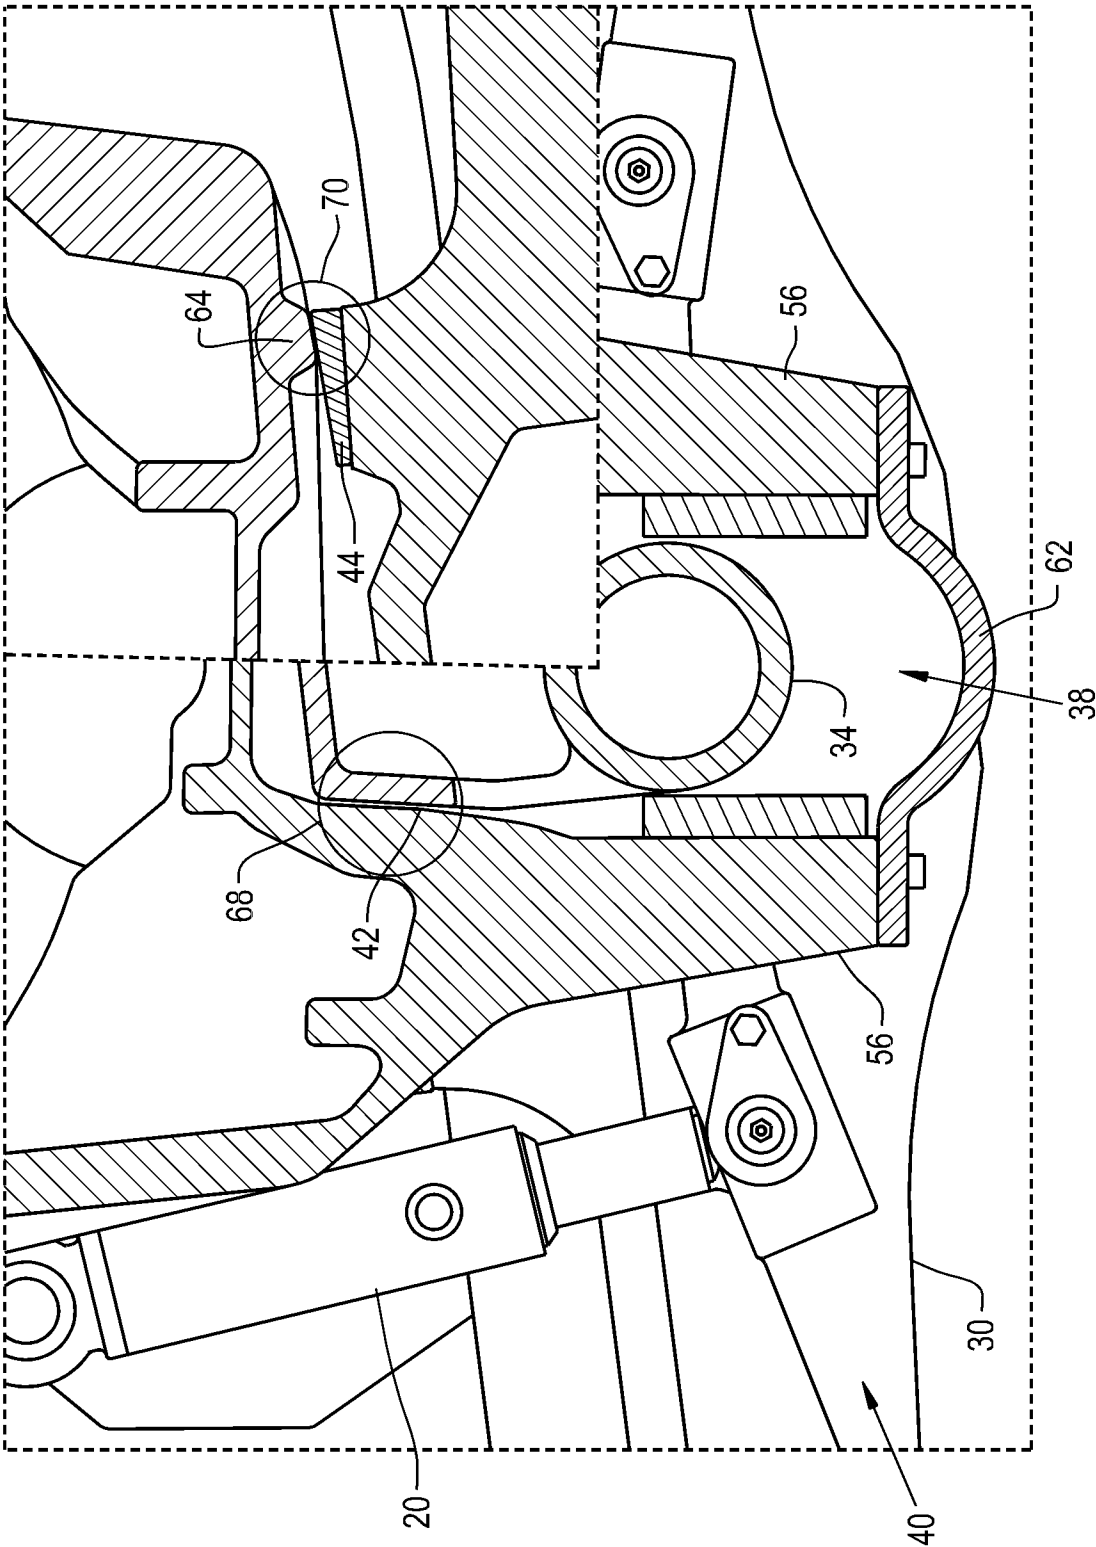


Fig. 10

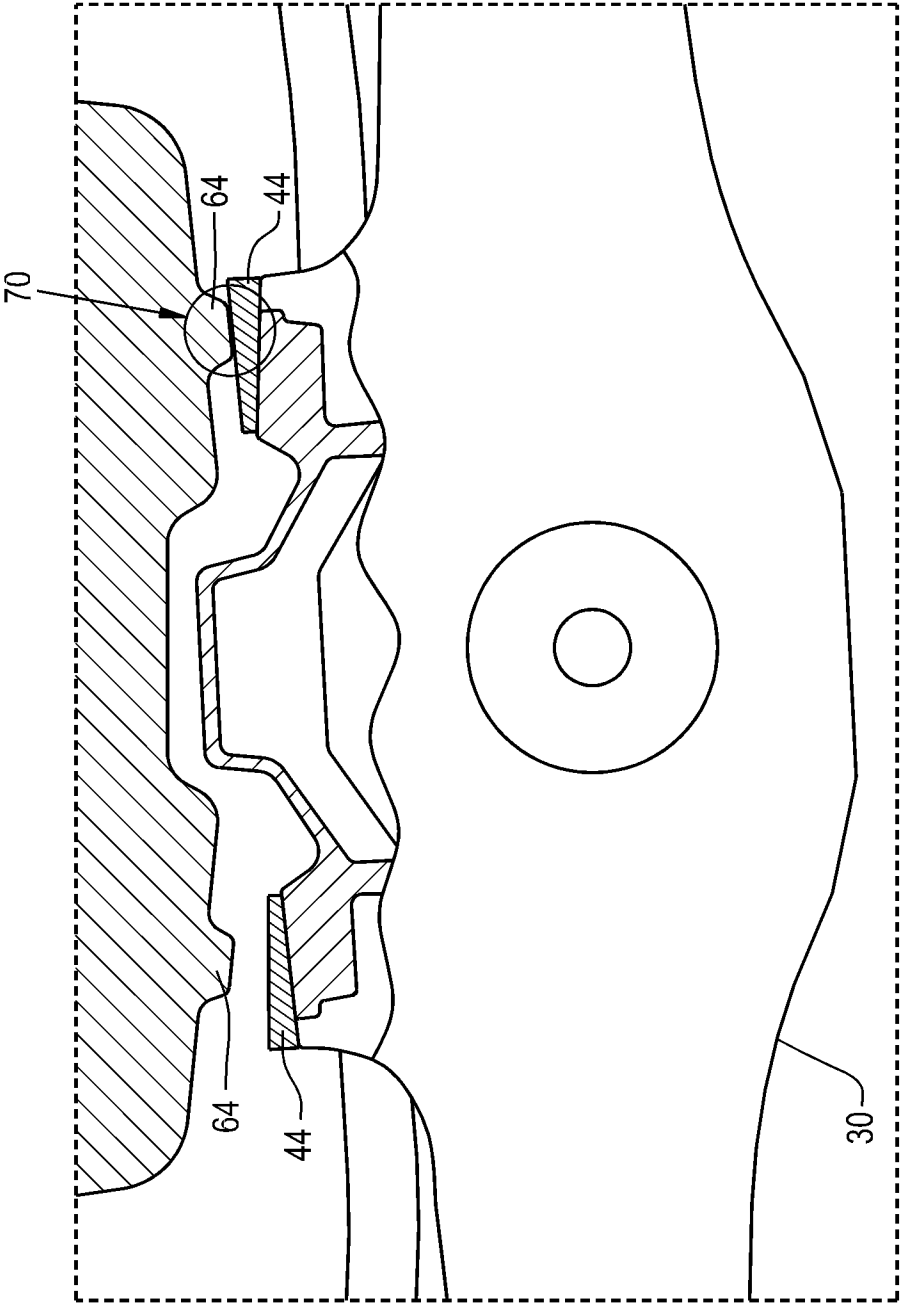


Fig. 11

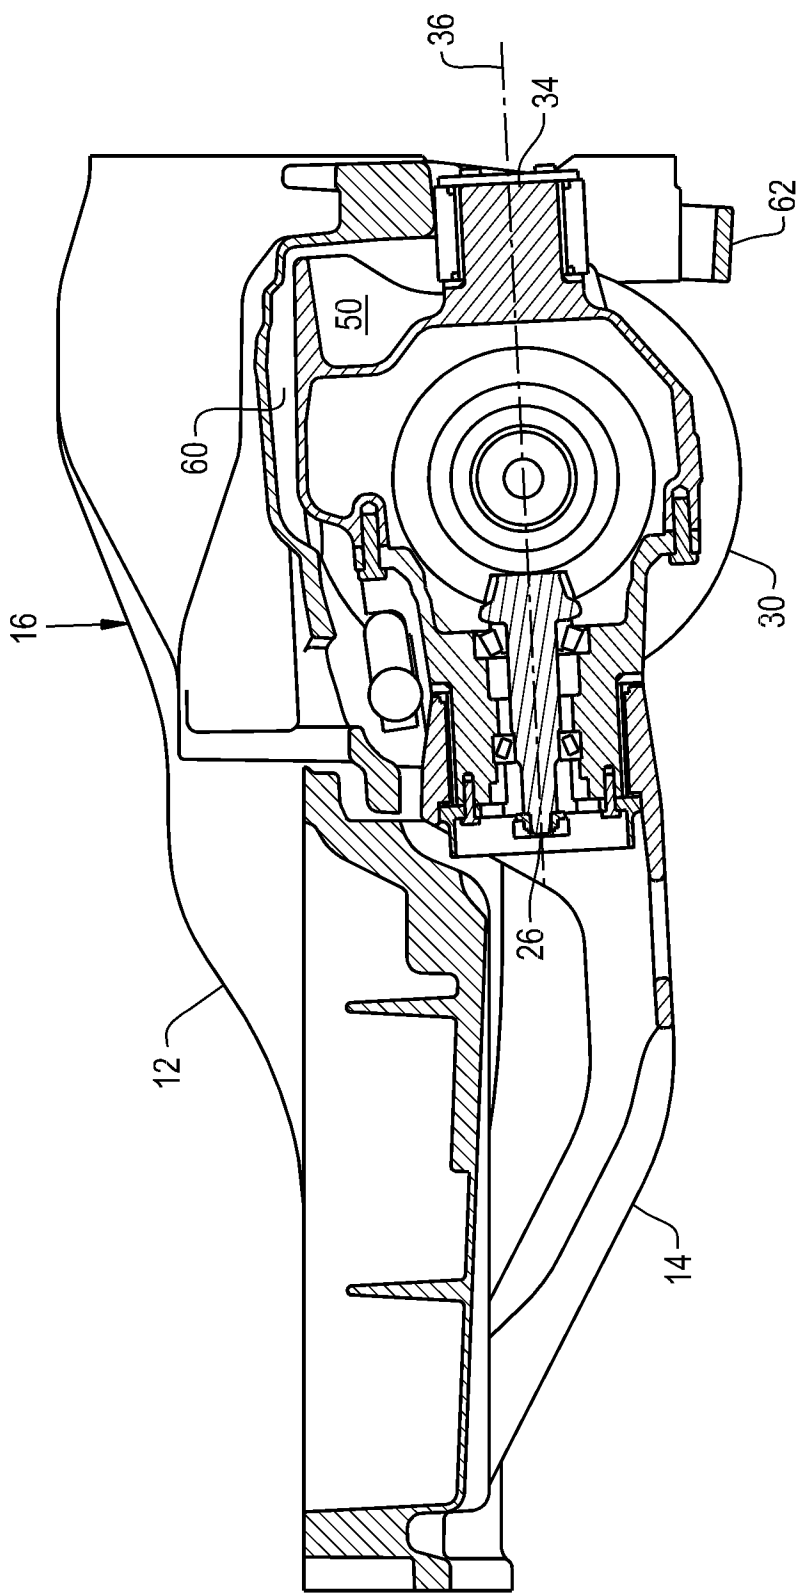


Fig. 12

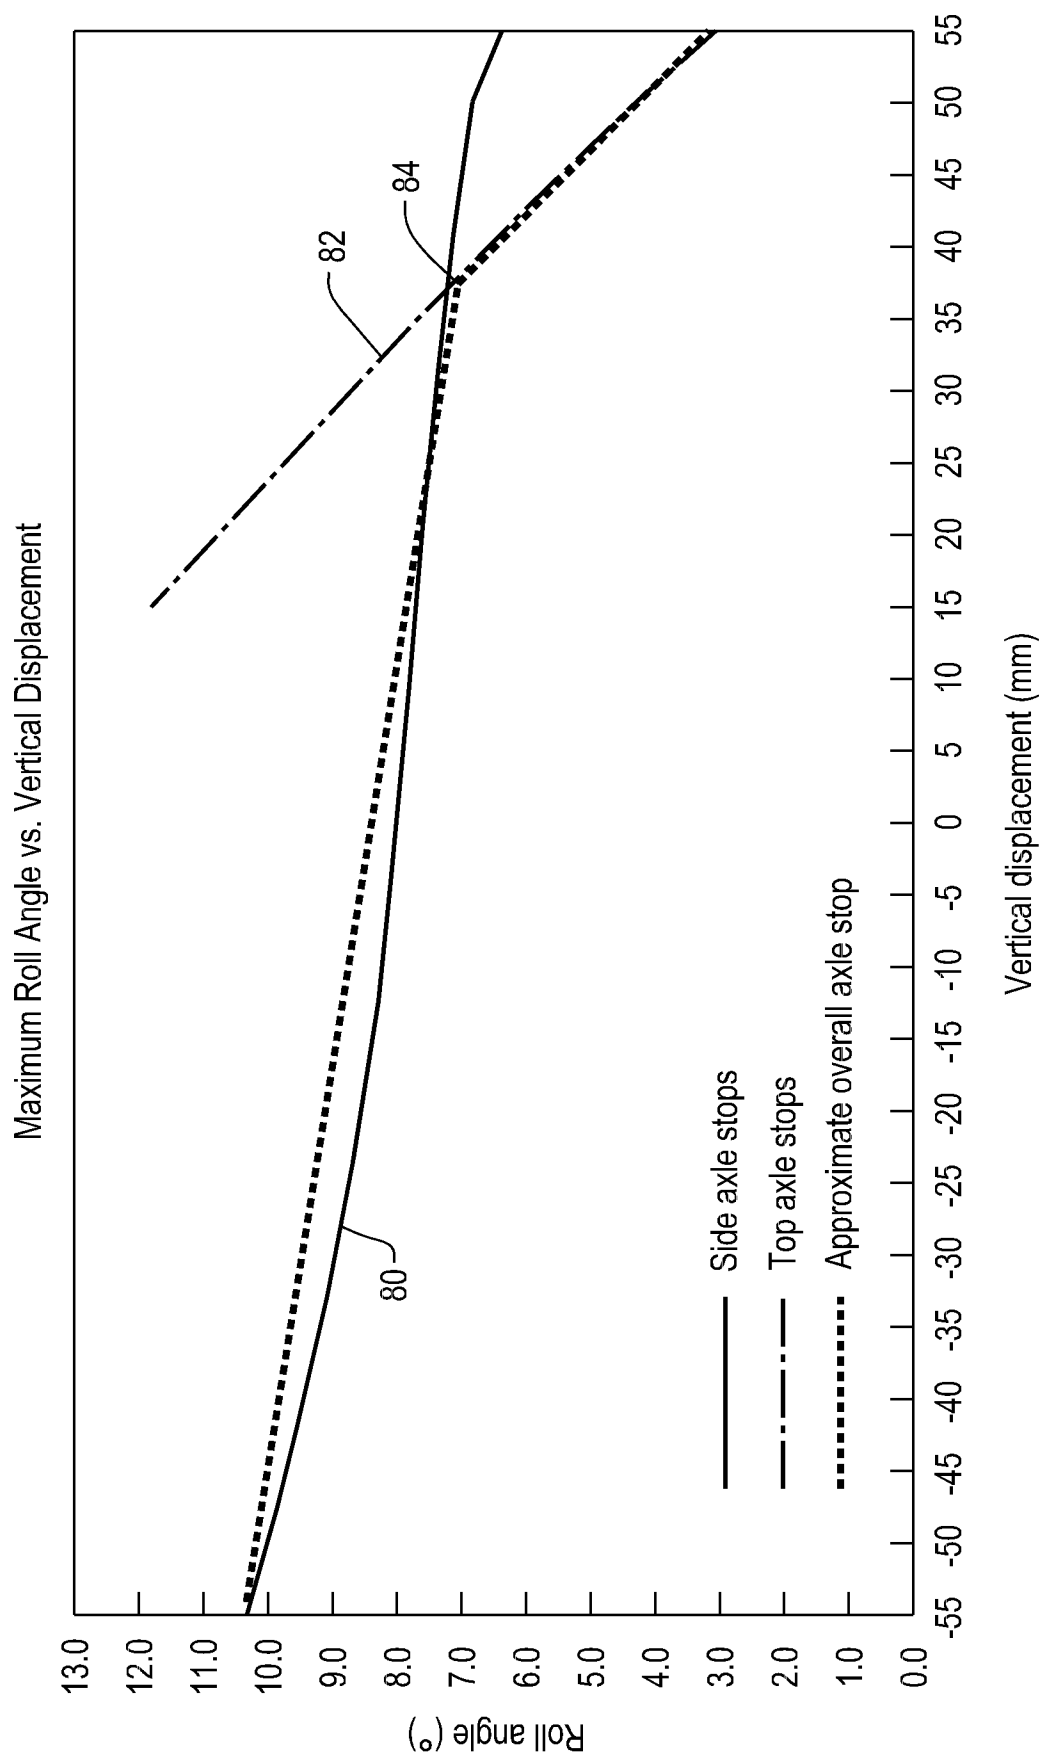


Fig. 13

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2015/057636

A. CLASSIFICATION OF SUBJECT MATTER
INV. B60G9/02
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
B60G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6 502 840 B1 (LEYONHJELM JEFFERY MICHAEL [AU] ET AL) 7 January 2003 (2003-01-07) column 2, line 43 - line 53; figure 4 -----	1-15
A	US 2005/082780 A1 (SEEDS HAROLD W [US] ET AL) 21 April 2005 (2005-04-21) paragraph [0022]; figure 1 -----	1-15
A	US 5 879 016 A (ALTHERR AUGUST [DE] ET AL) 9 March 1999 (1999-03-09) the whole document -----	1-15



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

18 June 2015

Date of mailing of the international search report

25/06/2015

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Savelon, Olivier

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2015/057636

Patent document cited in search report		Publication date	Patent family member(s)			Publication date
US 6502840	B1	07-01-2003	BR	0204105	A	16-09-2003
			EP	1302342	A2	16-04-2003
			ES	2262738	T3	01-12-2006
			JP	4136583	B2	20-08-2008
			JP	2003146041	A	21-05-2003
			US	6502840	B1	07-01-2003

US 2005082780	A1	21-04-2005	BR	PI0405126	A	18-10-2005
			EP	1571008	A2	07-09-2005
			KR	20050089128	A	07-09-2005
			US	2005082780	A1	21-04-2005
			US	2007241609	A1	18-10-2007

US 5879016	A	09-03-1999	AR	010249	A1	07-06-2000
			AT	204539	T	15-09-2001
			AU	713254	B2	25-11-1999
			AU	3923997	A	23-04-1998
			BR	9705075	A	09-03-1999
			CA	2214963	A1	19-04-1998
			CZ	9901339	A3	11-08-1999
			DE	19643263	A1	23-04-1998
			EP	0932512	A1	04-08-1999
			ES	2159882	T3	16-10-2001
			JP	3321047	B2	03-09-2002
			JP	H10129228	A	19-05-1998
			US	5879016	A	09-03-1999
			WO	9817488	A1	30-04-1998
