



- (51) International Patent Classification:
G06F 12/08 (2006.01)
- (21) International Application Number:
PCT/US2014/054624
- (22) International Filing Date:
8 September 2014 (08.09.2014)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/874,930 6 September 2013 (06.09.2013) US
61/874,926 6 September 2013 (06.09.2013) US
61/875,627 9 September 2013 (09.09.2013) US
61/875,625 9 September 2013 (09.09.2013) US
- (71) Applicants: **LYVE MINDS, INC.** [US/US]; 10001 De Anza Blvd., Suite 300, Cupertino, CA 95014 (US). **SEAGATE TECHNOLOGY LLC** [US/US]; 10200 S. De Anza Blvd., Cupertino, CA 95014 (US).
- (72) Inventors: **CRISWELL, Jon**; 18810 Brookside Circle, Saratoga, CA 95070 (US). **LIANG, Jian**; 1209 Mountain Quail Circle, San Jose, CA 95120 (US). **CHING, Rex Yik, Chun**; 963 Erica Dr., Sunnyvale, CA 94086 (US). **DYKES, James, Edward**; 5017 Bella Vista Drive, Longmont, CO 80503 (US).
- (74) Agents: **ISRAELSEN, R., Burns** et al.; Maschoff Brennan, 1389 Center Drive, Suite 300, Park City, UT 84098 (US).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LI, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report (Art. 21(3))

(54) Title: ELECTRONIC DEVICE DATA DISTRIBUTION

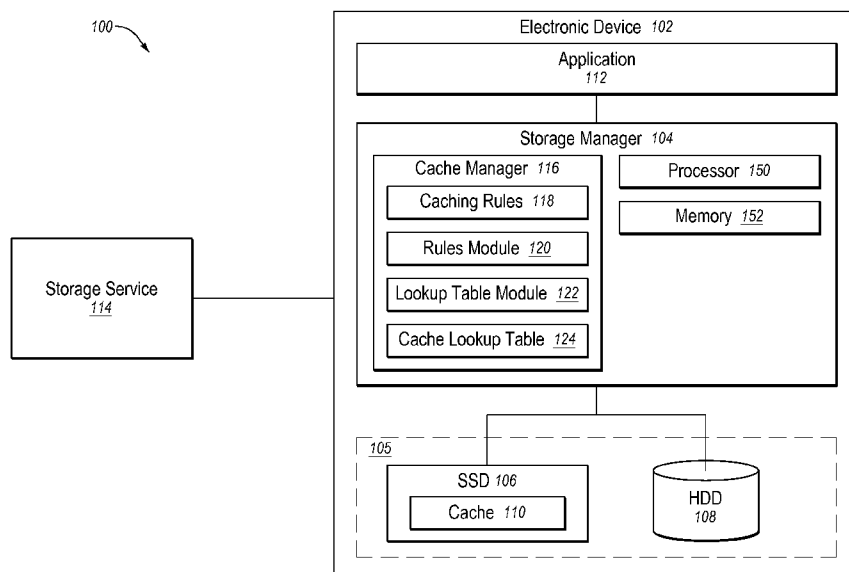


Fig. 1

(57) Abstract: A non-transitory computer-readable storage medium may include instructions that cause a system to perform operations, the operations may include receiving an operation associated with data and managing storage of the data on a first storage medium of an electronic device and in a cache on a second storage medium of the electronic device based on the operation and a cache policy. The cache policy may be based on one or more characteristics of the data that include a duration since a previous access of the data.

ELECTRONIC DEVICE DATA DISTRIBUTION FIELD

The embodiments discussed herein are related to data distribution in an electronic device.

5

BACKGROUND

The amount of data that users desire to store on portable electronic devices is increasing. Most portable electronic devices utilize solid-state memory such as flash memory for storage because of its relatively low power consumption and robust nature as compared to spinning storage such as hard disk drives. However, solid-state memory with large amounts of storage space may be expensive.

10

The subject matter described herein is not limited to embodiments that solve any disadvantages or that operate only in environments such as those described above. Rather, this background is only provided to illustrate one example technology area where some embodiments described herein may be practiced.

15

SUMMARY

According to an aspect of an embodiment, A non-transitory computer-readable storage medium may include instructions that cause a system to perform operations, the operations may include receiving an operation associated with data and managing storage of the data on a first storage medium of an electronic device and in a cache on a second storage medium of the electronic device based on the operation and a cache policy. The cache policy may be based on one or more characteristics of the data that include a duration since a previous access of the data.

20

The object and advantages of the embodiments will be realized and achieved at least by the elements, features, and combinations particularly pointed out below.

25

It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory and are not restrictive of the present disclosure.

BRIEF DESCRIPTION OF THE DRAWINGS

Example embodiments will be described and explained with additional specificity and detail through the use of the accompanying drawings in which:

30

Fig. 1 illustrates an example system configured to manage data storage on an electronic device;

Fig. 2 is a flowchart of an example method of managing data storage on an electronic device;

Fig. 3 is a flowchart of an example method of managing storage of data on an electronic device when an operation associated with the data is an “open” operation;

Fig. 4 is a flowchart of an example method of managing storage of data on an electronic device when an operation associated with the data is a “close” operation;

Fig. 5 is a flowchart of an example method of managing storage of data on an electronic device when an operation associated with the data is a “write” operation; and

Fig. 6 is a flowchart of an example method of managing removal of data from a cache.

DESCRIPTION OF EMBODIMENTS

As described in further detail below, an electronic device may include a first storage medium (e.g., a hard disk drive (HDD)) that may provide for a large amount of storage space on the electronic device at a significantly lower cost than using a second storage medium (e.g., a solid-state drive (SSD)) to obtain the same amount of storage space. However, accessing data and files on the first storage medium (e.g., HDD) may consume a significant amount of energy, which may be problematic for many electronic devices—especially portable, battery-powered electronic devices where increased battery life and decreased energy consumption may be a high priority. As such, as explained in detail below, the electronic device may also include the second storage medium (e.g., an SSD) that may consume less energy than the first storage medium, but that may be more expensive than the first storage medium with respect to storage capacity.

The electronic device may also include a storage manager where the storage manager may be configured to manage data storage on the first and second storage media such that the relatively low energy consumption of the second storage medium and the relatively large storage capacity of the first storage medium may be utilized to allow for use of the first storage medium in the electronic device while reducing power consumed by accessing the first storage medium. Therefore, the storage manager may allow for the electronic device to have a relatively large and inexpensive storage capacity through the use of the first storage medium while reducing and/or minimizing the negative effects of increased power consumption associated with the first storage medium.

Fig. 1 illustrates a block diagram of an example system 100 configured to manage data storage on an electronic device 102, according to at least one embodiment of the present disclosure. In some embodiments, the electronic device 102 may include an application 112, a storage manager 104, and a storage space 105 that may include an SSD 106 and an HDD 108.

The SSD 106 may include any suitable solid-state memory drive and may include Electrically Erasable Programmable Read-Only Memory (EEPROM) and/or flash memory, by way of example. In the present disclosure, use of the term “SSD” may refer to any suitable type of solid-state storage media and is not limited to “drives” per se. The HDD 108 may include any type of hard disk drive and may include any suitable computer-readable media configured to be accessed by spinning a component of the HDD 108.

The application 112 may include any suitable software or hardware application of the electronic device 102 that may be configured to direct operations associated with data that may be read from and/or written to the storage space 105. The operations may include any number of applicable operations including open and close operations which may also be associated with read and/or write operations. In some embodiments, the data may have various characteristics such as data size, frequency of access of the data, duration since a previous access of the data, and type of the data such as whether the data is configured as a file or as a directory as well as format or file type.

The storage manager 104 may be configured to intercept operations intended for the storage space 105 (e.g., operations intended for the storage space 105 as directed by the application 112). The storage manager 104 may include a cache manager 116 configured to manage storage of the data on the HDD 108 and in a cache 110 of the SSD 106 based on the operations as well as a cache policy, which may be applied according to the different operations in some embodiments.

In some embodiments, the cache policy may be based on reducing or minimizing accessing the HDD 108. Accessing the HDD 108 may result in causing the HDD 108 to spin (also referred to as “spinning up”), which may consume a relatively large amount of energy. Therefore, reducing or minimizing accessing the HDD 108 may reduce overall energy consumption. In some embodiments, the cache policy may be based on storing data on the cache 110 that is most likely to be accessed such that the data may be accessed without accessing the HDD 108.

For example, in some embodiments, the cache policy may be based on frequency of access of data and data types such that data, data types, and/or related data that are more frequently accessed may be prioritized as being stored on the cache 110 over data, data types, and/or related data that is less frequently accessed.

5 Similarly, the cache policy may be based on a number of times that data and data types may be accessed such that data, data types, and/or related data that have been accessed a relatively large number of times may be prioritized as being stored on the cache 110 over data, data types, and/or related data that have been accessed a relatively small number of times. Related data may include data having a similar
10 data type, similar metadata (e.g., similar timestamps, similar location information, similar tagging, etc.).

Further, many times recently stored, created, and/or accessed data is more likely to be accessed than less recently stored, created, and/or accessed data. Therefore, in some embodiments, the cache policy may be based on a duration of
15 time from when data was stored, created, and/or accessed.,

Additionally, in some embodiments the cache 110 may have limited storage space. Therefore, in these and other embodiments, the cache policy may be based on file sizes of the data so as to not fill the cache 110 with a relatively small number of files, which may cause more frequent access of the HDD 108. For example, the
20 cache policy may be based on storing in the cache 110 data with file sizes that allow for a relatively large number of files to be stored in the cache 110. sizes of files where the HDD 108 not spinning up often to access data that may not fit on the cache 110 because the cache 110 is full of a relatively small number of files or data sets. As such, the cache policy may be based on a potential number of files or data
25 sets that the cache 110 may be capable of storing, which may be based on a maximum allowed size of files that may be stored in the cache 110.

Further, as mentioned above, data may be transferred from the HDD 108 to the cache 110 as part of energy savings associated with the electronic device 102. However, the transfer or copying of large files from the HDD 108 to the cache 110
30 may cause the HDD 108 to spin up for a relatively long period of time, which may use a lot of energy such that potential energy savings may be reduced or eliminated.

Accordingly, the cache policy may be based on storing in the cache 110 files with sizes that may allow for desired energy savings where the HDD 108 is not spinning for relatively long periods of time because of large files or data sets being

transferred to the cache 110. As such, in some embodiments, the cache policy may be based on a relationship between file sizes and spinning time of the HDD 108 in which data with corresponding file sizes that may correspond to relatively long spin times may not be cached.

5 In some embodiments, the cache policy may be based on file size and available storage space on the cache 110 such that partial files may not be stored on the cache 110. Storing a portion of a file on the cache 110 and a portion of the same file on the HDD 108 may still result in the HDD 108 spinning up when that particular file is accessed. Therefore, energy savings may be increased by not
10 partially storing files in the cache 110.

In some embodiments, the cache manager 116 may include a set of caching rules 118 that may be based on the cache policy. For example, the caching rules 118 may include specific data characteristics that may dictate when to store data in the cache 110 and/or when to remove data from the cache 110. In some embodiments,
15 the caching rules 118 may include values such as file sizes, file access frequencies (e.g., how many times files may be accessed in a certain period of time), how many times a file has been accessed total, and/or durations since the last access to files that may dictate whether or not data should be stored in the cache 110 or removed from the cache 110. In some embodiments, the caching rules 118 may also include
20 weights for the different data characteristics such that some data characteristics may be given a higher priority and/or more deference than other data characteristics in determining whether or not to store data on or remove data from the cache 110.

The cache manager 116 may also include a rules module 120 in some embodiments. The rules module 120 may be configured to apply the caching rules
25 118 to data to determine whether the data should be stored on or removed from the cache 110. In some embodiments, the rules module 120 may be configured to assign a cache relevancy score and/or a cache relevancy rank to the data based on the cache policy and the caching rules 118 where the cache relevancy score and/or rank may dictate whether the data should be stored on or removed from the cache 110.

30 For example, in some embodiments, the rules module 120 may assign the cache relevancy score according to the following principles:

Possible scores: 1 2 3 (high / low / do not cache)

Score = (c1) ? 3 - c2 - c3 :3

Where:

c1 = (file size < MaxFileSize);
c2 = (current time < last access time + MinFileLife);
c3 = (file access frequency > MinAccessFrequency).

In the above principles, “MaxFileSize” may represent the largest file size
5 that may be cached, “MinAccessFrequency” may represent a minimum count of
times that a file may be accessed over a period of time, and “MinFileLife” may
represent a duration since the last time that a file was accessed, created, or stored.

In some embodiments, the different factors used to generate the cache
relevancy score may be given different weights such that some factors may
10 influence the cache relevancy score more than others. For example, in some
embodiments, one or more of the file size, the last access time, and the file access
frequency may be given different weights for generating the cache relevancy score.

The rules module 120 may also be configured to determine whether the data
should be stored on or removed from the cache 110 based on the operations
15 requested by the application 112 and/or based on a power policy associated with
when the electronic device 102 includes a battery as a power source. In some
embodiments, the power policy may be based on a power state of the electronic
device 102 as described below. In some embodiments, the rules module 120 may be
configured to determine whether to store data in or remove data from the cache 110
20 based on the operations, the power policy, and/or the cache policy according to
methods 200-500, discussed with respect to Figs. 2-5 below.

In some embodiments, the cache manager 116 may be configured to modify
the cache policy and/or the rules module 120 may be configured to modify the
caching rules 118 over time according to use of the electronic device 102 and/or the
25 data that may be stored in the storage space 105 of the electronic device 102. For
example, usage patterns of the data and the electronic device 102 may be monitored
and may indicate data types (e.g., music files, photo files, video files) that may be
commonly accessed, an access frequency of particular data and/or particular data
types, a relationship between how recently data was stored, created, and/or accessed,
30 a number of times that particular data (e.g., a particular file) or a particular data type
may be accessed, and subsequent accessing of the data, etc. As such, the cache
policy and/or the caching rules 118 may be modified based on the usage patterns to
include in the cache 110 the data that may be more likely to be accessed. The

improved caching may help better achieve the objectives (e.g., reduced power consumption) of the cache policy.

By way of example, in some embodiments, the use may indicate that different values for file sizes, file access frequencies, and/or durations since previous
5 accesses to files and/or their respective weights that may be included in the caching rules 118 may be modified. For example, with respect to the principles described above for generating the cache relevancy score, the “MaxFileSize” may be adjusted over time according to usage such that it may represent a value that covers sizes of data most accessed by a user (e.g., music file sizes, photo file sizes, video file sizes,
10 etc.). Additionally, the “MinAccessFrequency” may be adjusted over time based on usage patterns such that it may be related to an access frequency of particular data and particular data types that may more accurately predict the probability of future access of the particular data, the particular data type and/or data that may be related to the particular data and particular data type. Further, “MinFileLife” may be tuned
15 according to usage patterns (e.g., a relationship between how recently data was stored, created, and/or accessed and subsequent accessing of the data) such that it may be related to a probability of future access of data that may have been recently stored, created, and/or accessed, as indicated by prior use.

In some embodiments, the rules module 120 may be configured to change
20 the caching rules 118 based on instructions or suggestions received from an external service or module such as a storage service 114 communicatively coupled to the electronic device 102 and configured to assist in management of the storage space 105 of the electronic device 102. In some embodiments, the storage service 114 may be configured to monitor the usage patterns of the electronic device 102 and
25 associated data to determine changes that may be made to the caching rules 118. In these or other embodiments, the rules module 120 may also be configured to monitor the usage patterns of the electronic device 102 and associated data to determine changes that may be made to the caching rules 118. In some embodiments, the rules module 120 may be configured to determine whether or not
30 to implement suggestions by the storage service 114 to change the caching rules 118.

The cache manager 116 may also include a cache lookup table 124 and an associated lookup table module 122. The cache lookup table 124 may be configured to include which data and associated files may be stored in the cache 110. In some

embodiments, the cache lookup table 124 may also include scores and/or ranks of the data as ranked or scored according to the cache policy such that priorities with respect to maintaining storage of the data in the cache 110 may be determined. The lookup table module 122 may be communicatively coupled to the rules module 120
5 and the cache lookup table 124 and may be configured to update the cache lookup table 124 as data is removed from or added to the cache lookup table 124.

In some embodiments, the storage manager 104 may include a processor 150 and a memory 152. The processor 150 may include, for example, a microprocessor, microcontroller, digital signal processor (DSP), application-specific integrated
10 circuit (ASIC), a Field-Programmable Gate Array (FPGA), or any other digital or analog circuitry configured to interpret and/or to execute program instructions and/or to process data. In some embodiments, the processor 150 may interpret and/or execute program instructions and/or process data stored in the memory 152. Although illustrated as including a single processor, reference to the processor 150
15 may include any number of processors configured to individually or collectively perform one or more of the operations of the processor 150.

The memory 152 may include any suitable computer-readable media configured to retain program instructions and/or data for a period of time. By way of example, and not limitation, such computer-readable media may include tangible
20 computer-readable storage media including, Random Access Memory (RAM), Read-Only Memory (ROM), Electrically Erasable Programmable Read-Only Memory (EEPROM), Compact Disk Read-Only Memory (CD-ROM) or other optical disk storage, magnetic disk storage or other magnetic storage devices, flash memory devices (e.g., solid-state memory devices), a specific molecular sequence
25 (e.g., DNA or RNA), or any other storage medium which may be used to carry or store desired program code in the form of computer-executable instructions or data structures and which may be accessed by the processor 150. Combinations of the above may also be included within the scope of computer-readable media. Computer-executable instructions may include, for example, instructions and data
30 that cause a general-purpose computer, special-purpose computer, or special-purpose processing device (e.g., the processor 150) to perform a certain function or group of functions.

In some embodiments, the memory 152 may be configured to include instructions associated with operations that may be associated with the storage

manager 104 and the cache manager 116 such that the processor 150 may be configured to execute the operations associated with the cache manager 116 and the storage manager 104. Accordingly, in some embodiments, the processor 150 and the memory 152 may be part of an implementation of the cache manager 116 and the storage manager 104.

Modifications, additions, or omissions may be made to the storage system 100 without departing from the scope of the present disclosure. For example, the processor 150 and/or the memory 152 may not necessarily be included in the storage manager 104, but may be included elsewhere in the electronic device 102 but may be configured to perform the operations of the storage manager 104. As another example, in some embodiments, the SSD 106 may be included with the HDD 108 as a drive-level hybrid system and in other embodiments the SSD 106 may be separate from the HDD 108. Additionally, the individual modules and elements of the electronic device 102 are merely to provide an understanding to and illustrate the different functionality associated with the caching described herein. Accordingly, different implementations of the caching that include different elements or modules are within the scope of the present disclosure.

Fig. 2 is a flowchart of an example method 200 of managing data storage on an electronic device, according to at least one embodiment described herein. One or more steps of the method 200 may be implemented, in some embodiments, by one or more components of the storage system 100 of Fig. 1 such as the storage manager 104. Although illustrated as discrete blocks, various blocks may be divided into additional blocks, combined into fewer blocks, or eliminated, depending on the desired implementation.

The method 200 may begin at block 202, where an operation associated with data may be received. For example, the storage manager 104 of Fig. 1 may intercept an operation intended for the storage space 105 of the electronic device 102. At block 204, a type of the operation received at block 202 may be determined. The operation may include any applicable operation that may be performed with respect to data and the storage space 105 and may include an open, close, read, and/or write operation. Accordingly, the specific operation type (e.g., open, close, read, write, etc.) may be determined at block 204.

At block 206, storage of the data on an HDD and in a cache of an SSD may be managed based on the operation type determined at block 204 and based on a

cache policy such as the cache policy described above with respect to Fig. 1. For example, the cache policy may be based on one or more characteristics of the data, which may include size of a file associated with the data, frequency of access of the data, a number of times that the data has been previously accessed, a duration since
5 previous access of the data, a creation time of the data, and type of the data. The managing of the data may include determining whether to store the data on the HDD and in the cache based on the cache policy, removing the data from the cache based on the cache policy, determining whether to transfer the data from the HDD to the cache based on the cache policy, and determining whether to transfer the data from
10 the cache to the HDD based on the cache policy.

Method 300 of Fig. 3 illustrates a flowchart of an example method of managing storage of the data when the operation is an “open” operation, method 400 of Fig. 4 illustrates a flowchart of an example method of managing storage of the data when the operation is a “close” operation, and method 500 of Fig. 5 illustrates a
15 flowchart of an example method of managing storage of the data when the operation is a “write” operation.

Accordingly, the method 200 may be performed to manage storage of data on an HDD and in a cache of an SSD based on operations associated with the data and the cache policy. Storage management of data in this manner may provide for
20 improved energy efficiency associated with data storage using an HDD while also allowing for use of the HDD and its storage capacity potential.

One skilled in the art will appreciate that, for the method 200 and other processes and methods disclosed herein, the functions performed in the processes and methods may be implemented in differing order. Furthermore, the outlined steps
25 and operations are only provided as examples, and some of the steps and operations may be optional, combined into fewer steps and operations, or expanded into additional steps and operations without detracting from the essence of the disclosed embodiments.

For example, in some embodiments, the method 200 may include further
30 steps associated with assigning a rank to the data with respect to other data stored in the cache based on the cache policy and managing storage of the data on the HDD or the cache based on the rank. In these or other embodiments, the data may be assigned a score and managing storage of the data on the HDD and in the cache may be based on the assigned score. In these or other embodiments, the method 200 may

include operations associated with determining whether to store the data on the HDD and in the cache based on a power state of the electronic device, as discussed below.

Further, in some embodiments, the method 200 may include blocks associated with generating a set of caching rules based on the cache policy and managing storage of the data on the hard disk drive and in the cache based on the set of caching rules. In these or other embodiments, the method 200 may include blocks associated with modifying the caching rules according to usage of the electronic device.

As mentioned above, Fig. 3 is a flowchart of an example method 300 of managing storage of data on an HDD and in a cache when an operation associated with the data is an “open” operation, according to at least one embodiment described herein. One or more steps of the method 300 may be implemented, in some embodiments, by one or more components of the storage system 100 of Fig. 1 such as the storage manager 104. Although illustrated as discrete blocks, various blocks may be divided into additional blocks, combined into fewer blocks, or eliminated, depending on the desired implementation.

The method 300 may begin at block 302, where it may be determined whether the “open” operation associated with the data is for reading the data or writing the data. When the “open” operation is for writing the data, the method 300 may proceed to block 304. When the “open” operation is for reading the data, the method 300 may proceed to block 316.

At block 304, it may be determined whether an electronic device configured to store the data (e.g., the electronic device 102 that includes the storage space 105 of Fig. 1) is in a first power state or a second power state. Block 304 may be applicable in instances where the electronic device may be powered by a battery source and where the cache policy may be based on increasing the life and amount of time between charges of the battery. Accordingly, the power policy may dictate whether or not to store the data on the HDD and/or cache the data in some embodiments based on whether or not the electronic device is in the first power state or the second power state.

The first power state may include any power state where it may be deemed that accessing the HDD may not be a large concern. For example, the first power state may include a state where the electronic device is not operating off of the

battery (e.g., when the electronic device is plugged in) such energy use for accessing the HDD may not be a concern. In these or other embodiments, the first power state may include a state where the electronic device is operating off the battery but a power level of the battery is at or above a threshold such that accessing the HDD
5 may be less of an issue than if the battery level were below the threshold. Additionally or alternatively, the first power state may include a state where the electronic device is operating off the battery but when the battery is also charging.

The second power state may include any power state where it may be deemed that accessing the HDD may be more problematic. For example, the second
10 power state may include a state where the electronic device may be operating under battery power regardless of the power level of the battery. Additionally or alternatively, the second power state may include a state where the electronic device may be operating under battery power and when the power level is below a threshold.

15 If it is determined at block 304 that the electronic device is in the first power state, the method 300 may proceed from block 304 to block 314. At block 314, the data may be stored on the HDD. Following block 314, the method 300 may proceed to block 332 where a file handle associated with the data may be returned to the OS.

Returning to block 304, when the electronic device is determined to be in the
20 second power state, the method 300 may proceed from block 304 to block 306 where it may be determined whether or not the data should be cached. In some embodiments, the determination may be made by applying caching rules to the data, where the caching rules may be based on a cache policy, such as described above with respect to Fig. 1. If it is determined that the data should not be cached, the
25 method 300 may proceed from block 306 to block 308 where the data may be saved on the HDD of the electronic device. Following block 308, the method 300 may proceed to block 332 where a file handle associated with the data may be returned to an operating system (OS) of the electronic device.

Returning to block 306, if it is determined that the data should be cached, the
30 method 300 may proceed from block 306 to block 310. At block 310, it may be determined whether or not the cache has space for the data. If there is space in the cache for the data, the method 300 may proceed from block 310 to block 312 where the data may be saved in the cache. Following block 312, the method 300 may

proceed to block 332 where a file handle associated with the data may be returned to the OS.

Returning to block 310, if there is not space in the cache for the data, the method 300 may proceed from block 310 to block 311. At block 311, space may be freed up in the cache based on the cache policy. In some embodiments, the space may be freed up according to a relevancy policy that is based on the cache policy. For example, as mentioned above, in some embodiments, data and associated files stored in the cache may be given a particular score and/or rank based on one or more characteristics of the data such as file size, access frequency, and/or duration since the last access to a file. Accordingly, to free up space in the cache to store the data, one or more files may be removed from the cache based on their scores and/or rank as compared to other files stored on the cache, where the files with the lowest rank or score may be removed first. The files may be transferred from the cache to the HDD or simply deleted from the cache depending on the importance of maintaining the files on the electronic device. In some embodiments, the number of files removed from the cache may be based on the amount of space needed to free up in the cache and the size of the lowest priority files. Following block 311, the method 300 may proceed to block 332 where a file handle associated with the data may be returned to the OS.

Returning to block 302, if it is determined that the “open” operation is associated with reading the data, the method 300 may proceed from block 302 to block 316, where it may be determined whether the data is a file type or a directory type. If the data is a directory type, the method 300 may proceed from block 316 to block 318. At block 318, a directory stored on the HDD and associated with the data may be opened. Following block 318, the method 300 may proceed to block 332 where a file handle associated with the data may be returned to the OS.

Returning to block 316, if the data is a file type, the method 300 may proceed from block 316 to block 320. At block 320 it may be determined whether the data and associated file are already stored in the cache. For example, a cache lookup table such as the cache lookup table 124 of Fig. 1 may be referenced to determine whether the data and associated file are already stored in the cache. If the data and associated file are already stored in the cache, the method 300 may proceed from block 320 to block 334. At block 334, the file associated with the data may be opened from the

cache. Following block 334, the method 300 may proceed to block 332 where a file handle associated with the data may be returned to the OS.

Returning to block 320, if the file associated with the data is not already stored in the cache, the method 300 may proceed from block 320 to block 322. At
5 block 322, it may be determined whether the file should be cached. In some embodiments, the determination may be made by applying caching rules to the file, where the caching rules may be based on a cache policy, such as described above with respect to Fig. 1. If it is determined that the file should not be cached, the method 300 may proceed from block 322 to block 324 where the file may be opened
10 from the HDD of the electronic device. Following block 324, the method 300 may proceed to block 332 where a file handle associated with the data may be returned to the OS.

Returning to block 322, if it is determined that the file should be cached, the method 300 may proceed from block 322 to block 326. At block 326, it may be
15 determined whether or not the cache has space for the file. If there is space in the cache for the file, the method 300 may proceed from block 326 to block 330 where the file may be copied from the HDD to the cache. Following block 330, the method 300 may proceed to block 332 where a file handle associated with the data may be returned to the OS.

Returning to block 326, if there is not space in the cache for the file, the method 300 may proceed from block 326 to block 328. At block 328, space may be
20 freed up in the cache based on the cache policy. Similar to as described above with respect to block 311, in some embodiments, the space may be freed up at block 328 according to a relevancy policy that is based on the cache policy.

Accordingly, the method 300 may be performed to manage storage of data
25 on an HDD and in a cache of an SSD based on an “open” operation associated with the data and based on the cache policy. Storage management of data in this manner may provide for improved energy efficiency associated with data storage using an HDD while also allowing for use of the HDD and its storage capacity potential.

One skilled in the art will appreciate that, for the method 300 and other
30 processes and methods disclosed herein, the functions performed in the processes and methods may be implemented in differing order. Furthermore, the outlined steps and operations are only provided as examples, and some of the steps and operations may be optional, combined into fewer steps and operations, or expanded into

additional steps and operations without detracting from the essence of the disclosed embodiments.

Fig. 4 is a flowchart of an example method 400 of managing storage of data on an HDD and in a cache when an operation associated with the data is a “close” operation, according to at least one embodiment described herein. One or more steps of the method 400 may be implemented, in some embodiments, by one or more components of the storage system 100 of Fig. 1 such as the storage manager 104. Although illustrated as discrete blocks, various blocks may be divided into additional blocks, combined into fewer blocks, or eliminated, depending on the desired implementation.

The method 400 may begin at block 402, where it may be determined whether the data and its associated file that are related to the “close” operation are stored in a path managed by a storage manager configured to manage caching operations. For example, the storage manager 104 of Fig. 1 may determine whether data associated with an intercepted “close” operation is stored in the portions of the storage space 105 that are managed by the storage manager 104. If the data and its associated file are not stored in a storage manager managed path, the method 400 may proceed from block 402 to block 403 where the file associated with the data may be closed. Following block 403, the method 400 may proceed to block 416 where handling of the data may be returned from the storage manager to the OS of the electronic device.

Returning to block 402, if the file associated with the data is stored in a storage manager managed path, the method 400 may proceed from block 402 to block 404. At block 404, it may be determined whether the file was opened for a read operation or a write operation. If the file was opened for a read operation, the method 400 may proceed from block 404 to block 403, where the file may be closed.

Returning to block 404, if the file was opened for a write operation, the method 400 may proceed from block 404 to block 406. At block 406, it may be determined whether the file was opened from the HDD or from the cache. If the file was opened from the HDD, the method 400 may proceed from block 406 to block 403 where the file may be closed. If the file was opened from the cache, the method may proceed from block 406 to block 408.

At block 408, it may be determined whether the file that is to be closed and that is stored on the cache should also be stored on the HDD. If the file should not be

stored on the HDD, the method 400 may proceed from block 408 to block 403 where the file may be closed. If the file should be stored on the HDD, the method 400 may proceed from block 408 to block 410. At block 410, the file may be closed.

At block 412, a cache relevancy score, such as the relevancy score described
5 with respect to blocks 311 and 328 of Fig. 3 may be determined for the file. At block 414, a cache flush message that includes the cache relevancy score for the file may be posted. Method 600 described below with respect to Fig. 6 illustrates an example of how the cache flush message may be handled.

Accordingly, the method 400 may be performed to manage storage of data
10 on an HDD and in a cache of an SSD based on a “close” operation associated with the data and based on the cache policy. Storage management of data in this manner may provide for improved energy efficiency associated with data storage using an HDD while also allowing for use of the HDD and its storage capacity potential.

One skilled in the art will appreciate that, for the method 400 and other
15 processes and methods disclosed herein, the functions performed in the processes and methods may be implemented in differing order. Furthermore, the outlined steps and operations are only provided as examples, and some of the steps and operations may be optional, combined into fewer steps and operations, or expanded into additional steps and operations without detracting from the essence of the disclosed
20 embodiments.

Fig. 5 is a flowchart of an example method 500 of managing storage of data on an HDD and in a cache when an operation associated with the data is a “write” operation, according to at least one embodiment described herein. One or more steps of the method 500 may be implemented, in some embodiments, by one or more
25 components of the storage system 100 of Fig. 1 such as the storage manager 104. Although illustrated as discrete blocks, various blocks may be divided into additional blocks, combined into fewer blocks, or eliminated, depending on the desired implementation.

The method 500 may begin and at block 502 it may be determined whether
30 the data and its associated file that are related to the “write” operation are stored in a path managed by a storage manager configured to manage caching operations. If the data and its associated file are not stored in a storage manager managed path, the method 500 may proceed from block 502 to block 503 where a write command may

be passed to a standard OS storage stack. Following block 503, the method 500 may proceed to block 518 where the write result may be returned to the OS.

Returning to block 502, if the file associated with the data is stored in a storage manager managed path, the method 500 may proceed from block 502 to block 504. At block 504, it may be determined whether the file was opened from the HDD or from the cache. If the file was opened from the HDD, the method 500 may proceed from block 504 to block 503, where the write command may be passed to the standard OS storage stack such that the data and associated file may be written in the HDD and the method may proceed from block 503 to block 518. If the file was opened from the cache as determined at block 504, the method 500 may proceed from block 504 to block 506.

At block 506, the write command may be passed to the standard OS storage stack such that the data and its associated file may be written in the cache and the method 500 may proceed from block 506 to block 508. At block 508, it may be determined whether an error returned from the OS storage stack. If no error is returned, the method 500 may proceed from block 508 to block 518 where the write result may be returned to the OS. If an error is returned, the method 500 may proceed from block 508 to block 510.

At block 510, it may be determined whether the error is due to a lack of space in the cache. If the error is not due to a lack of space in the cache, the method 500 may proceed from block 510 to block 518. If the error is due to a lack of space in the cache, the method 500 may proceed from block 510 to block 512.

At block 512, it may be determined whether or not space may be freed in the cache to continue writing to the cache. If space may be freed in the cache, the method 500 may proceed to block 516 from block 512. At block 516, space may be freed up in the cache. In some embodiments, the space may be freed according to a relevancy score such as described above with respect to blocks 311 and 328 in Fig. 3. In some embodiments, the number of files removed from the cache may be based on the amount of space needed to free up in the cache and the size of the lowest priority files. Following block 516, the method 500 may proceed to block 518.

Returning to block 512, if space may not be freed in the cache as determined at block 512, the method 500 may proceed from block 512 to block 514. At block 514, the file associated with the data may be closed and logged to a cache database such as a cache lookup table. It may be logged that the file is a partial file due to the

write not being able to be completed because of lack of space on the cache. In some embodiments, the file may be opened on the HDD to continue the write that was not able to finish. Following block 514, the method 500 may proceed to block 518.

Accordingly, the method 500 may be performed to manage storage of data
5 on an HDD and in a cache of an SSD based on a “write” operation associated with the data and based on the cache policy. Storage management of data in this manner may provide for improved energy efficiency associated with data storage using an HDD while also allowing for use of the HDD and its storage capacity potential.

One skilled in the art will appreciate that, for the method 500 and other
10 processes and methods disclosed herein, the functions performed in the processes and methods may be implemented in differing order. Furthermore, the outlined steps and operations are only provided as examples, and some of the steps and operations may be optional, combined into fewer steps and operations, or expanded into additional steps and operations without detracting from the essence of the disclosed
15 embodiments.

Fig. 6 is a flowchart of an example method 600 of managing removal of data from the cache (also referred to as “flushing the cache”), according to at least one embodiment described herein. One or more steps of the method 600 may be implemented, in some embodiments, by one or more components of the storage
20 system 100 of Fig. 1 such as the storage manager 104. Although illustrated as discrete blocks, various blocks may be divided into additional blocks, combined into fewer blocks, or eliminated, depending on the desired implementation.

The method 600 may begin at block 602 where a flush file message may be waited for. For example, at block 602 a flush file message such as the flush file
25 message posted in block 414 of Fig. 4 may be anticipated. The flush file message may be associated with determining whether or not to flush a particular file from the cache. Additionally, the flush file message may be received when the particular file stored on the cache has been closed after a write operation was performed with respect to the particular file.

30 When a flush file message is received at block 602, the method 600 may proceed to block 604. At block 604, it may be determined whether any flush requests are outstanding. If a flush request is outstanding, such as the flush request caused by the flush file message that triggers the transition from block 602 to block 604, the method 600 may proceed from block 604 to block 606.

At block 606, the particular file associated with the flush file message may be copied from the cache to the HDD. In some instances, a series of flush file messages may be outstanding and their corresponding files may be placed in a queue. Accordingly, the particular file may be selected from the queue according to
5 some embodiments.

At block 608, it may be determined whether the particular file should be stored in the cache based on a cache relevancy score associated with the particular file. If it is determined that the particular file should not be stored in the cache, the method 600 may proceed to block 610 where the particular file may be deleted from
10 the cache. If it is determined that the particular file should be stored in the cache, the method 600 may proceed to block 604 where it may be determined if any other flush requests are outstanding.

If no flush requests are outstanding, the method 600 may proceed from block 604 back to block 602. This may typically occur after operations associated with
15 handling the flush message received at block 602 have been performed and no other flush messages have been received in the meantime.

Accordingly, the method 600 may be used to manage removal of data and associated files from the cache. One skilled in the art will appreciate that, for the method 600 and other processes and methods disclosed herein, the functions
20 performed in the processes and methods may be implemented in differing order. Furthermore, the outlined steps and operations are only provided as examples, and some of the steps and operations may be optional, combined into fewer steps and operations, or expanded into additional steps and operations without detracting from the essence of the disclosed embodiments.

As indicated above, the embodiments described herein may include the use
25 of a special-purpose or general-purpose computer (e.g., the processors 150 of Fig. 1) including various computer hardware or software modules, as discussed in greater detail below.

Embodiments described herein may be implemented using computer-
30 readable for carrying or having computer-executable instructions or data structures stored thereon. Such computer-readable media may be any available media that may be accessed by a general-purpose or special-purpose computer. By way of example, and not limitation, such computer-readable media may include tangible computer-readable storage media including RAM, ROM, EEPROM, CD-ROM or other optical

disk storage, magnetic disk storage or other magnetic storage devices, flash memory devices (e.g., solid-state memory devices), or any other storage medium which may be used to carry or store desired program code in the form of computer-executable instructions or data structures and which may be accessed by a general-purpose or
5 special-purpose computer. Combinations of the above may also be included within the scope of computer-readable media.

Computer-executable instructions comprise, for example, instructions and data which cause a general-purpose computer, special-purpose computer, or special-purpose processing device (e.g., one or more processors) to perform a certain
10 function or group of functions. Although the subject matter has been described in language specific to structural features and/or methodological acts, it is to be understood that the subject matter defined in the claims is not necessarily limited to the specific features or acts described above. Rather, the specific features and acts described above are disclosed as example forms of implementing one or more
15 embodiments of the present disclosure and claims.

As used herein, the terms “module” or “component” may refer to specific hardware implementations configured to perform the operations of the module or component and/or software objects or software routines that may be stored on and/or executed by general-purpose hardware (e.g., computer-readable media, processing
20 devices, etc.) of the computing system. In some embodiments, the different components, modules, engines, and services described herein may be implemented as objects or processes that execute on the computing system (e.g., as separate threads). While some of the system and methods described herein are generally described as being implemented in software (stored on and/or executed by general-
25 purpose hardware), specific hardware implementations or a combination of software and specific hardware implementations are also possible and contemplated. In this description, a “computing entity” may be any computing system as previously defined herein, or any module or combination of modules running on a computing system.

30 All examples and conditional language recited herein are intended for pedagogical objects to aid the reader in understanding the present disclosure and the concepts contributed by the inventor to furthering the art, and are to be construed as being without limitation to such specifically recited examples and conditions. Although embodiments of the present disclosure have been described in detail, it

should be understood that the various changes, substitutions, and alterations could be made hereto without departing from the spirit and scope of the present disclosure.

For example, the caching operations have been described above with respect to an SSD and an HDD where data may be cached on the SSD such that accessing
5 the HDD may be reduced. However, the caching operations may be performed with respect to any differing types of storage media where storage space may be less expensive on a first storage medium than a second storage medium but where the second storage medium may have better performance (e.g., energy efficiency) than the first storage medium. Accordingly, the caching operations and principles of the
10 present disclosure are not limited to particular types of storage media although the above description gives the specific examples of an SSD and an HDD.

Embodiments of the present disclosure can be further illustrated by reference to the following claims, which relate to various aspects of the present disclosure.

CLAIMS

What is claimed is:

1. A method comprising:
receiving an operation associated with data; and
5 managing storage of the data on a hard disk drive of an electronic device and a cache on a solid-state storage medium of the electronic device based on the operation and a cache policy, the cache policy being based on reducing access to the hard disk drive according to characteristics of the data that include size of a file associated with the data, frequency of access of the data, a total number of times that
10 the data has been previously accessed, a duration since a previous access of the data, a creation time of the data, and type of the data.
2. The method of claim 1, wherein the cache policy is based on one or more of:
a relationship between file sizes and spinning time of the hard disk drive with
15 respect to transferring data corresponding to the file sizes between the cache and the hard disk drive;
a potential number of files or data sets that the cache is capable of storing;
and
preventing storage of partial files in the cache.
- 20 3. The method of claim 1, wherein managing storage of the data comprises one or more of:
determining whether to store the data on the hard disk drive and in the cache based on the cache policy;
removing the data from the cache based on the cache policy;
25 determining whether to transfer the data from the hard disk drive to the cache based on the cache policy; and
determining whether to transfer the data from the cache to the hard disk drive based on the cache policy.
4. The method of claim 1, further comprising assigning a rank to the
30 data with respect to other data stored in the cache based on the cache policy and managing storage of the data on the hard disk drive or the cache based on the rank.

5. The method of claim 1, further comprising assigning a score to the data based on the cache policy and managing storage of the data on the hard disk drive or the cache based on the score.

6. The method of claim 1, wherein the operation includes one or more
5 of an open operation, a close operation, a read operation, and a write operation.

7. The method of claim 1, further comprising managing storage of the data on the hard disk drive and in the cache based on a power state of the electronic device.

8. The method of claim 1, further comprising generating a set of
10 caching rules based on the cache policy and managing storage of the data on the hard disk drive and in the cache based on the set of caching rules.

9. The method of claim 8, further comprising modifying the caching rules according to usage of the electronic device.

10. A non-transitory computer-readable storage medium including
15 instructions that cause a system to perform operations, the operations comprising:

receiving an operation associated with data; and

managing storage of the data on a first storage medium of an electronic device and in a cache on a second storage medium of the electronic device based on the operation and a cache policy, the cache policy being based on one or more
20 characteristics of the data that include a duration since a previous access of the data.

11. The non-transitory computer-readable storage medium of claim 10, wherein the one or more characteristics of the data include one or more of: size of a file associated with the data, frequency of access of the data, a total number of times that the data has been previously accessed, and a creation time of the data.

25 12. The non-transitory computer-readable storage medium of claim 10, wherein managing storage of the data comprises one or more of:

determining whether to store the data on the first storage medium and in the cache based on the cache policy;

removing the data from the cache based on the cache policy;

30 determining whether to transfer the data from the first storage medium to the cache based on the cache policy; and

determining whether to transfer the data from the cache to the first storage medium based on the cache policy.

13. The non-transitory computer-readable storage medium of claim 10, wherein the operations further comprise assigning a rank to the data with respect to other data stored in the cache based on the cache policy and managing storage of the data on the first storage medium or the cache based on the rank.

5 14. The non-transitory computer-readable storage medium of claim 10, wherein the operations further comprise assigning a score to the data based on the cache policy and managing storage of the data on the first storage medium or the cache based on the score.

10 15. The non-transitory computer-readable storage medium of claim 10, wherein the operation includes one or more of an open operation, a close operation, a read operation, and a write operation.

16. The non-transitory computer-readable storage medium of claim 10, further comprising managing storage of the data on the first storage medium and in the cache based on a power state of the electronic device.

15 17. The non-transitory computer-readable storage medium of claim 10, wherein the operations further comprise generating a set of caching rules based on the cache policy and managing storage of the data on the first storage medium and in the cache based on the set of caching rules.

20 18. The non-transitory computer-readable storage medium of claim 17, wherein the operations further comprise modifying the caching rules according to usage of the electronic device.

19. The non-transitory computer-readable storage medium of claim 10, wherein the first storage medium includes a hard disk drive and the second storage medium includes a solid-state storage medium.

25 20. A non-transitory computer-readable storage medium including instructions that cause a system to perform operations, the operations comprising:

receiving an operation associated with data;

generating a set of caching rules based on a cache policy configured to reduce accessing a first storage medium of an electronic device, the cache policy
30 being based on one or more characteristics of the; and

managing storage of the data on the first storage medium and in a cache on a second storage medium of the electronic device based on the operation, the set of caching rules, and a power state of the electronic device.

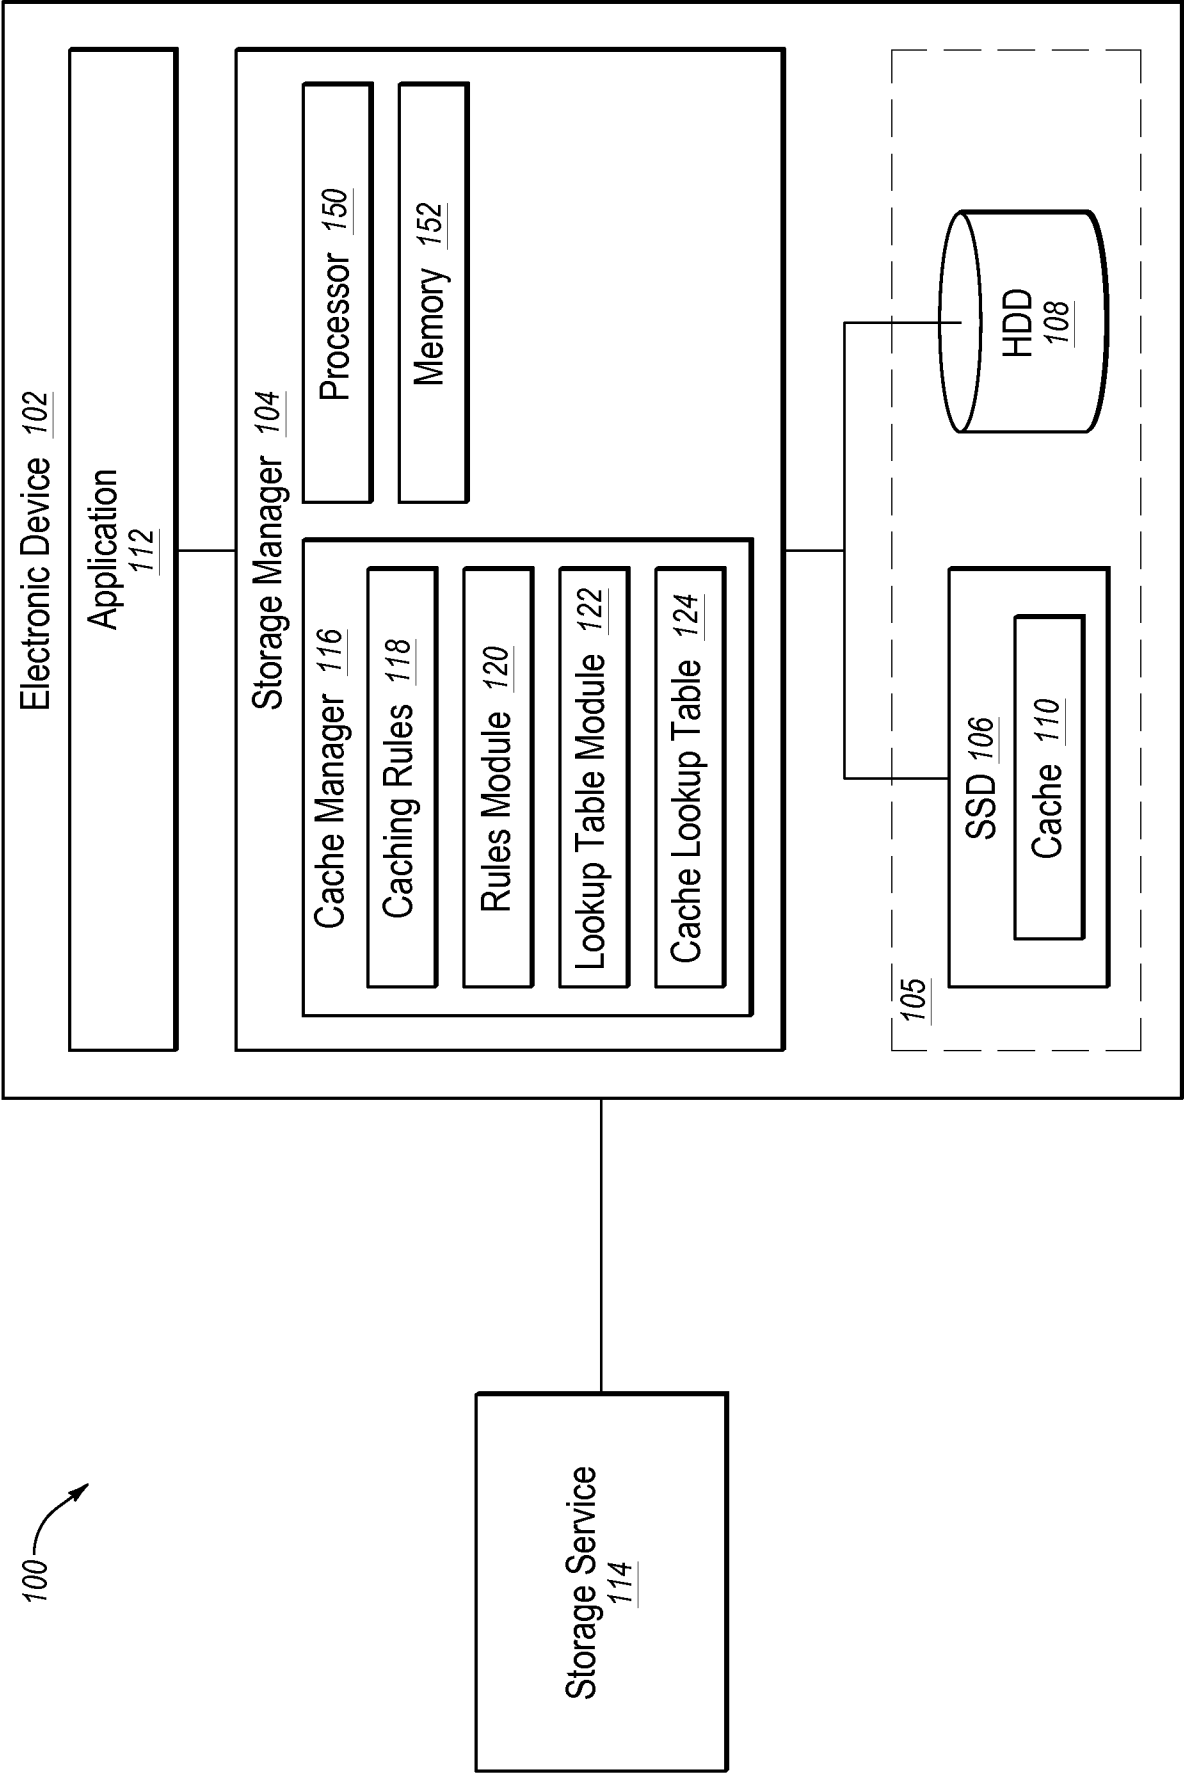
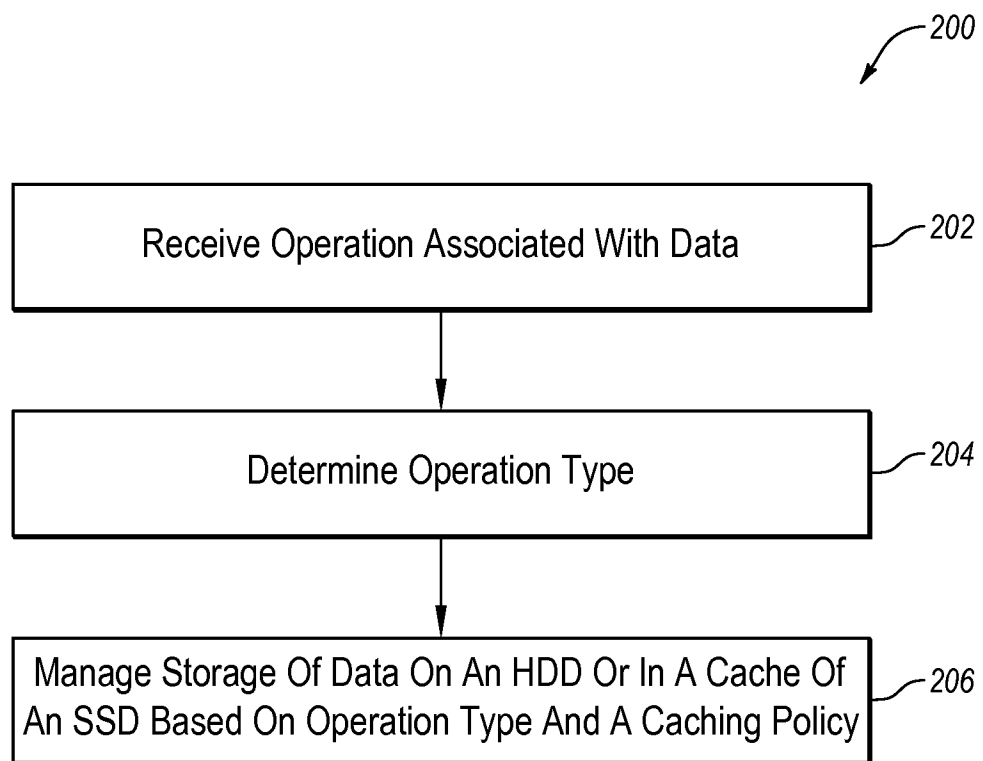


Fig. 1

2 / 6

**Fig. 2**

3 / 6



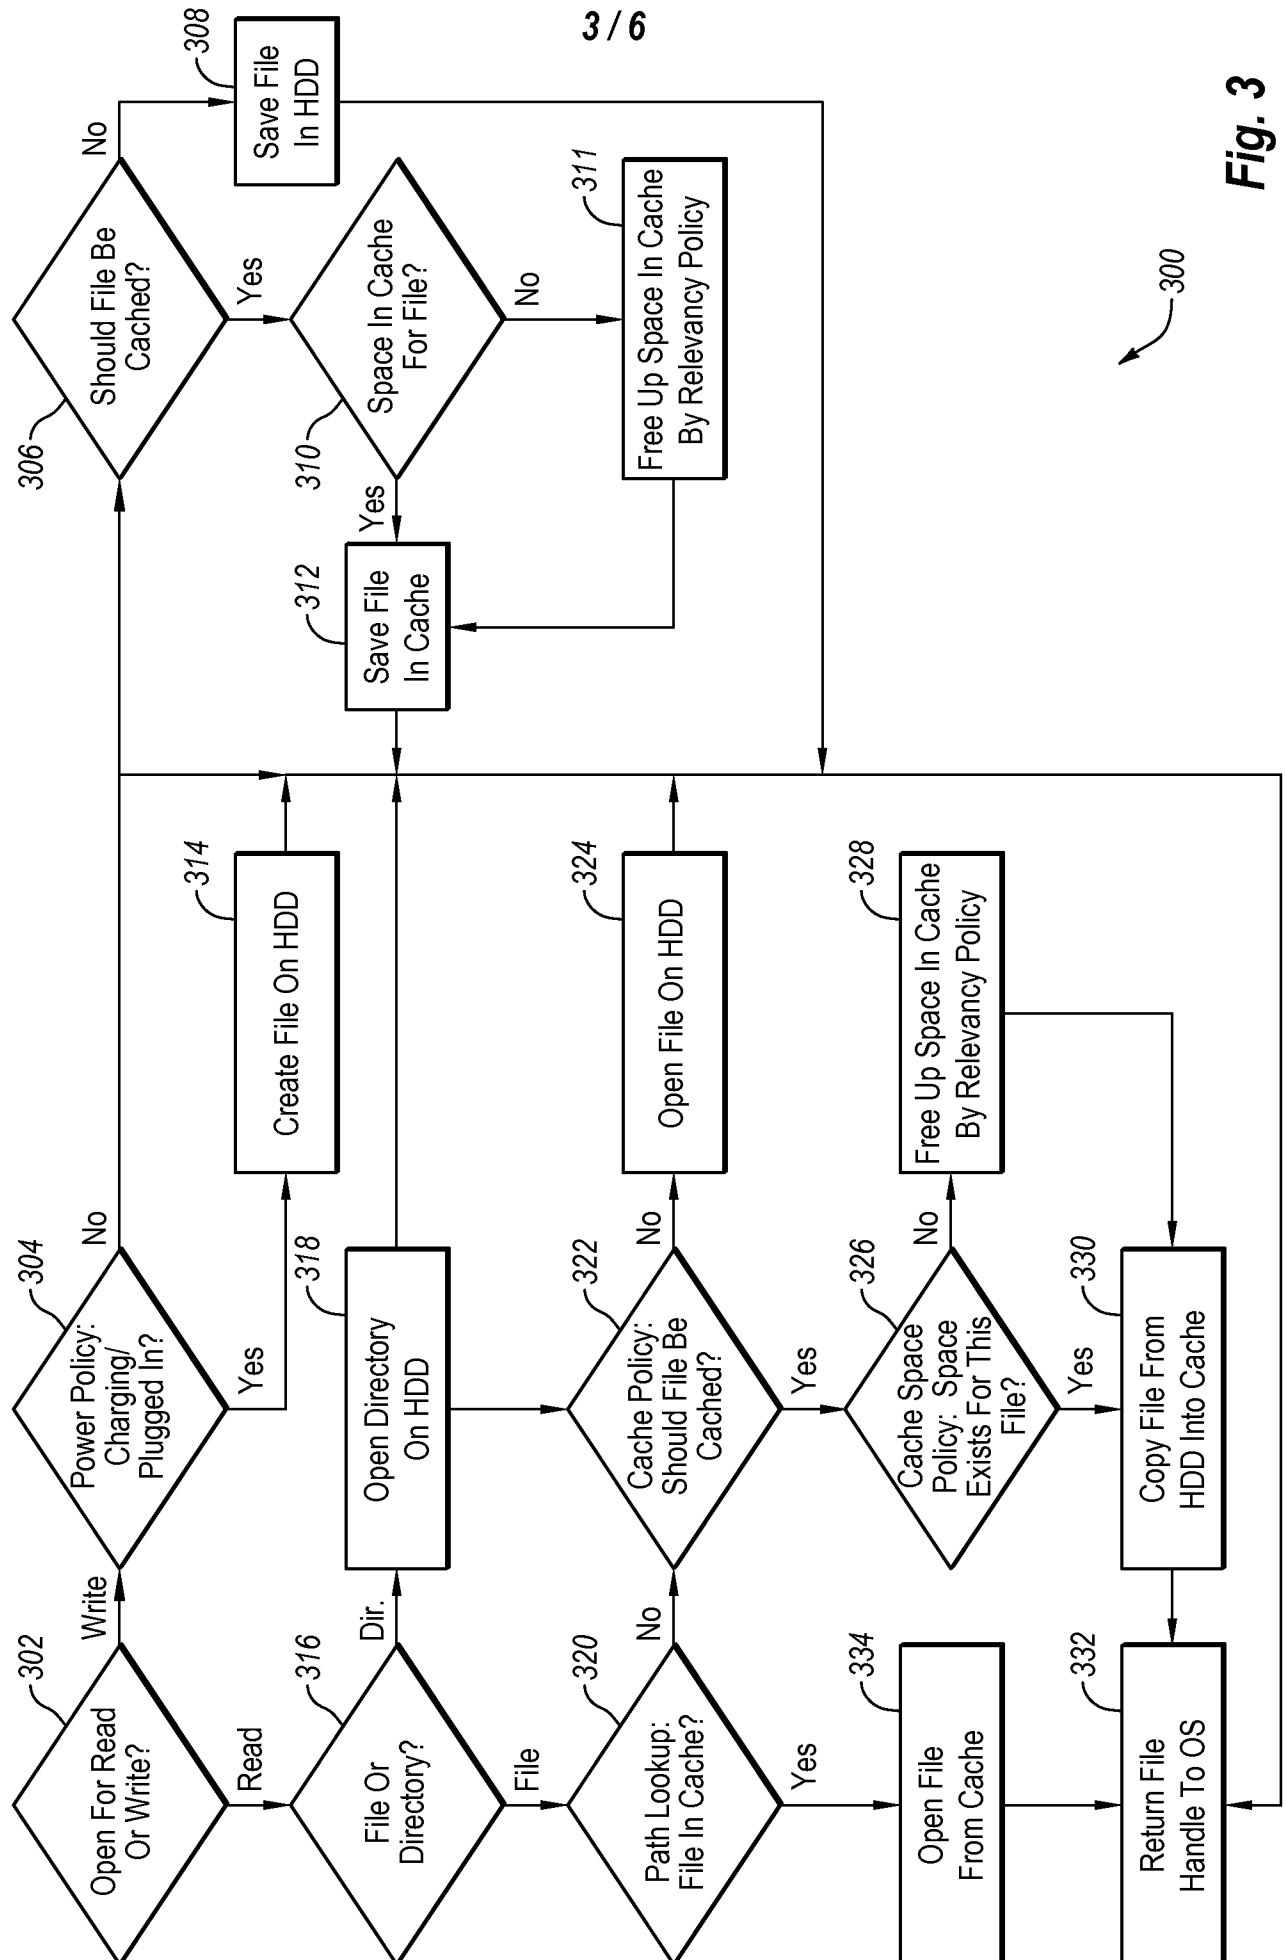


Fig. 3


4 / 6

**Fig. 4**

5 / 6

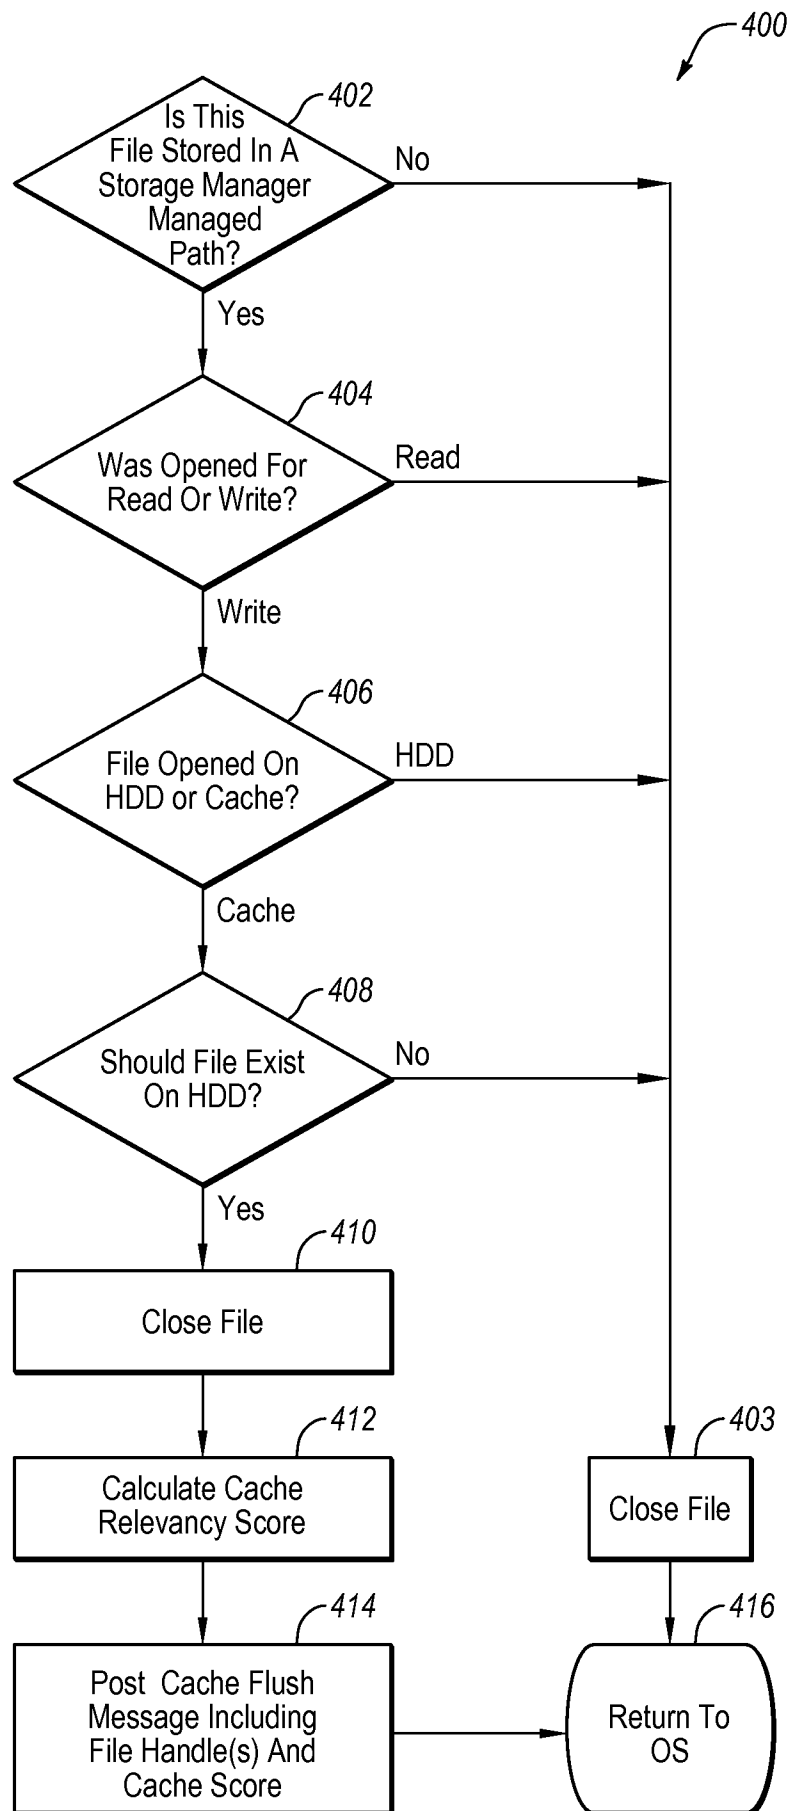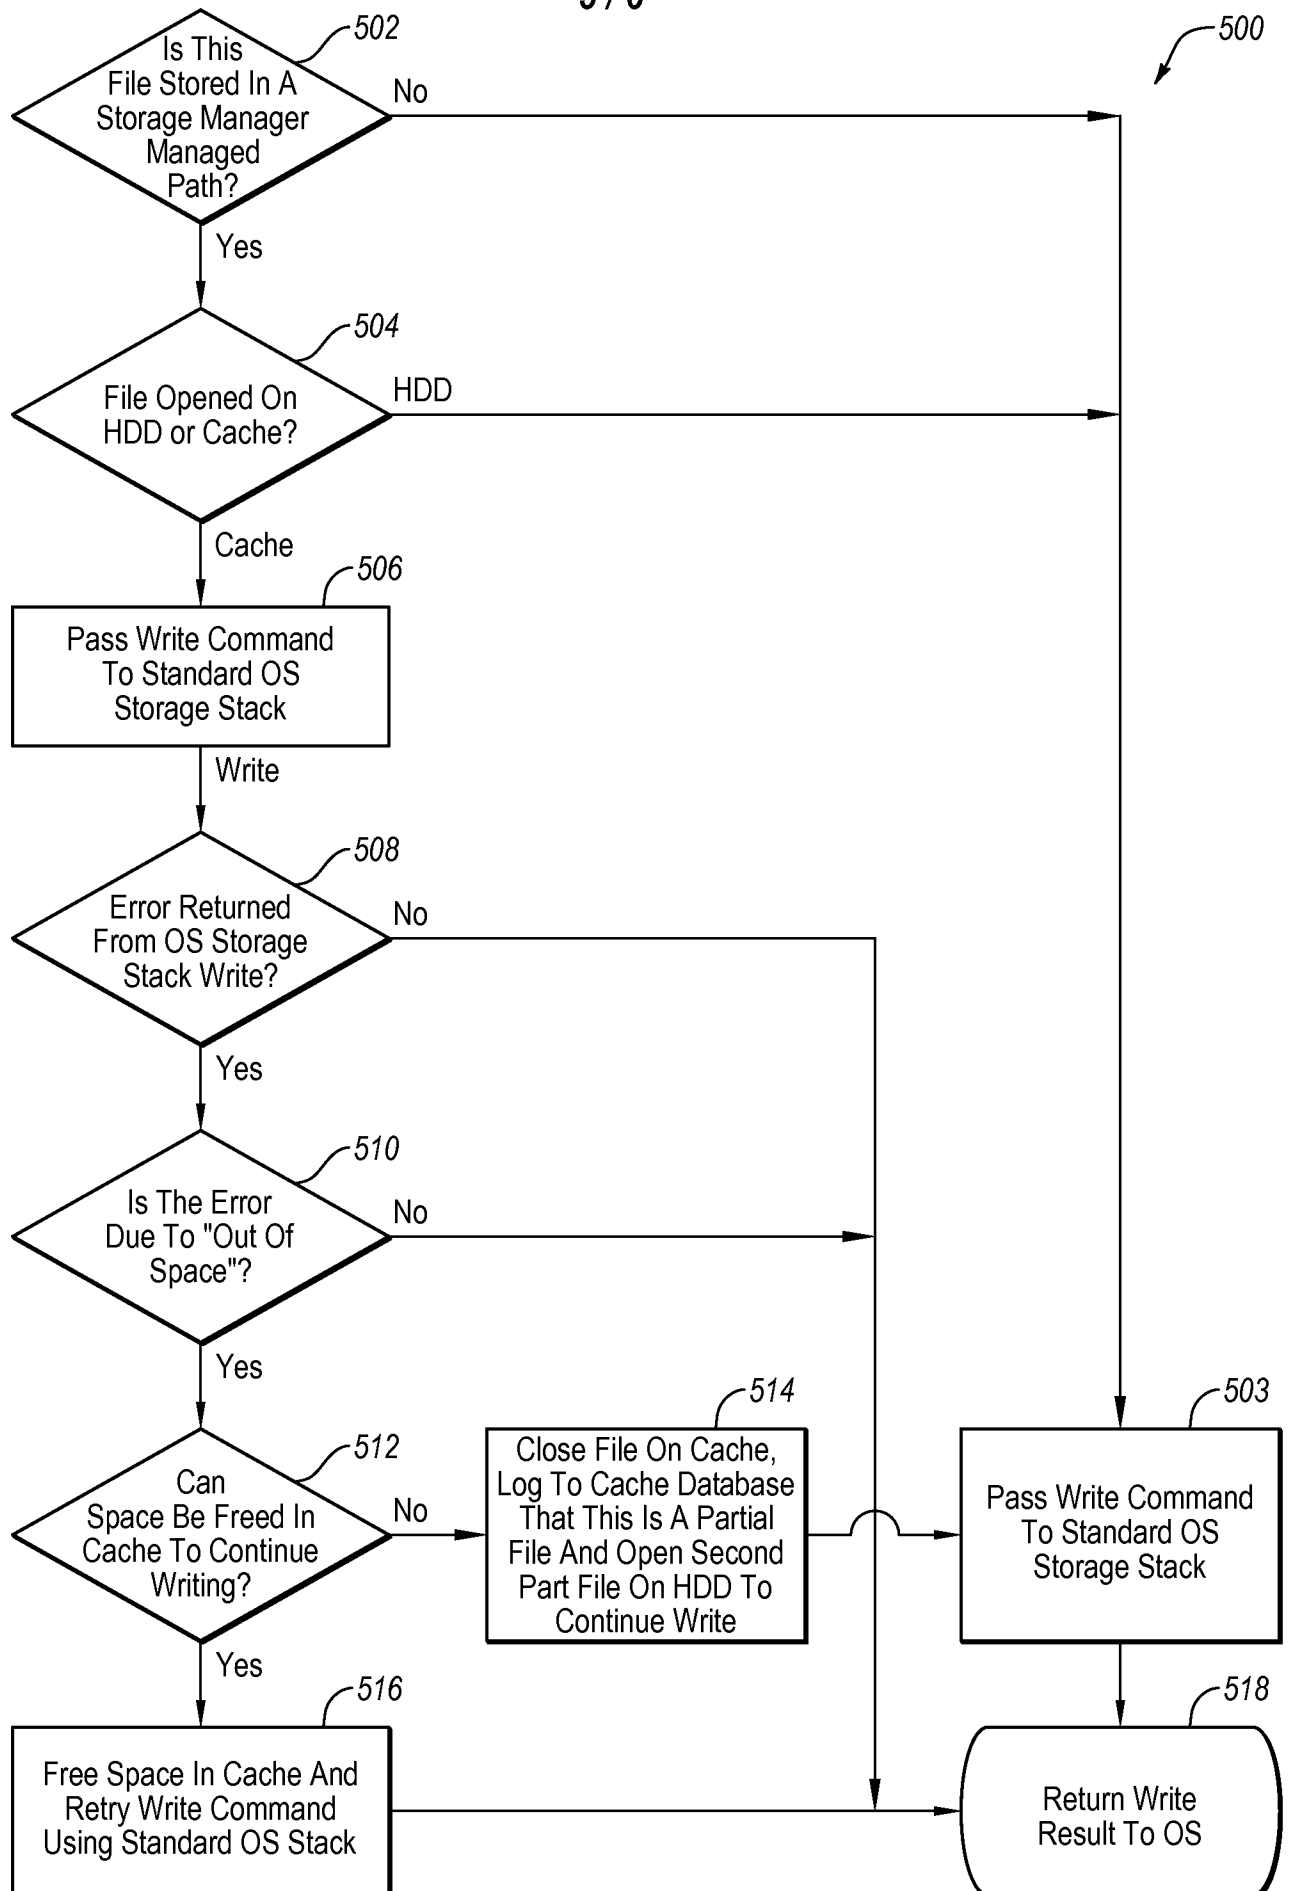

6 / 6

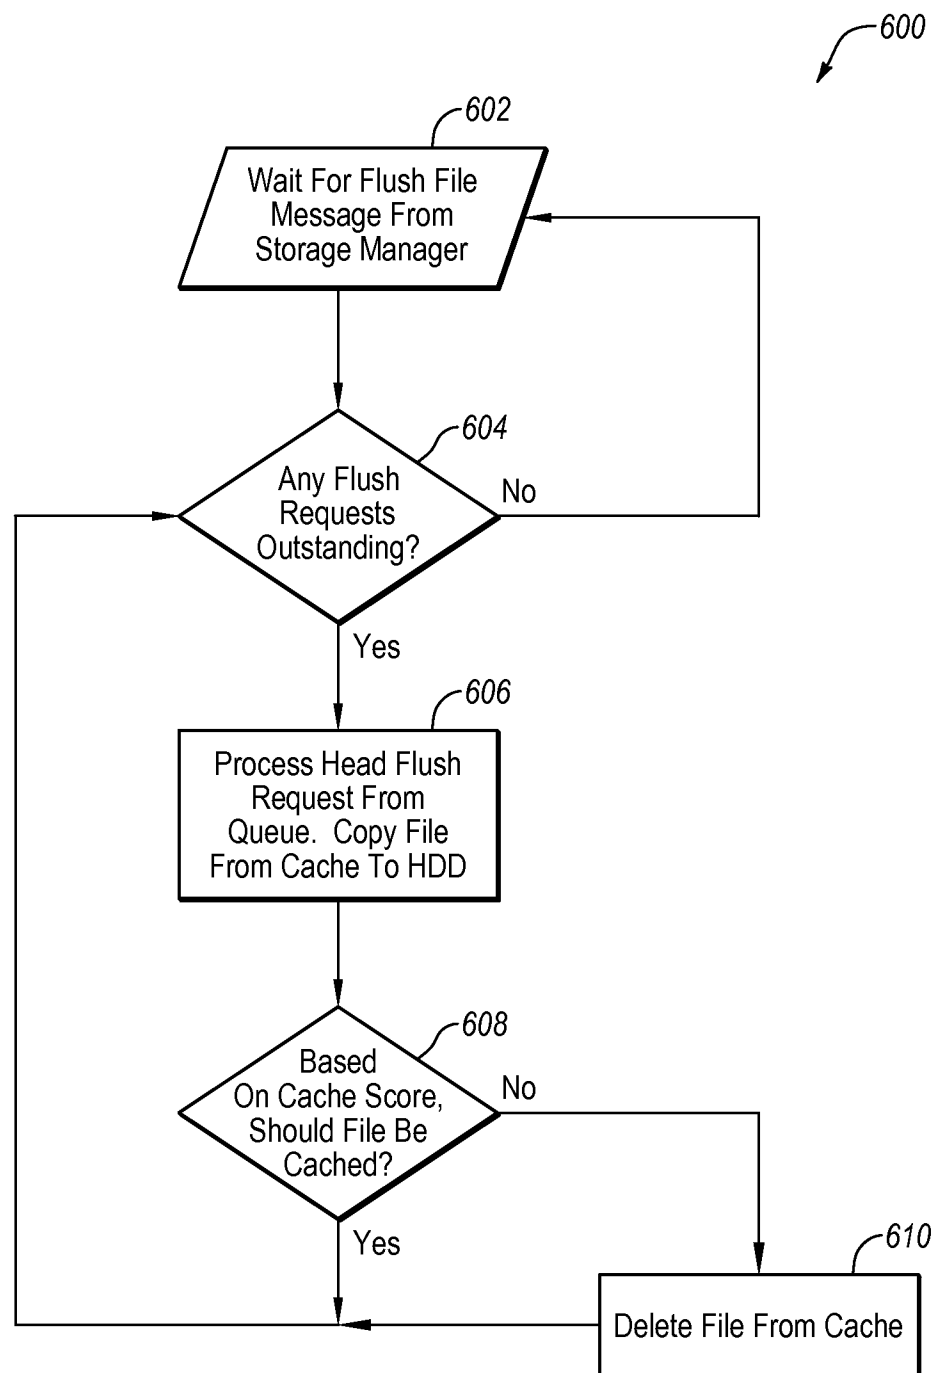**Fig. 6**

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2014/054624**A. CLASSIFICATION OF SUBJECT MATTER****G06F 12/08(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G06F 12/08; G06F 15/16; G06F 12/12; G06F 1212; G06F 3/06; G06F 9/06; G06F 12/00; G06F 13/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: storage, cache, policy, hard disk, frequency, access

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2011-031796 A2 (FUSION-IO, INC.) 17 March 2011 See paragraphs [0023], [0053]-[0057], [0072]-[0080], [0140], [0169], [0214]; claim 8; and figures 1-4.	10, 12-15, 17-19
Y		1-9, 11, 16, 20
Y	US 8327076 B2 (ROBERT D. MURPHY et al.) 04 December 2012 See column 2, lines 26-27; column 3, lines 31-34; column 6, lines 28-32; and figures 1,3.	1-9, 11, 16, 20
A	US 6449695 B1 (ALEXANDRE BEREZNYI et al.) 10 September 2002 See column 2, lines 36-42; column 34, lines 12-15; and figure 1.	1-20
A	US 8078794 B2 (CHARLES C. LEE et al.) 13 December 2011 See column 3, lines 60-66; column 8, lines 29-34; and figure 1.	1-20
A	EP 2378427 A1 (HITACHI, LTD.) 19 October 2011 See paragraphs [0007], [0011], [0032]; and figures 1-2.	1-20



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

18 December 2014 (18.12.2014)

Date of mailing of the international search report

19 December 2014 (19.12.2014)

Name and mailing address of the ISA/KR

International Application Division
Korean Intellectual Property Office
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan City, 302-701,
Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

BYUN, Sung Cheal

Telephone No. +82-42-481-8262



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2014/054624

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2011-031796 A2	17/03/2011	CA 2672035 A1	12/06/2008
		CA 2672100 A1	12/06/2008
		CN 101622594 A	06/01/2010
		CN 101622594 B	13/03/2013
		CN 101622595 A	06/01/2010
		CN 101622596 A	06/01/2010
		CN 101622606 A	06/01/2010
		CN 101622606 B	09/04/2014
		CN 101636712 A	27/01/2010
		CN 101646993 A	10/02/2010
		CN 101646994 A	10/02/2010
		CN 101657802 A	24/02/2010
		CN 101681282 A	24/03/2010
		CN 101689130 A	31/03/2010
		CN 101689131 A	31/03/2010
		CN 101689131 B	20/03/2013
		CN 101690068 A	31/03/2010
		CN 101715575 A	26/05/2010
		CN 102084330 A	01/06/2011
		CN 102597910 A	18/07/2012
		CN 102598019 A	18/07/2012
		CN 102696010 A	26/09/2012
		CN 103049058 A	17/04/2013
		CN 103098034 A	08/05/2013
		EP 2100214 A1	16/09/2009
		EP 2100214 B1	30/10/2013
		EP 2108143 A2	14/10/2009
		EP 2109812 A2	21/10/2009
		EP 2109822 A1	21/10/2009
		EP 2109822 B1	25/06/2014
		EP 2115563 A2	11/11/2009
		EP 2126679 A2	02/12/2009
		EP 2126680 A2	02/12/2009
		EP 2126698 A2	02/12/2009
		EP 2126709 A2	02/12/2009
		EP 2286326 A1	23/02/2011
		EP 2476039 A2	18/07/2012
		EP 2476055 A2	18/07/2012
		EP 2476055 A4	24/07/2013
		EP 2476079 A2	18/07/2012
		EP 2598996 A2	05/06/2013
		JP 05518197 B2	11/06/2014
		JP 05523835 B2	18/06/2014
		JP 05611597 B2	22/10/2014
		JP 2010-512568 A	22/04/2010
		JP 2010-512584 A	22/04/2010
		JP 2010-512586 A	22/04/2010
		JP 2010-515116 A	06/05/2010
		JP 2011-518380 A	23/06/2011

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2014/054624

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		JP 2013-504142 A	04/02/2013
		JP 2013-504820 A	07/02/2013
		KR 10-2009-0087119 A	14/08/2009
		KR 10-2009-0087498 A	17/08/2009
		KR 10-2009-0095641 A	09/09/2009
		KR 10-2009-0097906 A	16/09/2009
		KR 10-2009-0102788 A	30/09/2009
		KR 10-2009-0102789 A	30/09/2009
		KR 10-2011-0039417 A	18/04/2011
		KR 10-2012-0090965 A	17/08/2012
		KR 10-2012-0093869 A	23/08/2012
		KR 10-2013-0026517 A	13/03/2013
		US 2008-0137284 A1	12/06/2008
		US 2008-0183953 A1	31/07/2008
		US 2008-0225474 A1	18/09/2008
		US 2008-0229079 A1	18/09/2008
		US 2008-0256292 A1	16/10/2008
		US 2009-0125671 A1	14/05/2009
		US 2009-0132760 A1	21/05/2009
		US 2009-0150641 A1	11/06/2009
		US 2011-0022801 A1	27/01/2011
		US 2011-0047356 A2	24/02/2011
		US 2011-0047437 A1	24/02/2011
		US 2011-0058440 A1	10/03/2011
		US 2011-0060887 A1	10/03/2011
		US 2011-0060927 A1	10/03/2011
		US 2011-0066808 A1	17/03/2011
		US 7713068 B2	11/05/2010
		US 7778020 B2	17/08/2010
		US 7934055 B2	26/04/2011
		US 8019938 B2	13/09/2011
		US 8074011 B2	06/12/2011
		US 8195912 B2	05/06/2012
		US 8289801 B2	16/10/2012
		US 8402201 B2	19/03/2013
		US 8429436 B2	23/04/2013
		US 8443134 B2	14/05/2013
		US 8578127 B2	05/11/2013
		US 8706968 B2	22/04/2014
		US 8719501 B2	06/05/2014
		WO 2008-070172 A2	12/06/2008
		WO 2008-070172 A3	24/07/2008
		WO 2008-070173 A1	12/06/2008
		WO 2008-070174 A2	12/06/2008
		WO 2008-070174 A3	11/09/2009
		WO 2008-070175 A2	12/06/2008
		WO 2008-070175 A3	18/12/2008
		WO 2008-070191 A2	12/06/2008
		WO 2008-070191 A3	24/07/2008
		WO 2008-070796 A2	12/06/2008

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2014/054624

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		WO 2008-070796 A3	10/12/2009
		WO 2008-070798 A1	12/06/2008
		WO 2008-070799 A2	12/06/2008
		WO 2008-070799 A3	23/10/2008
		WO 2008-070800 A1	12/06/2008
		WO 2008-070802 A2	12/06/2008
		WO 2008-070802 A3	09/10/2008
		WO 2008-070803 A1	12/06/2008
		WO 2008-070811 A2	12/06/2008
		WO 2008-070811 A3	07/08/2008
		WO 2008-070812 A2	12/06/2008
		WO 2008-070812 A3	23/12/2009
		WO 2008-070813 A2	12/06/2008
		WO 2008-070813 A3	23/12/2009
		WO 2008-070814 A2	12/06/2008
		WO 2008-070814 A3	13/11/2008
		WO 2008-127458 A2	23/10/2008
		WO 2008-127458 A3	07/01/2010
		WO 2009-126542 A1	15/10/2009
		WO 2011-031796 A3	30/06/2011
		WO 2011-031899 A2	17/03/2011
		WO 2011-031899 A3	16/06/2011
		WO 2011-031900 A2	17/03/2011
		WO 2011-031900 A3	16/06/2011
		WO 2011-031903 A2	17/03/2011
		WO 2011-031903 A3	21/07/2011
		WO 2011-143628 A2	17/11/2011
		WO 2011-143628 A3	23/02/2012
		WO 2012-016089 A2	02/02/2012
		WO 2012-016089 A3	31/05/2012
		WO 2012-016209 A2	02/02/2012
		WO 2012-016209 A3	02/08/2012
		WO 2012-021847 A2	16/02/2012
		WO 2012-021847 A3	31/05/2012
		WO 2012-083308 A2	21/06/2012
		WO 2012-083308 A3	01/11/2012
US 8327076 B2	04/12/2012	US 2010-293337 A1	18/11/2010
US 6449695 B1	10/09/2002	None	
US 8078794 B2	13/12/2011	CN 100487678 C	13/05/2009
		CN 100501702 C	17/06/2009
		CN 101097551 A	02/01/2008
		CN 101118783 A	06/02/2008
		CN 101122865 A	13/02/2008
		CN 101122865 B	14/07/2010
		CN 101122887 A	13/02/2008
		CN 101398764 A	01/04/2009
		CN 101398785 A	01/04/2009

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2014/054624

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		CN 101399075 A	01/04/2009
		CN 101399076 A	01/04/2009
		CN 101403997 A	08/04/2009
		CN 101409111 A	15/04/2009
		CN 101425324 A	06/05/2009
		CN 101630375 A	20/01/2010
		CN 101644995 A	10/02/2010
		CN 101644995 B	28/12/2011
		CN 101727976 A	09/06/2010
		CN 101727976 B	19/09/2012
		CN 101923512 A	22/12/2010
		CN 101923512 B	20/03/2013
		CN 102469715 A	23/05/2012
		JP 03274433 B2	15/04/2002
		JP 03338417 B2	28/10/2002
		JP 2001-005945 A	12/01/2001
		JP 2001-118046 A	27/04/2001
		TW 2008-13713 A	16/03/2008
		TW 2008-42887 A	01/11/2008
		TW 2009-15080 A	01/04/2009
		TW 2009-17017 A	16/04/2009
		TW 2009-17256 A	16/04/2009
		TW 2009-26394 A	16/06/2009
		TW 2010-05652 A	01/02/2010
		TW I351599 B	01/11/2011
		TW I351599 I	01/11/2011
		TW I351605 B	01/11/2011
		TW I351605 I	01/11/2011
		US 2003-061474 A1	27/03/2003
		US 2004-236980 A1	25/11/2004
		US 2005-055481 A1	10/03/2005
		US 2005-059273 A1	17/03/2005
		US 2005-059301 A1	17/03/2005
		US 2005-070138 A1	31/03/2005
		US 2005-085129 A1	21/04/2005
		US 2005-085133 A1	21/04/2005
		US 2005-114587 A1	26/05/2005
		US 2005-120146 A1	02/06/2005
		US 2005-120157 A1	02/06/2005
		US 2005-120163 A1	02/06/2005
		US 2005-127735 A1	16/06/2005
		US 2005-138288 A1	23/06/2005
		US 2005-156333 A1	21/07/2005
		US 2005-160213 A1	21/07/2005
		US 2005-160218 A1	21/07/2005
		US 2005-164532 A1	28/07/2005
		US 2005-181645 A1	18/08/2005
		US 2005-182881 A1	18/08/2005
		US 2005-193161 A1	01/09/2005
		US 2005-193162 A1	01/09/2005

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2014/054624

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		US 2005-197017 A1	08/09/2005
		US 2005-201148 A1	15/09/2005
		US 2005-204187 A1	15/09/2005
		US 2005-223158 A1	06/10/2005
		US 2006-002096 A1	05/01/2006
		US 2006-030080 A1	09/02/2006
		US 2006-067054 A1	30/03/2006
		US 2006-075395 A1	06/04/2006
		US 2006-161725 A1	20/07/2006
		US 2006-286865 A1	21/12/2006
		US 2006-294272 A1	28/12/2006
		US 2007-076387 A1	05/04/2007
		US 2007-079043 A1	05/04/2007
		US 2007-118688 A1	24/05/2007
		US 2007-130414 A1	07/06/2007
		US 2007-130436 A1	07/06/2007
		US 2007-143509 A1	21/06/2007
		US 2007-147157 A1	28/06/2007
		US 2007-150963 A1	28/06/2007
		US 2007-156587 A1	05/07/2007
		US 2007-168614 A1	19/07/2007
		US 2007-178769 A1	02/08/2007
		US 2007-180264 A1	02/08/2007
		US 2007-183209 A1	09/08/2007
		US 2007-184685 A1	09/08/2007
		US 2007-184719 A1	09/08/2007
		US 2007-197101 A1	23/08/2007
		US 2007-198856 A1	23/08/2007
		US 2007-201274 A1	30/08/2007
		US 2007-204128 A1	30/08/2007
		US 2007-204206 A1	30/08/2007
		US 2007-233955 A1	04/10/2007
		US 2007-250564 A1	25/10/2007
		US 2007-255891 A1	01/11/2007
		US 2007-262155 A1	15/11/2007
		US 2007-268754 A1	22/11/2007
		US 2007-274032 A1	29/11/2007
		US 2007-276987 A1	29/11/2007
		US 2007-276988 A1	29/11/2007
		US 2007-283428 A1	06/12/2007
		US 2007-292009 A1	20/12/2007
		US 2007-293088 A1	20/12/2007
		US 2007-300028 A1	27/12/2007
		US 2007-300029 A1	27/12/2007
		US 2007-300030 A1	27/12/2007
		US 2008-003882 A1	03/01/2008
		US 2008-003883 A1	03/01/2008
		US 6547130 B1	15/04/2003
		US 6854984 B1	15/02/2005
		US 6874044 B1	29/03/2005

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2014/054624

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		US 7004794 B2	28/02/2006
		US 7021971 B2	04/04/2006
		US 7035110 B1	25/04/2006
		US 7044802 B2	16/05/2006
		US 7069369 B2	27/06/2006
		US 7073010 B2	04/07/2006
		US 7082056 B2	25/07/2006
		US 7094074 B2	22/08/2006
		US 7095617 B1	22/08/2006
		US 7103684 B2	05/09/2006
		US 7103765 B2	05/09/2006
		US 7104848 B1	12/09/2006
		US 7108560 B1	19/09/2006
		US 7125287 B1	24/10/2006
		US 7130958 B2	31/10/2006
		US 7174628 B1	13/02/2007
		US 7182646 B1	27/02/2007
		US 7186147 B1	06/03/2007
		US 7243185 B2	10/07/2007
		US 7249978 B1	31/07/2007
		US 7257714 B1	14/08/2007
		US 7259967 B2	21/08/2007
		US 7264992 B2	04/09/2007
		US 7269004 B1	11/09/2007
		US 7296345 B1	20/11/2007
		US 7297024 B2	20/11/2007
		US 7299316 B2	20/11/2007
		US 7301776 B1	27/11/2007
		US 7318117 B2	08/01/2008
		US 7333364 B2	19/02/2008
		US 7347736 B2	25/03/2008
		US 7365985 B1	29/04/2008
		US 7383362 B2	03/06/2008
		US 7394661 B2	01/07/2008
		US 7407393 B2	05/08/2008
		US 7420803 B2	02/09/2008
		US 7427217 B2	23/09/2008
		US 7428605 B2	23/09/2008
		US 7438562 B2	21/10/2008
		US 7440286 B2	21/10/2008
		US 7440287 B1	21/10/2008
		US 7447037 B2	04/11/2008
		US 7457897 B1	25/11/2008
		US 7466556 B2	16/12/2008
		US 7467290 B2	16/12/2008
		US 7471556 B2	30/12/2008
		US 7475174 B2	06/01/2009
		US 7476105 B2	13/01/2009
		US 7479039 B2	20/01/2009
		US 7483329 B2	27/01/2009

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2014/054624

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		US 7507119 B2	24/03/2009
		US 7517252 B2	14/04/2009
		US 7524198 B2	28/04/2009
		US 7535088 B2	19/05/2009
		US 7535719 B2	19/05/2009
		US 7544073 B2	09/06/2009
		US 7547218 B2	16/06/2009
		US 7552251 B2	23/06/2009
		US 7576990 B2	18/08/2009
		US 7606111 B2	20/10/2009
		US 7609523 B1	27/10/2009
		US 7610438 B2	27/10/2009
		US 7620769 B2	17/11/2009
		US 7628622 B2	08/12/2009
		US 7631195 B1	08/12/2009
		US 7643334 B1	05/01/2010
		US 7649742 B2	19/01/2010
		US 7649743 B2	19/01/2010
		US 7657692 B2	02/02/2010
		US 7660938 B1	09/02/2010
		US 7660941 B2	09/02/2010
		US 7664902 B1	16/02/2010
		US 7673080 B1	02/03/2010
		US 7676640 B2	09/03/2010
		US 7680977 B2	16/03/2010
		US 7690030 B1	30/03/2010
		US 7690031 B2	30/03/2010
		US 7702831 B2	20/04/2010
		US 7702984 B1	20/04/2010
		US 7707321 B2	27/04/2010
		US 7707354 B2	27/04/2010
		US 7708570 B2	04/05/2010
		US 7740493 B2	22/06/2010
		US 7744387 B2	29/06/2010
		US 7761653 B2	20/07/2010
		US 7768785 B2	03/08/2010
		US 7768789 B2	03/08/2010
		US 7769944 B2	03/08/2010
		US 7771215 B1	10/08/2010
		US 7788553 B2	31/08/2010
		US 7789680 B2	07/09/2010
		US 7795714 B2	14/09/2010
		US 7802155 B2	21/09/2010
		US 7804163 B2	28/09/2010
		US 7806705 B2	05/10/2010
		US 7809862 B2	05/10/2010
		US 7814337 B2	12/10/2010
		US 7818492 B2	19/10/2010
		US 7827348 B2	02/11/2010
		US 7830666 B2	09/11/2010

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2014/054624

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		US 7836236 B2	16/11/2010
		US 7844763 B2	30/11/2010
		US 7849242 B2	07/12/2010
		US 7850082 B1	14/12/2010
		US 7850468 B2	14/12/2010
		US 7855099 B2	21/12/2010
		US 7861312 B2	28/12/2010
		US 7865630 B2	04/01/2011
		US 7865809 B1	04/01/2011
		US 7866562 B2	11/01/2011
		US 7869218 B2	11/01/2011
		US 7869219 B2	11/01/2011
		US 7872871 B2	18/01/2011
		US 7872873 B2	18/01/2011
		US 7873837 B1	18/01/2011
		US 7873885 B1	18/01/2011
		US 7874067 B1	25/01/2011
		US 7877542 B2	25/01/2011
		US 7878852 B2	01/02/2011
		US 7886108 B2	08/02/2011
		US 7889544 B2	15/02/2011
		US 7890846 B2	15/02/2011
		US 7930531 B2	19/04/2011
		US 7934037 B2	26/04/2011
		US 7934074 B2	26/04/2011
		US 7941916 B1	17/05/2011
		US 7944702 B2	17/05/2011
		US 7944703 B2	17/05/2011
		US 7953931 B2	31/05/2011
		US 7962836 B1	14/06/2011
		US 7965546 B2	21/06/2011
		US 7966429 B2	21/06/2011
		US 7966462 B2	21/06/2011
		US 7984303 B1	19/07/2011
		US 7987006 B2	26/07/2011
		US 8014130 B1	06/09/2011
		US 8015348 B2	06/09/2011
		US 8021166 B1	20/09/2011
		US 8037234 B2	11/10/2011
		US 8043099 B1	25/10/2011
		US 8060670 B2	15/11/2011
		US 8073985 B1	06/12/2011
		US 8095971 B2	10/01/2012
		US 8102658 B2	24/01/2012
		US 8102662 B2	24/01/2012
		US 8108590 B2	31/01/2012
		US 8112574 B2	07/02/2012
		US 8116083 B2	14/02/2012
		US 8141240 B2	27/03/2012
		US 8166221 B2	24/04/2012

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2014/054624

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 2378427 A1	19/10/2011	US 8171204 B2	01/05/2012
		US 8180931 B2	15/05/2012
		US 8200862 B2	12/06/2012
		US 8241047 B2	14/08/2012
		US 8254134 B2	28/08/2012
		US 8262416 B2	11/09/2012
		US 8266367 B2	11/09/2012
		US 8296467 B2	23/10/2012
		US 8341332 B2	25/12/2012
		US 8452912 B2	28/05/2013
		US RE40115 E1	26/02/2008
		CN 102640120 A	15/08/2012
		EP 2378427 A4	10/07/2013
		JP 05236086 B2	17/07/2013
		US 2011-0252214 A1	13/10/2011
		WO 2011-092739 A1	04/08/2011