



(11) (21) (C) **2,148,633**
(22) 1995/05/04
(43) 1995/11/28
(45) 2000/03/21

(72) Skinner, James, US

(72) Thorn, John Stephen, US

(72) Nordby, Craig, US

(72) Marcinkiewicz, Joseph G., US


(73) Emerson Electric Co., US

(51) Int.Cl.⁶ G06F 19/00, H02P 13/00

(30) 1994/05/27 (250,286) US

(54) **MOTEUR MUNI DE SELECTEURS DE FONCTIONS
PROGRAMMABLES**

(54) **MOTOR DRIVE WITH PROGRAMMABLE FUNCTION
SWITCHES**

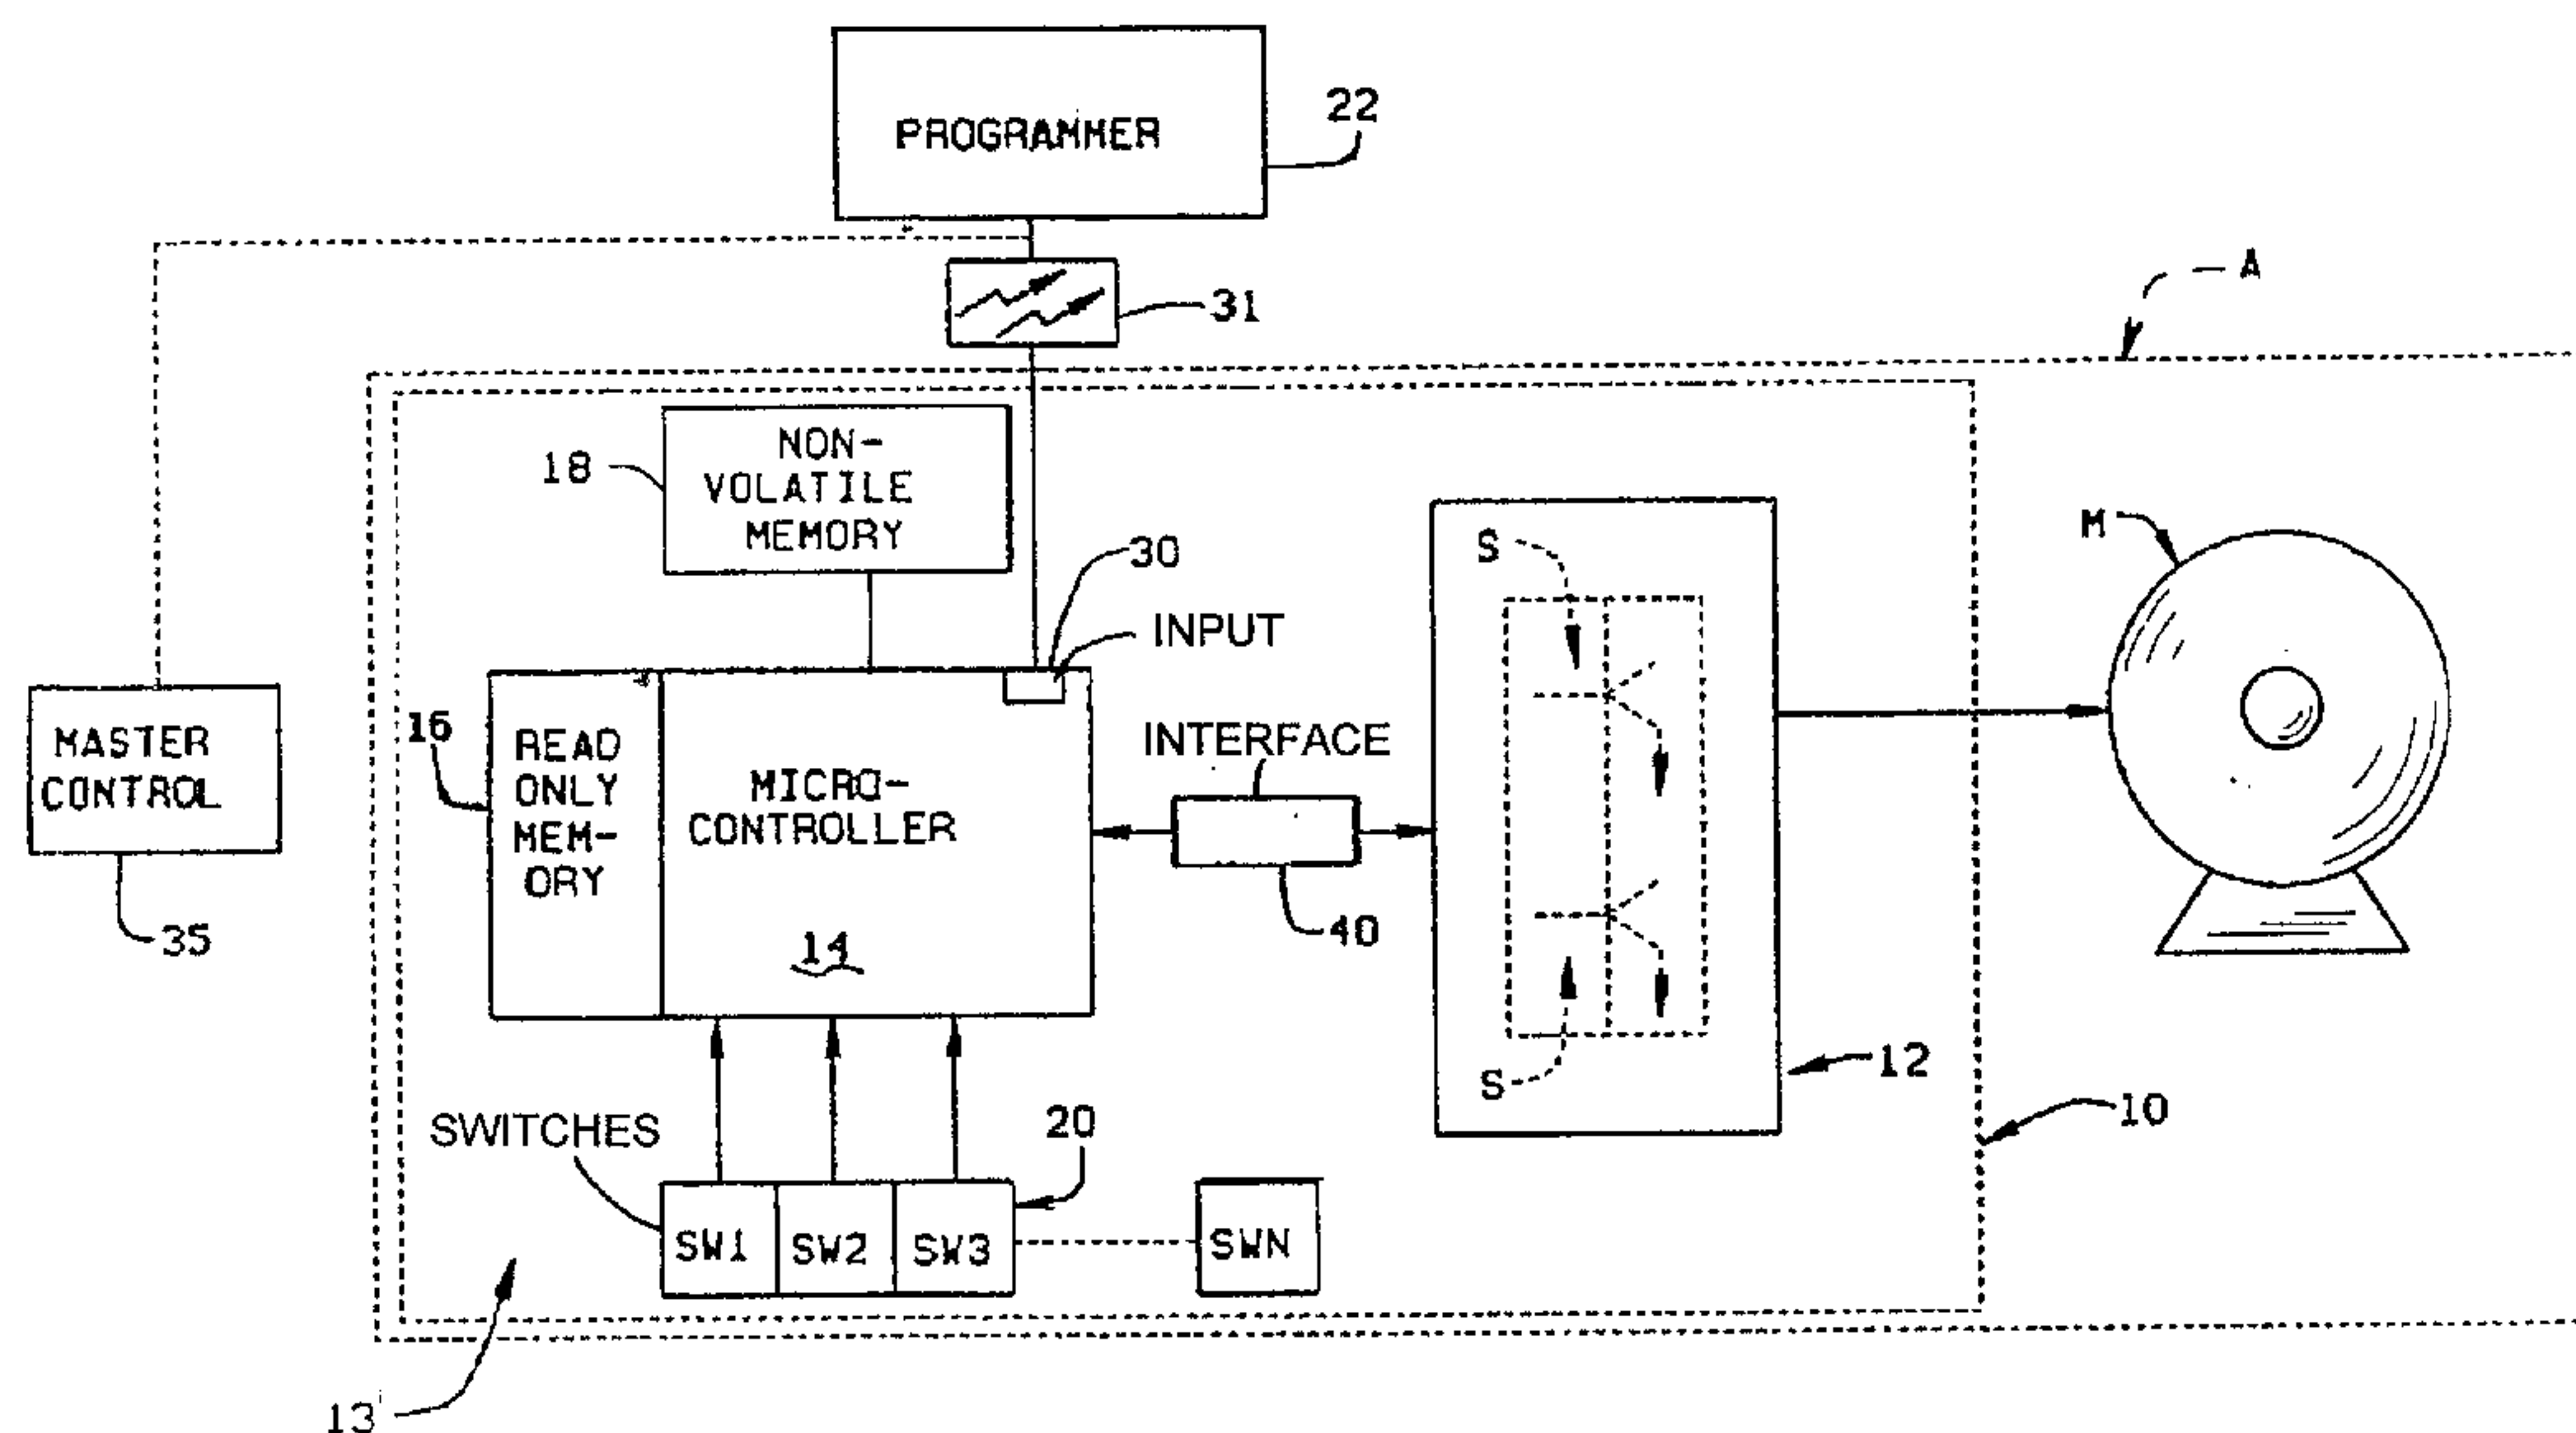

(57) Drive apparatus (10) for a dynamoelectric machine (M) for installation in an appliance (A) to provide a wide range of programmable features. In the preferred embodiment, the drive apparatus includes a machine drive (12) operatively connected to the dynamoelectric machine. The machine drive includes a microcontroller (14) having as a first and program memory (16) a ROM (read only memory) defining a processor module (13) for controlling machine operation during different appliance operating conditions, and as a second and data memory (18) an EEPROM (electrically erasable programmable read only memory) for storing machine and system operating characteristic information. Multi-position switches (SW1-SWN) are connected to the processor module. The switch functions are determined by a program stored in the program memory as further developed by data stored in the data memory. The switch settings, in combination with the program control, establish operating characteristics for the system. This allows an appliance manufacturer, for example, to select one set of functions or operating characteristics for the machine, and the value of the function selected by making one switch setting, while another different set of functions or operating characteristics, and other independent function valves are provided by making a different switch setting, or by a data memory change for the selected switch setting. The characteristics defined by the switches can be changed by changing the data in the data memory.



Abstract of the Disclosure

Drive apparatus (10) for a dynamoelectric machine (M) for installation in an appliance (A) to provide a wide range of programmable features. In the preferred embodiment, the drive apparatus includes a machine drive (12) operatively connected to the dynamoelectric machine. The machine drive includes a microcontroller (14) having as a first and program memory (16) a ROM (read only memory) defining a processor module (13) for controlling machine operation during different appliance operating conditions, and as a second and data memory (18) an EEPROM (electrically erasable programmable read only memory) for storing machine and system operating characteristic information. Multi-position switches (SW1-SWN) are connected to the processor module. The switch functions are determined by a program stored in the program memory as further developed by data stored in the data memory. The switch settings, in combination with the program control, establish operating characteristics for the system. This allows an appliance manufacturer, for example, to select one set of functions or operating characteristics for the machine, and the value of the function selected by making one switch setting, while another different set of functions or operating characteristics, and other independent function valves are provided by making a different switch setting, or by a data memory change for the selected switch setting. The characteristics defined by the switches can be changed by changing the data in the data memory.

Background of the Invention

This invention relates to dynamoelectric machines in the form of electric motors, and more particularly, to a simple, effective way of controlling operation of a motor when used by different manufacturers for different purposes. While the invention is described in particular detail with respect to its application in appliances, those skilled in the art will recognize the wider applicability of the inventive principles described hereinafter.

As is well-known in the art, electric motors are designed so that a particular motor has a different set of operating characteristics for one application, and another set of operating characteristics for other applications. Heretofore, motors were designed and tested with respect to a specific application until the operating criteria met desired goals. For example, with heating and air conditioning systems (HVAC), it is common to employ a motor to drive the blower for the HVAC system. The motor design can vary depending upon a number of anticipated load characteristics. The load characteristics, in turn, are a function of a number of variables, including the type of air handler used with a motor, and can vary from one manufacturer to another. The problem is further complicated because of the variety of electric motor "types" available for use in HVAC applications. For example, induction motors long have been the predominant choice in blower applications. More recently, brushless permanent magnet, switched reluctance,

controlled induction, and similar electronically operated motors have found use in such applications.

While a motor design for a blower application has a general set of operating features, each manufacturer incorporating a similar motor in its product wants or requires a different set of operating characteristics, because of that particular manufacturer's construction or the manufacturer's perception of his customer's needs. Even a single manufacturer often provides a series of models having varying capabilities. As a consequence, motor manufacturers heretofore have provided a number of different models of essentially the same motor design altered to accomplish the specific needs either of a particular original equipment manufacturer's (OEM) customer's requirements or, to satisfy the needs of the various OEM manufacturers. The large number of motor models, in turn, creates a problem for the motor manufacturer. Parts inventory and overhead costs increase with increased part numbers. Even when such costs are minimized, however, the motor manufacturer's assembly line often requires shut down in order to convert from one model to another model, thereby increasing labor costs.

The OEM manufacturer also incurs increased costs because the OEM must stock and track a variety of motors for its various product lines.

It thus is seen that a motor manufacturer can reduce costs if the manufacturer had the ability to produce one version of a motor for a particular application, the motor being readily

adapted after manufacture, for each different OEM's particular set of operating requirements. It also is advantageous to enable a particular motor to be used across a range of models for a particular OEM, based on function and performance of any particular model. Another advantage of our invention is that the OEM manufacturer is able to supply motors to fit new applications more quickly.

SUMMARY OF THE INVENTION

This invention provides a drive apparatus for a dynamoelectric machine.

This invention provides a drive apparatus for a dynamoelectric machine which enables essentially the same dynamoelectric machine construction to be used in a variety of versions of an appliance.

This invention provides a drive apparatus which is adaptable after manufacture to a variety of usages.

This invention provides a motor drive incorporating a microcontroller which has a set of parameters or an operating program sequence for the motor stored in it, a second memory having a series of data stored in association with it, and switches operatively connected to the microcontroller to enable the microcontroller to select the appropriate data for operation of the motor.

This invention provides a drive means with an associated motor capable of use over both a wide range of manufacturers and over a range of products of a single manufacturer.

This invention provides a drive which is designed to operate an electric motor satisfactorily under a wide range of selectable conditions.

This invention provides a drive apparatus which reduces inventory control problems for both the motor manufacturer and the original equipment manufacturer.

This invention provides a motor drive which is low in cost and which is readily associated with the motor structure.

This invention provides a motor and motor drive in which operative characteristics of the motor can be changed without the use of special tools or equipment.

In accordance with this invention, generally stated, a drive apparatus for use with a dynamoelectric machine is provided having a processing means - preferably a low cost microcontroller - adapted to operate means connected to the machine to control at least one of the current or voltage of the machine. The processing means supplies control information to the drive means. The processing means includes first memory means, program means in said first memory means, second memory means, and operating characteristic information in either memory means. In the preferred embodiment, the microcontroller includes a program module in the form of a ROM for controlling motor operation. A second and nonvolatile memory module in the form of an EEPROM is provided for storing motor operating characteristic information,

the information being accessible by the microcontroller. Switch means, preferably in the form of multi-position switches are connected to the processing means, settings of said switch means selecting operational characteristic information from either memory means. The data in the second memory module preferably determines the function of the switches. Preferably, data in the second memory module also determines the operating condition (values, parameters) of the drive apparatus. In a preferred embodiment, a separate programming device is used to download data to the microcontroller and to the second memory module. A plurality of switches, for example, are selectable by an installer of the motor, and the switch settings determine which functions the program module executes and how the program module uses the data stored in the second memory module. With this arrangement, one motor design may be used for one set of operating characteristics of the motor, while a second set of operating conditions may be obtained merely by changing the switch settings. In the alternative, data may later be loaded to the nonvolatile memory which alters the information selectable by the switches and the program flow thereby alters the operating characteristics of the motor.

Brief Description of the Drawings

Fig. 1 is a block diagram of one illustrated embodiment of drive apparatus of the present invention; and

Fig. 2 is a view of selection switches used in conjunction with the drive apparatus of Fig. 1 to select motor operational data.

Corresponding reference characters indicate corresponding parts throughout the drawings.

Description of a Preferred Embodiment

Referring now to Fig. 1, a dynamoelectric machine M is operatively associated with an appliance A. As indicated above, appliance A may be any of a variety of conventionally available devices taking the form, for example, of furnace blowers, compressor motors, washing machines, dryers, and other similar related applications. The motor M also is intended to be any of a variety of known constructions. For example, the motor may be a brushless permanent magnet, switched reluctance motor or controlled induction motor. Each of these motor types differ primarily in the construction of their rotors. Thus, the controlled induction motor employs what is known in the art as a squirrel cage induction motor rotor, while a switched reluctance motor employs an iron core rotor which may have a special configuration but is constructed without the rotor bars of the squirrel cage design. The brushless permanent magnet motor has permanent magnets associated with the rotor. The stator assemblies of any of the motors generally are conventional designs, although the windings of the stator assembly often are specifically designed to enhance the performance characteristics of each of the motor types.

As will be appreciated by those skilled in the art, there are a number of original equipment manufacturers of appliance products. Each manufacturer's specific products differ

in design and capability from those of other manufacturers. In addition, each OEM often has a range of products offering differing capabilities in its particular product line. Thus, even though a particular motor M is of a standard design well suited for use in a particular appliance A, a motor manufacturer may be required to make the motor M in a number of different models to satisfy market requirements.

A drive apparatus 10 of the present invention allows a motor manufacturer to make a single model of a motor M, but still enables an OEM to tailor the drive apparatus to a variety of applicational uses. The apparatus 10 further allows each OEM to install the motor M in a product having a set of operating characteristics unique to that manufacturer. Thereafter, the drive apparatus 10 may be adjusted to provide proper operating performance in the particular application.

Apparatus 10 includes a drive means 12 operatively associated with the motor M. The drive means 12 is, in the preferred embodiment, a conventional inverter bridge circuit operatively connected to the stator assembly of motor M. The inverter bridge operates to control at least one of the current or voltage of motor M. That is, the drive means 12 includes a plurality of power switching devices S, as represented by power transistors, for example, for controlling current flow through the motor phase windings (not shown). The drive means 12 controls the motor so that it operates at any one of a particularly selected condition. The selected condition depends

on a variety of application characteristics, as described in greater detail hereinafter. In this regard, the drive means 12 is responsive to control inputs provided to it to vary at least the current or the voltage input to the motor M. At the same time, the drive means provides information concerning the instantaneous operating conditions of the motor to a microcontroller 14 through a suitable interface 40.

A processing means 13 of apparatus 10 supplies motor control information to drive means 12. Processing means 13 includes the microcontroller 14. The microcontroller 14 has a first memory means associated with it in the form of a read only memory (ROM) module 16. Module 16 includes a fixed program which is inscribed in it during its manufacture. The program allows microcontroller 14 to control operation of motor M under various appliance operating conditions. The microcontroller 14 also has associated with it a second nonvolatile memory means in the form of an electrically erasable programmable read only memory (EEPROM) 18. The memory module 18 has data stored in it used to control operation of motor M. As indicated, EEPROM 18 is a nonvolatile memory, so that motor operating characteristic information stored therein is not lost when power is removed from the apparatus A. While EEPROM 18 is shown as a separate block in Fig. 1, those skilled in the art will recognize that a single integrated circuit may include what is shown separately in the drawings as microcontroller 14, ROM 16 and EEPROM 18.

Microcontroller 14 has an input 30. The input 30 preferably is connected to an external device through an

opto-coupler 31. Microcontroller 14 also has a plurality of switches 20, operatively connected to it through input lines or ports. In the embodiment illustrated, the switches are manually operable multi-position switches SW1-SWN. The switches are shown as eight position manually operable rotary switches in Fig. 2. It will be understood, however, that the switches may have any reasonable number of switch positions. Also, the various switches need not have the same number of positions as each of the other switches; and, various other types of switch constructions are compatible with the broader aspects of our invention. For the three, eight position switches SW1-SW3 shown in FIG. 2, there are 512 (8x8x8) possible switch settings which an installer or user of the motor can select.

A programming device 22, which can be a general purpose computer or a special use device, for example, is operatively connected through the opto-coupler 31 to the input 30 of the microcontroller 14. The programmer 22 is utilized to download appropriate data through the microcontroller to the EEPROM 18. The programmer 22 allows the motor manufacturer or OEM both to download appropriate information at the time of manufacture, and to update that information at a later time. If, for example, a new application is found for the motor, information relevant to that use can be loaded into the memory 18 as each new unit is constructed. Fabrication of a new memory chip is not required. Similarly, if previous motor operating data is refined, the memory in existing units is readily updated without having to recall or retrofit existing units.

As indicated, the programmer 22 is removably connected to drive apparatus 10. In applicational use, a system master control may be connected to the input 30. For example, in HVAC systems, it is conventional for a thermostat and thermostat wires to be connected to the blower motor control. Such wires would, with our invention, instead be connected to the microcontroller 14 through suitable input means.

The switches 20 are used to select relevant portions of the data contained in the memories 16 and 18. For example, the switch position may represent fan blower constants employed in the control algorithm for an HVAC system. The start delay for application for the furnace blower, i.e., the time between the energization of the heat element of the furnace, for example, and blower start up also can be indicated by switch position. Likewise, the stop delay, that is, the time between de-energization of a heating element, for example, and motor speed reduction, because of the heater turn-off, also may be selected by a switch position. Various commands representing desired air flow also can be represented by the switch positions. As will be appreciated by those skilled in the art, individual ones of the switch positions need not affect the variable selected by another of the switch positions. Thus, our invention allows considerable variation in function selections in determining system operation.

In operation, the microcontroller 14 reads switch 20 and the information set by the switches to obtain data for motor M operation. The microcontroller 14 also reads the commands from a

system master controller 35, and utilizing the information available from the system master controller and the switches, accesses the data in the memory 18 to operate motor M. The ability to use the switch readings to access data in the memories 16 and 18, in which the data in memory 18 may be altered after apparatus construction, is an important feature of our invention in that it enables a motor manufacturer to utilize a single motor model in a wide variety of applicational uses merely by altering the switch position of the switches 20. The use of the switches 20 enables one user of the motor M to select one set of operating characteristics for the motor by making one switch setting, while a second user can, by altering the switch selection position, enable the microcontroller 14 to access other operating data information in the memories 16 and 18. The apparatus, and the electric motor M applied to the apparatus, is usable in different versions or models of the same appliance, and enables the appliance manufacturer to offer a unique set of operating characteristics for each such use. The ability of the control of this invention to read the switch 20 position and associate that position with data downloadable to a nonvolatile memory enables motors produced in accordance with this invention to offer a range of programmability and functionality not heretofore associated with motor designs. This result is achieved at relatively low cost.

In view of the foregoing, it will be seen that the several objects of the invention are achieved and other advantageous results are obtained. Numerous variations, within

the scope of the invention, will be apparent to those skilled in the art in light of the foregoing description and accompanying drawings. Merely by way of example, the apparatus may be packaged with the motor itself, or may form a separate unit operatively connected to the motor in application use. As indicated, the various memories associated with the microcontroller 14 may be incorporated in an integrated design, or the memories may be separate units associated with the microcontroller 14 in a conventional manner. Other memory devices may be employed. While preferably the program for operation of the microcontroller was described as being loaded during ROM manufacture, both the program and data for that program may be downloaded by the programmer in other embodiments of the invention. These variations are merely illustrative.

CLAIMS

1. Drive apparatus for use with a dynamoelectric machine, comprising:

drive means connected to the dynamoelectric machine to control at least one of the current or voltage of the machine;

processor means including a microcontroller for supplying machine control information to the drive means, said processor means including first memory means and program means in said first memory means, said program means including a read only memory containing at least a portion of an operating program for operating the machine;

second memory means operatively associated with said processor means, said second memory means including a non-volatile memory;

switch means connected to said processor means, setting of said switch means selecting operational characteristic information from either of said first and said second memory means so as to permit different capabilities to be provided by said apparatus; and programming means operatively attachable to said processor means and removable therefrom for loading machine information into said processor means, said switch means allowing said dynamoelectric machine to perform different functions without alteration of the dynamoelectric machine except through operation of said switch means.

2. The drive apparatus of claim 1 further including signal means for transferring instructions from the microcontroller to the drive means, and signals from the drive means to the microcontroller.

3. The drive apparatus of claim 2 further including interface means connected between the microcontroller and the drive means, the interface means effecting communication flow

between the microcontroller and the drive means while permitting them to be separated physically.

4. The drive apparatus of claim 1 wherein said switch means comprises a plurality of independently settable, multi-position switches operatively connected to said microcontroller, the settings of said switches being selectable to vary operating characteristics of the motor to provide said different capabilities.

5. The drive apparatus of claim 4 wherein said switch means includes at least three switches, each of which has at least eight positions, whereby 512 different machine control combinations are selectable through operation of said switches.

6. A drive apparatus for use with an electric motor, comprising:

- a motor drive connected to the motor to control at least one of the current and voltage of the motor;

- a microcontroller for supplying motor control information to the motor drive, said microcontroller including a program for controlling motor operation during varying operating conditions of the motor, and a first memory device for storing motor operating characteristic information and for providing said information to the program;

- second memory means operatively associated with said microcontroller;

- a plurality of selectively movable switches connected to said microcontroller, the settings of said switch plurality selectively altering the operational characteristic information to permit said drive apparatus to provide different capabilities; and

- a programmer operatively attachable to said microcontroller for loading machine information into said microcontroller.

7. The drive apparatus of claim 6 wherein said first memory means is a read only memory which contains the program for operating the motor, and said second memory means includes a nonvolatile memory.

8. The drive apparatus of claim 7 further including interface means connected between the microcontroller and the motor drive for transferring control signals and motor operating information between the microcontroller and the motor drive, the interface effecting communication flow between the microcontroller and the motor drive while allowing them to be separated physically.

9. The drive apparatus of claim 8 wherein said switch plurality includes at least three switches, each of which has a least eight positions, whereby there are 512 different combinations which are selectable through switch operation.

10. A method of controlling operation of a dynamoelectric machine adapted for use in an appliance, comprising:

installing the motor in an appliance;

connecting a motor drive to the motor to control at least one of the current and voltage applied to the motor;

supplying motor control information to the drive means from a microcontroller, said microcontroller including program means for controlling the motor operation during different appliance operating conditions, and memory means for storing motor operating characteristic information and for providing said information to said program means;

selecting operating conditions for said motor by setting the position of at least one of a plurality of switches operatively connected to said microcontroller, said switch settings determining the operating characteristics stored in said memory means accessible by and provided to said program means so as to permit said

dynamoelectric machine to provide different capabilities;
and

downloading program information to said
microcontroller from a programmer operatively connected to
said microcontroller.

11. The method of claim 10 wherein said switch
plurality includes at least three switches, each of which
has at least eight positions, and said switch combination
providing 512 different motor control combinations through
said switch settings.

12. A drive apparatus for controlling a
dynamoelectric machine having a stator assembly and a rotor
assembly adapted for use in an appliance, comprising:

a motor drive operatively connected to the stator
assembly for controlling at least one of the voltage and
current applied to said stator assembly;

a microcontroller for supplying control information to
the motor drive, said microcontroller including means for
controlling operation of the dynamoelectric machine under
various appliance operating conditions, and memory means for
storing dynamoelectric machine operating characteristic
information and for providing such information to said
microcontroller;

a plurality of selectively movable switches
operatively connected to said microcontroller, said switch
plurality being operable to determine the operating
characteristics accessible by said microcontroller stored in
said memory means for operating said dynamoelectric machine
so as to vary the capabilities of said drive apparatus; and

a programmer for programming the memory means
operatively associated with said microcontroller for
programming the memory means with machine related data.

13. The apparatus of claim 12 wherein the programmer loads both the program means and data for that program after installation of the dynamoelectric machine in said appliance.

14. The apparatus of claim 13 wherein the operational characteristics selected by said switch plurality is altered by said programmer.

